12(%) 212.08 183.74 1.154 28.34 Discount rate: S = kW Value B1= kWH Value B2= kWH Value B3= B C1= 0.063853658 C2= 0.052677395 C3= 0.041516562 68 US\$/kW 0.063 US\$/kWH 0.005 US\$/kWH B/C UNIT-Million US\$

	9 · C	28.34							UNIT	
Ye	ar Seria		Discounted Cost Flow		roject Sal	28	 	Discounted	Benefit Flow	,
	Numbe	r Flow	Lost From	Salable Energy (GWN/Yr)	Surplus Energy (GWN/Yr)	Useful Capacity (XW)	Salable Energy	Surplus Energy	Useful Capacity	أعاد المستواد الساداد
19	87	1 4.81	4.29	0.00	0.00	0.00	0.00	0.00	0.00	
19	88 89	2 19.57 3 21.57 4 21.58		0.00	0.00	0.00 0.00	0.00 0.00	0.00	0.00 0.00 0.00 0.00 0.00 1.42 1.69 1.88 2.03 2.15 2.22 2.07 1.85	0.00
19	90	4 21.58	13.71	0.00	0,00	0.00 0.00 0.00 0.00 0.00 52.00 69.00	0.00	0.00	0.00	0.00 0.00
1 19	91	51 39.89	22.63	0.00	0.00	0.00	0.00	0.00	0 00	0.00
19	92 93	6 57.63 7 98.67	44.63	0.00	0.00	0.00	0.00	0.00	0.00	0.00 7.37
19	94	8 50.49	20.39	179.00	691, 10	52.00	4.55	1.39	1.42	7.37 8.61
19	95] 96: 1	9 7.25 0 12.85	20.39 2.61 4.13 2.59 0.92 0.82 0.73	256.00 333.00	537.10	86.10	6.75	0.86	1.88	9.50
19	97 1	1 9.02	2.59	415.00	537.10 888.50 803.50 715.50 623.50 527.50	104.20	7.51	1.27	2.03	9.50 10.83 11.26
1 19	98 !	3.60 3 3.60 4 3.60	0.92	500.00	803.50 715.50	123.20 143.00	8.08	0.81	2.15	11.26
20	00 1	3.60	0.73	680.00	623.50	149.40	8.76	0.63	2.07	11.53 11.48 11.26
20	01 1	51 3.60	1 0.00		527.50	149.40 149.40 149.40 149.40 149.40	8.93 9.00	0.48	1.85	11.26
20 20	02) I 03) I	6 3.60 7 3.60	0.52	980.00	427.50 323.50 214.50	149.40	8.99	0.23	1 1.47	113.7131
20	04 1	81 3.60	1 0.36	เกลอดกร	214.50	149.40	8.92			10.38
20 20	05 1	9 3.60 0 3.60	0.41 0.37	1201.00	102.50	149.40	8.51	0.05	1.17	10.02 9.56 8.54
20	07 2	1 3.60	0.33	1303.50	0.00	149.40	7.60	0.00	1.05 0.94	8.54
20	081 2	ان ک	1 9.47	1303.50	0.00	149.40 149.40	8.51 7.60 6.78 6.05	0.00	1 0.73	i 6 an!
20 20	10 2	3 3.60 4 3.60	0.20	1303.50	ווע ע	1 177.90]. 5.41	0.00	0.66	1 6 07 1
1 20	111 2	5 3.60	0.23 0.21 0.18	1303.50 1303.50	0.00 0.00	149.40	4.83 4.31	0.00	0.59	5.42 4.84
20	12 2 13 2	6 3.60 7 3.60	0.18	1303.50	0.00	149.40	4.31 3.85	0.00	0.47	4.32
20	141 2	8 3.60	0.15	1303.50 1303.50 1303.50	0.00 0.00	149.40	3,85 3,43 3,06 2,74	0.00	0.42	3.86 3.44 3.08
20	15 2 16 3	3.60 0 3.60	0.13	1303.50	0,00 0.00	149.40	3.05 2.74	0.00	0,37 0,33	3.44
20	17 3	11 7/0		1303.50 1303.50 1303.50 1303.50	0.00	149.40	2.44	0.00	0.30	2.75
1 20	181 3	2 3.60	0.09	1303.50	0.00	149.40	2.18	0.00	0.27	2.45 2.19
20 20	20 3	3.60 3.60 4 3.60 5 3.60 6 3.60 7 3.60 8 3.60 9 3.60	0.08 0.07 0.06 0.06	1303.50 1303.50 1303.50 1303.50 1303.50 1303.50 1303.50 1303.50	0.00	149.40	2.74 2.44 2.18 1.95 1.74 1.55 1.38	0.00 0.00 0.00	0.33 0.30 0.27 0.24 0.21	1.95
1 20	21 3	5 3.60 6 3.60	0.06	1303.50	0.00	149.40	1.55	0.00	11 0.17	1.74 1.56
1 20	231 3	61 3.60 7 3.60	0.06	1303.50	0.00	149.40	1.38	0.00	0.17	1.39
20	24	8 3.60	0.05 0.04	1303.50	0.00 0.00 0.00	149.40 149.40	1.10	0.00	0.15 0.13	1.39 1.24 1.11
20	25 3	9 3.60 0 3.60	0.04	1303.50	0.00	149.40 149.40	סל-ט וי	0.00	0.12	0.99
3 20	27 I &	11 2 60	1 n na	1303.50	0.00	149.40	0.78	$1 \cdot 0.00$	0.09	0.88 0.79
20	28 4	2 3.60	1 0.03	1303.50	0.00	149.40	0.70 0.62	1 0.00	0.08	0.79
20	30 4	3 3.60 4 3.60	0.02	1303.50	0.00	149.40	0.56	0.00	0.07	0.70
] 20	311 4	51 3.60	1 0.02	1303.50	0.00	149.40	0.50	1 0.00	0.06	0.561
20	32 4 33 4	6 3.60 7 3.60	0.01 0.01	1 1303 50	0.00	1 140 40	ปี่กรด	3 10 110) 0.05 1 0.04	0.50
20	34 4	8 3.60	10.0	1303.50 1303.50	0.00		0.39	1 0.00	0.04	0.40
20	35 4	9 3.60	0.01	1303.50	0.00	149.40	ij 0.31	0.00) 0.03	0.35
	37 5	0 3.60 1 3.60	0.01						0.03	0.28
20	38 5	2 3.60	0.00	1303.50	0.00	149.40	0.22	0.00	0.02	0.25
20 20		3 3.60 4 3.60			0.00					
20	41 5	5 3.60	0.00	1303.50	0.00	149.40	0.16	0.00	0.01	0.18
20 20		6 3.60 7 3.60								
21)		3.00		100.00		147.40	0.12	0.00	. 0.01	0.14
Tot		508.93	183.74				172.99	8.39	30.69	212.08
100	41	200.92	107.74	L	1	<u> </u>	174.99	0.3	30.09	414.00

C1: average net cost of useful salable energy and capacity
C2: average net cost of useful salable energy
C3: average net cost of total energy and capacity

12(X) 228, 20 188, 88 1, 208 39, 32 Discount rate: R = 8 = 8 / C = 8 / C = kW Value B1= kWH Value B2= kWH Value B3= 1 68 US\$/kW 0.063 US\$/kWH 0.005 US\$/kWH C1= 0.061117172 C2= 0.049534151 C3= 0.037754520

	40.00	B - C =	39.32	kWH '	Value B2= Value B3≃	0.005	US\$/kWH US\$/kWH	C3= (0.049534151 0.037754520	H=TINU	illion US\$
	rear	Serial Number	Cost Flow	Discounted Cost Flow		Project Sale	es			Benefit Flow	
					Salable Energy (GWH/Yr)	Surplus Energy (GWH/Yr)	Useful Capacity (MW)	Salable Energy	Surplus Energy	Useful Capacity	Total
	987	1	4.81	4.29	0.00	0.00		0.00		0.00	0.00
1	1988 1989	2	19.57 21.57	15.60 15.35	0.00	0.00		0.00		0:00	0.00
1 :	990	7	22.25	14.14		0.00 0.00	0.00	0.00 0.00	0.00 0.00		0.00 0.00
1	1991	5	41.94	23.79	0.00	0.00	0.00	0.00			0.00
	1992	6	61.20	1 31.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	1993 1994	7 8	102.14 52.10		0.00 179.00	0.00		0.00			0.00
1	1995	9	2.48	0.89	256.00	836.10 759.10	52.00 69.00	4,55 5,81			7.67 8.87
1	1996	10	7.61	2.45	333.00	682.10	86.10	6.75	1.09		9.73
	1997	11	13.21	3.79			104.20	7.51	0.86	2.03	10.41
	998 1999	12	9.24 3.73	2.37 0.85		1014.40	123.20	8.08			11.53
1 2	2000		3.73	0.76	680.00	926.40 834.40		8.48 8.76	1.06 0.85	2.22	11.77
1 2	1003	15	3.73	0.68	776.00	738.40	174.90	8.93			11.77
	2002				876.00	638.40	174.90	9.00	0.52	1.94	11.46
	2003 2004	17 18	3.73 3.73	0.54 0.48			174.90	8.99	0.38	1.73	11.11
	2005	19	3.73		1201.00		174.90 174.90	8.92 8.78	0.27 0.18		10.74 10.34
	3006	20	3.73	0.38	1318.00	196.40	174.90	8.60		1.38	9.94
	2007	21	3.73	0.34	1440.00	74.40	174.90	8.39	0.03	1.10	9.53
	8002	22	3.73			0.00	174.90	7.88			8.86
	2009 2010	23 24	3.73 3.73	0.27 0.24				7.03 6.28			7.91
	2011	25	3.73	0.21		0.00	174.90	5.61		0.78	7.06 6.31
2	2012	26	3.73	0.19	1514.40	0.00	174.90	5.01	0.00		5.63
	2013	27	3.73	0.17		0.00		4.47	0.00	0.55	5.03
	2014	28 29	3.73 3.73			0.00		3.99 3.56	0.00	0.49	4 49
	2016	30	3.73	0.13		0.00		3.18		0.44 0.39	4:01 3:58
1 2	(0)17	31		0.11	1514.40	0.00	174.90	2.84	0.00	0.35	3. 19
2	2018	32	3.73	0.09	1514.40	0.00	174.90	2.53	0.00	0.31	2.85
1 2	2019 2020	33 34	3.73 3.73	0.08	1514.40	0.00	174.90	2.26		0.28	2.54
2	2021	35	3.73	0.07		0.00		2-02 1.80	0.00 0.00		2.27 2.03
2	2022	36	3.73		1514.40	0.00	174.90	1.61		0.20	1.81
	3023	37	3.73	0.05	1514.40	0.00	174.90	1.44	0.00	0.17	1.62
	2024 2025	38. 39	3.73	0.05		0.00	174.90	1.28		0.16	1.44
	026	40	3.73 3.73	0.04 0.04		0.00 0.00		1.14		0.14 0.12	1.29 1.15
	2027	41	3.73	0.03	1514.40	0.00	174.90	0.91	0.00	0.11	1 02
2	2028	42	3.73	0.03	1514.40	0.00	174.90	0.81	0.00	0.10	0.91
	029	43	3.73	0.02		0.00		0.72	0.00		0.82
	2030 2031	44 45	3.73 3.73	0.02 0.02	1514.40 1514.40	0.00 0.00		0.65 0.58	0.00 0.00	0.08	0.73 0.65
	032	46	3.73			0.00	174.90	0.58		0.06	0.58
2	2033	47	3.73	0.01	1514.40	0.00	174.90	0.46		0.05	0.52
	034		3.73	0.01	1514.40	0.00	174.90	0.41	0.00	0.05	0.46
	1035 1036	49 50	3.73		1514.40						0.41
	1037	50 51	3.73 3.73			0.00					0.37 0.33
	038	52	3.73	0.01							0.29
2	2039	53	3 73	0.00	1514.40	0.00	174.90	0.23	0.00	0.02	0.26
	040	54	3.73	0.00							0.23
	041 042	55 56	3.73 3.73	0.00		0.00					0.21 0.18
	043	57	3.73	0.00		0.00					0.16
-				ļ		-	ļ	 		 	
Ta	tal		525.97	188-88				183.96	10.41	33.82	228.20
1,0	,	لتحددا	363.91	199:99		L	L	107.79	10.41	33.06	220.20

C1: average net cost of useful salable energy and capacity
C2: average net cost of useful salable energy
C3: average net cust of total energy and capacity

Discount rater	12(%) 242.02	S =	1		
° - B/€-	193.17 1.252	kW Value B1= kWN Value B2=	68 US\$/kW 0.063 US\$/kWH	C1 0.059009402 C2 0.047048685	UNIT-NILLion US\$
ВС	48.85	kWH Value B3=	0.005 US\$/kW8	C3- 0.034799634	

	B·€	48.85	kWll 1	Yalue B3≈	0.005	US\$/kWH	C3- (1.034799634	UNIT-N	111100 023
Year	Serial		Discounted		roject Sal	es		Discounted l	Benefit Flow	
	Number	Flow	Cost Flow	Salable Energy (GWH/Yr)	Surplus Energy (GWN/Yr)	Useful Capacity (NW)	Salable Energy	Surplus Energy	Useful Capacity	fólal
1987	1	4.81	4.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1988	2	19.57	15.60	0.00	0.00	0.00	0.00	0.00 0.00	0.00	0.00 0.00
1989.	3	21.57		0.00	0.00 0.00		0.00	1. 0.00	1 0.001	0.00
1990 1991	4 5	22.77 43.60	24.73	0.00	0.00	0.00	0.00	1 000	0.00	0.00
1992	i	64.18	32.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1993	. 7	105.08	47.53	0.00	0.00	0.00	0.00	0.00	0.00 1.42	0.0
1994		53.59	21.64	179.00	980.70 903.70	52.00 69.00	5.81	1.98 1.62	1.69	7.9 9.1
1995 1996		2.56 2.56		256.00 333.00	826.70	86.10	6.75	1.33	1.88	9.9
1997	11	8.10		415.00	744.70	104.20	751	1 07	2.031	10.6
1998	- 12	13.70	3.51	1 รถถากถ	659.70	123.20	8.08	0.84 1.29	2.15	11.0
1999		9.36		588.00 680.00	1133.60 1041.60	143.00 163.70	0.40	1 (.27	2.22 2.27	12.0 12.1
2000 2001		3.84 3.84	0.78				8.93		2.30	12.0
2002	16	3.84	0.62	876.00	845.60	201.00	9.00	0.68	2.221	11.9
2003		3.84	0.55	980.00	741.60	201.00	8.99	0.54	1.99	11.5
2004		3.84	0.49		632.60	201.00 201.00	8.92 8.78		1.77	10.6
2005 2006	19 20	3.84 3.84	0.44			201.00	8.60	0.20	1.411	10.2
2007	21	3.84	0.35	1440.00	281.60	201.00	8.39	0.13	1.261	9.7
2008	22	3.84	0.31	1567.00	154.60	201.00	8.15	0.06	1.12	9.3
2009		3.84	0.28	1699.00	22.60	201-00	7.89	0.00	1.00 0.90	8.9
2010		3.84 3.84	0.25 0.22	1721.60 1721.60	0.00		7.14 6.38	0.00	0.80	7.1
2011		3.84	0.22	1721.60	0.00		5.69	0.00	0.71	6,4
2013		3.84	0.18	1721.60	0.00	201.00	1 5 08	0.00	0.64	5.7
2014	28	3.84	0.16	1721.60	0.00	201.00	4.54	0.00	0.57 0.51	5.1
2015		3.84		1721.60 1721.60		201.00	4.05	0.00	0.45	4.5 4.0
2016 2017		3.84			0.00	201.00	3.23	0.00	0.40	
2018	32	3.84	[0.10	1721.60	0.00	201.00	2.88	0.00	0.36	3.2
2019		3.84	0.09	1721.60	1. 0.00	il 201.00	11 2.57	0.00	0.32	2. 2.
2020	34	3.84	0.08	1721.60	0.00	201.00	2.30	0.00	0.28 0.25	2.
2021 2022	35 36	3.84 3.84	0.07		0.00	201.00			0.23	2.0
2023	37	3.84	0.05	1721 60	0.00	201.00	1 63	0.00	0.20	148
2024	38	3.84	0.05	1721.60	0.00	201.00	1 46	0.90	0.18	1.0
2025	39	3.84	8.04	1721.60	0.00	201.00 201.00 201.00	1.30	0.00	0.16 0.14	1.4 1.3
2026 2027	40 41	3.84 3.84		1721.60 1721.60	0.00	201.00	1.16	0.00	0.13	1.
2028	42	3.84	0.03	1721.60	0.00	201.00	0.92	0.00	0.11	1,0
2029	43	3.84	0.02	1721.60	0.00		0.92	0.00	0.10	0.1
2030	44	3.84	0.02	1721:60	0.00	11 201 00)(0.74	11 - 0.00	0.09	Û.
2031	45] 46]	3.84 3.84	0.02	1721.60 1721.60	0.00	201.00 201.00	0.66	0.00	0.08	0. 0.
2033	47	3.84	0.02	1721.60	0.00	11 201.00	1 0 5	0.00	0.06	0.
2034	48	3.84	0.01	1721.60	0.00	201.00	0.47	7.1 0.00	0.05	0.
2035	49	3.84	0.01	1721.60	0.00		0.42	0.00		0.
2036	50	3.84		1721.60 1721.60	0.00					0. 0.
2037 2038	51 52	3.84 3.84			0.00					0.
2039	53	3.84		1721.60	0.00		0.26	0.00	0.03	0.
2040	54	3.84	0.00	1721.60	0.00	201.00	0.23	0.00	0.03	0.
2041	55	3.84								
2042	56 57	3.84 3.84	0.00 0.00							
otal		540.41		 			192.9	 	<u> </u>	

C1: average net cost of useful salable energy and capacity C2: average net cost of useful salable energy average net cost of total energy and capacity

Discount	ratez B C + B/C B C	12(X) 250.57 202.27 1.238 48.30	kW Valu kWli Valu kWli Valu	e 82=	1 68 US\$/kW 0.063 US\$/kWH 0.005 US\$/kWH	C1= 0:060009441 C2= 0.047647882 C3= 0.034636752	UNIT : Hillion
Year	Serial	Cost. D	iscounted	Р	roject Sales	Discounted Bene	fit. Flow

	B C		g =			US\$ZKWH US\$ZKWH	C3= (0.047647882 0.034636752	UNITINU	ittion US
Year	Serial Number	Cost. Flow	Discounted Cost Flow		Project Sal	es			Benefit Flow	
				Salable	Surplus Energy (GWH/Yr)	Useful	Salable Energy	Surplus Energy	Useful Capacity	Total
1987	1	4.81	4.29	0.00	0.00					0.0
1988 1989	2 3	19.57 21,57	15.60 15.35	0.00 0.00	0.00	0.00	0.00			0.6
1990	4		15.06	0.00	0.00		0.00 0.00			0.0
1991	. 5	46.04	26.12	0.00	0.00	0.00	0.00			0.0
1992	6		34.28	0.00	0.00	0.00	0.00	0.00	0.00	0.0
1993	7	107.61 54.39	48.67 21.96	0.00	0.00		0.00	0.00	0.00	0.1
1994 1995	8 9		21.90	179.00 256.00	799.80 722.80	52.00 69.00	4.55			7
1996	່ເດັ່	12.74	4.10	333.00	645.80	86.10	5.81 6.75	1.30 1.03	1.69	8
1997	ii	8.56	2.46	415.00	1047.10	104.20	7.51			9. 11.
1998	12	7.98	2.04	500.00	962.10	123.20	8.08		2.15	. 11.
1999	13	7.66	1.75	588.00	874.10	143.00	8.48	1.00	2.22	11.
2000 2001	14 15	5.49 4.08	1.12 0.74	680.00 776.00	1242.10	163.70	8.76		2.27	12.
2002	16		0.66	876.00	1 1076 10	200 20	8.93 9.00		2.30	12.
2003			0.59	980.00	942.10	224.80	8.99	0.68	2.31 2.22	12 11
2004	· 18	4.08	0.53	1089.00	833.10		8.92	0.54	1.98	11.
2005			0.47	1201.00	721.10	224.80	8.78	0.41	1.77	10.
2006	20	4.08	0.42 0.37	1318.00	604.10	224.80	8.60	0.31	1.58	10.
2007 2008	21 22	4.08 4.08	0.37	1440.00 1567.00	482.10	224.80	8.39		1.41	10.
2009	23			1699.00	355.10 223.10	224.80 224.80	8.15 7.89		1.26	9. 9.
οιος	24	4.08	0.26	1837.00	85.10	224.80	7.62		1.00	8.
1105	25	4.08	0.23	1863.20	58.90	224.80	6.90	0.01		7
2012	26	4.08	0.21	1863 20	58.90	224.80	6.16	0.01	0.80	6
2013	27	4.08	0.19 0.17	1863.20	58.90			0.01	0.71	δ.
2014 2015	28 29		0.17	1863.20 1863.20	58.90 58.90	224.80		0.01		5.
2016	30		0.13	1863 20	58 90	224.80 224.80				4. 4.
2017	31		0.12	1863.20	58.90	224.80	3.49	0.00	0.45	3.
2018	32	.4.08	0.10 0.09	1863.20	58.90	224.80	3.12	0.00	0.40	3.
2019	33	1.08	0.09	1863.20	58.90			0.00	0.36	3.
2020 2021	34 35	4.08	0.08	1863.20	58.90		2.48	0.00	0.32	2.
2022	36		0.07 0.06	1863.20 1863.20	58.90 58.90	224.80 224.80	2.22 1.98	0.00		2.
2023	.37	4.08	0.06	1863.20	58.90	224.80	1.77	0.00	0.23	2. 2.
024	- 38	4.08	0.05	1863.20	58.90	224.80	1.58	0.00	0.20	1.
2025	39	4.08	0.04	1863.20	58.90	224.80	1.41	0.00	0.181	1.
2026			0.04	1863.20	58.90	224.80	1.26	0.00	0.16	1.
027 028	41 42	4.08 4.08	0.03 0.03	1863.20 1863.20	58.90 58.90	224.80 224.80	1.12 1.00			1.
023	43			1863.20	58.90	224.80				1.
030	44			1863.20	58.90	224.80	0.80	0.00		0.
031	45	4.08	0.02	1863.20	58.90	224.80	0.71	0.00	0.09	. 0.
032	46			1863.20	58.90	224.80	0.63	0.00	0.08	0.
033	47			1863.20	58.90	224.80	0.57			
034 035	48 49	4.08 4.08			58.90 58.90	224.80 224.80				0. 0.
036	50	4.08	0.01	1863.20		224.80				0.
037	51	4.08		1863.20	58.90					0.
2038	52	4.08	0.01	1863.20	58.90	224.80	0.32	0.00	0.04	0.
039	53	÷ 4.08	0.01							0.
040	54	4.08	0.00							0.
2041 2042	55 56	4.08 4.08								0. 0.
2012	57	4.08			58.90					0.
- <u>-</u> -!			}				1	<u> </u>		
tal		570.20	202.27		1		198.21	13.46	38.89	250

C1: average net cost of useful salable energy and capacity
C2: average net cost of useful salable energy
C3: average net cost of total energy and capacity

Discount rate=	12(%)	•			4
\$ ≈	254.41	S =	1 68 US\$/kW	C1= 0.062076650	
Ç =	210.45	kW Value Bl= kWN Value B2=	0.063 US\$/kWI	C2= 0.049027168	
B/C= R C	1.208 43.96	kWII Value B2= kWII Value B3*	0.005 US\$/kWII	C3 - 0.034078518	UNIT William USS

	B C	43.96	kWII Y						UNITA	
Year	Serial		Discounted		Project Sale	S		iscounted	Benefit Flow	and the same series
	Number	Flow	Cost Flow	Salable Energy	Cirolno	Vseful	Salable	Surplus Energy	Useful Capacity	Tòtal
1987		4.81	4.29	0.00	0.00	0.00	0.00	0.00		0.00
1988	2	19.57	15.60	0.00	0.60	0.00	0.00	0.00		9.00 0.00
1989	31	21.57	15.35	0.00	0.00	0.00 0.00				0.00
1990		24.35	15.47	0.00						0.00
1991 1992	5	48.02 71.04		0.00		0.00	0.00	0.00	0.00	0.00
1993		111.03	50.22	0.00	0.00	0.00	0.00	0.00		0.00
1994	8	55.90	22.57	179.00		52.00	4.55 5.81	1.83 1.49	1.42 1.69	7.81 9.00
1995		2.21			831.50 754.50	69.00 86.10		1.21	1.88	9.85
1996 1997		7.29	2.34 3.73	333.00 415.00	672:50	104.20	7.51	0.96	2.03	10.51
1997		8.93	2.29	500.00	1118.50 1030.50	123.20	8.08	1.43	2.15	11.67
1999		8.39	1.92	588.00	1030.50	143.00	8 48		2.22	11.89
2000	14	17.82	3.64	680.00	938.50	163.70		0.96 1.21	2.27 2.30	12.00 12.45
2001		12.55	2.29		1330.20 1230.20	185.40 208.30			2.31	12.31
2002 2003		4.41 4.41			1126.10	232.30	8.99	0.82	2.30	12.11
2004		4.41		1089.00	1017.20	250.40	8.92	0.66	2.21	11.79
2005	19	4.41	0.51	1201.00	905.20	250.40	8.78	0.52	1.97	11.28 10.78
2006		4.41	0.45	1318.00	788.20	250:40 250:40	8.60 8.39	0.40 0.30		10.78
2007 2008	21 22	4.41			666.20 539.20		8.15	0.22	1.40	9.78
2009	23	4.41	0.32			250.40	7.89	0.15	1.25	9.30
2010		4.41	0.29	1837.00	269.20	250.40	7:62	0.08	1.12	8.83
2011	25	4.41	0.25		243.00	250.40	6.90		1.00	7.97 7.12
2012	26	4.41	0.23	1863.20 1863.20		250.40 250.40	6.16 5.50		0.89	6.35
2013 2014		4.41		1863.20	243.00		4.91	0.05	0.71	5.67
2015		4.41			243.00	250.40	4.38	0.04	0.63	5.07
2016	30	4.41	0.14	1863.20	243.00	250.40	3.91	0.04	0.56	4.52
2017		4.41			243.00	250.40	3.49			4.04 3.60
2018	32 33	4.41 4.41	0.11 0.10	1863.20 1863.20	243.00 243.00	250.40 250.40	3 12 2 78		0.40	3.22
2019 2020	334	4:41		1863.20	243.00	250.40	2.48		0.36	2.87
2021	35	4.41		1863.20	243.00	250.40	2.22	0.02	0.32	2.56
2022	36	4.41		1863.20	243.00	250.40		0.02	0.28	2.29
2023	37	4.41			243.00	250.40 250.40			0.25 0.22	2.04 1.82
2024 2025	38 39	4.41			243.00 243.00	250.40				1.63
2026	40	4.41	0.04	1863.20	243.00	250.40	1.26	0.01	0.18	1.45
2027	41	4.41	0.04	1863.20	243.00	250.40	1 12	0.01	0.16	1.30
2028	42	4-41	0.03	1863.20	243.00	250.40	1 00	0.01	0.14	1.16 1.03
2029 2030	43	4.41 4.41	0.03 0.03		243.00 243.00		0.89 0.80	0.00	0.13	0.92
2031	45	4.41		1863.20	243.00		0.71	0.00) 0.10 l	0.82
2032	46	4.41	0.02	1863.20	243.00	250.40	0.63	0.00	0.09	·· 0.73
2033	47	4.41	0.02	1863.20	243.00	250.40	0.57			0.65
2034	48	4.41	0.01		243.00					
2035 2036	49 50	4.41	0.01 0.01	1863.20 1863.20	243.00 243.00	250.40 250.40	0.40			0.46
2037	51	4.41	0.01	1863.20	243.00			0.00	0.05	0.41
2038	52	4.41	0.01	1863.20	243.00	250.40	0.32	0.00	0.04	0.37
2039	53	4.41	0.01	1863.20		250.40				0.33
2040	54	4.41	0.00 0.00	1863.20 1863.20	243.00 243.00				0.03	0.29 0.20
2041	55 56	4.41 4.41	0.00	1863.20					0.02	0.23
2043	57	4.41	0.00	1863.20	243.00				0.02	0.21
Total	1	611.70	210.45			:	. 198.21	15.14	41.05	254.4

C): average net cost of useful salable energy and capacity
C2: average net cost of useful salable energy
C3: average net cost of total energy and capacity

12(X) 238.07 189.49 Discount rates B + C - B/C B C S =
kW Value B1=
kWH Value B2=
kWH Value B3= 1 1 68 US\$/kW 0.063 US\$/kWH 0.005 US\$/kWH C1= 0.058803134 C2= 0.046933589 C3= 0.035365278 48.58

	B C	gari.	48.58		kWH	Valúe β3≃	0.063	US\$/kW#	· C3= (1.035365278	UNIT : M	illion US\$
Yea	r Seriai Humbei		lost	Disco Cost	unled Flow		Project Sal	es		Discounted	Benefit Flow	
						Salable Energy	Surplus Energy (GWH/Yr)	Useful Capacity (KW)	Salable Energy	Surplus Energy	Useful Capacity	Total
198			4.81		4.29			0.00			0.00	0.00
198			19.57 21.57		15.60 15.35		0.00	0.00	0.00	0.00	0.00	0.00
199	ol -	1	21.96	ŀ	13.95	0.00	0.00	0.00 0.00	0.00		0.00 0.00	0.00
199		il .	41.11		23.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00
199	1 2 3	:1	61.59 103.28	,	31.20 46.71	0.00	0.00		0.00	0.00	0.00	0.00
199		11	52.61		21.24	179.00	940.40	0.00 52.00	0.00 4.55			0.00 7.88
199	5	H ·	2.51	1	0.30	256.00	863.40	69.00	5.81		1.42	9.06
199			8.01	i .	2.57	333.00	786.40	86.10	6.75	1.26	1.88	9.90
199			13.61	ĺ	3.91 2.37	415.00 500.00	704.40 619.40	104.20 123.20	7.51 8.08		2.03	10.56
199	9 1	3 [9.27 3.77		0.86	588.00	1073.80	143.00	8.48	1.23	2.15 2.22	11.03 11.94
200	ΰ į		3.77	1	0.77	680.00	981.80	163.70	8.76	1.00	2.27	12.04
200		?}	3.77 3.77	}	0.68 0.61	776.00 876.00	885.80 785.80	185.40	8.93		2.30	12.04
200			3.77	l	0.54	980.00	681.80	193.80 193.80	9.00 8.99	0.64 0.49	2.14 1.91	11.79 11.40
200	4 18	3	3.77	1:	0.49	1089.00	572.80	193.80	8.92	0.37	1.21	11.00
200			3.77		0.43	1201.00	460.80	193.80	8.78	0.26	1.53	10:58
200	6 20 7 2	"	3.77 3.77	1	0.39	1318.00 1440.00	343.80 221.80	193.80 193.80	8.60 8.39			10.15
200			3.77		0.31	1567.00	94.80	193.80	8.15	0.10 0.03	1.21	9.71 9.28
200	9 2	3}	3.77		0.27	1661.80	0.00	193.80	7.72	0.00	0.97	8.69
201	0 2	!	3.77	[0.24	1661.80	0.00	193.80	6.89	0.00	0.86	7,76
201)	3.77 3.77		0.22 0.19	1661.80 1661.80	0.00		6.15 5.49		0.77	6.9 3 6.19
201	3 2		3.77	1	0.17	1661.80	0.00		4.90		0.69 0.61	5.52
201	41 2	3	3.77)	0.15	1661.80	0.00	1 193.80	1 4.38	0.00	0.55	4.93
201	5 2		3.77		0.14		0.00	193.80	3.91	0.00	0.49	4:40
201			3.77		0.12		0.00		3.49	0.00 0.00	0.43	3.93
201	8l 3:		3.77			1661.80	0.00	193.80	2.78		6 35	3.51 3.13
201	9 3	3	3.77	1	0.08	1661.89	0.00	193.80	2.48	0.00	0.31	2.80
202		1	3.77		0.07		0.00	193.80	2.22	0.00	0.27	2.50
202 202			3.77 3.77	ŀ	0.07	1661.80 1661.80	0.00 0.00		1.98 1.77	0.00 0.00	0.24	2.23
202			3.77	•	0.05		0.00		1.58	0.00	0.22 0.19	1.99 1.77
202	4 3		3.77	l	0.05	1661.80	0.00	193.80	1.41	0.00	0.17	1.58
202			3.77		0.04		0.00		1.26	0.00	0.15	1.41
202			3.77 3.77	Ì.	0.04		0.00		1.12	0.00 0.00		1.26 1.13
202			3.77		0.03	1661.80	0.00	193.80	0.89	0.00	0.11	1.00
202			3.77	ł	0.02	1661.80	0.00	193.80	0.80	0.00	0.10	0.90
203	0 4		3.77	l	0.02	1661.80	0.00	193.80	0.71	0.00	0.09	0.80
203	2 4		3.77 3.77		0.02		0.00	193.80 193.80	0.63 0.57	0.00	0.08 0.07	0.71 0.64
203	3 4	7	3.77	1.	0.01	1661.80	0.00	193.80	0.50	0.00	0.06	0.57
203	4 4	3	3.77		0.01	1661.80	0.00	193.80	0.45	0.00	0.05	0.51
203	51 49	11	3.77	1	0.01	1661.80	0.00	193.80	0.40			0.45
203 203		'	3.77 3.77		$0.01 \\ 0.01$		0.00					0.40 0.36
203			3.77 3.77		0.01	1661.80					0.03	0.30
203	9 5	3	3.77		0.00	1661.80	0.00	193.80	0.25	0.00	0.03	0.29
204			3.77 3.77		0.00							0.25 0.23
204			3.77		0.00							0.23
204			3.77	1	0.00							0.18
Tota	1		529.55	1	189.49	-			190.51	11.67	35.89	238.07

C1: average net cost of useful salable energy and capacity
C2: average net cost of useful salable energy
C3: average net cost of total energy and capacity

Discount rate	12(%)			
B -	247.61 205.53	S = kW Value B1=	68 US\$/kW	c1- 0.061575991
BAC -	1.204	kWII Value B2=	0.063 US\$/kWII	C2* 0.049496865 C3* 0.035193049 UNIT Million US\$
R+C+	42.08	kWN Value 183:	0.005 US\$/kWH	1'24 0'033153003 Rull pillion 094

	B C	42.08	kWII '	Value B3=	0.005	US\$/kW8	C3~ (3.035193049	URIT K	Ilion USS
Year	Serial	Cost	Discounted		Project Sale	38	į t	iscounted t	Benefit Flow	19 19 19. <u>14 14 14 1</u> 4 1
	Нимрег	Flow	Cost Flow	Salable Energy (GWH/Yr)	Surplus Energy (GWH/Yr)	Capacity (NW)	Energy	Bnergy	Capacity	fotal
1987	1	4.81	4,29	0.00	0.00	0.00	0.00	0.00	0.00 0.00 0.00	0.00 0.00
1988	2	19.57	15.60	0.00		0.00	0.00	0.00	0.00	0.00
1989 1990	1 41	21.57 24.51	16 67	0.00 0.00 0.00 0.00	0.00	0.00 0.00 0.00	0.00	0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 1.42 1.69 1.88 2.03 2.15 2.22 2.27 2.30 1.86 1.66 1.48 1.32 1.18 1.05 0.94 0.75 0.67 0.67 0.67 0.67 0.67	0.00
1991	5	49.64	28.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1992 1993	6 7	71.00 110.37	35.97	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1994	8	56, 68	22.89	0.00 0.00 179.00	1041.10	52.00	4,55	2.10	1.42	8 08
1995	1 91	2.70 2.70	0.97	256.00	964.10	69.00	5.81 6.25	1.73	1.09	10.06
1996 1997	10	2.70 8.42	0.86 2.42	333.00 415.00	805.10	104.20	7.51	1.15	2.03	10.71
1998	12	14.01	3.59	500.00	720.10 1223.30 1131.30	123.20	8.08	0.92	2.15	11.15
1999	13	9.65 4.05	2.21 0.82	588.00 680.00	1223.30	143.00	8.48 8.76	1.40	2.27	12.20
2000 2001	14 15	4.05	0.73	776.00	1035.30	185.40	8.93	0.94	2,30	12.18
2002	161	4.05	0.66	876.00	935.30	208.30	9.00	0.76	2.31	12.07
2007 2004	17 18	4.05 4.05	0.58 0.52	980.00 1089.00	831.30 722.30	211.20	8.92	0.00	1.86	11.25
2005	19	4.05	0.47	1201.00	610.30	211.20	8.78	0.35	1.66	10.80
2006	20	4.05	0.41	1318.00	493.30	211.20	8.60	0.25	1.48	10.35 0.80
2007 2008	21 22	4.05 4.05	0.37	1440.00 1567.00	244.30	211.20	8.15	0.10	1.18	9.44
2009	23	4.05 4.05	0.29	1567.00 1699.00	112.30	211.20	7.89	0.04	1.05	8.99
2010	24 25	4.05 4.05	0.26 0.23	1811.30	0.00	211.20	6.71	0.00	0.94	7.55
2011 2012		4.05	0.21	1811.30 1811.30 1811.30	0.00	211.20	5.99	0.00	0.75	6.74
2013	[27]	4.05	0.18	1811.30	0.00	211.20	5.35	0.00	0.67	6.02
2014 2015	28	4.05 4.05	0.16 0.15	1811.30 1811.30	0.00	211.20	4.26	0.00	0.53	4.80
2016] 30}	4.05	0.13	1811.30 1811.30 1811.30 1811.30	0.00	211.20	3.80	0.00	0.47	4.28
2017 2018	31	4.05 4.05	0.12 0.10	1811.30	0.00	211.20	3.40 3.03	0.00	0.42 0.38	3.41 3.41
2019	33	4.05	0.09		0.00	211.20	2.71	0.00	0.34	3.0
2020	34	4.05	0.08	1 (811.50	0.00	211.20	3.03 2.71 2.42 2.16 1.92 1.72	0.00	0.30 0.27 0.24	2.72
2021		4.05 4.05		1811.30	0.00	211.20	1.92	0.00	0.24	2.72 2.4 2.17
2023	37	4.05	0.06	1811.30	0.00	211.20	1.72	0.00	11 0.211	1.93
2024	38	4.05 4.05	0.05 0.04	1811.30 1811.30	1 0.00	211.20	1.53 1.37 1.22	0.00	0.19	1.7
2025 2026		4.05	0.04	1 1211 30	1 กาก	211.20	1.22	0.00	0.15	1.38
2027	41)	4.05	0.03	1811.30	0.00	211.20	1.09	1. 0.00	0.13	1.2
2028 2029		4.05 4.05	0.03	1811.30	0.00	211.20 211.20 211.20	0.97	0.00 0.00	0.12	1.10
2030	44	4.05	1 กกว	1811 70	. ไ กกก	1 211.20	0.77	1 0.00	11 - 0.091	0.98 0.87 0.78
2031	45	4.05	[0.02	1811.30	0.00	1 211.20	0.69	0.00 0.00 0.00	0.08	0.7
2032 2033	46 47	4.05 4.05	0.02	1811.30	0.00	211.20 211.20	11 0.55	0.00	0.07	0.6 0.6
2034]	[48]	4:05	0.01	1811.30	1 - 0.00	211.20	0.49	0.00	0.061	0.5
2035 2036	49 50	4.05 4.05			0.00		0.44	0.00	0.05	0.4 0.4
2037	511	4.05				211.20	3 0.35	0.00	0.04	0.3
2038	52	4.05	0.01	1811.30	0.00	211.20	0.31	0.00	0.03	0.3
2039 2040	53 54	4.05 4.05						0.00	0.03	0.3
2041	55	4.05	0.00	1811.30	0.00	211.20	0.22	0.00	0.02	0.2
2042	56	4.05		1811.30			0.20		0.02	0.22 0.20
2043	57	4.05	0.00	1811.30	0.00	211.20	0.17	0.00	0.02	0.20
Fotal		573.83	205.53				196.35	13.61	37.64	247.6

C1: average not cost of useful salable energy and capacity
C2: average not cost of useful salable energy
C3: average not cost of total energy and capacity

12(%) 252.63 236.63 1.067 Discount rate
B
C
B/C kW Value B1= kWii Value B2= kWii Value B3= 68 US\$/kW 0.063 US\$/kWH 0.005 US\$/kWH C1= 0.070158249 C2= 0.057971944 C3= 0.040429358 8 -C= 16.00 UNIT-Million US\$

Γ''	L	A	[C3= U.U4U429398 UNII-MIIIION USS				
	Serial Number	Cost Flow	Discounted Cost Flow		roject Sal	ės	Discounted Benefit Flow				
				Salable Energy (GWH/Yr)	Suratus	Henful.	Salable Energy		Useful Capacity	Total	
1987	1		4.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
1988	. 2	19.57	15.60		0.00	0.00	0.00	0.00	0.00	0.00	
1989	3		15.35	0.00		0.00	0.00	0.00	0.00	0.00	
1990	4 5	29.60 65.09		0.00	0.00 0.00				0.00	0.00	
1992	6		43.84	0.00	0.00			0.00 0.00		0.00	
1993	7	120.37	54.44	0.00		0.00	0.00	0.00	0.00	0.00 0.00	
1994	8	61.75	24.93	179.00	796.80	52.00	4.55	1.60	1.42	7.59	
1995	9		2.60	256.00	719.80	69.00	5.81	1.29	1.69	8.80	
1996	10	13.00	4.18	333.00	642.80	86.10 104.20 123.20	6.75	1.03	1.88	9.67	
1997	11			415.00 500.00	1046.90	104.20	7.51	1.50	2.03	11.05	
1998 1999	13	8.05	1.84	588.00	961.90 873 90	143.00	8.08 8.48	1.23	2.15 2.22	11.47	
2000	14	6.07	1.24	680.00	873.90 1250.80	163.70	8.76	1.27	2.27	11.71 12.32	
2001	15	8.05 6.07 4.61 4.61	0.84	776.00	1154.80	185.40	8.93	1.05	2,30	12.28	
2002				026 00	1004 00		9.00	0.86	2.31	12.28 12.17	
2003	17		0.67	980.00	950.80	223.60	8.99	0.69	2.21	11.89	
2004 2005	18 19	4.61 4.61	0.59 0.53	1089.00	950.80 841.80 729.80 612.80	223.60 223.60	8.92 8.78		1.97	11.44	
2006	20	4.61	0.47	1318.00	612.80	223.60	8.60	0.42 0.31	1.76 1.57	10.97 10.50	
2007	21	4.61	0.42	1440.00	490.80	1 443.00	8.39	0.22	1.40	10.03	
2008	22	4.61	0.38	1567.00	363.80	223.60	8.15	0.15	1.25	9.56	
2009	23			1699.00	231.80	223.60	7.89	0.08	1.12	9.10 8.65	
2010	24	4.61	0.30	1837.00	93.80	223.60	7.62	0.03	1.00	8.65	
2011 2012	25 26			1930.80 1930.80	0.00 0.00	223.60 223.60	7.15 6.38	0.00 0.00	0.89 0.79	8.04	
2013	27		0.24	1930.80	0.00	223.60	5.70	0.00	0.79	7.18 6.41	
2014	28	4.61	0.19	1930.80	0.00	223.60	5.09	0.00	0.71 0.63 0.56	5.72	
2015	70	4 61	0.17	1930.80	0.00	223.60	4.54	0.00	0.56	5.11	
2016	30	4.61	0.15	1 1020 20	เกก	223.60	4.06	0.00] 0.50]	4.56	
2017	31	4.61		1930.80 1930.80	0.00 0.00	223.60 223.60	3.62	0.00		4.07	
2018 2019	32 33	4.61 4.61		1930.80	0.00	223.60	3.23 2.88	0.00	0.40 0.36	3.64 3.25	
2020	34	4,61		1930.80	0.00	223.60	2.58	0.00	0.32	2.90	
2021	35	4.61	0.08	1930.80	0.00	223.60	2.30	0.00	0.28	2.59	
2022	36	4.61	0.07	1930.80	0.00	223.60	2.05	0.00	0.25	2.90 2.59 2.31	
2023	37	4.61	0.06	1930.80 1930.80	0.00	223.60	1.83	0.00	0.22 0.20	2.06 1.84	
2024 2025	38		0.06 0.05	เ เจรก ผก	חח מו	223.60 223.60		0.00 0.00	0.20	1.84	
2026	40	4.61	0.03	1930.80	0.00	223.60	1.30	0.00	0.16	1.47	
2027	41	4.61	0.04	1930.80	0.00	223.60	1.16	0.00	9.14	1.31	
2028	42	4.61	0.03	1930.80	0.00	223.60	1.04	0.00	0.13	1.17	
2029	43		0.03	1930.80 1930.80	0.00	223.60 223.60	0.93	0.00	1 0.111	1.04 0.93	
2030 2031	44 45		0.02	1930.80	0.00 0.00	223.60	0.74	0.00	0.10	0.93	
2032	46		0.02	1930.80 1930.80 1930.80	0.00	223.60	0.66	0.00	0.08	0.74	
2033	47	4.61	0.02	1930.80	0.00	223.60	0.59	0.00	0.07	0.66	
2034	48	4.61		1 1930.80	0.00	223.60	0.52	0.00	0.06	0.59	
2035	49	4.61		1930.80	0.00		0.47	0.00	0.05 0.05	0.53 0.47	
2036 2037	50 51	4.61 4.61	0.01 0.01	1930.80 1930.80	0.00	223.60			0.04	0.42	
2038	52	4.61	0.01	1930.80	0.00			0.00		0.37	
2039	53	4.61	0.01	1930.80	0.00	223.60	0.29	0.00	0.03	0.33	
2040	- 54	4.61	0.01	1930.80	0.00	223.60	0.26	0.00		0.30	
2041	55	4.61	0.00	1930.80	0.00					0.26	
2042	56	4.61	0.00	1930.80	0.00		0.21 0.19	0.00		0.23 0.21	
2043	57	4.61	0.00	1930.80	0.00	225.00	0.19	0.00	0.02		
Tutal		659.20	236.63				200.49	13.35	38.78	252.63	
10041		057.20	430.03			L	1				

C1: average net cost of useful salable energy and capacity
C2: average net cost of useful salable energy
C3: average net cost of total energy and capacity

Discount rate	12(%)			
B - C - B · C -	1.161 kWR	S = Value B1= Value B2= Value B3=	I 68 US\$/kW 0.063 US\$/kWH 0.005 US\$/kWH	C1= 0.063375943 C2= 0.052328944 C3= 0.043436698 UNIT=Million US\$

	B · C =	29.11	kwii '	Value B3=	0.005	U\$\$7KWII	· · · · · · · · · · · · · · · · · · ·			
Year	Serial	Cost	Discounted		Project Sale	es	1	discounted l	Benefit Flow	raine († 1964). Mysikasa (* 18
	Number	Flow	Cost. Flow	Salable Energy (GWH/Yr)	Surplus Encrsy (GWH/Yr)	Useful Capacity (NW)	Salable Energy	Surplus Energy	Useful Capacity	Total
1987	1	4.81	4.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1988	2	19,57	15.60	0.00	0.00	0.00	0.00			0.00
1989	3	21.57	15.35	0.00	0.00	0.00	0.00 0.00	0.00 0.00		0.0 0.0
1330	4	20.64	13.11.	0.00	0.00 0.00	0.00	0.00	0.00	0.00	0.0
1991 . 1992	5 6	38.65 55.65	21.93	Q.00	0.00	0.00	0.00	0.00		0.0
1993	7	96.69		0:00	0.00	0.00	0.00	0.00	0.00	0.0
1994	8	49.95	20.17	179.00	686.80	52.00	4.55		1.42	7.3
1995	9	7.05	2.54 4.08	256.00	609.80 532.80	69.00 86.10	5.81 6.75		1.69 1.88	8.6 9.4
1996	10	12.68	4.08 2.56	333.00 415.00	450.80	99.40	7.51	0.64	1.94	10, 1
1997 1998	11 12	8.92 3.53	0.90	500.00	365.80	99.40	8.08	0.46	1.73	10.2
1999	13	3.53	0.80	588.00	697,20	143.00	8.48	0.79		11.5
2000	141	3.53	0.72	680.00	605.20	149.10				11.4
2001	15	3.53	0.64	776.00	509.20 409.20	149.10 149.10	8.93 9.00	0.46 0.33	1.85	
2002	16 17	3.53 3.53	0.57 0.51	- 876.00 980.00	305.20	149.10		0.22	1.47	10.6
2003 2004	18	3.53	0.45	1089.00	196.20	149.10	8.92		1.31	10.3
2005	191	3.53	0.40	1201,00	84.20	149 10	8.78			10.0
2006	20	3.53	0.36	1285.20	0.00	149.10	8.39	0.00		9.4
2007	21	3.53 3.53	0.32 0.29	1285.20 1285.20	0.00 0.00	149.10 149.10				7.9
2008 2003	22 23	3.53	0.26	1285.20	0.00	149.10			0.74	6.7
2010	24	3, 53	0.23	1285, 20	0.00	149.10		0.00	0.66	6.0
2011	25	3.53 3.53	0.20	1285.20 1285.20	0.00	149.10	4.76		0.59	5.3
2012	26	3.531	0.18	1285.20	0.00	149.10	4.25 3.79	0.00		4.7
2013	27	3.53 3.53	0.16 0.14	1285.20 1285.20	0.00 0.00	149.10 149.10		0.00		3.8
2014	28 29	3.53	0.13	1285.20	0.00	149.10		0.00	0.37	3.4
2016	30	3.53	0.11	1285.20	0.00	149.10	2.70	0.00		3.0
2017	31	3.53 3.53	0.10	1285.20	0.00	149.10	2.41	0.00		2.7
2018	32	3.53	0.09	1285.20 1285.20	0.00 0.00	149.10 149.10	2.15 1.92	0.00		2.4 2.1
2019 2020	33 34	3.53 3.53	0.08 0.07	1285.20	0.00	149.10		0.00	0.21	1.9
2021	35	3.53	0.06	1285.20 1285.20	0.00	149.10	1.53	1 0.00	0.19	1.5
2022	36	3.53	0.05	1285.20	0.00	149.10	1.36	0.00	0.17	1.5
2023	37	3.53	0.05	1285.20	0.00	149.10	1.22	0.00	0.15	1.3
2024	38	3.53	0.04	1285.20 1285.20	0.00 0.00	149.10 149.10	1.09 0.97			: 1.2 170
2025 2026	39 40	3.53 3.53	0.04 0.03	1285.20	00.00	149.10	0.87	0.00		0.4
2027	41	3.53	0.03	1285.20	0.00	149.10	0.77	0.00	0.09	0.8
2028	42	3.53	0.03	1285.20	0.00	149.10	0.69		0.08	.0.
2029	13	3.53	0.02	1285.20		149.10	0.61	0.00		0.0
2030	14	3.53	0.02	1285.20 1285.20	0.00	149.10	0.55		0.06	0.1 0.
2031	45 46	3.53 3.53	0.02 0.01	1285.20		149.10 149.10	0.49		0.05	
2033	47	3.53 3.53	0.01	1285.20	0.00	149.10	0.39	0.00	0.04	0.
2034	48	3.53	0.01	1285.20	0.00	149.10	0.35	0.00	0.04	0.
2035	49	3.53	0.01	1285.20	9.00		0.31	0.00	0.03	0.
2036	50 51	3.53	10.0	1285.20	0.00	149.10			0.03	0. 0.
2037 2038	11 52	3.53i 3.53	0.01 0.00	1285.20 1285.20	0.00 0.00	149.10				
2039	53	3.53	0.00	1285.20 1285.20	0.00	149.10	0.19	0.00	0.02	0.0
2040	54]	3.53	0.00	[1285.20	0.00	149.10	0 17	0.00	0.02	0.
2041	55	3.53	0.00	1285.20	0.00	149.10	0.15			0.
2042 2043	56 57	3.53 3.53	0.00 0.00	1285.20 1285.20	0:00 0:00	149.10 149.10	0.14	0.00	0.01	0. 0.
	~						 		-	
rotal		498.56	180.00		ļ		171.89	7.07	7 30.14	209.

C1: average net cost of useful salable energy and capacity
C2: average net cost of useful salable energy
average net cost of total energy and capacity

12(%) 247.67 200.12 1.237 47.55 Discount rate:
B =
C = S = kW Value B1= kWH Value B2= kWH Value B3= 1 68 US\$/kW 0.063 US\$/kWH 0.005 US\$/kWH C1= 0.059839744 C2= 0.047742994 C3= 0.034266461 B/C= B-C-

	, в «С» -	47.55		value 65=	0,005	U2#\KMH	C3= (0.034266461	บพเว⊤ห	illion US:	
	Serial Number	Cost	Discounted Cost Flow		Project Sal	es	Discounted Benefit Flow				
		Flow		Salable Energy (GWN/Yr)	Surplus Energy (GWH/Yr)	(Capacily	Salable Energy	Surplus Energy	Useful Capacity	Total	
1987		4.81	4.29	0.00		0.00	0.00	0.00	0.00	0.00	
1988	2	19.57				0.00	0.00	0.00	0.00	0.0	
1989 1990	3	21.57 23.51		0.00 0.00		0.00	0.00		0.00	0.0	
1991	5	45.83	26.00	0.00	9.00 0.00	0.00	0.00		0.00	0.0	
1992	6	67.63	34.26	0.00	1 000	0.00	0.00	0.00 0.00	0.00	0.0 0.0	
1993	7	109.30	49.44	0.00 179.00	0.00			0.00		0.0	
1994	- 8	56.00	22.61	179.00	1041.10	52.00	4.55	2.10		8.0	
1995	9	2.67	0.96	256.00	964.10	69.00	5.81 6.75 7.51	1.73	1.69	9.2	
1996	10 11		0.85 2.39	333.00	887.10	86.10	6.75	1.42	1.88	10.0	
1997 1998	12	0.71	3.59	415.00 500.00	805.10 720.10	104.20 123.20	7.51	1 1 1 1	2.03	10.7	
1999	131	9 63	2.20	588.00	1223.30	143.00	8.08 8.48		2.15	11.1	
2000	14	4.00	0.81	680.00	1131.30	163.70	8.76	1.40 1.15	2.22	12.1	
2001	[15]	4.00	0.73	776.00	1035 30	185 40	8.93	0.94	2.30	12.2 12.1	
2002	16	4.00	0.65	876.00	935.30	208.30	1 9 00	0.76	2.31	12.0	
2003	17		0.58	980.00 1089.00	831.30	211.80	8.99	0.60	2 09	11.6	
2004 2005	18 19	4.00 4.00	0.52 0.46	1089.00	935.30 831.30 722.30 610.30	211.80 211.80 211.80	8.92		1.87	11.2	
2005	20	4.00	0.40	1201.00 1318.00			8.78	0.35	1.67	10.8	
2007	21		0.37	1440.00	371.30	211.80	8.60 8.39	0.25 0.17	1.49	10.3 9.9	
2008	22	4.00	0.33	1567.00	1 244 30	E 211 RD	8.15	0.17		9.4	
2009	23	4.00	0.29	1699.00	112 30	211.80	7.89	0.04	1.06	9.0	
2010	24	4.00		1811.30 1811.30	0.00	211.80	7 51	0.00	0.94	8.4	
2011	25	4.00	0.23	1811.30	0.00	211.80	6.71	0.00	0.84	7.5	
2012 2013	26 27	4.00	0.21 0.18	1811.30 1811.30	0.00	211.80	5.99 5.35	0.00	0.75	6.7	
2014	28	4.00	0.16	1811.30	0.00	211.80	4.77	0.00		6:0 5:3	
2015	29	4.00	0.14	1811.30	0.00	211.80 211.80 211.80	4.26	0.00		4.8	
2016	30		0.13	1811.30	0.00	211.80	3.80	0.00	0.48	4.2	
2017	31	4.00	0.11	1811.30	0.00	1 211.80	3.40	0.00	0.42	3.8	
2018	32	4.00	0.10		0.00	211.80	3.03	0.00	0.38	3 4	
2019 2020	33 34	4.00 4.00	0.09 0.08	1 1811.30	1 0.00	211.80	2.71		0.34	3.0	
2021	35	4.00	0.07	1811.30	0.00		2.42 2.16	0.00 0.00		2.7 2.4	
2022	36			1811.30	0.00	211.80	1.92	0.00		2.4	
2023	37	4.00	0.06	1811.30		211.80	1.72	0.00		1.9	
2024	38	4.00	0.05	1811.30	0.00	211.80	1.53	0.00	0.19	1.7	
2025	39	4.00	0.04	1811.30	1 0.00	211.80	1.37	1 0.00	0.171	1.5	
2026 2027	40		0.04	1811.30	0.00	211.80	1.22	0.00	0.15	1.3	
2027	41 42	4.00 4.00					1.09 0.97	0.00	0.13	1.2	
2029	43	4.00	0.03	1811.30 1811.30		211.80 211.80	0.97	0.00 0.00	0.12 0.11	1.1 0.9	
2030	44	4.00	0.02	1811.30	0.00	211.80	0.77	0.00	0.09	0.8	
2031	45	4.00	0.02	1811.30	0.00	211.80	0.69	0.00	0.08	0.7	
2032	46	4.00	0.02	1811.30	0.00	211.80	0.62	0.00	0.07	0.6	
2033	47	4.00 4.00	0.01	1811.30	0.00			0.00		0.6	
2034 2035	48 49	4.00 4.00		1811.30 1811.30	0.00		0.49 0.44	0.00		0.5	
2036	50	4.00	0.01	1811.30	0.00		0.44	0.00		0.4 0.4	
2037	51	4.00	0.01	1811.30				0.00		0.3	
2038	52	4.00	0.01	1811.30	0.00		0.31	0.00	0.03	0.3	
2039	53	4.00	0.00	1811.30	0.00	211.80	0.28	0.00	0.03	0.3	
2040	54	4.00	0.00	1811.30	0.00					0.2	
2041	55	4.00	0.00	1811.30						0.7	
2042 2043	56 57	4.00					0.20			0.2 0.2	
2043	2/	4.00	0.00	1811.30	0.00	211.80	0.17	0.00	0.02	·	
otal		561.52	200.12			ļ	196.35	13.61	37.70	247.0	

<sup>C1: average net cost of useful salable energy and capacity
C2: average net cost of useful salable energy
C3: average net cost of total energy and capacity</sup>

Discount rate:	12(%)		e _	1	:	
В Са	212.08 195.84	kW Value	5 = B1=	68 US\$/kW		C1= 0.068261793
B/C=	1.082	kWH Value	B2=	0.063 US\$/kWH		C2= 0.057085530 C3= 0.044251650 UNIT=Million USS
B - C=	16.24	kWII Value	B3≈	0.005 US\$/kWH		C3= 0.044251650 UNIT=Million USS

<u></u>	B-C=	16.24			/alue B3=		022/x#H				
Year	Serial	Cost	Discou Cost			Project Sale				lenefit Flow	
	Number	Flow	COSt	1.10M	Salable	Surplus	Use(u)		Surplus	Useful Capacity	Fotal
1 1				٠.,	Energy	Energy (GWH/Yr)	Capacity (NW)	Energy	Energy	capacity	TOLAT
					(GWH/Yr)	-(UWII/11/					
1987	1	4.81		4.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1988	2	19.57]]	5.60	0.00	0.00	0.00	0.00	0.00 0.00	0.00 0.00	0.00 0.00
1989	3	21.57		5.35	0.00 0.00	0.00 0.00	0.00 0.00	0.00	0.00	0.00	0.00
1990	4	22.47 44.67		4.28 5.34	0.00	0.00	0.00	0.00	0.00		0.00
1991 1992	5 6	64.78		2.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1993	7	105.54	4	7.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1994	8	53.88	2,	1.76	179.00	691.10	52.00	4.55	1.39 1.10	1.42	7.37 8.61
1995	9	7.38		2.66	256.00 333.00	614.10 537.10	69.00 86.10	5.81 6.75	0.86	1.88	9.50
1996 1997	10 11	13.19 9.35		4.24 2.68	415.00	888.50	104.20	7.51	1.27	2.03	10.83
1998	12	3.80	1	0.97	500.00	803.50	123.20	8.08	1.03	2.15	11.26
1999	13	3.80	(0.87	588.00	715.50	143.00	8.48		2.22	11.53
2000	14	3.80		0.77	680.00	623.50	149.40	8.76	0.63	2.07	11.48 11.26
2001	15	3.80		0.60	776.00	527.50 427.50	149.40 149.40	8.93 9.00	0.48 0.34	1.85	11.00
2002 2003	16 17	3.80 3.80		().61 ().55	876.00 980.00	323.50	149.40	8.99	0.23		10.70
2003	18	3.80	,	0.49	1089.00	214.50	149.40	8.92		1.32	10.38
2005	19	3.80	(0.44	1201.00	102.50	149.40	8.78	0.05	1.17	10.02
2006	20	3.80	. (0.39	1303.50	0.00		8.51	0.00		9.56
2007	21	3.80		0.35	1303.50	0.00	149.40	7.60	0.00 0.00	0.94	8.54 7.62
2008	22	3.80		0.31	1303.50	0.00 0.00	149.40 149.40				6.80
2009	23	3.80 3.80		0.28 0.25	1303.50 1303.50	0.00	149.40	5.41	0.00		6.07
2010 2011	24 25	3.80		0.22	1303.50	0.00					5.42
2012	26	3.80	- (0.19	1303.50	0.00	149.40	4.31	0.00	0.53	4.84
2013	27	3.80	- (0.17	1303.50	0.00	149.40	3.85	0.00		4.32
2014	28	3.80		0.15	1303.50	0.00	149.40				3,86 3,44
2015	29 30	3.80 3.80		0.14 0.12	1303.50 1303.50	0.00 0.00	149,40 149,40				3.44
2016 2017	30 31	3.80		0.12 0.11	1303.50	0.00	149.40	2.44		0.30	2.75
2018	32	3.80		0.10	1303.50	0.00	149.40	2.18	0.00	0.27	2.45
2019	33	3.80	(0.09	1303.50	0.00	149.40	1.95	0.00	0.24	2.19
2020	34	3.80	(0.08	1303.50	0.00	149.40	1.74			1.95
2021	35	3.80		0.07	1303.50	0.00	149.40	1.55	0.00		1.74 1.56
2022	36 37	3.80 3.80		0.06 0.05	1303.50 1303.50	0.00	149,40 149,40	1.38 1.23	0.00	0.17	1.30
2023 2024	38	3.80		0.05	1303.50	0.00	149.40			0.13	1.24
2025	39	3.80		0.04	1303.50	0.00		0.98	0.00	0.12	1.11
2026	4 0	3.80	1 (0.04	1303.50	0.00	149.40	0.88	0.00	0.10	0.99
2027	41	3.80		0.03	1303.50	0.00	149.40				0.88
2028	42	3.80		0.03	1303.50		149.40	0.70			0.79 0.70
2029 2030	43 44	3.80 3.80		0.02	1303.50 1303.50		149.40 149.40				
2031	45	3.80		0.02			149.40				
2032	46	3.80		0.02	1303.50	0.00	149.40	0.44	0.00	0.05	0.50
2033	47	3.80		10.0	1303.50	0.00	149,40	0.39	0.00		0.44
2034	48	3.80		10.0	1303.50		149.40			0.04	
2035	49	3.80		0.01	1303.50	0.00					0.35 0.31
2036 2037	50 51	3.80 3.80	1	$0.01 \\ 0.01$	1303.50 1303.50	0.00					0.28
2038	52	3.80	1	0.01	1303.50		149.40	0.22	0.00		0.25
2039	53	3.80		0.00	1303.50	0.00	149.40			0.02	0.22
2040	54	3.80		0.00	1303.50	0.00	149.40	0.18	0.00	0.02	0.20
2041	55	3.80		0.00	1303.50	0.00	149.40	0.16		0.01	0.18
2042	56	3.80		0.00							0.16
2043	57	3.80	L	0.00	1303.50	0.00	149.40	0.12	0.00	0,01	0.14
	,]								
Total		542.01	19	5.84				172.99	8.39	30.69	212.08
L	لـــ ــــا	·-,	J		L	.l		1		L	1

C1: average net cost of useful salable energy and capacity
C2: average net cost of useful salable energy
C3: average net cost of total energy and capacity

Discount rate	12(%)				
B C B/C B ⋅C	228.20 201.57 1.132 26.62	kW Value kWH Value kWH Value	B2=	1 68 US\$/kW 0.063 US\$/kWH 0.005 US\$/kWH	CI= 0.065465495 C2= 0.053882473 C3= 0.040292552

	B/C B-C	1.132 26.62		Value B2= Value B3=	0.063	US\$/kWH US\$/kWH		0.053882473 0.040292552	UNI T : M	illion US\$
Year	Serial Number	Cost	Discounted Cost Flow		roject Sale	es	Discounted Benefit Flow			
	1112001		cost 110w	Salable Energy (GWN/Yr)	Surplus Energy (GWH/Yr)	Useful Capacity (KW)	Salable Energy	Surplus Energy	Useful Capacity	Total
1987		4.81	4.29	0.00	0.00				0.00	0.00
1988		19.57 21.57	15.60 15.35		0.00 0.00		0.00			0.00
1990		23.10		0.00	0.00	0.00	0.00 0.00	0.00	0.00	0.00
1991	5	46.98	26.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1992		68.75			0.00		0.00	0.00	0.00	0.00
1993		109.39 55.79			0.00 836.10				0.00	0.00
1995		2,62		256.00	759.10		4.55 5.81	1.68 1.36		7.67 8.87
1996	10	7.74	2.49	333.00	682.10	86.10		1.09	1.88	9.73
1997	11	13.55	3.89		600.10	104.20	7.51	0.86	2.03	10.41
1998		9,58 3,93			1014.40		8.08			11.53
2000		3.93	0.80		926.40 834.40		8.48 8.76		2.22 2.27	11.77
2001		3.93	0.71		738.40	174.90	8.93			11.89
2002	16	3.93		876.00	638.40	174.90	9:00	0.52	1.94	11.46
2003	17	3.93			534.40	174.90				. 11.11
2004 2005		3.93 3.93	0.51 0.45				8.92	0.27	1.54	10.74
2006		3.93				174.90 174.90			1.38	10.34
2007	21	3.93	0.36	1440.00	74.40	174.90		0.10	1.10	9.53
2008	22	3.93		1514.40	0.00	174.90	7.88	0.00		8.86
2009		3.93		1514.40	0.00					7.91
2010		3.93 3.93			0.00 0.00		6.28			7.06
2012		3.93			0.00	174.90	5.61 5.01	0.00 0.00		6.31 5.63
2013	27	3.93	0.18	1514.40	0.00			0.00		5.03
2014		3.93	0.16	1514.40	0.00	174.90	3.99	0.00		4.49
2015		3.93 3.93							0.44	4.01
2016										3.58
2018		3.93	0.10					0.00	0.37	3.19 2.85
2019	33	3.93	0.03		0.00		2.26			2.54
2020		3.93		1514.40	0.00	174.90	2.02	0.00	0.25	2.27
2021							1.80			2.03
2022		3.93 3.93			0.00					1.81
2024		3.93								1.62
2025	39	3.93	0.04	1514.40	0.00		1.14	0.00	0.14	1.29
2026		3.93			0.00			0.00	0.12	1.15
2027		3.93 3.93								1.02
2029		3.93			0.00 0.00		0.81 0.72			0.91
2030	44	3.93					0.65	0.00		0.73
2031	45	3.93	0.02	1514.40	0.00	174.90	0.58	0.00	0.07	0.65
2032					0.00	174.90	0.51			0.58
2033		3.93			0.00		0.46			0.52
2035		3.93 3.93			0.00 0.00			0.00		0.46 0.41
2036	50	3.93	0.01	1514.40	0.00	174.90	0.33	0.00	0.04	0.37
2037	51	3.93	0.01	1514.40	0.00	174.90	0.29	0.00	0.03	0.33
2038		3.93			0.00					0.29
2039 2040		3.93 3.93			0.00 0.00					0.26 0.23
2010	55	3.93			0.00					0.21
2042	56	3.93	0.00	1514.40	0.00	174.90	0.16	0.00	0.02	0.18
2043	57	3.93	0.00	1514.40	0.00	174.90	0.14	0.00	0.01	0.16
Total		560.30	201.57		·		183.96	10.41	33.82	228.20

C1: average net cost of useful salable energy and capacity
C2: average net cost of useful salable energy
C3: average net cost of total energy and capacity

Discount rate:	15(%)				
y =	242.02	kw Value	S:= B1=	1 68 US\$/kW	C1= 0.063543053
€ = 8/C=	207.05 1.168	kWH Value	B2=	0.063 US\$/kWH	C2= 0.051582336
B - C -	34.96	kWH Value	83=	0.005 US\$/kWH	 C3= 0.037301072 UNIT=Million US\$

	B-C-	34.96	KWN		ช.บบร					
	Serial		Cost Discounted		Discounted Project Sales Cost Flow				Benefit Flow	
	Number	Flow	Cost Flow	Salable Energy	Surplus Energy (GWH/Yr)		Salable Energy	Surplus Energy	Useful Capacity	Total
1987	1	4.81	4.29	0.00	0.00	0.00	0.00	0,00	0.00	0.00
1988	2	19.57	15.60	0.00 0.00 0.00	0.00 0.00	0.00 0.00	0,00		0.00	0.00
1989	3	21.57 23.67	15.35 15.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1990 1991	5	49.08	27.84	1 0.00	1 0.00	0.00	0.00	0.00	0.00	0.00
1992	6	72.41	36.68	1 n.on	0.00 0.00	0.00	0.00	0.00	0.00	0.00 0.00
1993	7	113.06	51 14	0.00 179.00	980.70	0.00 52.00	0.00 4.55	0.00	1.42	7.96
1994	8	57.72 2.71	23.31 0.97	256.00	903.70	69.00	5.81	1.62	1.69	9.13
1996		2.71	0.87	333.00	826.70	86.10	6.75	[1.33	1.88	9.97
1997	11	8, 25	2.37	415.00	744.70	104.20	7.51 8.08			10.62 11.08
1998	12	14:06 9.72	3.60 2.22	500.00 588.00	659.70 1133.60	143.00	8.48		2.22	12.01
2000	14	4.07	1 0.83	1 680.00	1041.60	163,70	8.76	1.06	2.27	12,10
2001	15	4.07	0.74	776.00	945.60	185.40	8.93	0.86	2.30	12.09 11.92
2002	16	4.07 4.07	0.74 0.66 0.59	876.00	845.60 741.60	201.00 201.00	9.00 8.99	0 68 0 54		11.52
2003	17 18	4.07 4.07	0.59	980.00 1089.00	632.60	201.00				11131
2004		A 07	1 0.47	1201.00	520.60	201.00	8.78	0.30	1.58	10.67
2006	20	4.97	0.42	1318.00	403.60	201.00	8.60			10.23 9.79
2007	21	4.07 4.07	0.37 0.33	1440.00 1567.00	281.60 154.60	201.00 201.00	8.39 8.15	0.13 0.06	1,26	9.39
2008 2009	22 23	4.07	0.30	1699.00	22.60	201.00	7.89	0.00	1,00	8.91
2010	24	4.07	0.26	1721.60	0.00	201.00	7.14	0.00	0.90	8.04 7.18
2011	25	4.07	0.23	1721.60	0.00	201.00 201.00		0 00	0.80	6.4
2012	26 27	4.07 4.07	0.21	1721.60 1721.60	0.00	201.00		0.00	0.64	5.72
2014	28	4.07	0.17	1721.60	0.00	201.00	4.54	0.00	0.57	5.11
2015	29	.4.07	(0.15	[1721.60	0.00	201.00	4.05			4.56 4.0
2016		4.07 4.07	0.13 0.12	1721.60 1721.60	0.00	201.00 201.00	3.62		0.40	3.6
2018		4.07	0.10	1721.60	0.00	201.00	2.88	0.00	0.36	3.2
2019	33	4.07	0.09	1721.60	0.00	201.00	2.57	0.00	0.32	2.90
2020	34	4.07 4.07	0.08	1721.60 1721.60	0.00	201.00 201.00	2.30 2.05		0.28 0.25	2.59 2.31
2022	35 36 37	4.07	0.06	1721.60	0.00	201.00	1.83	0.00	0.23	2.00
2023	37	4.07 4.07	0.06	1721.60	0.00	201.00	1.63	0.00	0.20	1.84
2024	38	4.07	0.05	1721.60	0.00	201.00	1.46	0.00	0.18	1.60
2025 2026	39 40	4.07	0.04		0.00	201.00 201.00	1.30		0.16 0.14	1.3
2027	41	4.07	0.03	1721.60	0.00	201.00	1.04	0.00	0.13	1.4
2028	42	4.07	0.03	1721.60	0.00	201.00	0.92	0.00	0.11	1.0
2029	43	4.07 4.07	0.03	1721.60 1721.60	0.00	201.00	0.82		0.10	0.9 0.8
2030 2031	44 45	4.07	0.02	1721.60	0.00	201.00	0.66		0.08	
2032	46	4.07	0.02	1721.60	0.00	201.00	0.59	0.00	0.07	0.6
2033	47	4.07	0.01	1721.60	0.00	201.00	0.52			
2034 2035		4.07 4.07	0.01				0.47			
2036	50	4.07	0.01	1721.60	0.00	201.00	0.37	0.00	0.04	0.4
2037	51	4.07	0.01	1721.60	0.00	201.00	0.33	0.00	0.04	0.3
2038	52	4.07	0.01	1721.60				0.00	0.03	0.3
2039 2040	53 54	4.07 4.07	0.01 0.00	1721.60 1721.60					0.03	0.3 0.2
2041	55	4.07	0.00				0.21	0.00	0.02	0.2
2042	56	4.07	0.00	1721.60	0.00	201.00	0.19	0.00	0.02	0.2
2043	57	4.07	0.00	1721.60	0.00	201.00	0.16	0.00	0.02	0.1
Total		578.42	207.05				192.95	12.4	36.63	242.0

C1: average net cost of useful salable energy and capacity
C2: average net cost of useful salable energy
C3: average net cost of total energy and capacity

t rate: 12(X)

B = 250.57

C = 217.46

B/C= 1.152

B-C: 33.10 Discount rate: kW Value 81= kWH Value 82= kWH Value 83= B = C = B/C= 1 68 US\$/kW 0.063 US\$/kWH 0.005 US\$/kWH C1= 0.064839325 C2= 0.052477766 C3= 0.037238889

	B-C	33.10	kWII 1	Value B3=	0.063	US\$/kWH US\$/kWH	C2= (C3= ().052477766).037238889	UNIT=X	illion US\$
Year	Serial Number	Cost Flow	Discounted Cost Flow		Project Sal	0s			Benefit Flow	i
	Noacoci	1100	COST FIOW	Salable Energy (GWH/Yr)	Surp)us Energy (GWH/Yr)	Useful Capacity (MW)	Salable Energy	Surplus Energy	Useful Capacity	Total
1987	1	4.81	4.29			0.00	0.00	0.00	0.00	0.00
1988	2	19.57 21.57			0.00	0.00	0.00	0.00	0.00	0.00
1989 1990	3	24.60	15.35 15.63	0.00 0.00	0.00	0.00		0.00	0.00	0.00
1991	5	52.06	29.54	0.00	0.00		0.00	0.00 0.00		0.00
1992	6	76.71	38.86	0.00	0.00	0.00	0.00	0.00		0.00
1993	7	116.10		0.00	0.00	0.00	0.00	0.00	0.00	0,00
1994	8	59.10 7.08	23.86	179.00	799.80	52.00	4.55	1.61	1.42	7.59
1995 1996	10	13.06		256.00 333.00	722.80 645.80	69.00	5.81	1.30	1.69	8.81
1997	liĭ	8.88	2.55	415.00			. 6.75 7.51	1.03 1.50	1.88	9.67
1998	12	8.17	2.09	500.00		123.20	8.08	1.23	2.03 2.15	11.05 11.47
1999	. 13		1.84	588.00	874.10	143.00	8.48	1.00		11.71
2000	14	5.87	1.20	680.00		163.70	8.76	1.27	2.27	12.31
2001 2002	15 16	4,34 4,34	0.79 0.70	776.00	1146.10	185.40	8.93	1.04		12.28
2002	17	4,34	0.70	876.00 980.00		208.30 224.80	9.00 8.99	0.85	2.31	12.16
2004	18	4.34	0.56		833.10	224.80		0.68 0.54		11.90 11.45
2005	19		0.50	1201.00		224.80	8.78	0.41	1.77	10.97
2006	20	4.34			604.10	224.80	8.60	0.31	1.58	10.50
2007	21	4.34	0.40	1440.00		224.80	8.39	0.22	1.41	10.03
2008 2009	22 23	4.34 4.34	0.35 0.32				8.15	0.14	1.26	9.56
2010	24	4.34	0.32	1699.00 1837.00	223.10 85.10	224.80 224.80		0.08 0.02		9.10
2011	25	4.34	0.28 0.25	1863.20		224.80	6.90	0.02	1.00	8.65 7.82
-2012	26	4.34	0.22	1863.20	58.90	224.80		0.01	0.80	6.98
2013	27	4.34		1863.20	58.90	224.80	5.50	0.01	0.71	6.23
2014	28	4.34	0.18	1863.20	58.90	224.80		0.01	0.64	5.56
2015 2016	29 30	4.34 4.34	0.16 0.14	1863.20	58.90	224.80	4.38	0.01	0.57	4.97
2017	31	4.34	0.14	1863.20 1863.20	58.90 58.90	224.80 224.80	3.91 3.49	0.00 0.00	0.51 0.45	4.43
2018	32	4.34	0.11		58.90	224.80	3.12	0.00	0.40	3.53
2019	33	4.34	0.10	1863.20	58,90	224.80	2.78	0.00	0.36	3.15
2020	34	4.34			58.90	224.80		0.00	0.32	2.82
2021 2022	35 36	4.34 4.34				224.80		0.00	0.28	2.51
2023	37	4.34	0.07 0.06		58.90 58.90	224.80 224.80		0.00 0.00		2.24
2024	38	4.34	0.05		58.90	224.80	1.58	0.00		2.00
2025	39	4.34		1863.20	58.90	224.80	1.41	0.00	0.18	1.60
2026	40	4.34	0.04		58.90	224.80		0.00	0.16	1.42
2027	41	4.34	0.04		58.90	224.80		0.00	0.14	1.27
2028 2029	42 43	4.34 4.34				224.80 224.80		0.00 0.00		1.13
2030	44	4.34			58.90	224.80				1.01
2031	45	4.34			58.90	224.80		0.00		0.81
2032	46	4.34	0.02	1863.20	58.90	224.80	0.63	0.00	0.08	0.72
2033	47	4.34			58.90	224.80				0.64
2034 2035	48					224.80			0.06	0.57
2035	49 50	4.34 4.34	0.01 0.01					0.00 0.00		0.51 0.46
2037		4.34	0.01			224.80				0.40
2038	52	4.34	0.01		58.90					0.36
2039	. 53	4.34	0.01	1863.20	58.90	224.80	0.28	0.00	0.03	0.32
2040		4.34	0.00	1863.20	58.90	224-80				0.29
2041 2042	55 56	4.34 4.34	0.00 0.00					0.00		0.26 0.23
2042	57	4.34			58.90	224.80		0.00		0.23
			}	1.303.20	1			1		
	1				[
Total		612.24	- 217.46				198-21	13.46	38.89	250.57
	<u> </u>							·		

C1: average net cost of useful salable energy and capacity
C2: average net cost of useful salable energy
c3: average net cost of total energy and capacity

12(%) 254.41 226.53 1.123 27.87 Discount rate 6 C 3 kW Yalue 81= kWH Yalue 82= kWH Yalue 83= 1 68 US\$/kW 0.063 US\$/kWH 0.005 US\$/kWH C1= 0.067188234 C2= 0.054138751 C3= 0.036682687 B-C-UNIT-Million USS

Year	Serial	Cost	Discounte Cast Flo	1		es		·	Benefit Flow	entrale in 1995. <u>- Arrio II</u>
	Number	Flow	tost Flor	Salable Energy (GWH/Yr)	Energy (GWH/Yr)	Capacity (NW)	Energy	Energy		Total
1987	1	4.81	4.2	0.00	0.00 0.00 0.00	0.00	0.00 0.00	0.00 0.00	0.00 0.00	0.00 0.00
1988	2	19.57 21.57	15.66 15.39	1 0.00	0.00	0.00	0.00	0.00	0.00	0.00
1989 1990	3	25.18	16.00) I O O O O	. 8.00	1 0.00	0.00	0.00	0.00	0.00
1991	5]	54.38	30.8	31 0.00	0.00	0.00	0.00	0.00	0.00	0.0
1992	. 6	80.62	40.8 54.3	0.00	0.00	0.00 0.00 52.00 69.00 86.10	0.00 0.00	0.00	0.00	0.0 0.0
1993 1994	7 8	120.16 61.10		179.00	908.50	52.00	4.55	1.83	1.42	7.8 9.0
1995	9	2.34	0.8	256.00	831.50	69.00	5.81	1.49	1.69	9.0
1996	10	7.42	2.3	333.00	754.50	86.10	6.75 7.51	1.21 0.96	1.88 2.03	9.8 10.5
1997		13.31 9.25	3.83	7 500.00	672.50 1118.50	104.20 123.20	8.08	1. 1.42	1 2.15	. [1,6
1998 1999	12	8.59	1.9	588.00	1030.50	143.00	8.48	1.18	2.22	11.8
2000	14	18.20	3.7	680.00	938.50	163.70	8 76	0.96	2,27	12.0
2001	15	12.94	2.3	776.00 876.00	1330.20 1230.20	185.40	8.93 9.00	1.21		12.4 12.3
2002 2003	16 17	12.94 4.68 4.68 4.68	0.70	3 980.00	1126.10	232.30	2 2 2	0.82	2.30	12.1
2003		4.68	0.6	0 1089.00	1017.20	250 40		0.66	2.21	11.7
2005	19	4.68 4.68 4.68	0.5	1201.00	905.20	250.40	1 8.78	0.52	1.97	11.2
2006	20	4.68	0.4	1318.00	788.20 666.20			0.40	1.76 1.57	10.7
2007	21 22	4.68 4.68	0.4	3 1440.00 8 1567.00	539.20	250.40	1 9 15	1 0 22	1.40	10.7 10.2 9.7
2009	23	4.68	0.3	4 1699.00	407.20	1 250.AN	1 780	1 / 11/15	1.25	9. 8.8 7.
2010	24	4.68 4.68	0.3	0 1837.00	269.20	250.40	7 67	ነ በሰዕ	1.12	8.8
2011	25	4.68	0.2	7 1863.20		250.40		0.07 0.06	1.00	7.9
2012		4.68 4.68	0.2	4 1863.20 1 1863.20	243.00	250.40 250.40	5.50	0.05	0.79	7. 6.3
2014	28	4.68	0.1	91 1863.20	243.00	250.40	1 01	ነ ሰሴ	0.71	5.6
2015	29	4.68	0.1	7 1863.20	243.00	250.40	4.38	0.04	0.63	7.6
2016	30	4.68	0.1	5 1863.20	243.00 243.00	250.40	3.91	1 00%	0.56	4.5
2017 2018	31 32	4.68 4.68	0.1	3 1863.20 2 1863.20	1 247.00	250.40 250.40	3.12	0.03		3.7
2019	33	4.68	0.1	1 1863.20	243.00	250.40	2.78	0.02	0.40	3.2
2020	34	4.68	0.0	91 1863.20	243.00	250 40	2.48	0.02	0.36	2.8
2021	35	4.68	0.0	8 1863.20	243.00	250.40	2.22	0.02 0.02	0.32	2.5 2.7 2.0
2022 2023	36 37	4.68 4.68	0.0	7 1863.20 7 1863.20	243.00 243.00	250.40 250.40				2.0
2024	38	4.68	0.0	6 1863.20	243:00	250.40	1.58	0.01	0.22	1.8
2025	39	4.68	0.0	51 1863.20	243.00	250.40	1.41	0.01	0.20	1.0
2026	40	4.68	0.0	5 1863.20	243.00	250.40 250.40	1.26		0.18	11
2027 2028	41 42	4.68 4.68	0.0	4 1863.20 4 1863.20	243.00 243.00	250.40 250.40	1.12		0.16 0.14	1. 1.
2029	43	4.68	0.0	3 1863.20	243,00	250:40	0.89	0.00	0.13	1.0
2030	44	4.68	0.0	3] 1863.20	243.00	250.40	0.80	0.00	0.11	0.9
2031	45	4.68 4.68	0.0	2] 1863.20 2] 1863.20	243.00 243.00	250.40 250.40	0.71 0.63	0.00	0.10	0.1 0.
2032 2033	46 47	4.68	0.0	2 1863.20	ป วงจากก	II 250.40			0.09	
2034	48	4.68	0.0	2 1863.20	243.00	250.40	0.50	0.00	0.07	0.
2035	49	4.68	0.0	11 1863.20) 243.00) 250.40	0.45	0.00	0.06	0.
2036		4.68					0.40	0.00		0.
2037 2038	51 52	4.68 4.68								0. 0.
2039		4.68								
2040	54	4.68	0.0	1 1863.20	243.00	250.40	0.25	0.00	0.03	0.
2041	55	4.68								0.:
2042 2043	56 57	4.68 4.68								0. 0.
2017	'	1.00		1003.20	247.00	4,00.40	0.10	0.00	- 0.02	J
otai		656.00	226.5	3			198.21	15.14	41.05	254.

<sup>C1: average net cost of useful salable energy and capacity
C2: average net cost of useful salable energy
C3: average net cost of total energy and capacity</sup>

Discount rate 12 (%)	S = 1		
8 = 370.42	kW Value Bi= 68 UK\$AW		
C = 229.12	kWH Value B2= 0.063 (63)/kWH	Cl= 0.039282102	
B/C= 1.616	kwii Value B3= 0.048 US\$/kwii	C2= 0.031454502	•
B-C= 141.30	kWilValue B4≕ 0.005 US\$/kutt	C3= 0.033578778	UNIT= Willion USE

	B-C≃	141.30	· · · · · · · · · · · · · · · · · · ·	d Project Sales				C3= 0.033578778 UNIT= WITTION UNIT					
	Serial Number	Cost	Discounted Cost Flow		Project Sale	es			Discounted Benefit Flow				
				Salable Domestic Energy (CMI/Yr)	Salable Export Energy (GMI/Yr)	Surplus Energy	Usefut Capacity	Salable Domestic Energy	Salable Export Energy	Surplus Enersy	Useful Capacity	Total	
	<u> </u>					(GAI/Yr)	(HW)						
1987 1988	1 2	4.81 19.57	4.29 15.60	0.00 0.00	0.00	0.00 0.00						0.00	
1989	3	21.57	15.35	0.00	0.00	0.00	0.00				0.00	0.00 0.00	
1930 1991	4 5	22.56 44.85	14.33 25.44	0.00 0.00		0.00 0.00		0.00	0.00	0.00	0.00	0.00	
1992	6	65.03	32.97	0.00	0.00	0.00		0.00 0.00				0.00 0.00	
1993	7	105.75 57.18	47.83 23.09	0.00 179.00	0.00			0.00	0.00	0.00	0.00	0.00	
1994 1995	8 9	14.56	5.25	256.00	0.00	691.10 614.10		4.55 5.81				7.37 8.61	
1996	10	19.40	6.24	333.00	0.00	537.10	86.10	6.75	0.00	0.86	1.88	9.50	
1997 1998	11 12	58.72 39.37	16.88 10.10	415.00 500.00		888.50 803.50	104.20 123.20	7.51 8.08	0.00 0.00		2.03 2.15	10.83 11.26	
1920	13	8.60	1.97	588.00	1843.30	0.00	143.00	8.48	20.27	0.00	2.22	30.99	
2000 2001	14 15	5.13 5.13		680.00 776.00		0.00 0.00		8.76 8.93	17.20 14.51	0.00		28.24	
2002	16	5.13	0.83	876.00	1555.30	0.00	208.30	9.00	12.17	0.00	2.31	25.75 23.49	
2003 2004	17 18	5.13 5.13		983.00 1089.00	1451.30 1342.30	0.00 0.00		8.99	10.14	0.00	2.30	21.43	
2005	19	5.13	. 0.59	1201.00	1230.30	0.00						19.57 17.88	
2006 2007	20 21	5.13 5.13	0.53 0.47	1318.00 1440.00		0.00		8.60	5.53	0.00	2.10	16.25	
2008	22	5.13	0.42	1567.00	854.30	0.00						14.68 13.26	
2009	23	5.13	0.37	1699.00	732.30	0.00	298.80	7.89	2.59	0.00	1.49	11.99	
2010 2011	2A 25	5.13 5.13		1837.00 1863.20	594.30 568.10	0.00 0.00		7.62 6.90				10.84 9.70	
2012	26	5.13	0.26	1863.20	568.10	0.00	298.80	6.16	1.43	0.00	1.06	8.66	
2013 2014	27 28	5.13 5.13	0.24 0.21	1863.20 1863.20	568.10 568.10							7.73 6.90	
2015	29	5.13	0.19	1863.20	563.10	0.00	298.80	4.38	1.01	0.00	0.75	6.16	
2016 2017	30 31	5. [3 5. [3	0.17 0.15	1863.20 1863.20		0.00			0.91 0.81	0.00	0.67	5.50	
2018	32	5.13	0.13	1863.20	568-10	0.00	298.80	3,12				4.9) 4.39	
2019 2020	33 31	5.13 5.13	0.12 0.10	1863.20 1863.20	568.10 568.10			2.78	0.64	0.00	0.48	3.91	
2021	35	5.13	0.10	1863.20	568.10							3.49 3.12	
2022	36 37	5.13	0.08	1863.20	568.10	0.00	298.80	1.98	0.46	0.00	0.34	2.79	
2023 2024	38	5.13 5.13	0.07 0.06	1863.20 1863.20	568.10 568.10	0.00		1.77 1.58				2.49 2.22	
2025	39	5.13	0.06	1863.20	568-10	0.00	298.80	1.41	0.32	0.00	0.24	1.98	
2026	40 41	5.13 5.13		1863.20 1863.20				1.26 1.12				1.77 1.59	
2028	42	5.13	0.04	1863.20	568.10	0.00	298.80	1.00	0.23	0.00	0.17	1.4	
2029 2030	43 44	5.13 5.13	0.03 0.03	1863.20 1863.20		0.00		0.89 0.80				1.20	
2031	45	-5.13	0.03	1863.20	568.10	0.00		0.71	0.16			1.12 1.00	
2032 2033	46	5.13	0.02	1863.20	568,10	0.00	298.80	0.63	0.14	0.00	0.11	0.89	
2034	47 48		0.02							0.00	0.08	0.80 0.71	
2035	49	5.13	0.01	1853.20	568.10	0.00	298.80	0.45	0.10	0.00	0.07	0.63	
2036 2037	50 51	5.13 5.13	0.01 0.01	1863.20 1863.20								0.57 0.50	
2038	52	5.13	0.01	1863.20	568.10	0.00	298.80	0.32	0.07	0.00	0.05	0.45	
2039 2040	53 54	5.13 5.13	0.01 0.01	1863.20 1863.20								0.40 0.36	
2041	55	5.13	0.01	1863.20	568.10	0.00	298.80	0.23	0.05	0.00	0.03	0.32	
2042	56 57	5.13	0.00									0.28 0.29	
20/13		5.13	0.00	1863.20	568.10	0.00	230.80	0.18	0.04			0.23	
Total		707.74	229.12			}		198.21	122.01	5.67	44.52	370.42	
i vidi		101.14	469.12	L	L	Ļ	l	170.21	122.01	L	14.32		

C1: average net cost of useful salable energy and capacity
C2: average net cost of useful salable energy
C3: average net cost of total energy and capacity

12 (%) 402.55 237.72 1.693 164.82 S = kW Value B1= kWI Value B2= kWI Value B3= kWI Value 84= 1 68 US\$/kW 0,063 US\$/kWH 0,048 US\$/kWH 0,005 US\$/kWH Discount rate: B = C = B/C= B·C=

C1= 0.036836160 C2= 0.029274397 C3= 0.031503644 UNIT- Million USS

	Serial Number	Cost. Flow	Niscounted Cost. Flow		Project Sale	I	I		Discounted 		r	ty Total
				Salable Domestic Energy	Energy	Surplus Energy	tiseful Capacity (MW)	Salable Doccstle Energy	Salable Export Energy	Surplus Finer sy	Useful Capacity	Total
				(GMI/Yr)	(GMI/Yr)	(GMI/Yr)						
1987	ı	4.81	4.29	0.00		0.00	0.00	0.00	0.00	0.00 0.00	0.00	0.
1388	2	19.57	15.60	0.00 0.00		0.00 0.00	0.00	0.00 0.00	0.00 0.00	0.00	0.00	0.
1989 1990	3	21.57 23.19	15.35 14.73	0.00	0.00	0.00	0.00	0.00	0,00	0.00	0.00	0.
lmi i	5	47.16	26.75	0.00) v.w	0.00 0.00	0.00 0.00	0.00	0.00	0.00	0.00	0.
1992 1993	6	69.04	34.97	0.00	0.00	0.00	0.00	0.00 0.00	0.00 0.00	0.00 0.00	0.00	0.
1993	7	109.58	49.56	0.00 179.00	0.00 0.00	0.00	0.00	4.55	0.00	1.68	1.42	7.
994	8 9	59.49 10.66	24.02 3.84	256.00	0.00		52.00 69.00	5.81	0.00	1.36	1.69	8
1995 1996	10	21.26	6.84	333.00	l nm	682.10	l 86.10	6.75	0.00	1.09	1.88	9,
997	111	64.86	18.64	415.00	0.00	600.10	104.20	7.51	0.00	0.86	2.03	10.
1738	12]	42.27	10.84	500.00	0.00	1014.40	123.20	8.08 8.48	0.00 23.34	1.30 0.00	2.15	!!.
999	13	9.04	2.07	588.00 680.00	2020.60	0.00	143.00	8.76	19.94	0.00	2.27	30
0001 0001	14 15	5.35 5.35	1.0 9 0.97	776.00	1934.60	0.00 0.00	185.40	8.93	16.96	0.00	2.30	28.
2002	16	5.35 5.35 5.35 5.35 5.35 5.35	0.87	876.00	1824.6U	0.00	208.30	9.00	14.36	0.00	2.31	25
00031	17	5.35	0.77	980.00	1730.60	0.00	232.30	8.99 8.92	12.09 10.12	0.00	2.30	23.
1)04	18	5.35	0.69	1089.00 1201.00	1621.60	0.00 0.00	257.50	8.92	10.12 8.41	0.00 0.00	2.41	10
005 006	19 20	5.35 5.35	0.62 0.55	1318.00	1509.60 1392.60 1270.60 1143.60 1011.60 873.60	0.00	311.30	8.78 8.60 8.39	6.92	0.00	2.19	17
007	21	5.35 5.35 5.35 5.35 5.35	0.49	1440.00	1270.60	0.00 00.00	340.10	8.39	5.64	0.00	2.14	16
007 003	22	5.35	0.44	1567.00	1143.60	0.00	349.80	8.15	4 5	0.00	1.96	14
וממנ	23	5.35	0.39	1699.00 1837.00	1011.60	0.00	349.80	7.89 7.62	3.58 2.76	0.00 0.00	1.75	11
oto	24	5.35 5.35	0.35 0.31	1857.00	8/3.60 847.40	0.00 0.00	349.80	6.90	2.70	0.00	1.30	io.
011 012	24 25 26 27	5.35	0.31	1863-20	l 847.40	0.00 l	349.80	6.16 5.50	2.13	0.00	1.24	9.
ורומ	27	5.35 5.35 5.35 5.35 5.35 5.35 5.35 5.35	0.25 0.22 0.20	1863.20 1863.20	847.40	0.00	349.80	5.50	2.13 1.90 1.70	0.00 0.00	1.11	8
2014 2015	28 29 30	5.35	0.22	1863.20	847.40	0.00	349.80	4.91	1.70	0.00	0.99	7
2015	291	5.35 c.26	0.20	18/3.20	847.40	0.00 0.00	349.80 349.80 349.80	4.39 3.91	1.52 1.35	0.00	0.79	1 6
2016 2017	31	5.35	0.17 0.15	1863.20 1863.20	847.40 847.40	0.00	349.80	3.49	1.21	0.00	0.70	Š
ภายเ	32	5.35	0.14	1863.20	847.40	0.00	349.80 349.80	3.12 2.78	1.00	0.00	0.63	4
2019	32 33 34	5.35	0.12	1863.20	847.40	0.00	349.80	2.78	0.90	0.00	0.56	4
2020 2021	34	5.35	0.11 0.10	1863.20 1863.20	847.40 847.40	0.00	349.80	2.48	0.86	0.00	U.20	3
0022	35 36 37	2.22 5.35	0.10	1863.20	847.40	0.00	349.80 349.80	2.22 1.98	0.68	0.00	0.40	3
2023	37	5.35	0.08	1863.20	847.40	1 ก.ชา	1 49.80	1.77	0.61	0.00	0.35	. 2
2024	38 39	5.35	0.07	1863.20	847.40	0.00	349.80 349.80	1.58 1.41	0.54	0.00	0.32	2
2025	39	5.35	0.06	1863.20 1863.20	847.40	0.00	349.80 349.80	1.41	0.48 0.43	0.00	0.28	2
2025) 2027	40 41	5. <i>3</i> 5 5.35	0.05 0.05	1863.20	847.40 847.40	0.00	349.80	1.26	0.39	0.00	0.22	
3728	42	5.35	0.04	1863.20	847.40	0.00	349.80 349.80	1.12 1.00	0.34	0.00	l 0.20	t i
m29	43	5.35	0.04	1863.20	1 847.40	0.00	349.80) 0.89	0.3		0.18	1
030 031	44	5.35 5.35 5.35 5.35 5.35 5.35 5.35 5.35	0.03 0.03	1863.20 1863.20 1863.20	847.40 847.40	0.00	349.80 349.80	0.80	0.2	0.00		1 1 0
3131 3132	45 46	り. <i>3</i> り 5.35	0.03	1803.20	847.40 847.40	0.00	349.80	0.71	0.2	0.00	0.12	1
133	47	5.35	0.02	1863.20	847.40	0.00	349.80		7 0.19	0.00	0.11	0
034	48	5.35	0.02	1863.20	847.40	0.00	349.80	0.50	0.1	0.00	0.10) 0
035	49	5.35	0.02	1863.20	847-40	0.00			0.19	0.00		
036 037	50 51	5.35 5.35								0.00 0.00		
938 1938	52	5.35	0.01			0.00	349.80) 0.32				
3)39	53	5.35	0.01	1863.20	847.40	0.00	349.8	0.2	0.10	0.00		
1)40	54	5.35		1863.20	847.40							
D41 D42	55 56	5.35 5.35	10.0 0.00									
043	57	5.35	0.00	I								
tal		737.90	237.72					198.2	1 150.5	6.3	1 47.50	402

Cl: average net cost of useful salable energy and capacity
Cl: average net cost of useful salable energy
Cl: average net cost of total energy and capacity

Discount rate= 12 (%) B = 428.78 C = 245.49 B/C= 1.746 B C 183.29	Discounted Cash Flow Hethod S = 1 KW Value Bl= (8 USS/kW kW Value B2= 0.063 USS/kW kW Value B3= 0.048 USS/kW kW Value B4= 0.005 US	Case= II - 100 C1= 0.035027288 C2= 0.028022335 C3= 0.02995237 UNIT= Million US

	Year	Serial	Cost.	Discounted	<u></u>	value 64= Project Sal		(ISS/KWI	<u> </u>	Oiscounted 1	3.029995237 Seperit Flo	······································	lillion 18%
		Number	Flow	Cost Flow	Salable	Salable	Surplus	Useful	Salable	Salable	Surplus	Useful	
					Domestic Energy (GMI/Yr)	Export Energy (GMH/Yr)	Energy (GMI/Yr)	Capacity (NW)	Domestic	Export Energy	Energy	Capacity	Total
	1987 1988	1 2	4.81 19.57		0.00 0.00	0.00 0.00			0.00	0.00	0.00	0.00	0.00
	1989	3	21.57	15.35	0.00 0.00	1 nm	0.00	0.00	0.00	0.00 0.00 0.00 0.00 0.00 0.00 0.00	0.00 0.00	0.00	0.00
	1990 1991	4 5	23.69	15.05	0.00	0.00 0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	1992	έ	72.47	36.71	0.00 0.00 0.00 0.00	0.00	0.00	0.00	0.00	0.00	0.00 0.00	0.00	0.00 0.00 0.00
	1993 1994	7	112.97	51.10 24.88	179.00	0.00 0.00	0.00	0.00	0.00	0.00	0.00	1 0 00	0:00 7.96
	1995	9	23.69 49.10 72.47 112.97 61.61 11.33 17.16	4.08	256.00	1 0.00	903.70	69.00	0.00 0.00 0.00 0.00 4.55 5.81 6.75 7.51 8.08 8.48 8.76	0.00	1.98 1.62 1.33 1.07	1.42 1.69	9.13
j	1996 1997	- 10 - 11	69.43	5.52 19.95	415.00	0.00	826.70 744.70	86.10 104.20	6.75	0.00 0.00	1.33	1.88 2.03	9.97 10.62
	1998	12	69.43 46.95 10.65 5.57	12.05	500.00	า กด	1 650.70	123.20	8.08	0.00	0.84	2.15	11.08 36.81
	1999 2000	13 14	5.57	2.44 1.13	I 680.00	2280.30	0.00	143.00	8.48 8.76	0.00 26.09 22.39	0.00 0.00	2.22 2.27	36.81 33.88
	2001 2002	15 16	5.57	1 1 01	776.00	2184.30	0.00	185.40	8.93	19.15	0.00	1 2.30	33.44 30.38 27.63 25.13
	2003	17	5.57	0.81	980.00	1980. K	0.00	232.30	9.00	16.31 13.84	0.00 0.00	2.31 2.30	27.63 25.13
	2004	18 19		0.72	1089.00	1871.30	0.00	257.50	8.92	11.68	0.00	1 2.27	22.87 20.83 18.97 17.29 15.67
İ	2006	20	5.57	0.57	1318.00	1642.30	l nm	311.30	8.60	9.80 8.17	0.00 0.00	2.24 2.19	20.83 18.97
	2007	21 22	5.57 5.57	0.51 0.46	1440.00 1567.00	1520.30 1323.30	0.00 0.00	340.10	8.39	6.75	0.00	1 2.14	17.29
.	2000	23	5 57	1 0.31	l 1699.00	1261-30 1123-30	0.00	354.00	7.89	9.52 4.46	0.00 0.00 0.00	1.98 1.77	15.67 14.14
į	2010 2011	24 25	5.57 5.57	0.36 0.32	1 1863 20	1123.30	0.00 0.00	354.00	7.62	3.55	0.00	1.58 1.41	12:80
	2012	26	l 5.57	0.29	1863.20	1097.10	0.00	354.00	8.93 9.00 8.99 8.92 8.78 8.60 8.39 7.62 6.90 6.16 5.50 4.91 4.38 3.91 3.49	16.31 13.84 11.68 9.80 9.80 9.80 9.55 5.52 4.46 3.55 3.09 2.76 2.46 2.20 1.96 1.75 1.50 1.25 1.11 0.99 0.89 0.79 0.70 0.63 0.50 0.40 0.35 0.32 0.28	0.00	1.26	11.41 10.19
	2013 2014	27 28	5.57 ÷ 5.57	0.23	1863.20 1863.20	1097.10	l nm	354.00 354.00	5.50 4.91	2.46 2.20	0.00 0.00	1.12 1.00	9.10
	2015	29	5.57	0.20	1 1863.20	1097.10	al nom	354.00	4.38	1.96	0.00	0.89	9.10 8.12 7.25 6.47
	2016 2017	31	5.57	0.16	1863.20	1097.10	0.00	354.00	3.91 3.49	1.75	0.00	0.80 0.71	6.47 5.78
	2018 2019	32 33	5.57 5.57	1 0.14	1863.20 1863.20	d i tooz to	0.00	354.00	3.12 2.78 2.48 2.22 1.98 1.77 1.58 1.41 1.26 1.12 1.00 0.89 0.71 0.63 0.57	1.40	0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.0	0.64	5.78 5.16
İ	2020	34	5.57	0.11	1863.20	1097.10	0.00	354.00	2.48	1.11	0.00	0.57 0.51	4.61 4.11
	2021 2022	35 36	5.57 5.57	0.10	1863.20	11. 10097.10	0.00	354.00	2.22	0.99	0.00	0.45 0.40	4.11 3.67 3.28
	2023	37	5.57 5.57	0.08	1863.20	1097.10	0.00	354.00	1.77	0.79	0.00	0.36	2.93
	2024 2025	38 39	5.57	'l 0.06	1863.7	II IUM7. III	11 - (1.68)) 354.00 354.00	1.58	0.70	0.00	0.32 0.28	2.93 2.61 2.33
	2026	40	5.57	1 0.05	1863.20	1097.10 1097.10	0.00	354.00	1.26	0.56	0.00	0.25	2.08
	2028	41 42	5.57 5.57	0.05	1863.20	1097.10	1 n.m	354.00	1.12	0.50	0.00 0.00	0.23 0.20	1.86 1.66
	2029	43 44	5.57 5.57	0.04	1863.20	1097.10 1097.10	0.00	354.00	0.89	0.40	0.00 0.00 0.00	0.18	1.48
	2031	45	5.57	1 0.03	1863.20	1097.10	1 0.00	354.00	0.71	0.32	0.00	0.16 0.14	1.32 1.18
	2032 2033	46 47	5,57 5,57	0.03	1863.20 1863.20	1097.10 1097.10	0.00	354.00	0.63	0.28	0.00	0.13 0.11	1.09
	2034	48	5.57	0.02	1863.20	1097.10	0.00	354.00	0.50	0.22	0.00	0.10	0.84
	2035 2036	49 50		0.02 0.01		1097.10 1097.10							0.75 0.67
	2037	51	5.57	0.01	1863.20	1097.10	0.00	354.00	0.36	0.16	0.00	0.07	0.59
]	2038 2039	52 53	5.57 5.57	0.01 0.01									0.53 0.47
	2040 2041	54 EE	5.57	0.01									0.42
	2042	55 56			1863.20	1097.10	0.00	354.00	0.20	0.09	0.00		0.34
	2043	57	5.57	0.00	1863.20	1097.10	0.00	354.00	0.18	0.08	0.00	0.03	0.30
	Total		766.39	'	'		<u> </u>	<u></u>	198.21	175.99	6.85	47.71	428.78
	. (2: ave	erage net c	ost of usef ost of usef ost of tota	ul salable	energy	capacity						
													•
	٠.							<i>.</i> .					

UNIT= Million USS

S = kW Value B1= kWl Value B2= kWl Value B3= kWl Value B4= 1 68 US\$/kW 0.063 US\$/kM 0.048 US\$/kM 0.005 US\$/kM 12 (Y) 424.16 270.41 1.628 163.74 Discount rate B = C = B/C= B-C= C1= 0.037725133 C2= 0.030001720 C3= 0.031608604


Year	Serial		w Cost Flow		roject Sale	es		Discounted Benefit Flow				
	Mittel	Flow	Cost Flow	Salable Domestic Energy	Salable Export Energy	Surplus Energy	lkseful Capacity	Salable Domestic Energy	Salable Export Energy	Surplus Energy	Useful Capacity	Total
			,	((Mi/Yr)	(GAH/Yr)	(MI/Yr)	(HW)					بكندنيا
1987	1	4.81	4.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1988	2	19.57	15.60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1989	3	21.57	15.35	0.00	0.00	0.00 0.00	0.00	0.00 0.00	0.00 0.00		0.00 0.00	0.00 0.00 0.00 0.00 0.00
1990	4	24.69 52.25	15.69 29.64	0.00 0.00	0.00 0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.0
1991 1992	5 6 7	77.05	39.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.0
1993	7	116.30	52.60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.0 7.5
1994	8	63.76	25.75	179.00	0.00	799.80	52.00 69.00	4.55 5.81	0.00	1.61 1.30	1.42 1.69	8.8
1995	9	17.04 23.70	6.14 7.63	256.00 333.00	0.00 0.00	722.80 645.80	26.10	6.75	0.00	1.03	1.88	9.6
1996 1997	10 11	71.41				1047.10	104.20	7.51	0.00	1.50	2.03	11.0 11.4
1998	12	53.21	13.65	500.00	0.00	962.10	123,20	8.08	0.00	1.23	2.15	11.4
1999	13	11.80	2.70			874.10	143.00	8.48	0.00	1.00		11.7
2000	14	7.40	1.51 1.10	680.00 776.00		0.00	1 195 (0)		24.62 21.14	0.00 0.00	2.30	35.6 32.3 29.4
2001 2002	15 16	6.06 6.06	0.98	876.00	2310.90	0.00	208.30	9.00	18.09	0.00	2.31	29.4
2003	17	6.06	0.88	980.00	2206.90	0.00	232.30	8.99	15.42	0.00	2.30	26.7
2004	18	6.06	0.78	1089.00	2097.90	0.00	208.30 232.30 257.50 283.80 311.30 340.10	8.92	13.09	0.00	2.27	24.2 22.0
2005	19	6.06				0.00	283.80	8.78 8.60	11.00 9.29	0.00		22.0
2006 2007	20 21	6.06 6.06	0.62 0.56	1318.00 1440.00		0.00	340.10	8.39	7.76	0.00	2.14	20.1 18.2 16.5 14.9 13.4
2008	22	6.06	0.50	1567.00	1619.90 1487.90	0.00	354.00	8.15	6.42	0.00	1.98	16.5
2009	23	6.06	0.44	1699.00	1487.90	0.00			5.26	0.00		14.9
2010	24	6.06	0.39	1837.00	1349.90	0.00		7.62 6.90	4.26	0.00		12.0
2011	25	6.06 6.06	0.35 0.31	1863.20 1863.20		0.00	354.00	6.16	3.33	0.00	1.26	10.7
2012 2013	26 27	6.06	0.28				354.00	6.16 5.50	2.97	0.00	1.12	10.7 9.6
2014	28	6.06	0.25	1863.20	1323.70	0.00	354.00	4.91	1 2.66	0.00	1,00	8.5 7.6
2015	20	6.06	0.22	1863.20	1323.70	0.00	354.00	4.38	2.37	0.00		7.6 6.8
2016	30	6.06	0.20	1863.20 1863.20		0.00		3.91 3.49	2.12	0.00		6.1
2017 2018	31 32	6,06 6.06	0.18 0.16	1863.20	1323.70	0.00		3.12	1.69	0.00	0.64	6.1 5.4 4.8
2019	33	6.06	0.14	1863.20	1323.70	0.00	354.00	2.78	3 1.50	0.00	0.57	4.8
2020	Я	÷ 6.06			1323.70	0.00	354.00	2.4	1.34		0.51	4.3
2021	35	6.06				0.00		2.22 1.98	1.20	0.00 0.00		3.8 3.4
2022 2023	35 37	6.06 6.06		1863.20 1863.20	1323.70	0.00		1.7	0.99			3.0
2024	38	6.00		1863.20	1323.70	0.00	354,00	1.5	3 0.85	0.00	0.32	2.7
2025	38 39	6.06	0.07	1863.20	1323.70	0.00	354.00	1.4		0.00		2.4
2026	40	6.00	0.00			0.00		1.2	0.68	0.00	0.25	2.2
2027 2028	41 42	6.06 6.06	0.05			0.00		1.1%	2 0.60 0 0.54		0.23	1.9 1.7
2029	43	6.06	0.04		1323.70	0.00) 354.00	16.6	0.48	0.00	81.0	1.5
2030	44	6.06	0.04	1863.20	1323.70	0.00	354.00	0.8	N 0.4.	0.00	0.1€	1.4
2031	45	6.06	0.03	1863.20	1323.70	0.00		0.7				1.
2032 2033	46 47	6.06 6.06				0.00		0.6	3 0.3 7 0.30		0.13	
2034 2034	48	6.06						0.5				
2035	49	6.06	0.02		1323.70	0.00	354.00	0.4	5 0.2	1 0.00	0.09	0.
2036	50	6.06	0.02	1863.20	1323.70	0.00	354.00	0.4	0.2	1 0.00	0.08	0.1
2037	51	6.06								7 0.00 7 0.00		
2038 2030	52 53	6.06 6.06										
2040	54	6.06			1323.70	0.00	354.00	0.2			0.05	0.
2/41	55	6.06	0.01	1863.20	1323.70	0.00	354,00	0.2	3 0.13	2 0.00	0.04	0.
2042	56 57	6.06 6.06										
2043		·····	0.00	1000.20	1525.10	J. W	7,74,00	, J	0.0	1		· ·
otal		825.14	260.41]				198.2	1 170.5	2 7.6	47.71	424.1

CI: average net cost of useful salable energy and capacity C2: average net cost of useful salable energy C3: average net cost of total energy and capacity

	Discounted Cash Flow Method	e P	Case- III - 200	
Discount rate= 12 (X) B = 443.66 C = 259.03 B/C= 1.649 B-C= 174.63	S = kW Yalue B1= kWł Yalue B2= kWł Yalue B3= kWł Yalue B4=	1 68 USS/AW 0.063 USS/AWH 0.048 USS/AWH 0.005 USS/AWH	C1= 0.036765376 C2= 0.030040847 C3= 0.030842876	UNIT= Million LESS

/ear	Serial Number	Cost Flow	Discounted Cost Flow	1	Project Sale	s			Discounted 1	Benefit Flo	w	
				Salable Domestic Energy (GMH/Yr)	Salable Export Energy (GMH/Yr)	Surp) us Energy (CWH/Yr)	Useful Capacity (Ma)	Salable Domestic Energy	Salable Export Energy	Sumplus Energy	Useful Capacity	Total
987		4.81	4.29	0.00	0.00	0.00						-
998	2	19.57	15.60	0.00	l n.m	0.00		0.00 0.00		0.00 0.00	0.00	0. 0.
989 1930	3	21.57	15.60 15.35	0.00 0.00 0.00	0.00	0.00	0.00	0.00		0.00	0.00	Û.
930	4	25.28 54.56 80.90	I6.06 30.95 40.98	0.00	0.00	0.00	0.00	0.00	. 0.00	0.00	0.00	
9911	5	54.56	30.95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0
992	6 7	120.14	40.98 54.34	0.00 0.00	0.00 0.00	0.00		0.00	0.00			0
993 994	8	6.11	26.70	179.00	0.00	908.50	0.00 52.00	0.00 4.55	0.00	0.00		0
995	9	12.91	4.65	256.00	0.00	831.50	69.00	5.81	0.00	1.83 1.49	1.42 1.69	7
996	10	24.98	8.04	333.00	0.00	754.50	85.10	6.75	0.00	1.21	1.88	. 9
997	11	77.73	22.34	415.00	0.00	672,50	104.20	7.51	0.00	0.96	2.03	10
998	12	57.01	14.63	500.00	0.00 0.00	1118.50	123.20	8.08	0.00	1.43	2.15	10 11
999 000	13	12.35 7.69	2.83	588.00 680.00	2716.40	1030.50	143.00	8.48	0.00	1.18	2.22	11 37
001	14 15	6.20	1.57 1.14	776.00		0.00 0.00	163.70 185.40	8.76 8.93	26.67 22.97	0.00	2.27	37
002	: 16	6.29 6.29 6.29	1.02	876.00		0.00	208.30	9.00	19.73	0.00 0.00	2.30	34
XXX3	17	6.29	0.91	980.00	2416.40	0.00	232.30	8.99	16.89	0.00	2.31 2.30 2.27	31 28
2004 2005	18	6.29	1 0.81	1089.00	2307.40	0.00	257.50	8.92	14.40	0.00 0.00	2.27	25
005	19	6.29 6.29	0.73	1201.00	1 2195,40	0.00	283.80	8.78	12,23	0.00	2.24	23
006	20	6.29	0.65	1318.00	2078.40	0.00	311.30	8.60 8.39	10.34	0.00	2.19	21
007 008	21 22	6.29	0.58 0.51	1440.00 1567.00	1956.40 1829.40	0.00 0.00		8.39	8.69	0.00	2.14	19
W)	23	6.29 6.29	0.46	1669.00	1697.40	0.00	354.00 354.00	8.15 7.89	7.25 6.01	0.00		17
Ωĩć	24	6.29	0.41	1837.00	1559.40	0.00	354.00	7.62		0.00	1.77 1.58	15
oii,	25	6.29	0.36	1863.20	1533.20	0.00		6.90	4.32	0.00	1.41	12
210	26	6.29 6.29 6.29	0.36 0.33	1863.20	1533.20	1 0.00	354.00	6.16	3.86	0.00	1.26	14 12 11
013	27	6.29	0.29	1863.20	1533.20	1 0.00	354.00	5,50	3,45	0.00	1 12	10
2014	28 20	6.29 6.23	0.26	1863.20	1533.20 1533.20	0.00		4.91	3.08	0.00	1.00	9
015 1017	30 30	6.29	0.23 0.20	1863.20	1533.20	0.00	354.00	4.38	2.75	0.00	0.89	8
2016 2017	31	6.29	0.20	1863.20 1863.20	1533.20 1533.20 1533.20	0.00		3.91 3.49	2.45 2.19	0.00		7 6
018	32	6.29	0.16	1863.20	1533.20	0.00	354.00	3.12	1.95	0.00	0.64	5
2019	33	6.29	0.14	1863, 20	1533.20	0.00	354.00	2.78	1.74	0.00	0.57	5 5 4
020	34	6.29	0.13	1863.20	1533.20	0.00	354.00	2.48	1.56	0.00	0.51	4
021	35	6.29	0.11	1863.20	1533.20	0.00		2.22	1.39	0.00	0.45	[4
022	36	6.29	0.10	1863.20	1533.20	0.00	354.00	1.98	1.24	0.00	0.40	3
023 02A	37	6.29 6.29	0.09 0.08	1863.20 1863.20	1533.20 1533.20	0.00	354.00 354.00	1.77 1.58	1.11 0.99	0.00	0.36 0.32	3
025	38 39	6.29	0.07	1863.20	1533 20	0.00	354.00	1.41	0.53	0.00	0.28	2
026	40	6.29 6.29	0.06	1863.20	1533.20	0.00	354.00	1.26	0.88 0.79	0.00	0.25	2
027	41	6.29	0.06	1863.20	1533,20	0.00	354.00	1.12	. 0.70	0.03	0.23	2
028	42	6.29 6.29	0.05	1863.20	1533.20	0.00	354.00	1.00	0.63	0.00	0.20	1
029	43	6.29	0.64	1863.20	1533.20	0.00	354.00	1 0.89	0.56	0.00	0.18	1
030 031	44	6.29 6.29	0.04	1863.20	1553.20	0.00	354.00	0.80	0.50	0.03	0.16	I I
032	45 46	6.29	0.03 0.03	1863.20 1863.20	1533.20 1533.20	0.00		0.71 0.63	0.44 0.40	0.00		1
033	47	6.29	0.03	1863.20	1533.20	0.00	354.00	0.57				1
034	48	6.29	0.02	1863.20	1533.20	0.00	354.00	0.50				
035	49	6.29	0.02	1863.20	1533.20	0.00	354.00	0.45	0.28	0.00	0.09	0
0.6	50	6.29	0.02	} 1863.20	1533.20	1 6.00	354.00	0.40	0.25	0.00	80.0	0
037	51	6.29	0.01	1863.20	1533.20 1533.20	0.00						0
038	52 53	6.29	0.01	1863.20	1533.20	0.00						0
039 040	54	6.29 6.29	0.01	1863-20 1863-20								0
ภูเ	55	6.29	0.01	1863.20								
012	56	6.29	0.01	1863.20								
Ď43	57	6.29				0.00						
					 	 	 	<u> </u>			1	 -
tal		856.08	269.03			1		198.21	189.60	8.13	47.71	44

Cl: average net cost of useful salable energy and capacity
C2: average net cost of useful salable energy
C3: average net cost of total energy and capacity

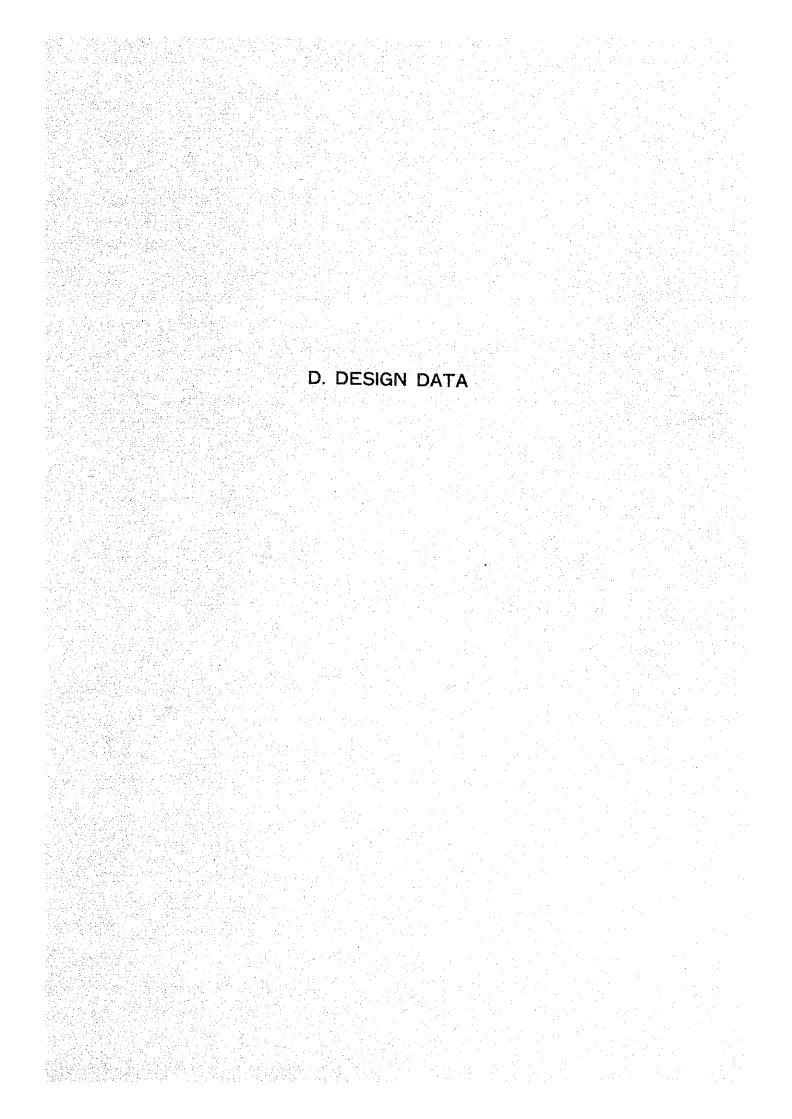

D. DESIGN DATA

W.		Page
D.1	Rating Curve at Dam Site	D-1
D.2	Discharge Capacity of Diversion Tunnel	D-4
D.3	Stability Analysis of Dam	D-8
D.4	Spillway Discharge Capacity	D-28
D.5	Oscillation Analysis of Surging Water Level	D-32
D.6	Water Hammer at Penstock	D-40
D.7	Rating Curve at Tailrace Outlet	D-46
D.8	Calculation of Head Loss	D-49
D.9	Probability Analysis on Seismic Hazard	
	at the ARUN-3 Project Site	D-54

D.1 Rating Curve at Dam Site

(1) Formula

$$Q = AV = A \frac{1}{n} I^{\frac{1}{2}} R^{\frac{2}{3}}$$

where

Q: Discharge (m^3/s)

A: Cross Sectional Area (m²)

V: Flow Velocity (m/s)

n: Coefficient of Roughness 0.045, 0.035.

I: Hydraulic Gradient 1/100

R: Hydraulic Radius

(2) Rating Curve

Results are shown in Table - D-1, - D-2 and Fig. D-1. The symbols in the Tables are as following

F : Froude Number

 $SQ : Discharge = Q (m^3/s)$

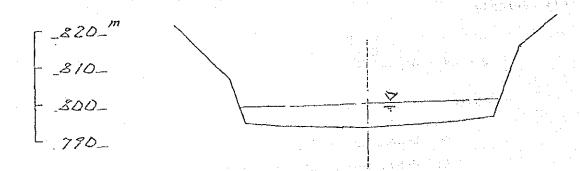


Table D-1

7-0.045 __ 1 / 100


1 / 100

EL.	(m)	A (m²)	ه (m)	R (m)	n	V (m/s)	14.5 a)	\$0 (m³/s)	(m³/s)
792.000 793.000 794.000 795.000 796.000 797.000 799.000 800.000 801.000 802.000 803.000 804.000 805.000	3.156 4.119 5.073 6.017 6.953 7.880 8.799 9.710 10.614 11.509	354.114 624.272 495.132 566.693 638.956	47.043 67.142 69.262 71.382 73.502 75.622 77.741 79.861 81.981 84.101 86.221 88.340 90.460 92.580	0.500 1.199 2.135 3.025 3.873 4.683 5.457 6.200 6.913 7.598 8.257 8.893 9.506 10.100	0.045 0.045 0.045 0.045 0.045 0.045 0.045 0.045 0.045 0.045	1.399 2.508 3.684 4.648 5.480 6.220 6.883 7.500 8.064 8.588 9.078 9.538 9.972 10.383	0.835 0.976 0.905 0.925 0.941 0.953 0.962 0.970 0.981 0.985	32.878 201.891 544.708 1003.450 1560.010 2202.570 2922.540 3713.340 4569.750 5487.480 6462.990 7493.290 8575.840 9708.440	32.878 201.891 544.708 1003.450 1560.010 2202.570 2922.540 3713.340 4569.750 5487.480 6462.990 7493.290 8575.840 9708.440

Table D-2

7-00:5

EL.	(m)	A (m²)	ρ ¯ (m)	R (m)	n i	(w/a)	F	50 (m³/s)	(m ³ /s)
792.000 793.000 794.000 795.000 795.000 797.000 799.000 800.000 801.000 802.000 803.000 804.000 805.000	0.500 1.201 2.184 3.156 4.119 5.073 6.017 6.953 7.880 8.799 9.710 10.614 11.509	354.114 424.272 495.132 566.693 638.956 711.921 785.588 859.956	47.043 67.142 69.262 71.382 73.502 75.622 77.741 79.861 81.981 84.101 86.221 83.340 90.460 92.580	0.500 1.199 2.135 3.025 3.873 4.683 5.457 6.200 6.913 7.598 8.257 8.893 9.506	0.035 0.035 0.035	1.799 3.225 4.737 5.976 7.046 7.997 8.856 9.642 10.368 11.042 11.672 12.264 12.822 13.350	1.190 1.210 1.225 1.237 1.247 1.255 1.261 1.266	2005.730 2031.870 3757.550 4774.300 5875.390 7055.330	

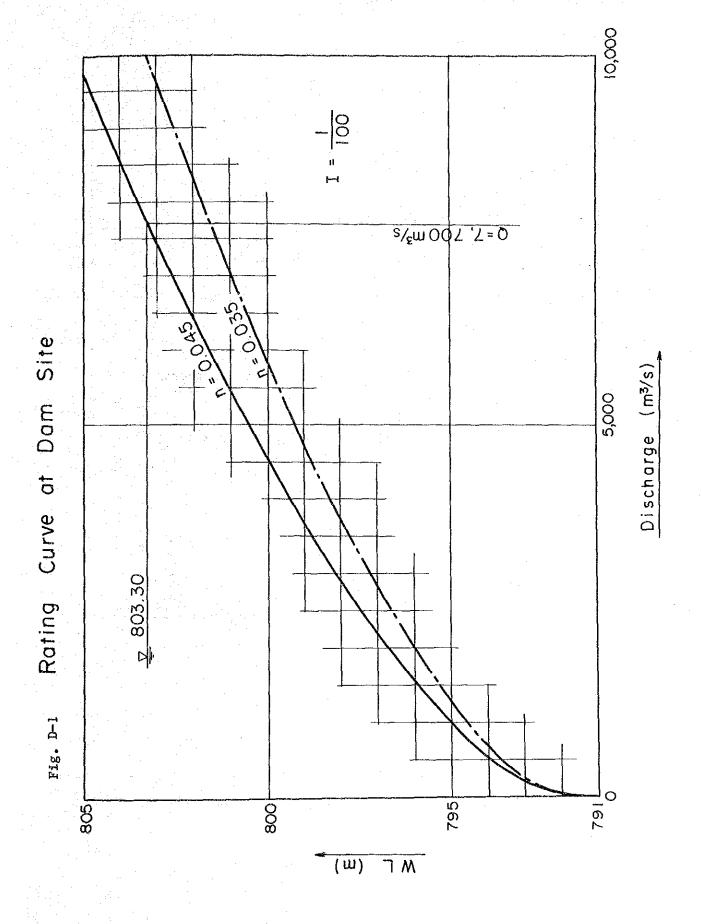

D.2 Discharge Capacity of Diversion Tunnel

(1) Open flow condition

Formula

$$H = hc + \frac{V_c^2}{2g}$$
 (1+fe) + Hc

where

H: Water Surface EL.

hc: Critical depth of flow at Inlet


Hc: EL. of Inlet invert (EL. 800.0m)

Vc: Critical Velocity

fe: Coefficient of Head Loss due to Entrance

(fe = 0.20)

g: Acceleration of Gravity (g = 9.8 m/s^2)




Calculations

Table D-3

Q (m ³ /s)	h _c (m)	V _C (m/s)	V _{c2} (1+fe)	H (m)
50	1.79	3.99	0.89	802.68
100	3.00	4.76	1.27	804.27
150	3.61	5.94	1.98	805.59
200	4.51	6.34	2.26	806.77
250	5.23	6.83	2.62	807.85
300	5.91	7,25	2.95	808.86
350	6.55	7.63	3.27	809.82
400	7.16	7.98	3.57	810.73
450	7.74	8.31	3.88	811.62

(2) Pipe flow condition

Formula



$$Hh = \frac{v^2}{2g} (1+fe+f_L+fb) + Ht$$

where

Hh: Water level at Inlet (EL.)

Ht: Water level at Outlet (EL.) (= 800.00m)

fe: Coefficient of head loss due to entrance

$$fe = 0.1$$

 f_{ℓ} : Coefficient of head loss due to friction

$$f_{\chi} = \frac{122.0 \times n^2 \times L}{D^{4/3}}$$

$$n = 0.015$$


fb: Coefficient of head loss due to bend fb = 0.064

Hh =
$$\frac{v^2}{2g}$$
 (1+0.1+0.727+0.064) + 800
= 0.096 v^2 + 800
 $v = Q/A = Q/40.633$

Calculations

Table D-4

Q (m ³ /s)	V (m/s)	$(1+fe+f+fb)\frac{v^2}{2g}$	Ht (m)	Hb (m)
300	7.383	5.233	800.00	805.23
350	8.614	7.123	19	807.12
400	9.844	9.303	11	809.30
450	11.075	11.775		811.78
500	12.305	14.536		814.54
550	13.536	17.589	• • • • • • • • • • • • • • • • • • •	817.59
600	14.766	20.931		820.93
650	15.997	24.567	vr .	824.57
700	17.227	28.490	**	828.49

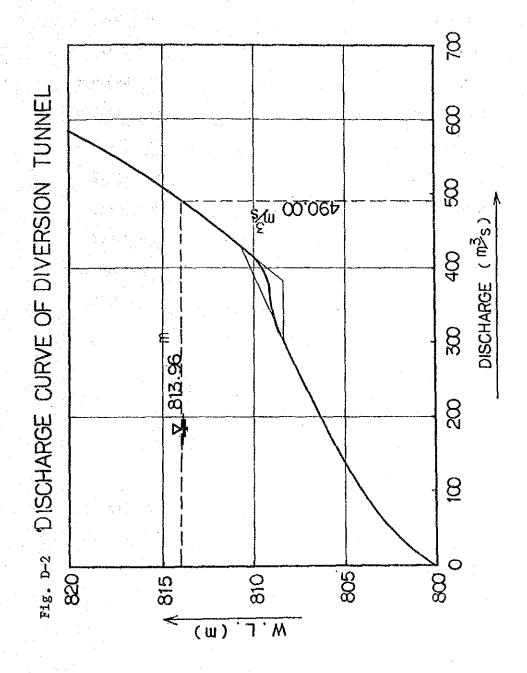

D.3 Stability Analysis of Dam

1. Design Conditions

Unit Weight of Water

Unit Weight of Concrete

Unit Weight of Sediment (Submerged)

Coefficient of Sediment Pressure

Seismic Coefficient

Crest EL.

Foundation Rock EL.

Sediment EL.

Slope (D/S)

Slope (U/S) EL. 846.0 - EL. 806.0

EL. 806.0 - EL. 781.0

Shear Strength

Coefficient of Internal Friction

 $Wo = 1.0 \text{ t/m}^3$

 $Wc = 2.30 \text{ t/m}^3$

 $W1 = 1.1 \text{ t/m}^3$

Ce = 0.5

K = 0.12

EL. 846.0 m

EL. 781.0 m

EL. 828.0 m

m = 1:0.9

Vertical

n = 1:0.3

 $\tau_0 = 150 \text{ t/m}^2$

f = 0.75

2. Load and Calculations

(1) Body Weight

 $Wc = wc \cdot V$

where

Wc: Body Weight (t)

wc: Unit Weight of Concrete = $2.30 (t/m^3)$

V: Volume (m³)

(2) Seismic Force

 $Hc = Wc \cdot K$

where

Hc: Seismic Force (t)

K: Seismic Coefficient

(3) Hydrostatic Pressure

$$P = wo.h$$

where

P: Hydrostatic Pressure (t/m2)

wo: Unit Weight of Water = 1.00 (t/m3)

h: Water Depth (m)

1) Upstream

Normal High W.L =
$$842.00 + 1.50^{1} + 0.50^{2} = 844.0 \text{ m}$$

2) Downstream W.L

Downstream Bed EL + 2.0 m = 795.0 m

(4) Sediment Pressure

where

Pe: Sediment Pressure in Horizontal Direction (t/m^2)

Ce: Coefficient of Sediment Pressure = 0.50

wl: Unit Weight of Sediment (Submerged) (t/m^3)

$$w1 = w - (1-v).wo$$

w: Apparent Unit Weight of Sediment = $1.80 (t/m^3)$

v: Porosity of Sediment = 0.30

$$w1 = 1.80 - (1-0.3) \times 1.00 = 1.1 (t/m^3)$$

d: Sediment Depth (m)

Note 1) Wave height induced by wind

²⁾ Wave height induced by earthquake

(5) Uplift pressure

Heel : Upstream Water Pressure

Drainage: Downstream water pressure plus over 1/5 of the

difference between upstream and downstream ends

Toe : Downstream Water Pressure

Waves and effects of instantaneous change of reservoir W.L are not considered in the water pressures above mentioned.

(6) Hydrodynamic Pressure

$$Pd = \frac{7}{8} \cdot \text{wo.K. H.h}$$

where

Pd: Hydrodynamic Pressure (t/m³)

wo: Unit Weight of Water = $1.00 (t/m^3)$

K: Seismic Coefficient

H: Water depth measured from water surface of reservoir to foundation

h: Water depth measured from water surface down to a given point

(7) Miscellaneous

In addition to the aboves, the weight of water, sediment, and weight due to auxiliary structures are considered.

3. Stability Analyses

Stability Analyses are carried out by personal computer, on condition that the reservoir is H.W.L and earthquake takes place.

Working Point of Load $Xo = \frac{M}{V}$ (m)

Distance of Eccentricity $e = X_0 - \frac{L}{2} (m)$

L: Bottom Length

Moment around the center of Mo = e. V (t.m)Bottom Section Normal Stress

Heel.

 $\sigma_{\rm u} = \frac{\Sigma_{\rm V}}{L} \left(1 - \frac{6 \cdot e}{L}\right) \left(t/m^2\right)$


Toe

 $\sigma_{\rm d} = \frac{\Sigma_{\rm V}}{L} \, (1 + \frac{6 \cdot e}{L}) \, (t/m^2)$

Safety Factor for Shear Friction


 $n = \frac{V.f + ToL}{H}$

Fig. D-3 Load Diagram for Stability Analysis

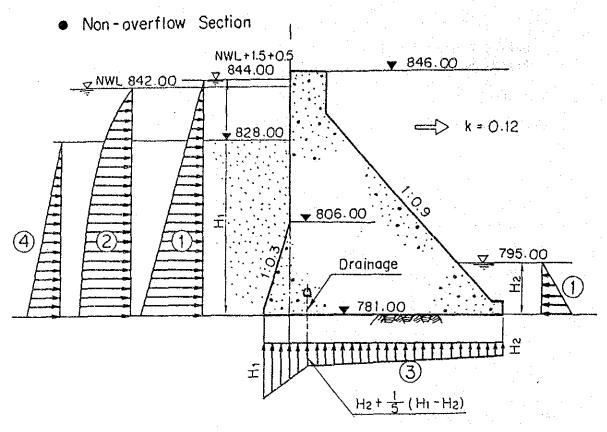

Overflow Section

Sediment pressure

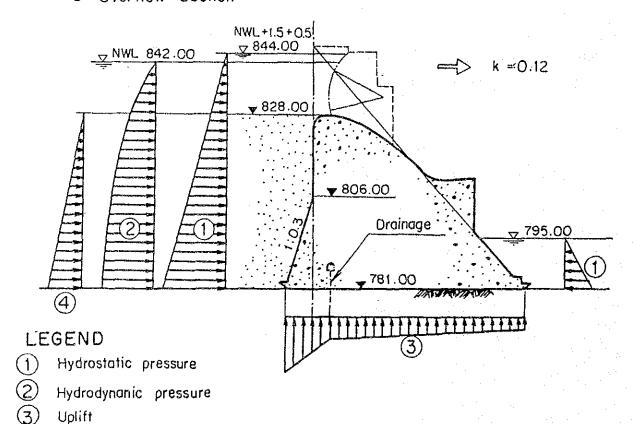

D - 12

4. Calculation Results

4.1 Crest gate type (Non-overflow section)

(1) Dam shape

Point	Y (m)	EL (m)
1	58.500	846.000
2	48.500	846.000
3	48.500	834.889
4	58.500	806.000
5	66.000	781.000
6	0.000	781.000

Note: Foundation Rock EL 781.000
Width of Crest Road 10.000

Slope Upperstream 1:0.000 1:0.300 below EL 806.00

Dormotusou 1.0.000

Downstream 1:0.900

(2) Conditions related w.l etc.

Design Discharge W.L EL = 844.20 m

Surcharge W.L = 844.20 m

Normal H.W.L = 842.00 m

Sediment EL = 828.00 m

Downstream W.L

Design Discharge = 803.30 m

Surcharge W.L = 795.00 m

Normal H.W.L = 795.00 m

Empty = 781.00 m

Wave Height

Wind Induced H = 1.50 m

Earthquake Induced = 0.50 m

Uplift Pressure: considered

Hydrodynamic Pressure at Downstream: non-

Drainage Hole

EL

53.000


Y

813,000

Seismic Coefficient

= 0.120

Fig. D-4 Non-Over Flow Section (Crest Gate Type)

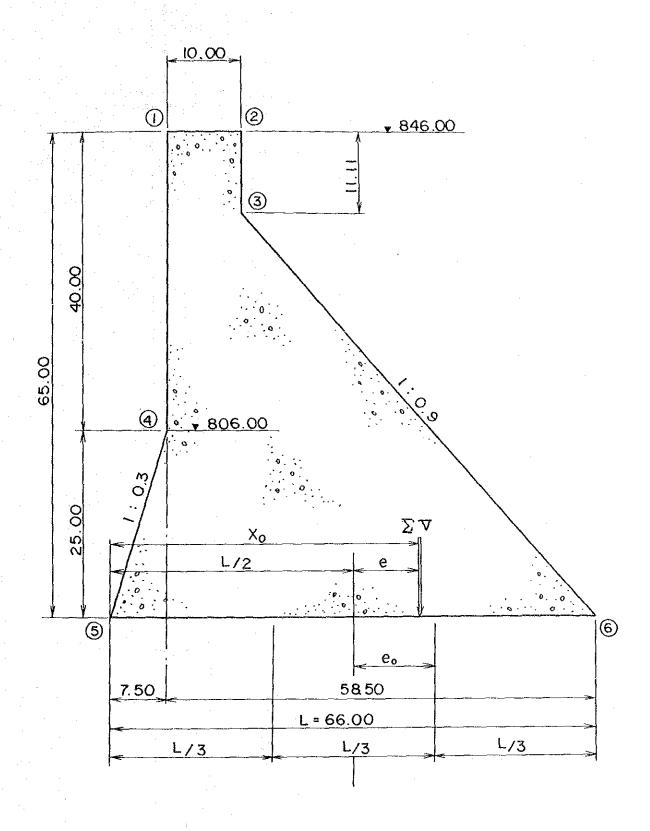

(3) Calculation and Results (Elevation 781.00)

	Working Point	Vertical Force	Working Point	Horizontal Force	Moment around
	Хg (ш)	V (t)	yg (m)	H (t)	M (t.m)
Body weight, seismic force	25.646	4,716.277	22.131	565,953	133,480,885
U/s hydrostatic pressure	3,441	378.750	21.000	1,984,500	42,977.625
U/s hydrodynamic pressure	000*0	0.000*0	24.400	260.470	6,355,468
Sediment pressure	3,297	284.625	15.667	607.475	10,455,546
D/s hydrostatic pressure	61.800	88.200	4.667	000*86 -	4,993,427
D/s hydrodynamic pressure	000*0	000*0	2.600	000*0	000*0
Uplift	26.069	- 1,527,950	000*0	00000	- 39,832,858
Adjustment due to irregure shape		000*0		000°0	000*0
ms		3,939,901		3,320,398	158,430,092

Bottom Length L(m) = 66.000Working Point of Load Xo(m) = 40.212Middle Third eo(m) = 11.000Distance of Eccentricity e(m) = 7.212Moment arround the center Mo(t.m) = 28,413.343of Bottom Section Coefficient of Internal Friction f = 0.750Shear Strength $\tau_0 = 150.000$ Normal Stress

 $\sigma_{\rm u} = 20.559 \, {\rm t/m^2}$ Hee1

 $\sigma_{\rm d} = 98.832 \, {\rm t/m^2}$ Toe

Safety Factor for Shear Friction n = 3.872

(4) Calculation and Results (Elevation 806.00)

	Working Point	Vertical Force	Working Point	Horizontal Force	Moment around
	Xg (m)	V (t)) हु (m)	H (c)	M (t.m)
Body weight, seismic force	11.618	1,783,777	14.978	214.053	23,929.982
U/s hydrostatic pressure	000*0	00000	12.667	722.000	9,145.333
U/s hydrodynamic pressure	000*0	000*0	14,400	118,091	1,700,510
Sediment pressure	000*0	000*0	7,333	133.100	976.067
D/s hydrostatic pressure	000*0	000*0	0.000	- 98.000	000.0
D/s hydrodynamic pressure	000*0	000*0	0.000	000.0	00000
Uplift	8,749	- 219.600	0.000	000°0	- 1,921,200
Adjustment due to irregure shape		000*0		000*0	000-0
mns		1,564,176	<i>y 1</i>	1,187.244	33,830,692
###					

Bottom Length

L(m) = 36.000

Working Point of Load

Xo(m) = 21.628

Middle Third

eo(m) = 6.000

Distance of Eccentricity

e(m) = 3.628

Moment arround the center

of Bottom Section

Mo(t.m) = 5,675.515

Coefficient of Internal Friction

f = 0.750

Shear Strength

 $\tau_0 = 150.000$

Normal Stress

Hee1

 $\sigma_u = 17.174 \text{ t/m}^2$

Toe

 $\sigma_{d} = 69.725 \text{ t/m}^2$

Safety Factor for Shear Friction

n = 5.536

4.2 Crest Gate Type (Overflow section)

(1) Dam shape

Point	Y (m)	EL (m)
1	58.500	846.000
2	48.500	846.000
3	48,500	834.889
4	58.500	806.000
. 5	66.000	781.000
6	0.000	781.000

Note:

Foundation Rock EL

781.000

Width of Crest Road

10.000

Slope Upperstream

1:0.000

1:0.300 below 806.00

Downstream

1:0.900

(2) Conditions related w.l etc.

Design Discharge W.L EL = 844.20 m

Surcharge W.L = 844.20 m

Normal H.W.L = 842.00 m

Sediment EL = 828.00 m

Downstream W.L

Design Discharge = 803.30 m

Surcharge W.L = 795.00 m

Normal H.W.L = 795.00 m

Empty = 781.00 m

Wave Height

Wind Induced H = 1.50 m

Earthquake Induced = 0.50 m

Uplift Pressure: considered


Hydrodynamic Pressure at Downstream: non

Drainage Hole Y EL

53,000 813,000

Seismic Coefficient = 0.120

 $_{\text{Fig. D-5}}$ Over Flow Section (Crest Gate Type)

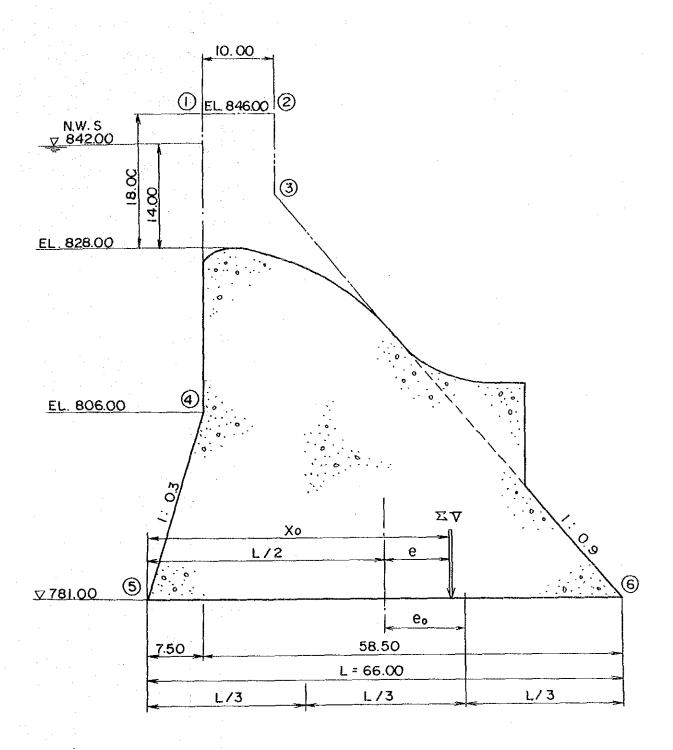

(3) Calculation and Results (Elevation 781.00)

	Working Point	Vertical Force	Working Point	Horizontal Force	Moment around the Heel
	Xg (m)	V (t)	yg (m)	H (t)	M (t.m)
Body weight, seismic force	25.646	4,716,277	22,131	565,953	133,480.885
U/s hydrostatic pressure	3.441	378.750	21.000	1,984,500	42,977.625
U/s hydrodynamic pressure	000*0	000*0	24.400	260,470	6,355.468
Sediment pressure	3.297	284.625	15.667	607,475	10,455.546
D/s hydrostatic pressure	61.800	88.200	4.667	000*86 -	4,993.427
D/s hydrodynamic pressure	00000	000*0	2.600	000*0	000*0
Uplift	26.069	- 1,527,950	000.0	000*0	- 39,832,858
Adjustment due to irregure shape		- 210,968		- 33,717	1,033.940
Sum		3,728.933		3,286.681	159,464.032

Bottom Length

L(m) = 66.000

Working Point of Load

Xo(m) = 42.764

Middle Third

eo(m) = 11.000

Distance of Eccentricity

e(m) = 9.764

Moment arround the center

Mo(t.m) = 36,409.227

of Bottom Section

f = 0.750

Shear Strength

 $\tau_0 = 150.000$

Normal Stress

Heel

 $\sigma_{\rm u} = 6.349 \, {\rm t/m^2}$

Toe

 $\sigma d = 106.649 \text{ t/m}^2$

Safety Factor for Shear Friction

Coefficient of Internal Friction

n = 3.863

4.3 Bottom Flushing Type (Non-overflow section)

(1) Dam shape

	<u> </u>	The second secon
Point	Y (m)	EL (m)
1	58.50	846.000
2	48.50	846.000
3	48.50	834.889
4	58.50	805.000
5	65.70	781.000
6	0.00	781.000

Note: Foundation Rock EL

781.000m

Width of Crest Road

10.000m

Slope Upstream

1:0.00

Tope opacteem

1:0.30 below EL 805.00

Downstream

1:0.90

(2) Conditions related w.l etc.

Sediment EL = 805.00 m

Downstream W.L

Design Discharge = 803.30 m

Surcharge W.L = 795.00 m

Normal H.W.L = 795.00 m

Empty = 781.00 m

Wave Height

Wind Induced H = 1.50 m

Earthquake Induced = 0.50 m


Uplift Pressure: Considered

Hydrodynamic Pressure at Downstream: non

Drainage Hole: Considered

Seismic Coefficient = 0.15

Fig. D-6 Non-Over Flow Section (Bottom Flushing Type)

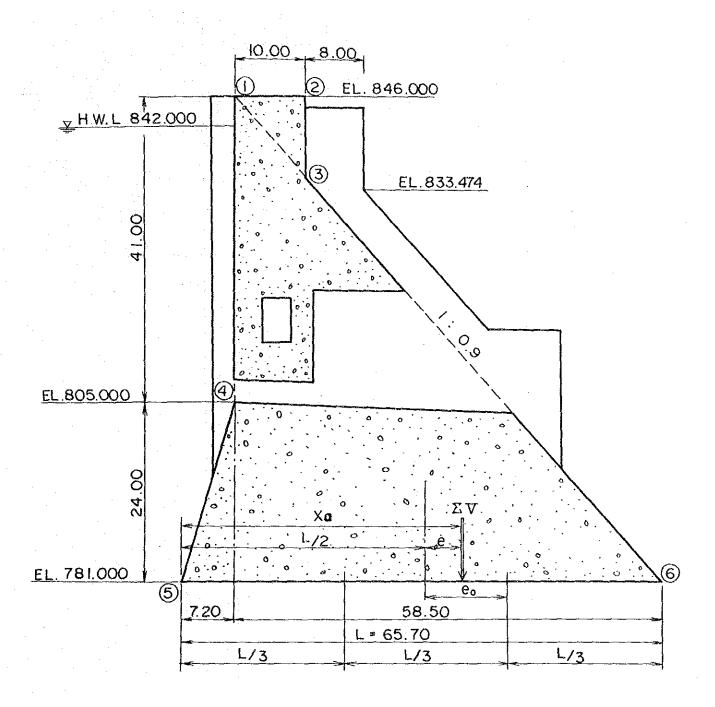

(3) Calculation and Results (Elevation 781,000)

	Working Point	Vertical Force	Working Point	Horizontal Force	Moment around the Heel
	Xg (π)	V (t)	yg (m)	H (t)	M (c.m)
Body weight, seismic force	25,425	4,699,372	22.166	704.906	135,106,595
U/s hydrostatic pressure	3.318	367,200	21,000	1,984,500	42,892,740
U/s hydrodynamic pressure	00000	000*0	24.400	325,588	7,944,335
Sediment pressure	2.400	95,040	000*8	158.400	1,495.296
D/s hydrostatic pressure	61.500	88.200	4.667	- 98°000	4,966,967
D/s hydrodynamic pressure	0000	0.000	2*600	000*0	000*0
Uplift	26,001	- 1,515,290	000.0	000*0	- 39,399,590
Adjustment due to irregure shape		- 210.968		- 42.146	454.747
Sum		3,523,553		3,033,247	153,461,090

Bottom Length L(m) = 65.700Working Point of Load Xo(m) = 43.553Middle Third eo(m) = 10.950Distance of Eccentricity e(m) = 10.703Moment arround the center Mo(t.m) = 37,712.358of Bottom Section Coefficient of Internal Friction f = 0.750Shear Strength $\tau_0 = 150.000$ Normal Stress $\sigma_u = 1.210 \text{ t/m}^2$ Hee1

Safety Factor for Shear Friction n = 4.120

Toe

 $^{\circ} d = 106.052 \text{ t/m}^2$

D. 4 Spillway Discharge Capacity

1. General

Five (5) overflow sections (12.00 m wide each) are arranged as spillway section with crest top of EL 828.00.

The shape of overflow crest consists of a combined curve of Harold's standard crest and circles. This curve is inscribed with the principal triangle of dam body.

2. Calculation Formula

Ishii-Fujimoto's formula is applied.

$$Q = n \cdot c^{\dagger} \cdot B \cdot H^{\frac{3}{2}}$$
 $c^{\dagger} = c \cdot \left\{1 - Md \left(\frac{H}{Hd}\right)^{\frac{1}{2} \cdot 5}\right\}$

$$Md = 0.0756 \left(\frac{Hd}{B}\right)^{0.5}$$

when n=1 or $n\geq 2$ and $B/S\geq 0.8$

$$Md = 0.0756(\frac{Hd}{B})^{0.5} \left\{ \frac{1}{n} + 1.465(\frac{n-1}{n})(\frac{b}{s})^{1.7} \right\}$$

..... when $n \ge 2$ and B/S<0.8

$$c = 1.60 \frac{1 + 2a(\frac{H}{Hd})}{1 + a(\frac{H}{Hd})}$$

$$cd = 2,200 - 0.0416(\frac{Hd}{W})^{0.99}$$

where, Q: Overflow Discharge (m^3/s)

n: Numbers of overflow section (5)

c': Coefficient of discharge, taking effects due to pier and abutment

B: Width of overflow section per one span (m)

H: Overflow head at crest (m)

Md : Adjustment factor

c : Coefficient of discharge without effects due to pier and abutment

Hd: Design head 16 m

: Constant

W : Height of weir

b: Width of pier


s: Surplus length of pier from U/S face of dam body

3. Results

Calculated results are shown in Table D-5 and Fig. D-7.

Table D-5 Discharge Calculation B = 12.000 N = 5 CRELV = 828.000 b = 3.000 S = 3.000 Hd = 16.000 W = 23.000 Cd = 2.171 Al = 0.55434 Md = 0.08730


828.000 0.000 0.000 0.000 0.000 823.100 0.100 1.606 1.605 3.05 828.200 0.200 1.611 1.611 8.64 828.300 0.300 1.616 1.616 15.93 828.400 0.460 1.622 1.621 24.61	WL
828.500 0.500 1.627 1.626 34.50 828.600 0.600 1.633 1.632 45.50 828.700 0.700 1.638 1.637 57.51 828.800 0.800 1.643 1.647 84.35 829.900 1.900 1.654 1.651 99.08 829.100 1.100 1.659 1.656 144.64 829.200 1.200 1.664 1.661 131.00 829.300 1.300 1.669 1.666 148.13 829.400 1.400 1.674 1.670 166.01 829.500 1.500 1.679 1.675 184.62 829.500 1.500 1.684 1.679 124.65 829.800 1.800 1.684 1.679 124.65 829.800 1.800 1.694 1.638 244.65 829.900 1.909 1.699 1.693 266.01 842.000 14.000 2.123 1.971 6195.56 842.100 14.100 2.125 1.972 6264.26	828.000 823.100 823.100 828.300 828.300 828.600 828.600 828.700 829.000 829.100 842.100 842.100 843.100 844.100

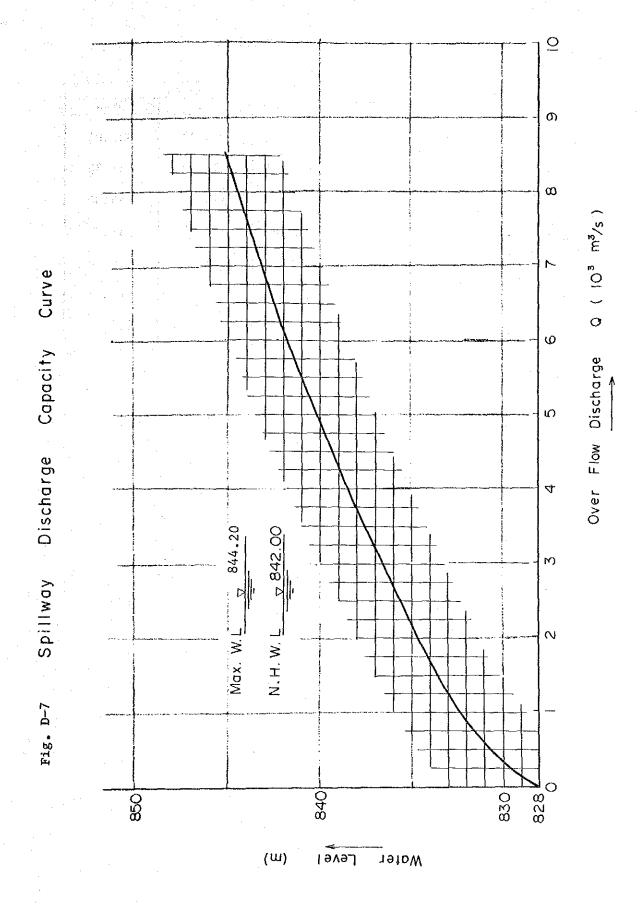


D.5 Oscillation Analysis of Surging Water Level

Table D-6 Surging WL Analysis


Case	Port	2,	HW at		ng WL
Name	Dia	Qm ³ /s, t(s)	Reservoir	Up	Down
U-1	3.00	80 -> 0, 5.5	842.00	865.02	825.84
U-2	2.40	80 -> 0, 5.5	842.00	859.00	831.30
บ-3	2.40	80 -> 57, 0	842.00	844.46	835.00
U-4	2.40	80 -> 0, 0	842.00	858.99	831.30
D-1	3.00	40 -> 80, 5.5	837.00	gar <u>e</u>	816.24
D-2	2.40	40 -> 80, 5.5	837.00	•	817.71
D-3	2.40	40 -> 80, 0	837.00	•••	817.72



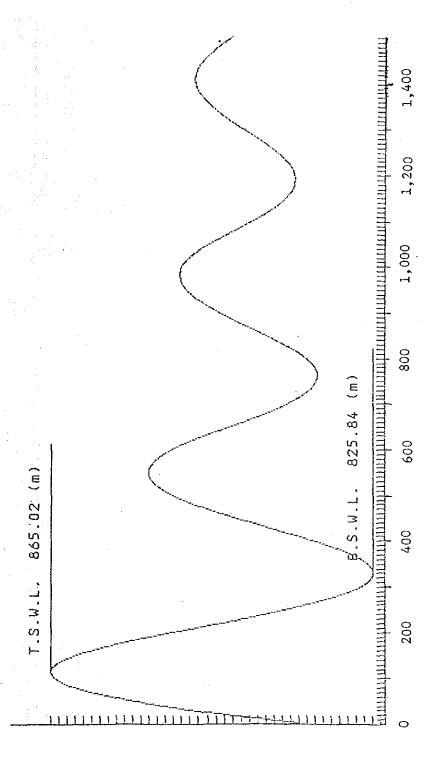


Time (Sec)

Water Surface Level EL (m)

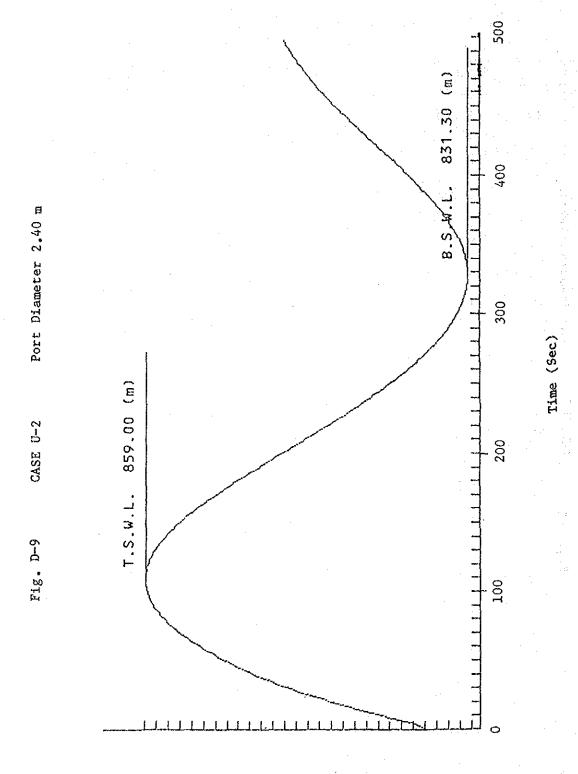


Mater Surface Level EL (m)

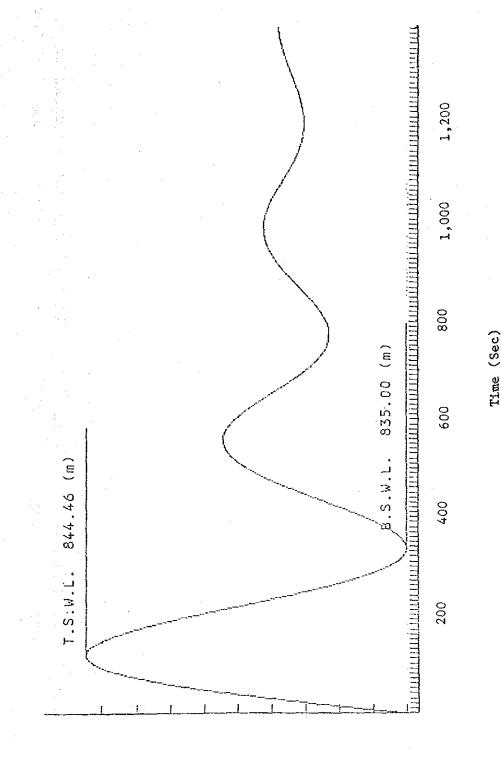


Port Diameter 2.40 m


Water Surface Level EL (m)



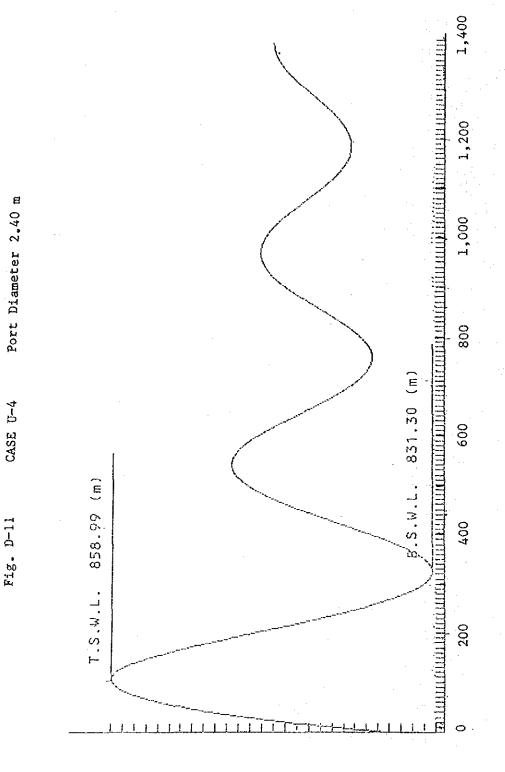


Water Surface Level EL (m)



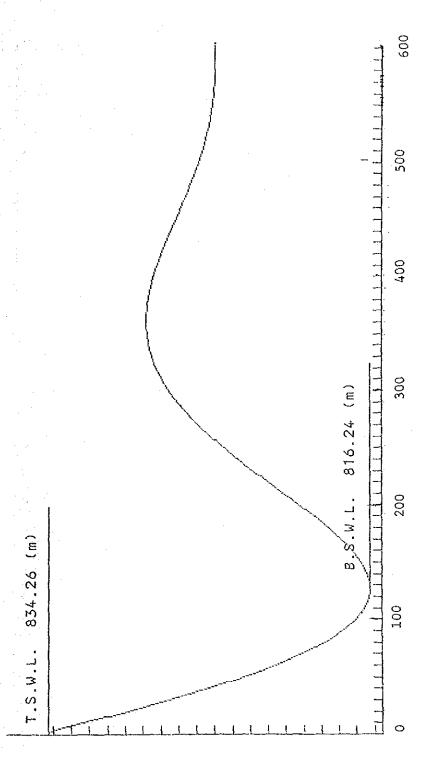


Time (Sec)

Water Surface Level EL (m)

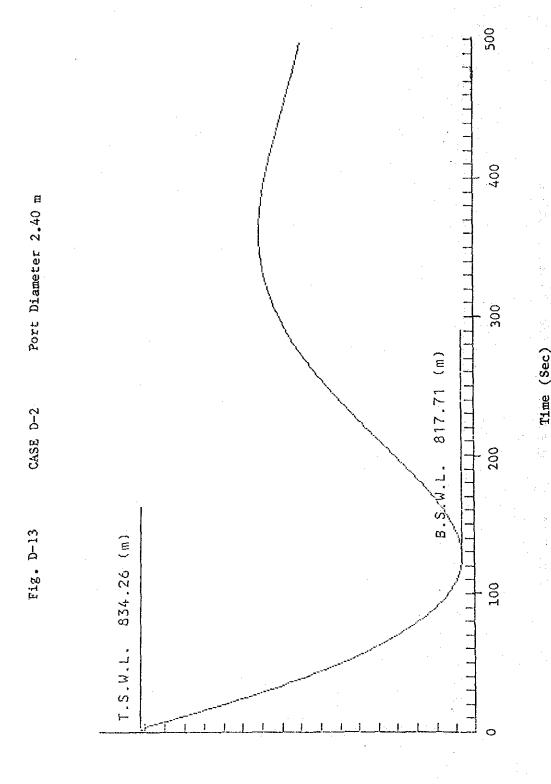

Water Surface Level El (m)

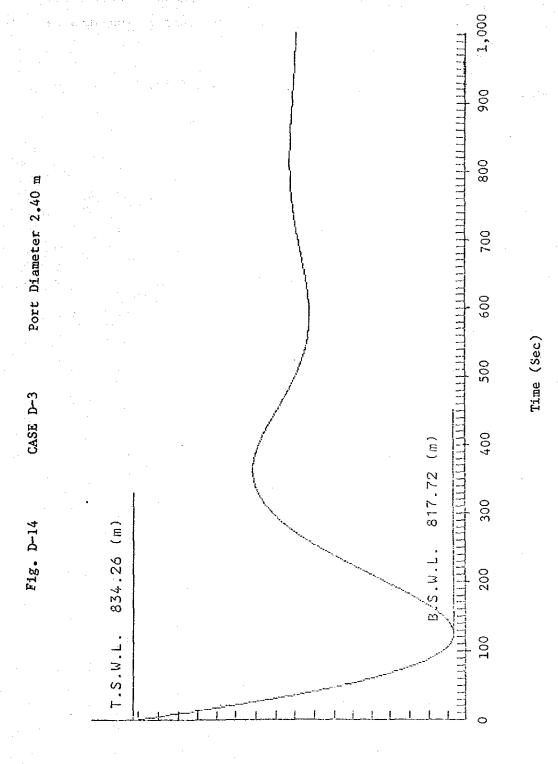



Water Surface Level EL (m)

D.6 Water Hammer at Penstock

General features of a net work of waterway is shown in Fig. D-15. The net work consists of elements of waterway (pipe), pondages, a surge tank and turbines.


Results computed are shown in Fig. D-16 - Fig. D-19.

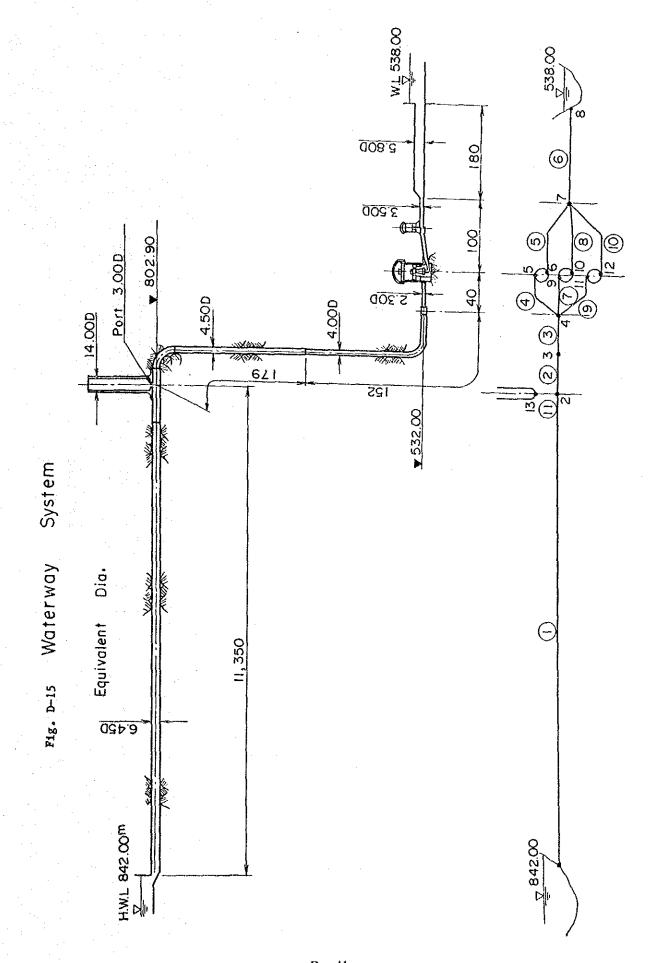


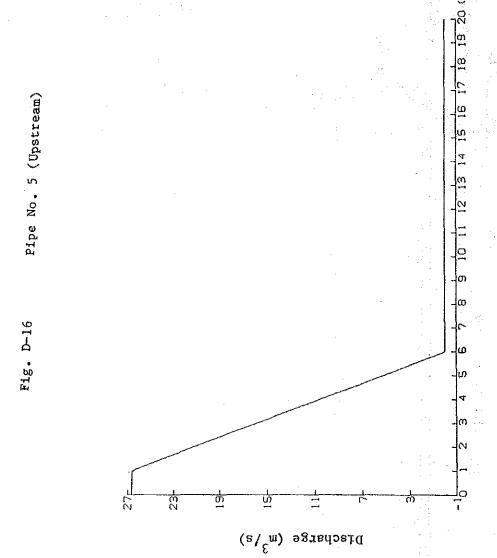


Time (Sec)



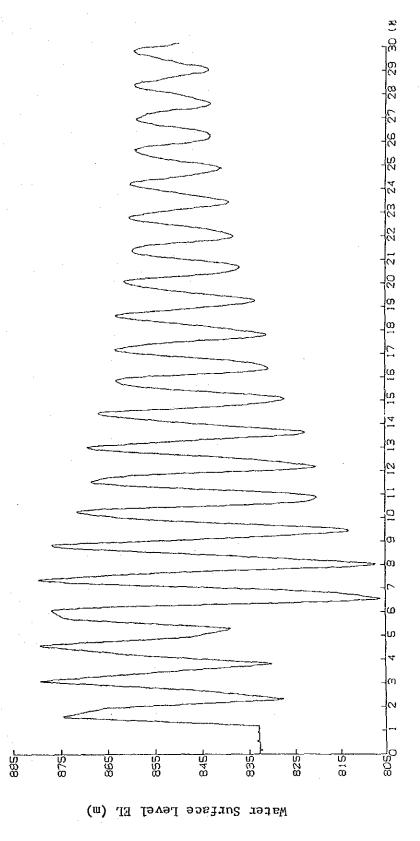

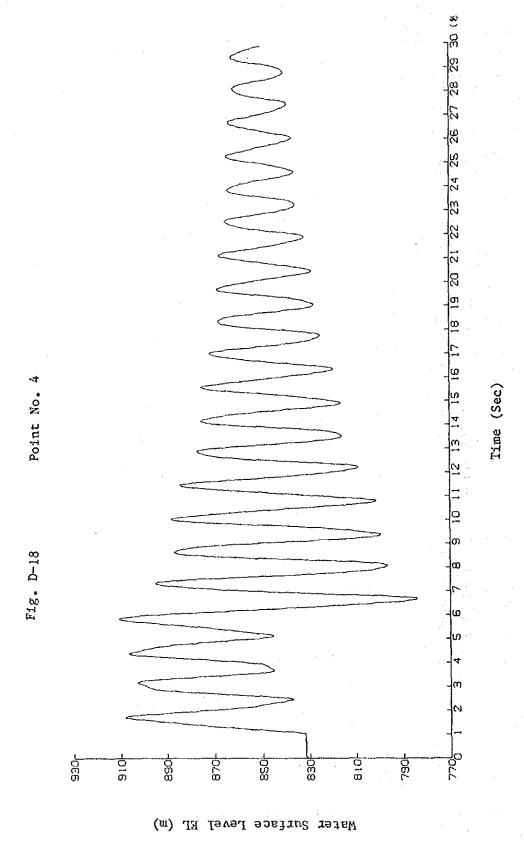



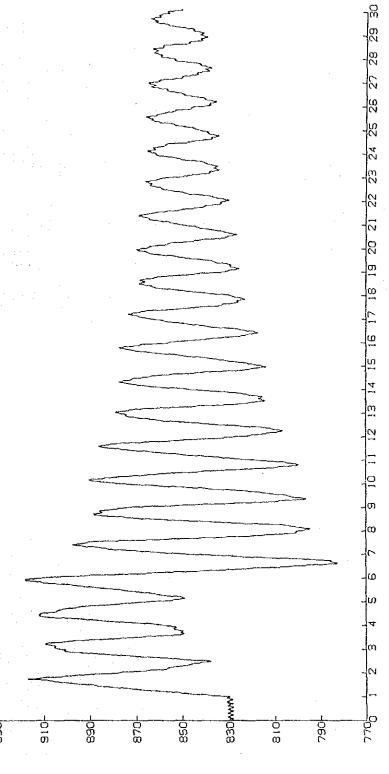

Mater Surface Level EL (m)

D. 7 Rating Curve at Tailrace Outlet

** n=0.035 **

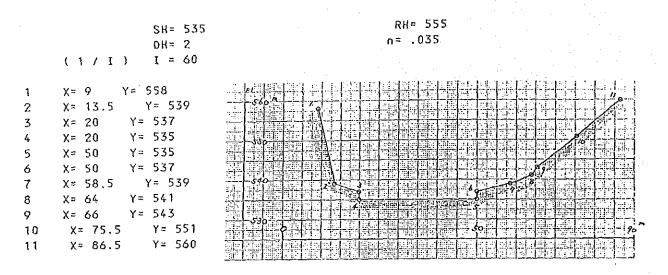


Table D-7

1 / 60

EL. D (m) (m)	A (m²)	P (m)	R (m)	n	V (m/s)	F	5Q (m³/s)	Q (m³/s)
535.000 0.000 537.000 2.000 539.000 3.000 541.000 4.531 543.000 6.275 545.000 7.907 547.000 9.478 549.000 10.997 551.000 12.470 553.000 13.890 555.000 15.275	0.00 60.00 135.00 230.97 335.40 445.14 560.58 681.72 808.55 941.16	0.000 34.000 49.533 57.441 62.324 67.485 72.645 77.805 82.965 88.179 93.393		0.035 0.035 0.035 0.035 0.035	7.197 9.327 11.327 12.973 14.404 15.677 16.829 17.881	0.000 1.276 1.392 1.468 1.515 1.546 1.584 1.584 1.597 1.608	0.00 323.19 971.59 2154.34 3799.08 5774.90 8074.48 10687.10 13607.30 16828.60 20358.60	0.00 323.19 971.59 2154.34 3799.08 5774.90 8074.48 10687.10 13607.30 16828.60 20358.60

** n=0.045 **


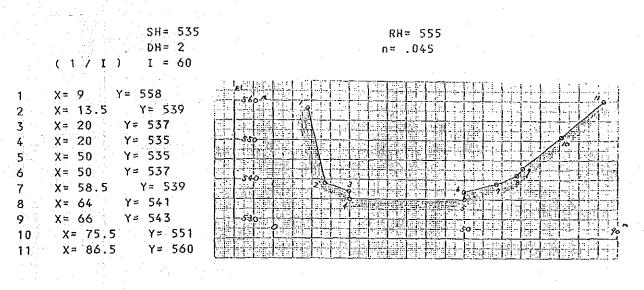


Table D-8

1 / 60

EL.	D (m)	A (m²)	(m)	R (m)	. n	V (m/s)	F	SQ (m³/s)	Q (m³/s)
535.000 537.000 539.000 541.000 543.000 545.000 547.000 549.000 551.000 553.000	12.470	0.00 60.00 135.00 230.97 335.40 445.14 560.58 681.72 808.55 941.16	0.000 34.000 49.533 57.441 62.324 67.485 72.645 77.805 82.965 88.179 93.393	0.000 1.765 2.725 4.021 5.381 6.596 7.717 8.762 9.746 10.673 11.560	0.045 0.045 0.045 0.045	0.000 4.189 5.598 7.255 8.810 10.090 11.203 12.193 13.089 13.907 14.667	0.000 0.993 1.083 1.142 1.178 1.202 1.219 1.232 1.242 1.250 1.257	0.00 251.37 755.68 1675.60 2954.84 4491.59 6280.15 8312.15 10583.50 13088.90 15834.50	0.00 251.37 755.68 1675.60 2954.84 4491.59 6280.15 8312.15 10583.50 13088.90 15834.50

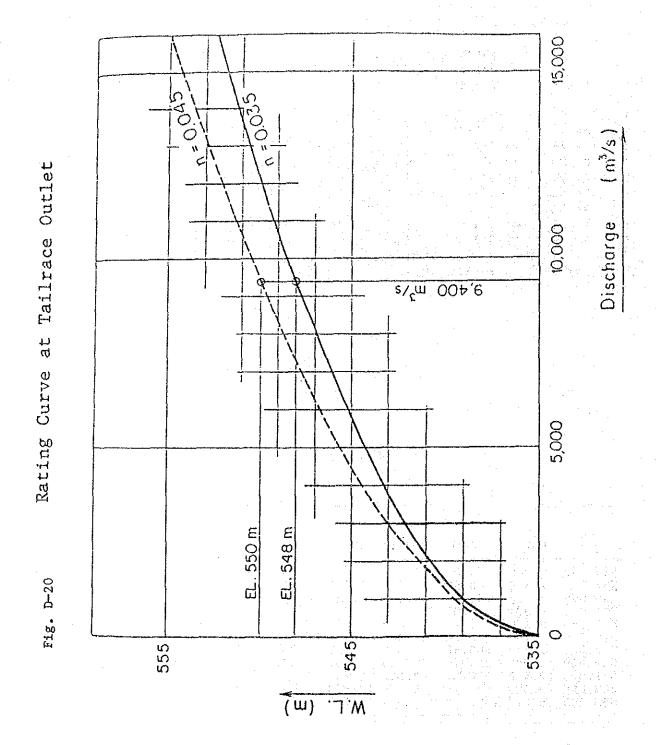

D.8 Calculation of Head Loss

1. General

Dimensions of waterway, such as diameter, length, etc. are shown in Fig. D-21, 22 and 23.

Coefficients of roughness are as shown below:

Unlined, (TBM)	0.020
Shotcrete (TBM)	0.018
Shotcrete (CBM)	0.020
Concrete lined	0.013
Steel lined	0.012

2. Results

The summary table (Table D-9) shows calculation results.

Table D-9 Summary Tabel of Head Losses

 $Q=80m^3/s$ Loss of Head (m) Unit $3.1250 \times 10^{-5} \times Q^2 = 0.20$ Intake = 9.14142.8658 Tunne1 **= 3.55** 55.5827 Penstock 1 = 0.8312.9728 Tailrace Outlet 13.72 Total $3.1250 \times 10^{-5} \text{xQ}^2 = 0.20$ Intake = 9.14142.8658 Tunnel 2 51.7560 = 3.31Penstock = 0.80 12.4848 Tailrace Outlet 13.45 Total $3.1250 \times 10^{-5} \times Q^2 = 0.20$ Intake 142.8658 = 9.14 Tunne1 3 Penstock 55.5843 = 3.56 10.5949 = 0.68Tailrace Outlet 13.58 Total

A design head loss of 14.00 m is applied for the optimum studies and the planning, taking some miscellaneous losses into consideration.

Surge tank Steel lined 3,655m C. B. M. 11,337m (11,307m) tunnel Headrace T.B.M 7,470m Intake and Desanding Basin Culvert C. B.M. 177.0 (147.0) 8 D-51

Tunnel

Fig. D-21 Headrace

T. B. M		C, B. M		Note	w
Unliend 2,C	2,000	Shotcrete	1,300		
Shotcrete 3,3	3,370	Concret (I), with Shotcrete 400	e 400		
Concrete [1], with Shutcrete 600		Concrete [II]	2,102	2,102 Including 147	147
Concrete [I]	200	1,500 Stell lined	35		
Total 7,4	170	7,470 Total	3,837		

Fig. D-22 Penstock

Trifurcation - Turbine


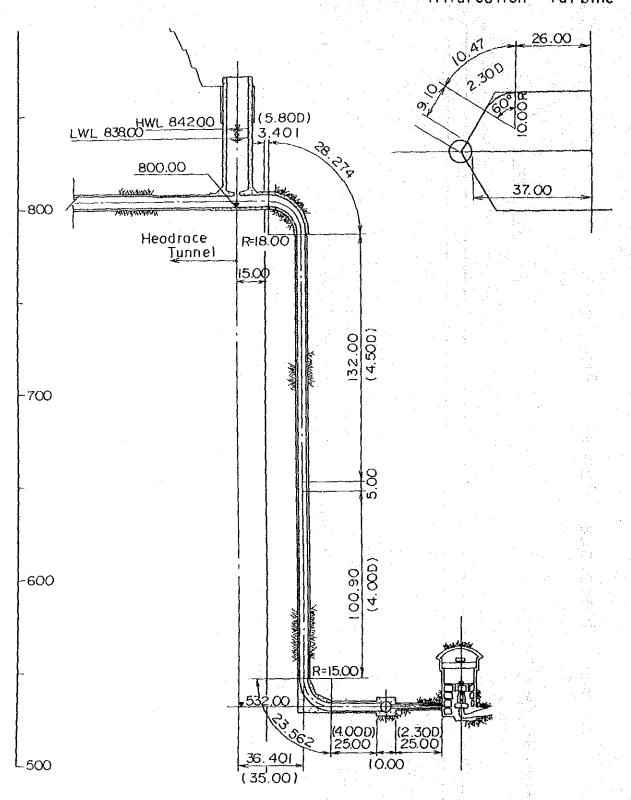


Fig. D-23 Tailrace Tunnel

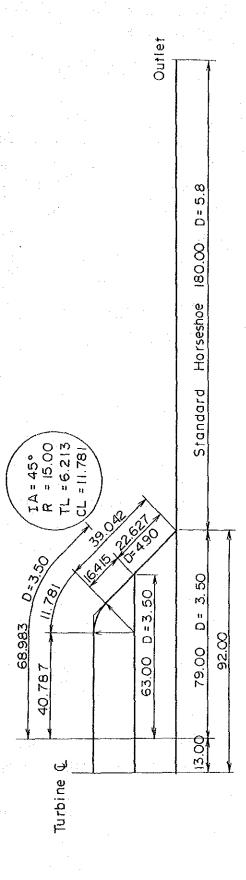

D.9 Probability Analysis on Seismic Hazard at the ARUN-3 PROJECT site

1. Seismicity Data

Seimicity data used in this study are based on those retrieved from 'The Earthquake Data File' compiled by NOAA (National Oceanic and Atmospheric Administration Environmental Data Service). Total number of the data amounts to 964, covering a period from 1963 to 1985. Location of all the data is plotted in Fig. 1 in which the ARUN-3 project site (27°33'40"N, 87°18'25"E) is shown by a cross. Numbers of the data in each year during the period are shown in Table 1, together with accumulative numbers from 1963. General aspects of the data such as magnitude and epicentral distance can be seen in Table 2 and also in Figs. 2-12.

2. Attenuation Models

Of previously proposed attenuation models which express peak acceleration, A (gal), in terms of earthquake magnitude, M, and hypocentral distance, R (km), or epicentral distance, D (km), five models shown below are used in this study.

$$\log A = 3.090 + 0.347M - 2 \log (R+25)$$
 (1) proposed by C. Oliveira¹⁾.

$$log A = 2.674 + 0.278M - 1.301 log (R+25)$$
 (2) proposed by R. K. McGuire².

log A =
$$2.041 + 1.842M - 1.6 \log D$$
 (3)
proposed by L. Esteva and E. Rosenblueth³.

$$\log A = 2.308 + 0.411M - 1.637 \log (R+30)$$
 proposed by T. Katayama⁴.

$$\log (A/640) = (D+40)(-7.6+1.724M-0.1036M^2)/100$$
 (5)
proposed by S. Okamoto⁵⁾.

For all the data described earlier, peak accelerations were calucated by using the above attenuation models, and maximum accelerations in each year -long interval were found to be as shown in Table 3.

3. Statistical Analysis of Maximum Accelerations

The seismicity data are available for successive 23 years from 1963 to 1985. Hence, a probalistic model based on the "Theory of Extreme Values" can be established by setting an equal time interval to one year.

Although a probability function of the maximum acceleration expected at the project site is not known, it is reasonable to suppose that the function should be associated with the third type asymptotic distribution defined by

$$P(x) = \exp[-[(w-x)/(w-u)]^{k}]$$
 (6)

where w is an upper limit of a variable, k is a shape parameter, u is a characteristic value, and x is a random variable taken as logarithm of the maximum acceleration during a year-long interval, expressed as

$$x = \log A_{\text{max}} \tag{7}$$

The previously mentioned maximum acceleration values are plotted in Figs. 13-17. Plotting position of each maximum value was calculated by

$$p(m) = (N-m+1)/(N+1)$$
 (8)

where N (± 23) is the total number of the time interval and m is the order of the value from the largest one. In these figures, regression curves estimated for the third asymptotic distribution function are also shown by solid lines, from which the maximum acceleration for any return period can be evaluated. Table 4 shows the maximum acclerations expected at the site for five different return periods of 50, 100, 200, 500 and 1000 years.

4. References

- 1) Oliveira, C.; Seismic Risk Analysis, EERC 74-1, Earthquake Engineering Research Center, University of California, Berkeley (1974), 1-102.
- 2) McGuire, R. K.; Seismic Structural Response Risk Analysis incorporating Peak Response Regressions on Earthquake Magnitude and Distance, Mass. Inst. Tech. Dep. Civ. Eng., R74-51 (1974).
- 3) Esteva, L. and Rosenblueth, E.; Espectos de Temblores a Distancias Moderadas y Grandes, Proc. Chilean Conference on Seismology and Earthquake Engineering, vol. 1, University of Chile (1963).
- 4) Katayama, T.; Fundamentals of Probabilistic Evaluation of Seismic Activity and Seismic Risk (in Japanese), SEISAN-KENKYU (Monthly Journal of Institute of Industrial Science, University of Tokyo), 27-5 (1975), 1-11.
- 5) Okamoto, S.; Introduction to Earthquake Engineering 2nd ed., University of Tokyo Press (1984), 152-154.

Table-1 Number of Earthquakes in a year during the period from 1906 to 1985

	Year	N	Sum of N	Year	N	Sum of K
	1906	1		1946	4	
1	1907	0		1947	3	ļ
	1908	1		1948	0	
1	1909	0		1949	1	
	1910	0		1950	101	Ţ
	1911	1		1951	44	[
1	1912	0		1952	29	
	1913	3		1953	15	. [
	1914	0		1954	13	
1	1915	1		1955	26	
	1916	1	·	1956	17	
	1917	0		1957	- 17	
	1918	3		1958	21	
	1919	1		1959	30	
	1920	3		1960	22	
	1921	2		1961	27	1
	1922	0		1962	21	
	1923	4		1963	22	22
	1924	11		1964	32	54
	1925	4		1965	37	91
	1926	14		1966	45	136
	1927	13		1967	32	168
	1928	5		1968	35	203
	1929	3		1969	23	226
	1930	14		1970	22	248
	1931	13		1971	30	278
٠.	1932	18		1972	26	304
	1933	4		1973	32	336
	1934	18		1974	32	368
	1935	16		1975	67	435
	1936	14		1976	36	471
1	1937	13		1977	53	524
	1938	15		1978	56	580
	1939	5		1979	55	635
	1940	11		1980	83	718
	1941	12	₹ .	1981	56	774
	1942	3		1982	70	844
	1943	1	1	1983	38	882
	1944	5		1984	68	950
	1945]		1985	14	964
1		1	<u> </u>]	<u> </u>	1

Note: Magnitude is not described in the files before 1962. HOLE THANKS TO HAVE

Table 2

Distribution of Magnitude and Epicentral Distance of the Seismicity Data

 Δ : Epicentral Distance [km] M: Magnitude

Table 3

Maximum Accelerations during a year from 1963 to 1985

unit : gal


					unit (gai
year	C.Oliveira Eq.(1)	R.k.McGuire Eq.(2)	L.Esteva & E.Rosenblueth Eq.(3)	T.katayama Eq.(4)	S.Okamoto Eq.(5)
1963	7.1	27.3	7.0	9.1	10.3
1964	7.6	30.8	7.0	11.7	17.0
1965	77.3	61.2	15.5	33.8	61.8
1966	1.6	10.8	1.4	3.1	0.2
1967	1.8	12.3	1.7	3.9	0.4
1968	2.5	15.1	2.3	5.0	1.2
1969	0.7	6.6	0.7	1.8	0.0
1970	2.9	17.1	2.6	6.2	1.8
1971	6.8	29.3	6.1	11.5	13.3
1972	5.9	27.1	5.3	10.6	10.4
1973	7.4	31.6	6.6	13.0	16.2
1974	5.3	27.1	4.7	11.8	9.8
1975	22.3	64.8	24.4	30.4	122.2
1976	1.8	12.6	1.7	4.2	0.6
1977	1.3	9.9	1.2	3.0	0.1
1978	2.9	17.2	2.6	6.2	1.9
1979	5.0	24.1	4.4	9.2	6.4
1980	5.2	27.6	4.6	12.6	9.8
1981	1.0	8.3	0.9	2.5	0.0
1982	2.2	14.0	2.0	4.8	0.7
1983	0.5	5.1	0.5	1.2	0.0
1984	2.1	13.2	1.9	4.1	0.6
1985	0.4	5.4	0.5	1.6	0.0

Table 4

Maximum Accelerations for Five Return Periods


unit: ga

		Return Period , Tr (year)					
Model (Eq.No.)	Proposer(s)	50	100	200	500	1000	
(1)	C.Oliveira	26	34	42	55	65	
(2)	R.K.McGuire	71	84	97	113	125	
(3)	L.Esteva & E.Rosenblueth	28	41	57	85	113	
(4)	T.Katayama	38	48	59	75	87	
(5)	S.Okamoto	164	231	298	381	436	

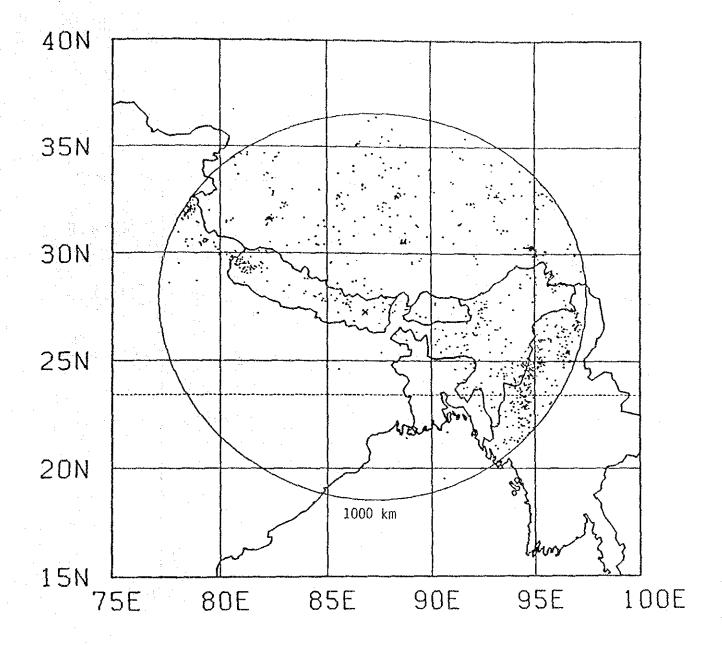


Seismicity of all data in 1963-1985, Total Number of Plots in the area of $\Delta \leq 1000.0$ (km) is 964.

Fig. 1

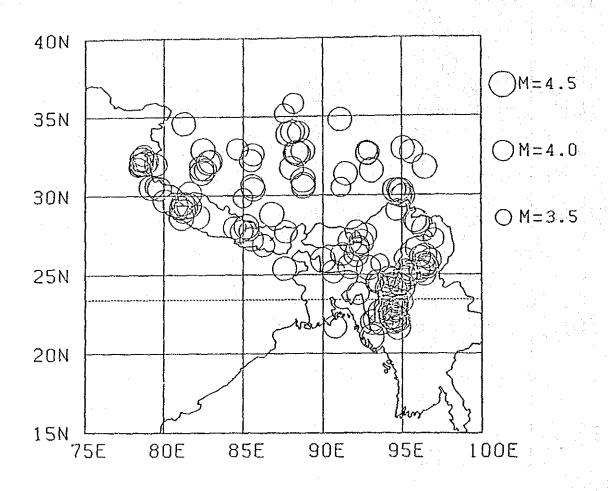


Seismicity of Magnitude 3.5 \leq M < 4.5 in 1963-1985, Total Number of Plots is 147.

Fio. 2

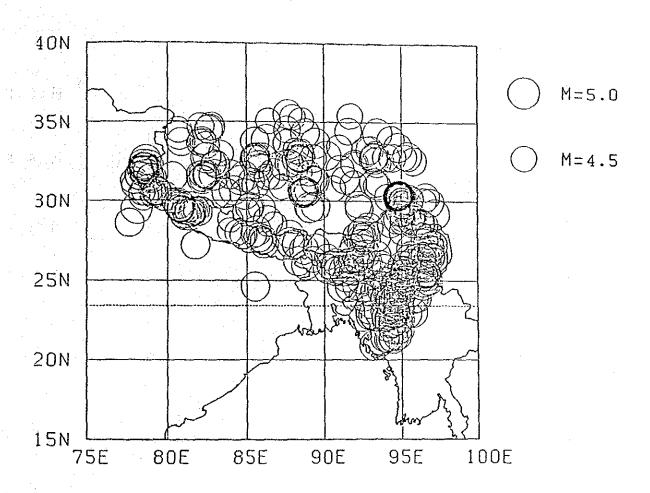


Seismicity of Magnitude $4.5 \le M < 5.0$ in 1963-1985, Total Number of Plots is 496.

Fig. 3

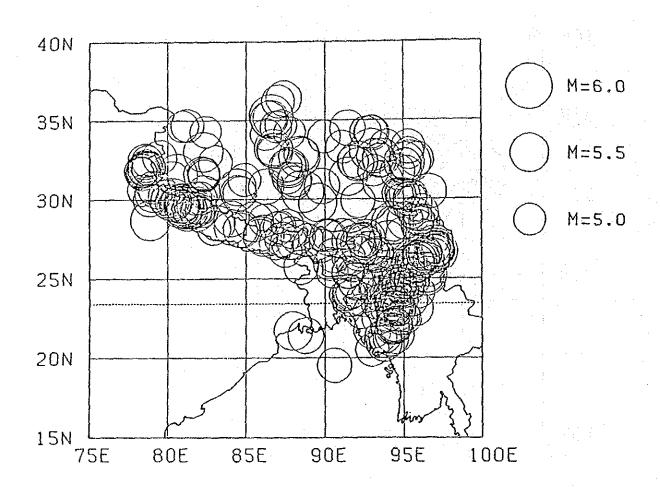


Seismicity of Magnitude $5.0 \le M < 6.0$ in 1963-1985, Total Number of Plots is 303.

Fig. 4

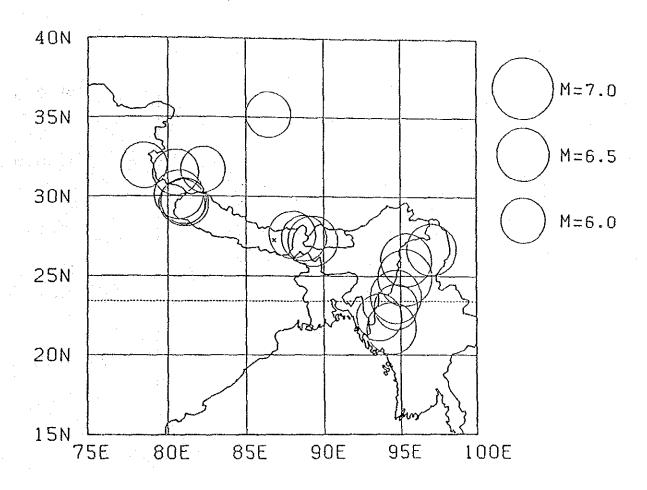


Seismicity of Magnitude 6.0 \leq M < 7.0 in 1963-1985, To tal Number of Plots is 18.

Fig. 5

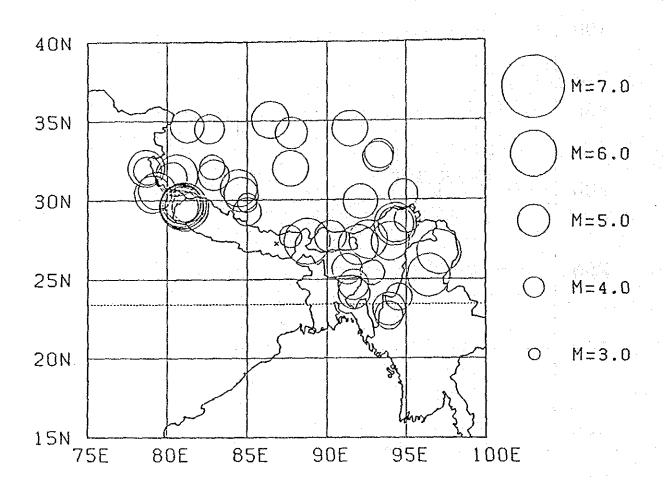


Distribution of Focal Depth $0 \le D \le 20$ km in 1963-1985, Total Number of Plots is 48.

Fig. 6

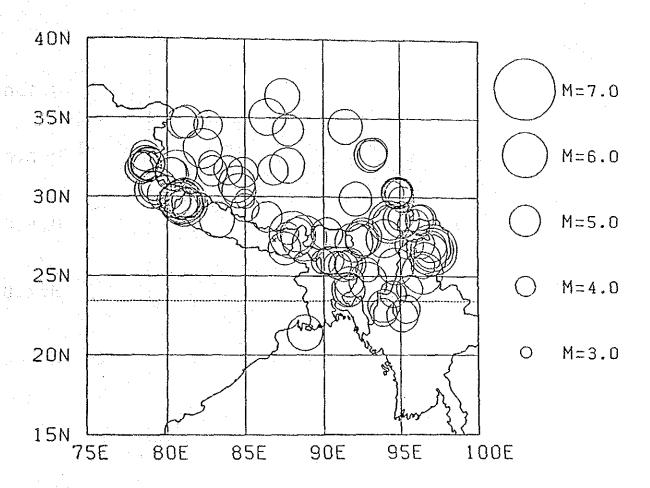


Distribution of Focal Depth $0 \leq D \leq 30$ km in 1963-1985, Total Number of Plots is 105.

Fig. 7

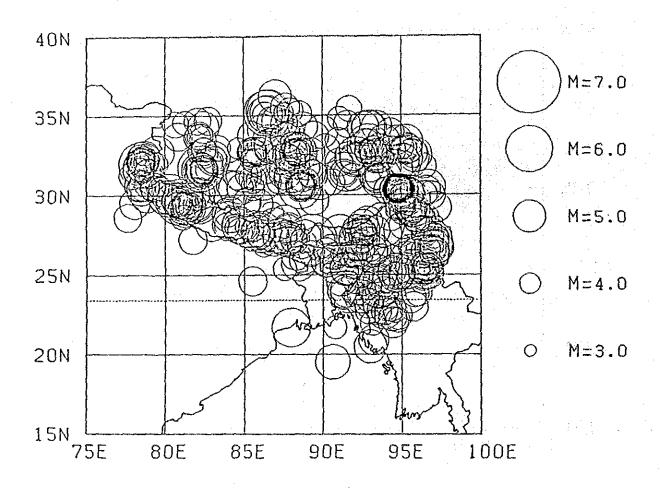


Distribution of Focal Depth $30 \le D \le 40$ km in 1963-1985, Total Number of Plots is 534.

Fig. 8

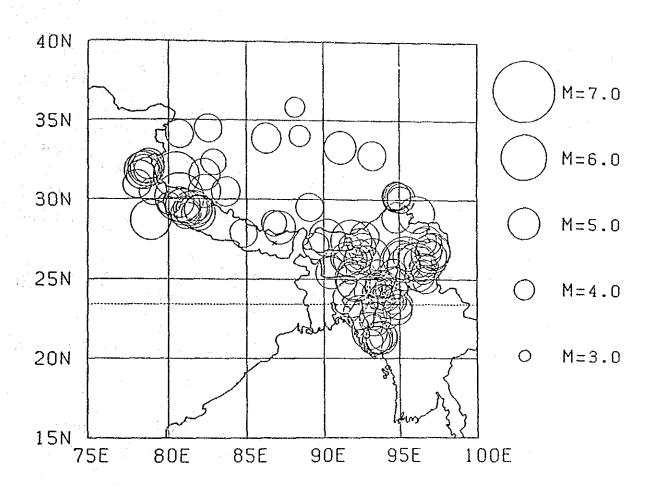


Distribution of Focal Depth $40 \le D \le 60$ km in 1963-1985, Total Number of Plots is 118.

Fig. 9

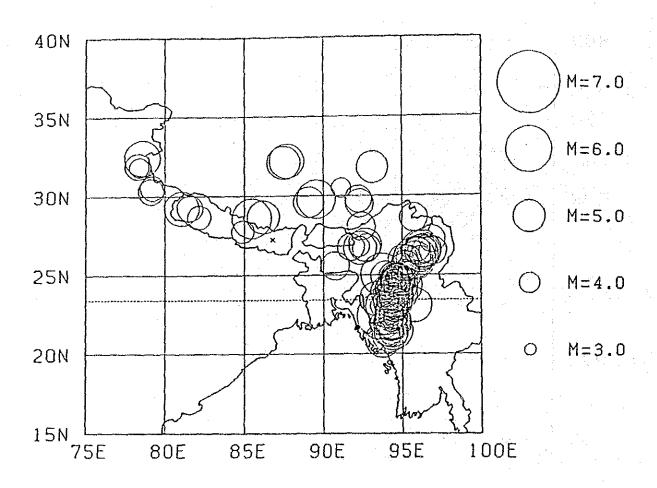


Distribution of Focal Depth $60 \le D \le 100$ km in 1963-1985, Total Number of Plots is 129.

Fig. 10

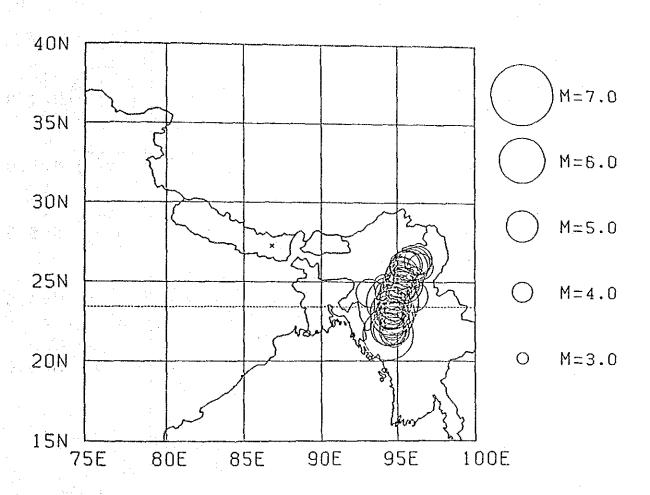


Distribution of Focal Depth $100 \le D < 150$ km in 1963-1985. Total Number of Plots is 65.

Fig. 11

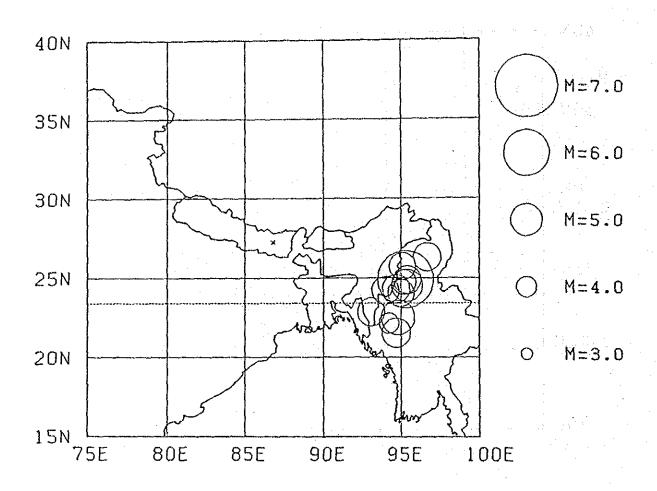


Distribution of Focal Depth 150 \leq D < 200 km in 1963-1985, Total Number of Plots is 13.

Fig. 12

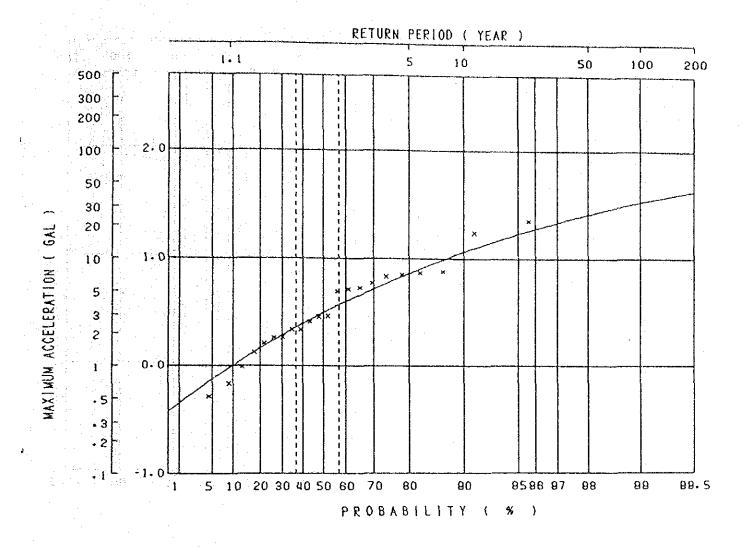


Return Period for Maximum Accelerations calculated by Eq.(1)

Fig. 13

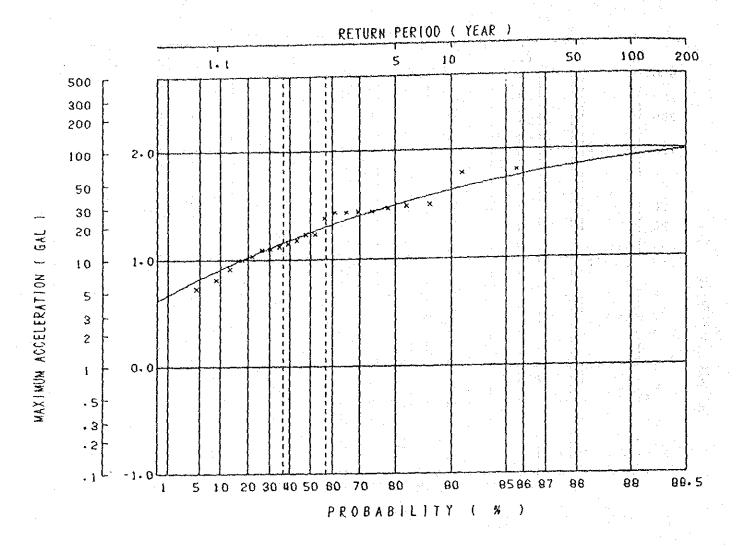


Return Period for Maximum Accelerations calculated by Eq. (2)

Fig. 14

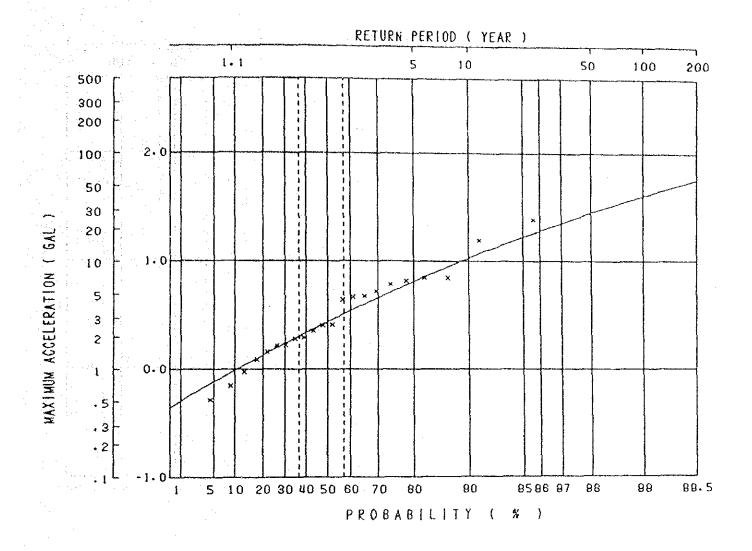


Return Period for Maximum Accelerations calculated by Eq.(3)

Fig. 15

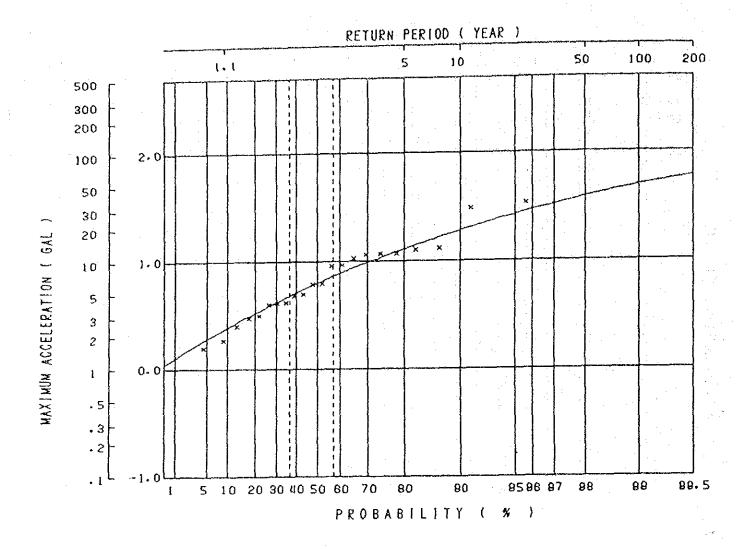

Return Period for Maximum Accelerations calculated by Eq. (4)

Fig. 16

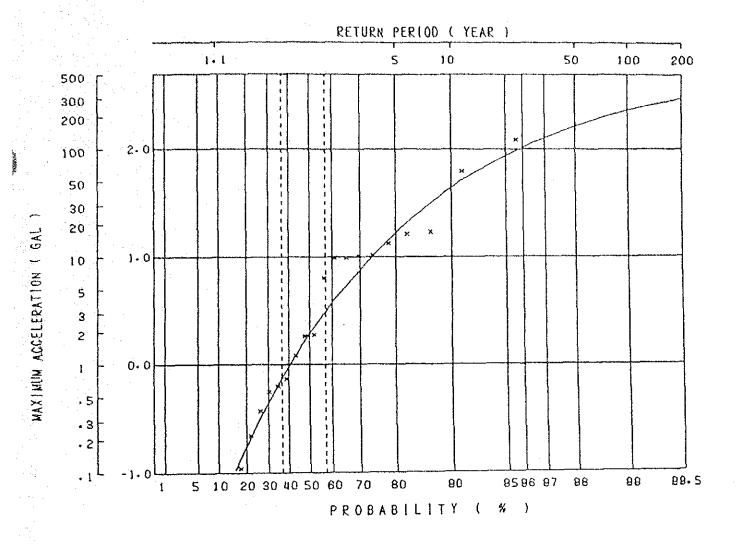

Return Period for Maximum Accelerations calculated by Eq.(5)

Fig. 17

