

ANNEX 3

ANNEX 3

X-RAY POWDER DIFFRACTION CHARTS


Diffractometer : Type RAD – 2A
RIGAKU DENKI Co., Ltd.

Specifications	:	Target/Filter	Cobalt/Iron
		Voltage/Current	30 kV/10 mA
		Count Full Scale	400 cps.
		Time Constant	2 sec.
		PHA	050 – 200
		Div. slit/Rec. slit	1 deg/0.3 mm
		Scan Speed	2 deg/min
		Chart Speed	2 cm/min

Abbreviation of mineral names:

anat	:	anatase	goe	:	goethite
ank	:	ankerite	gyp	:	gypsum
ara	:	aragonite	ha	:	halite
boe	:	boehmite	ma	:	marcasite
ca	:	calcite	py	:	pyrite
crn	:	crandallite	rhod	:	rhodochrosite
gibb	:	gibbsite	si	:	siderite

24/3B

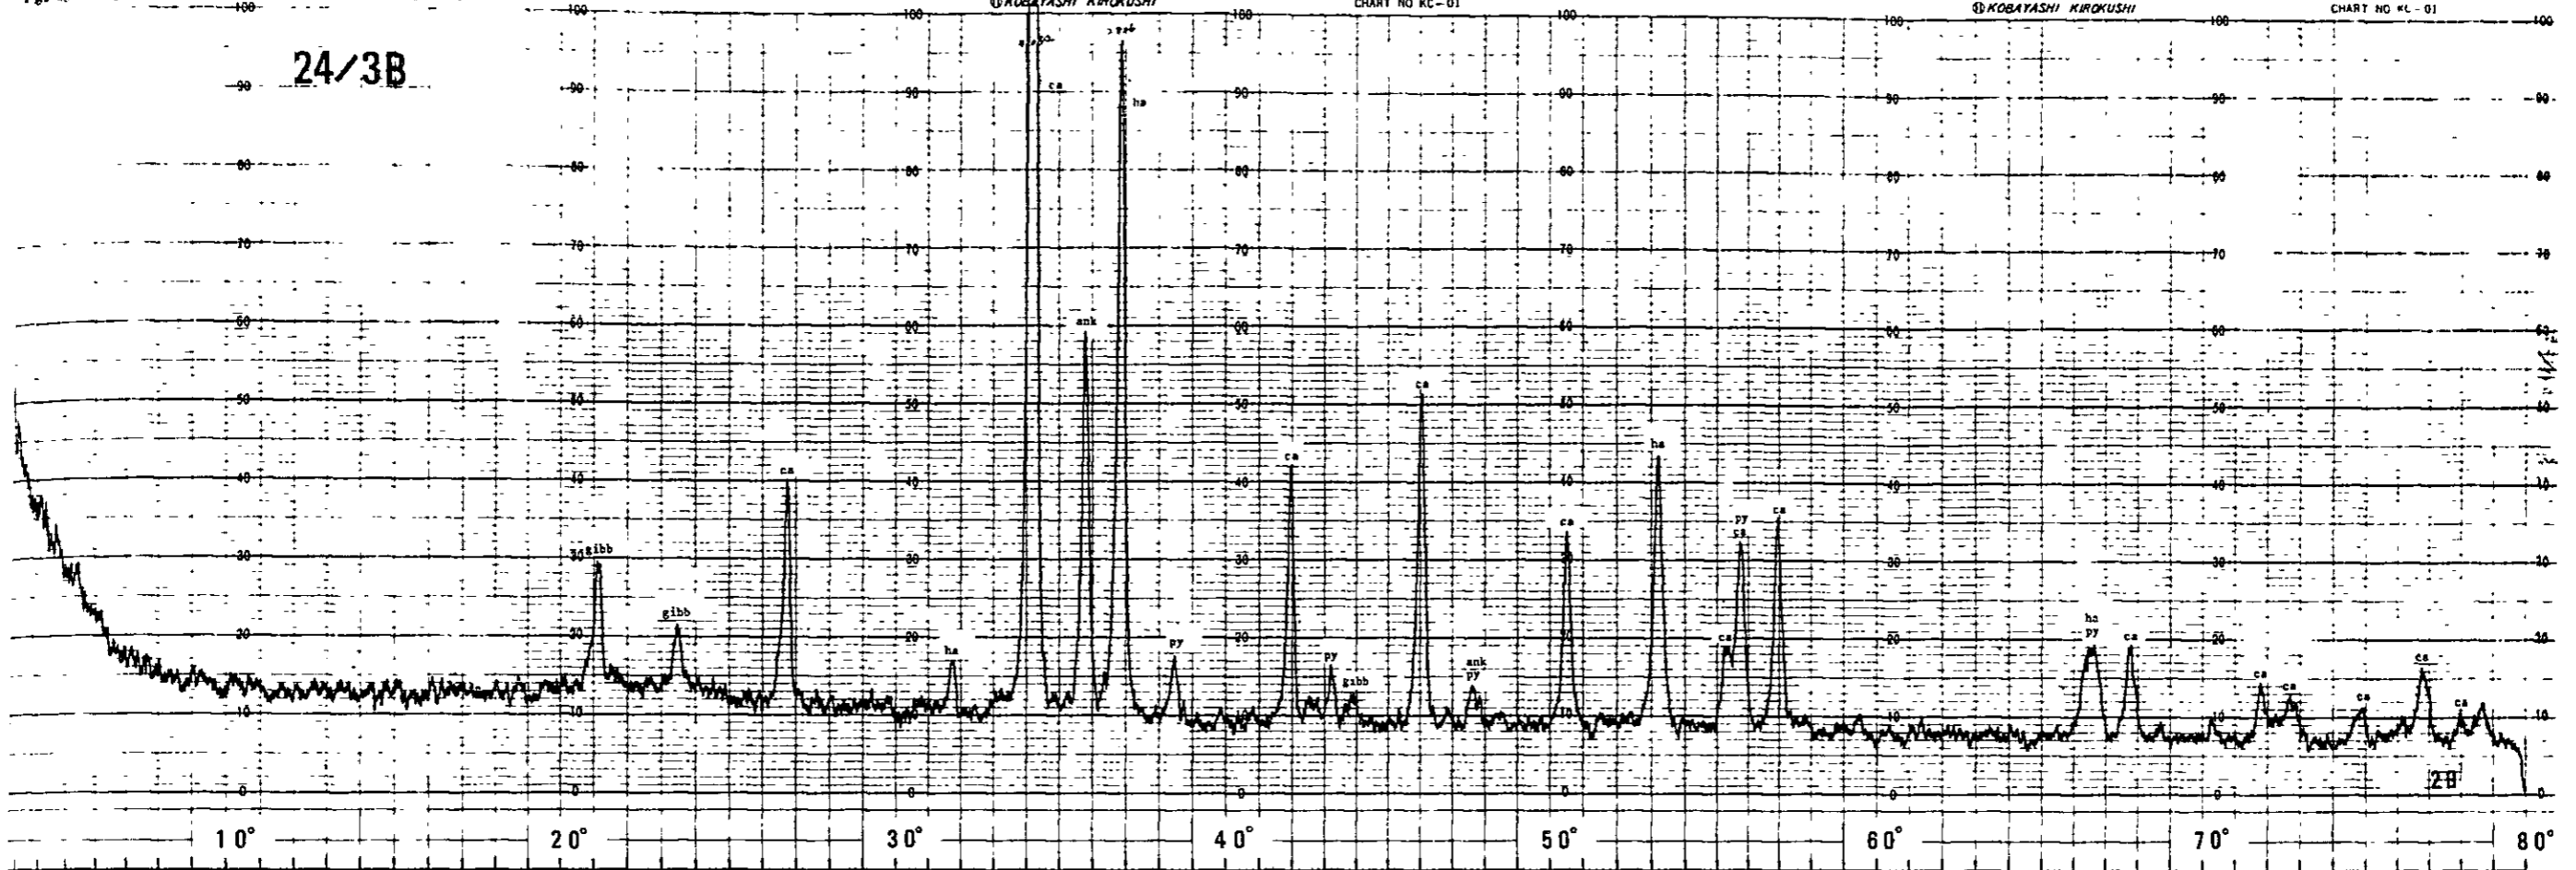

25/1

