




Conditions for X-Ray Diffraction


Sample	AC-43
Target	Cu
Filter	
Voltage	40 KV
Current	30 mA
Counter Type	S.C.
Count Full Scale	1000 c/s
Time Constant	1 sec
Scanning Speed	2 °/min
Chart Speed	2 cm/min
Divergency	1 °
Slit Receiving	0.15 mm
Slit Scatter	1 °
Operator	
Date	


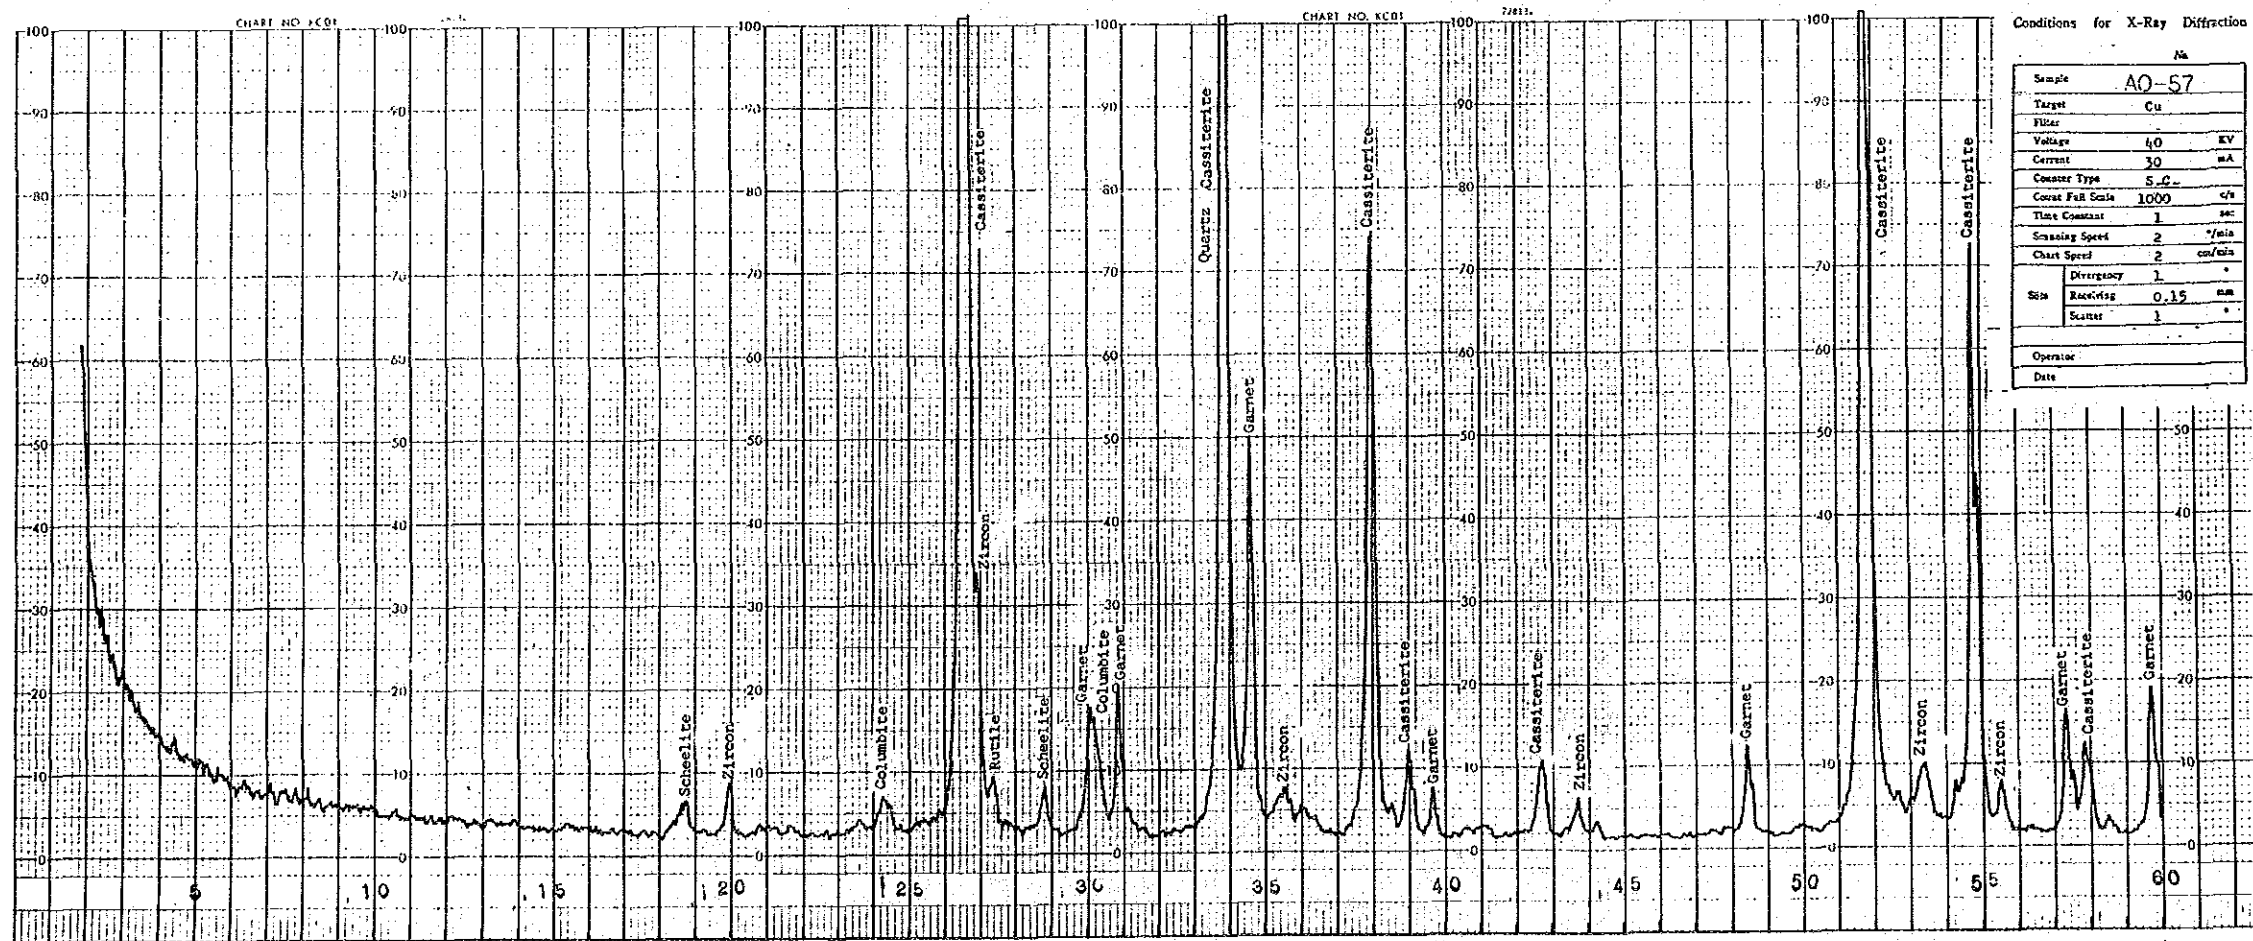




Conditions for X-Ray Diffraction



Sample	AO-57
Target	Cu
Filter	
Voltage	40 KV
Current	30 mA
Counter Type	S.C.
Count Full Scale	1000 c/s
Time Constant	1 sec
Scanning Speed	2 °/min
Chart Speed	2 cm/min
Divergency	1 °
Slit Receiving	0.15 mm
Slit Scatter	1 °
Operator	
Date	

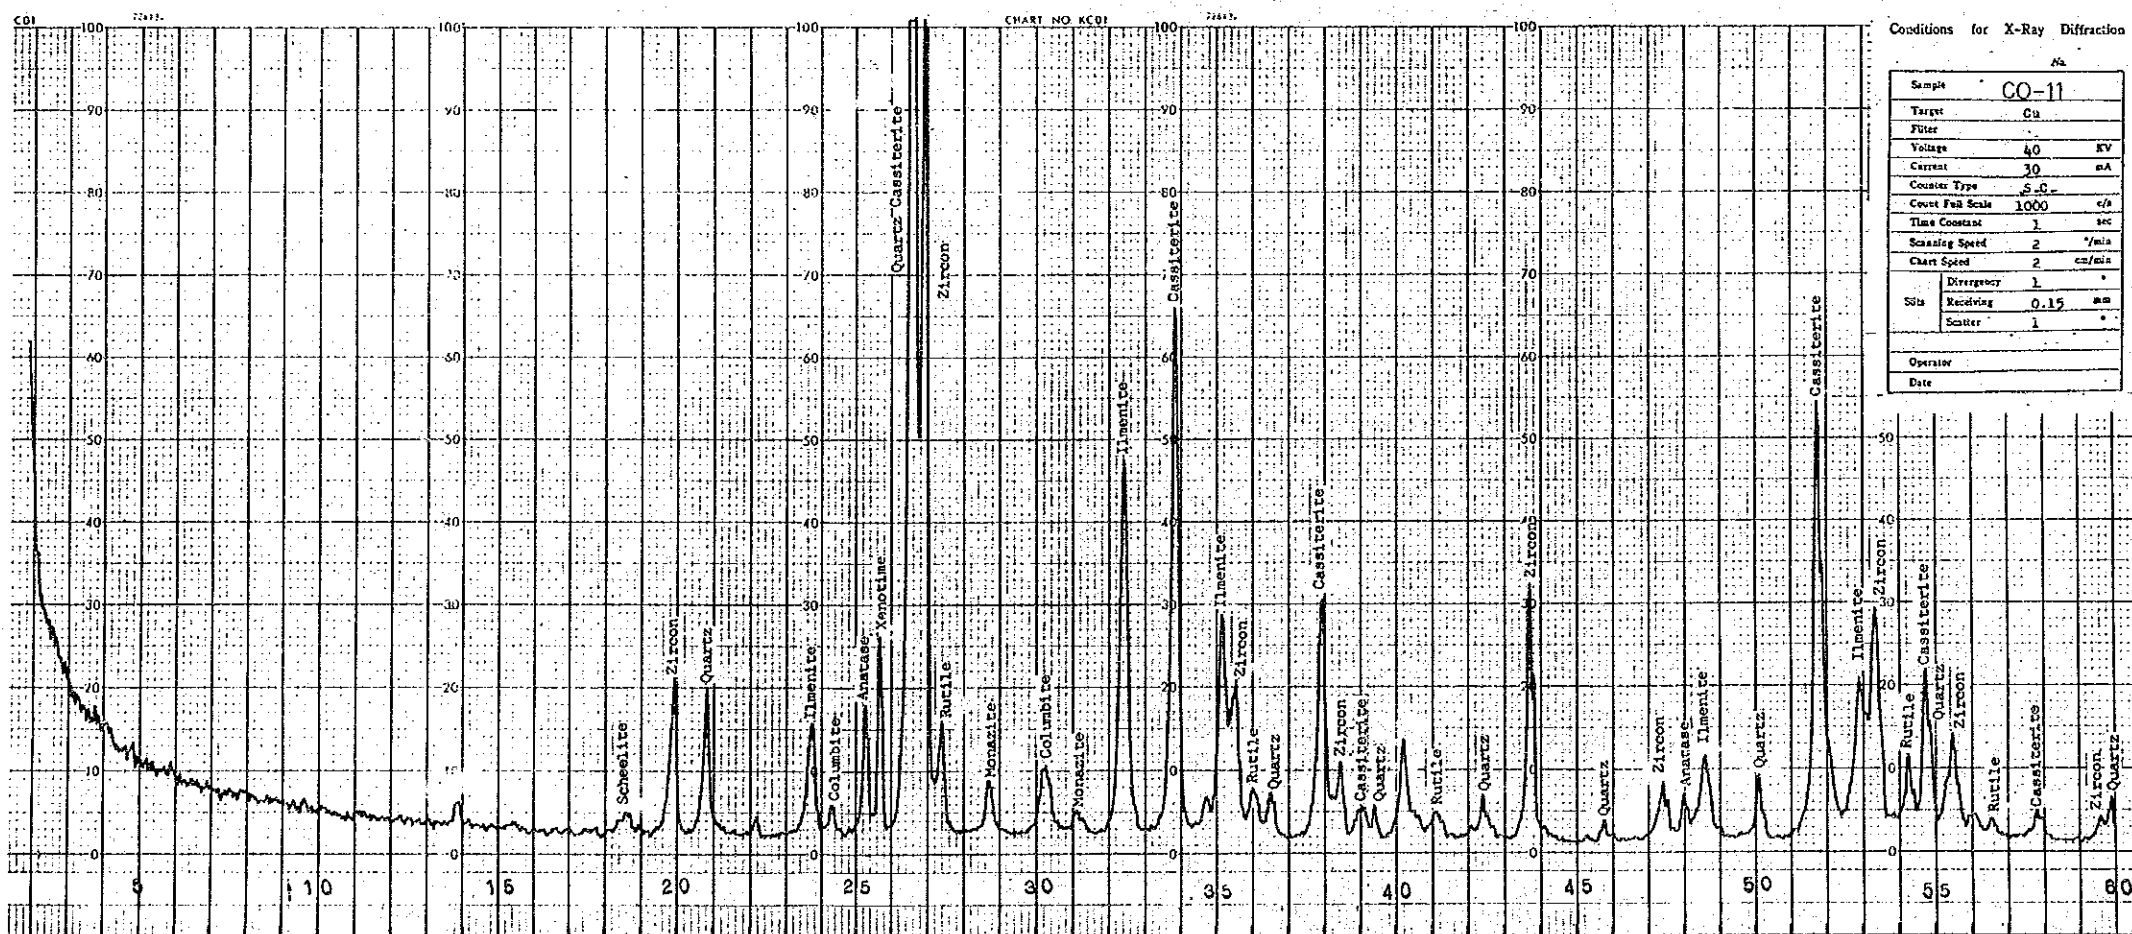
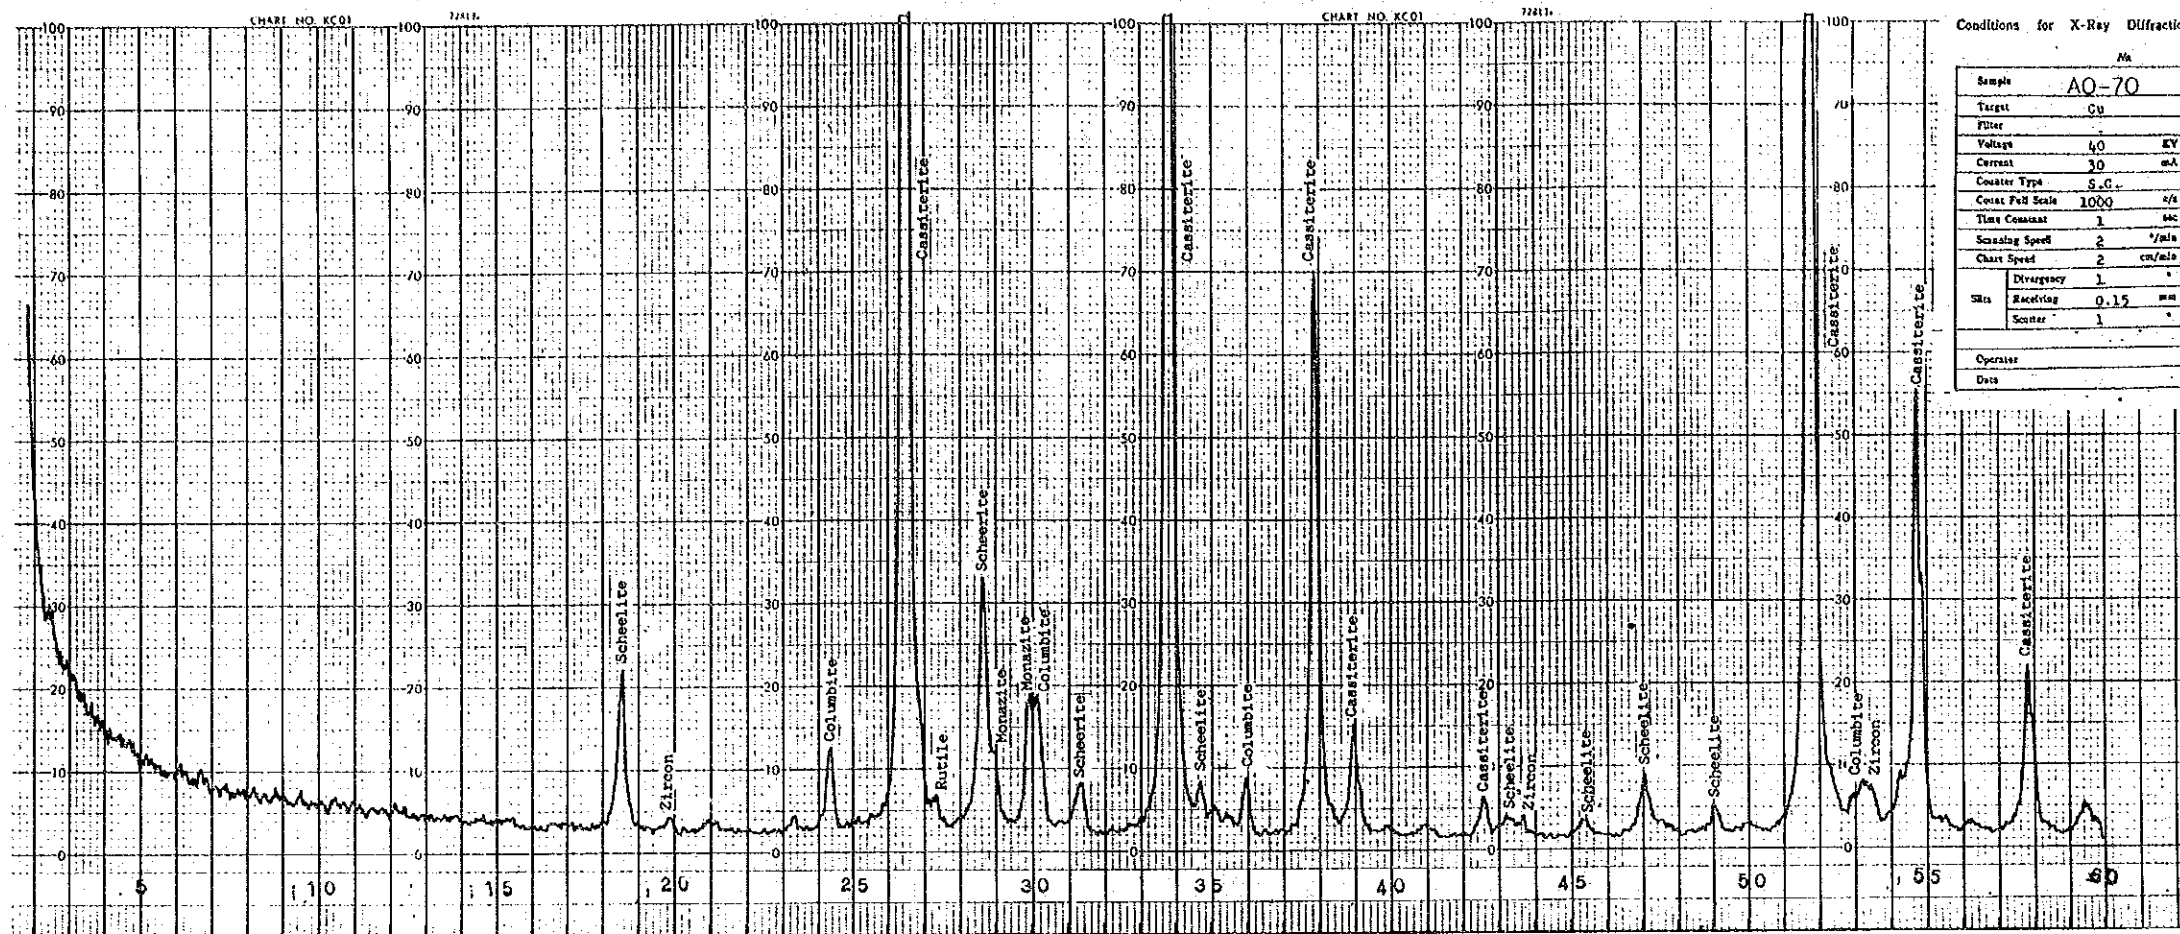



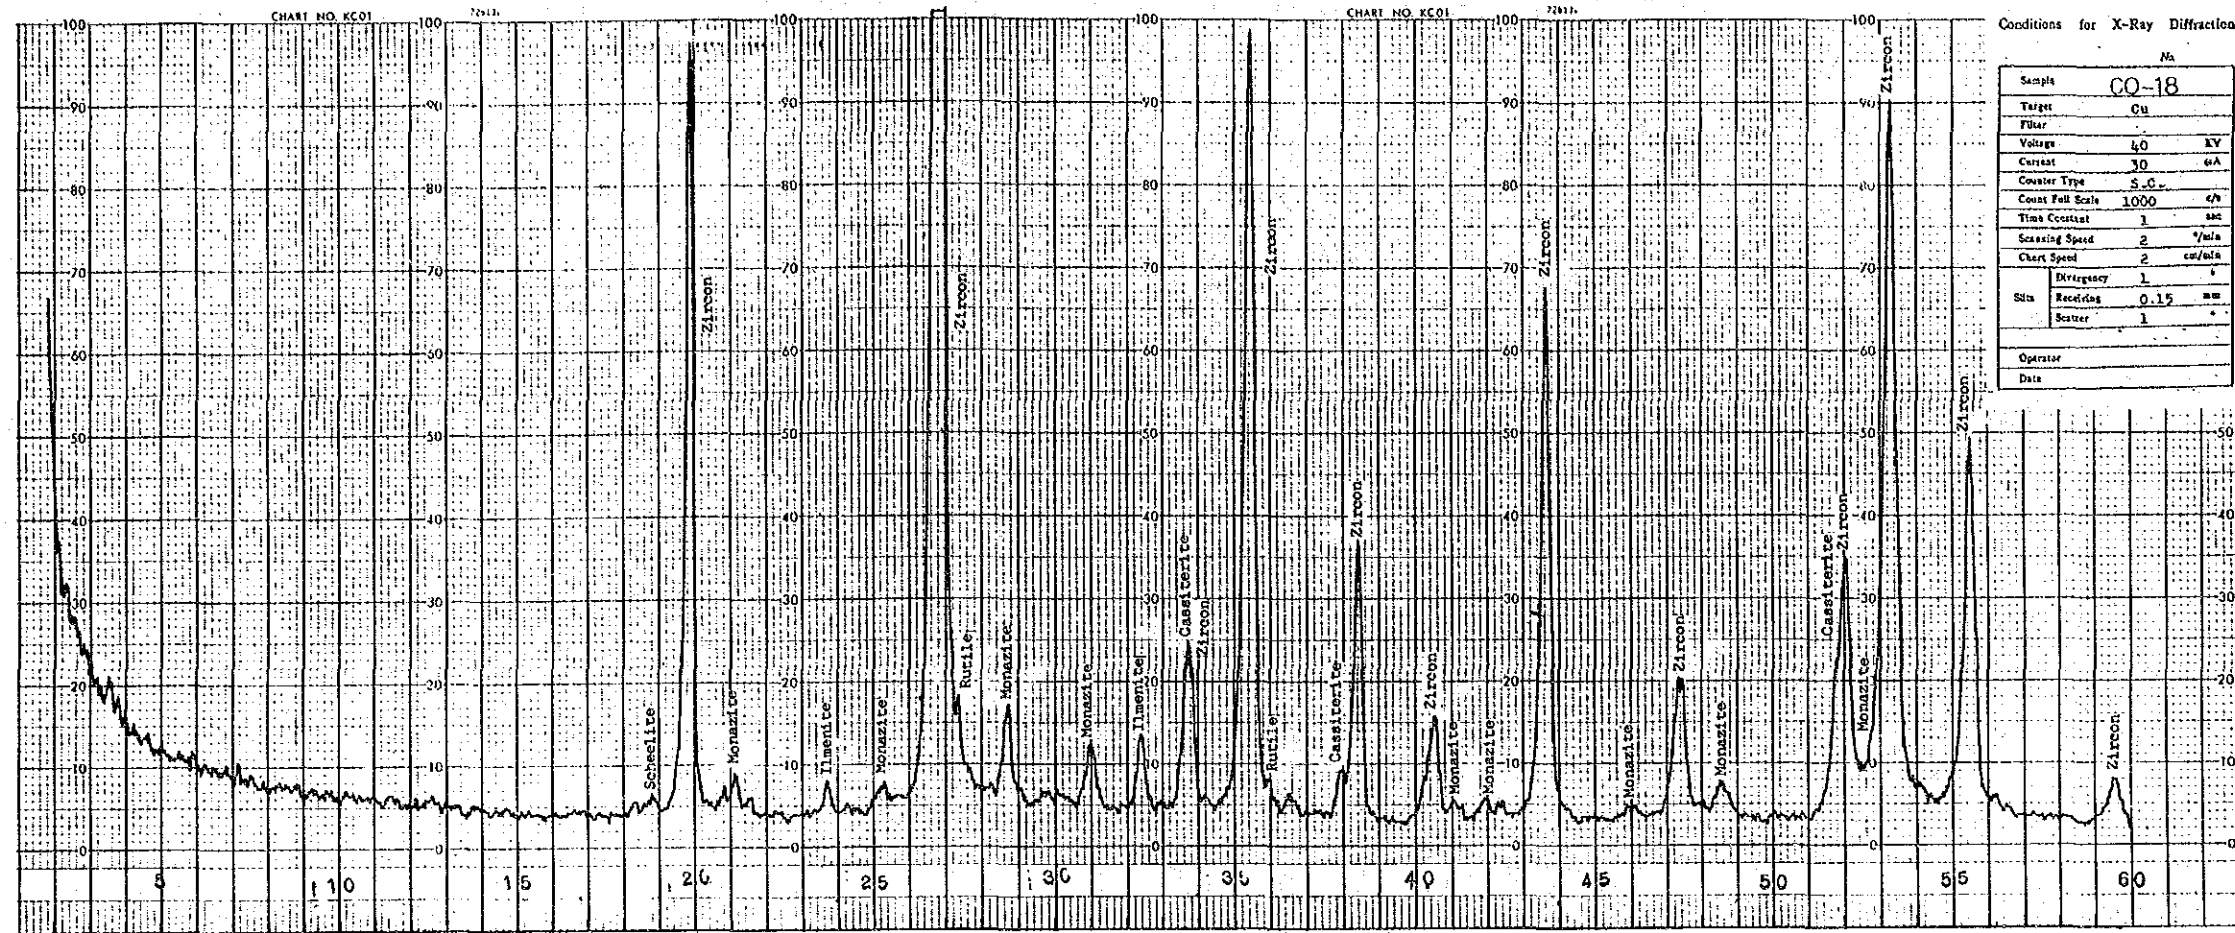


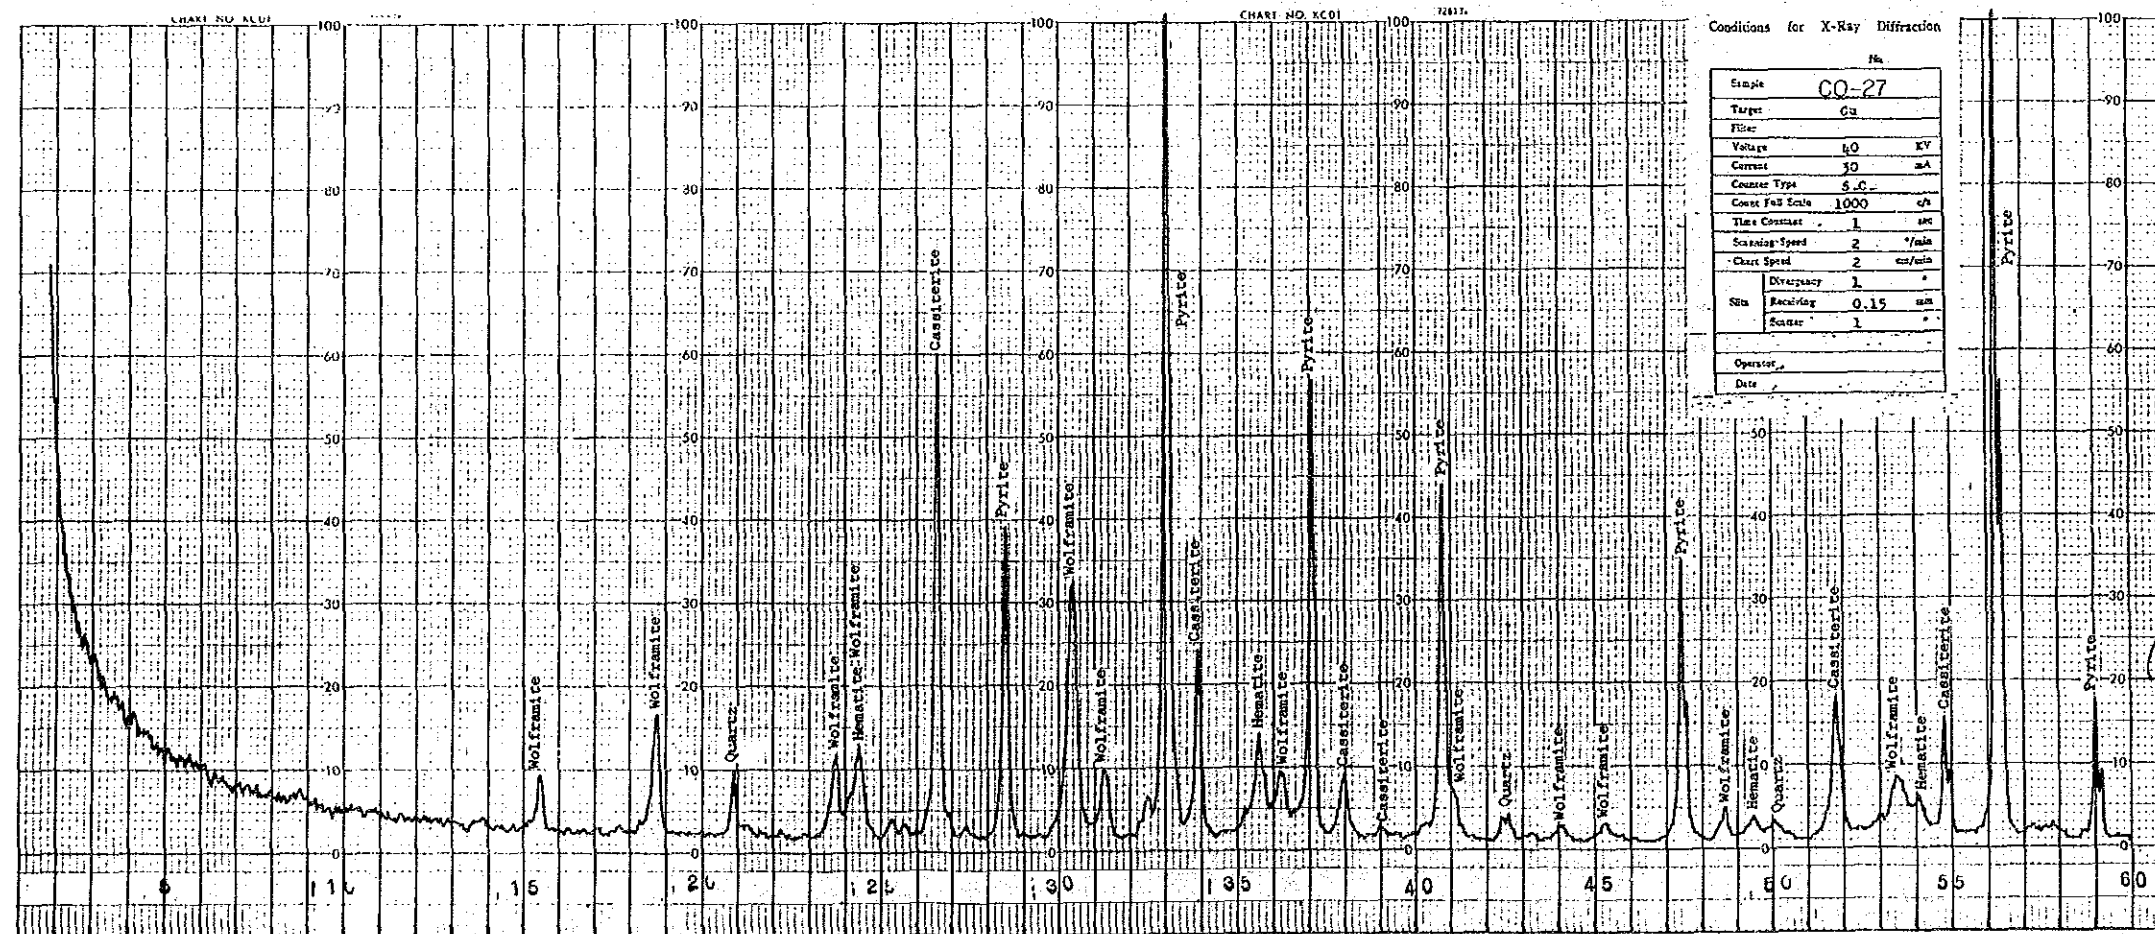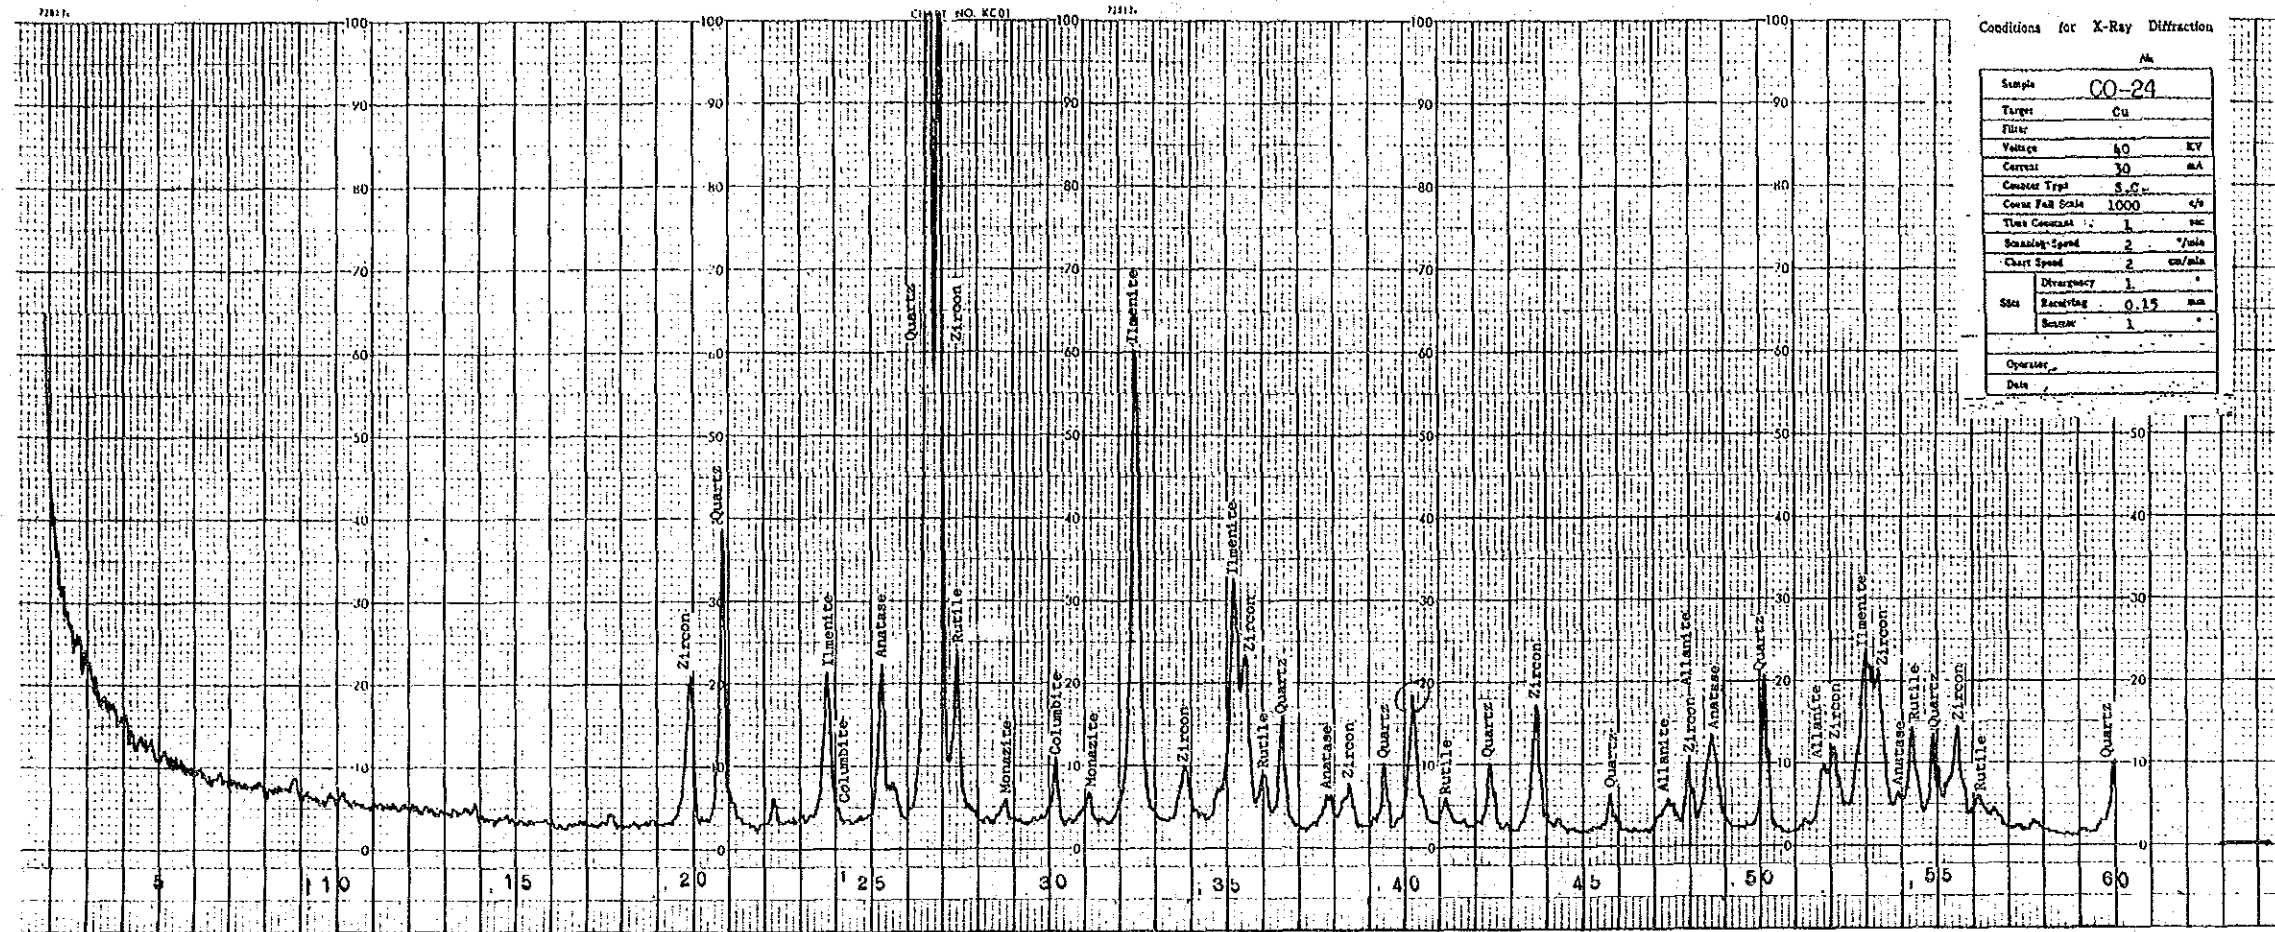

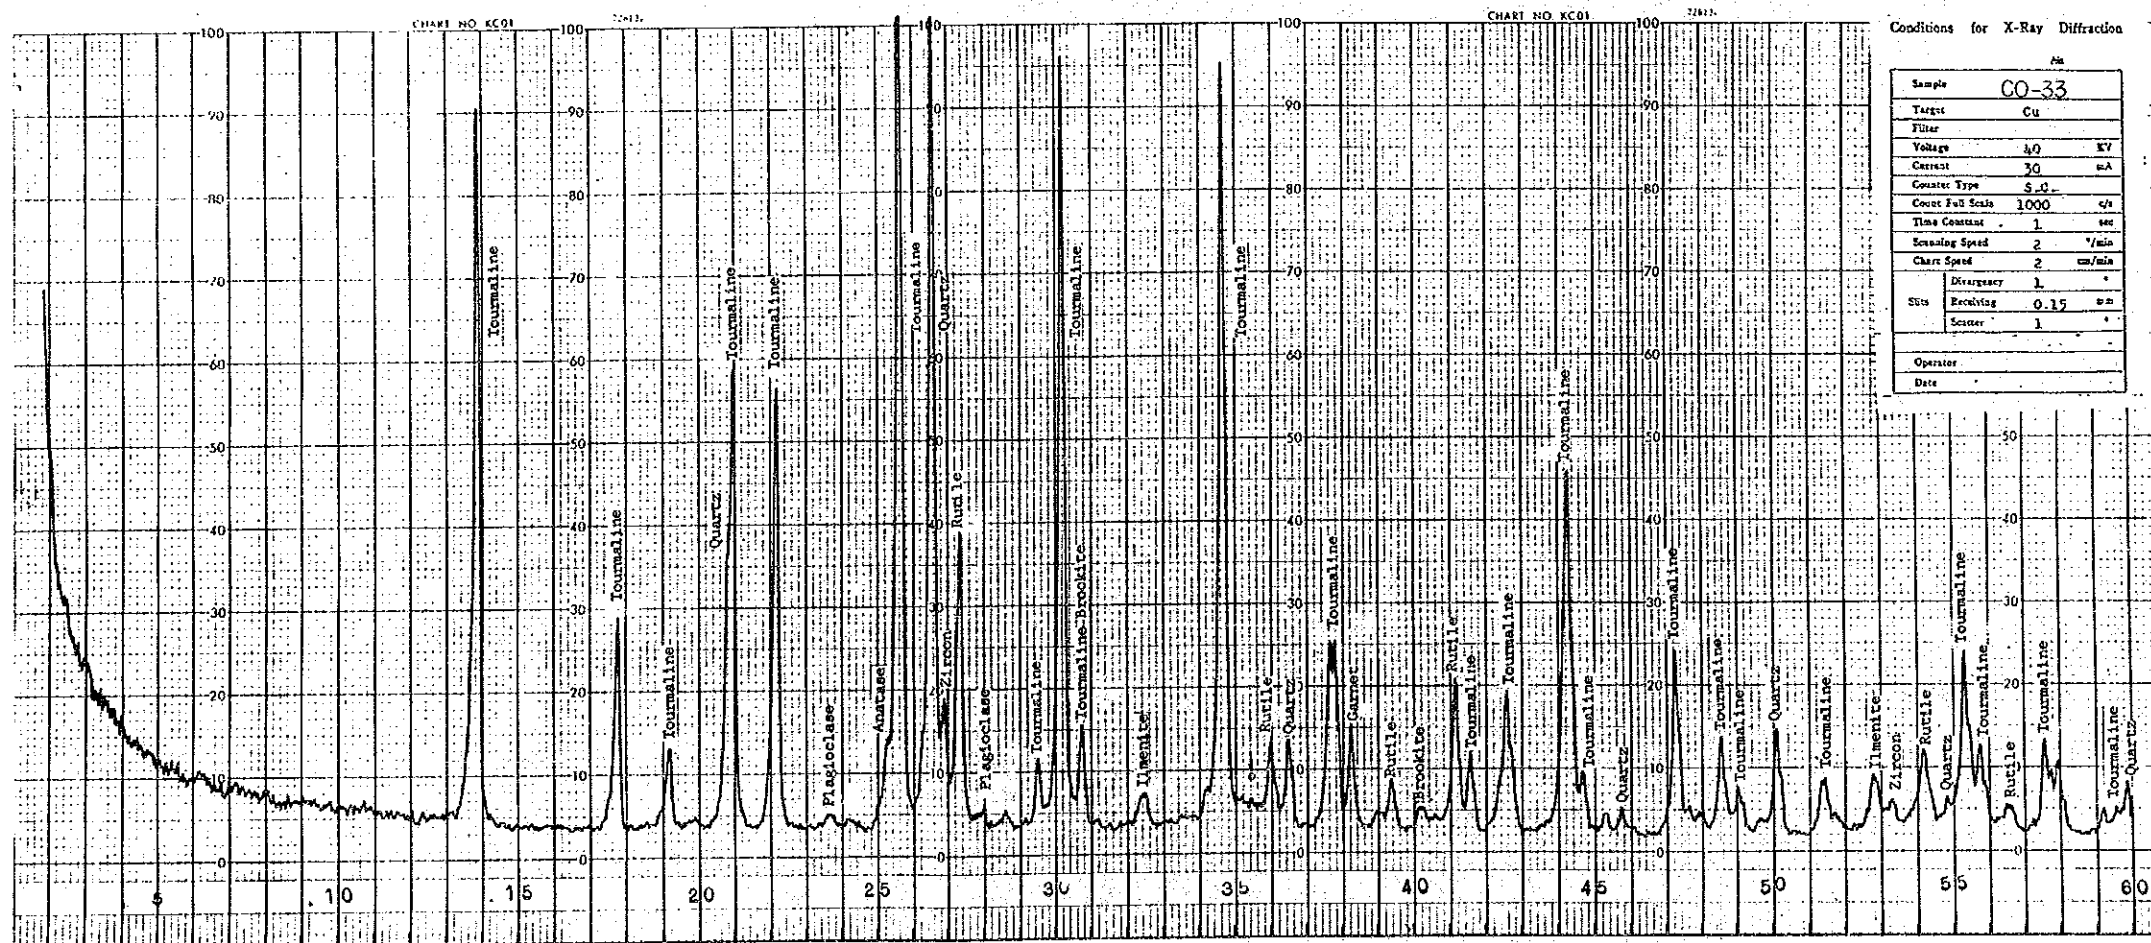
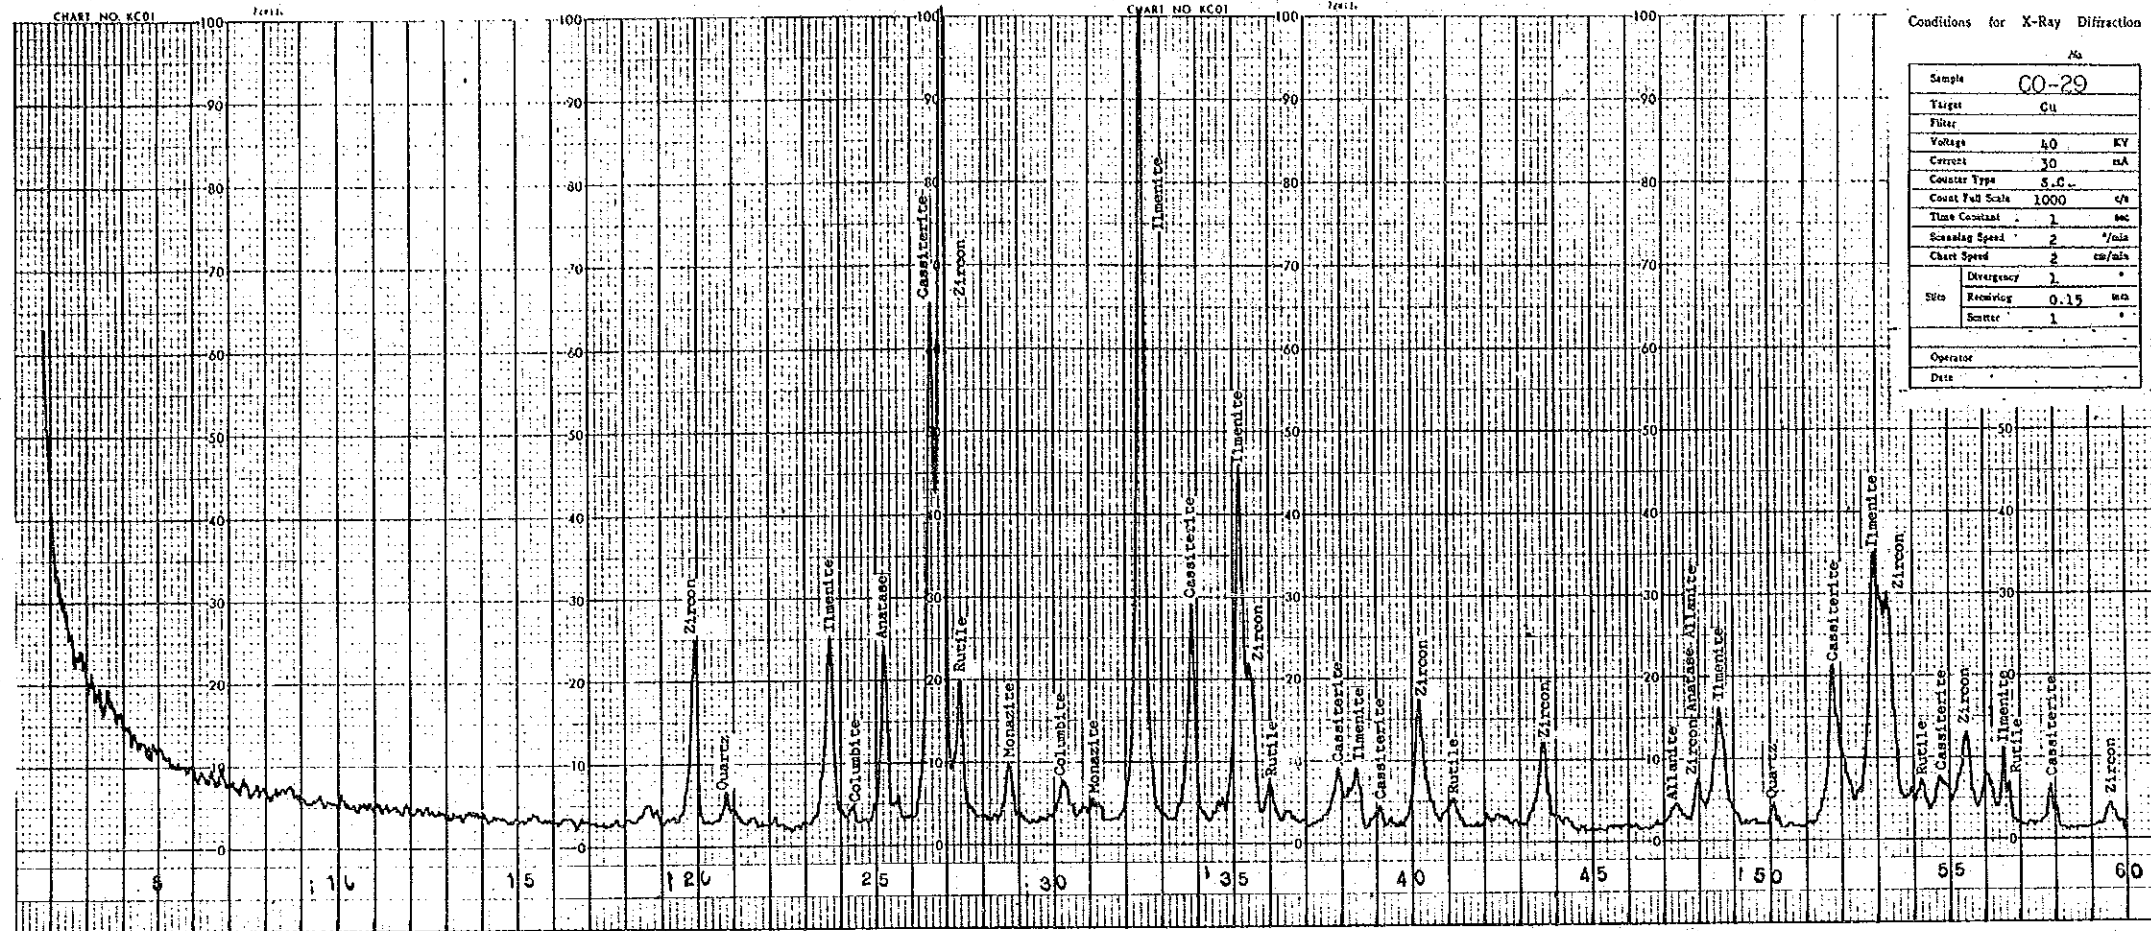


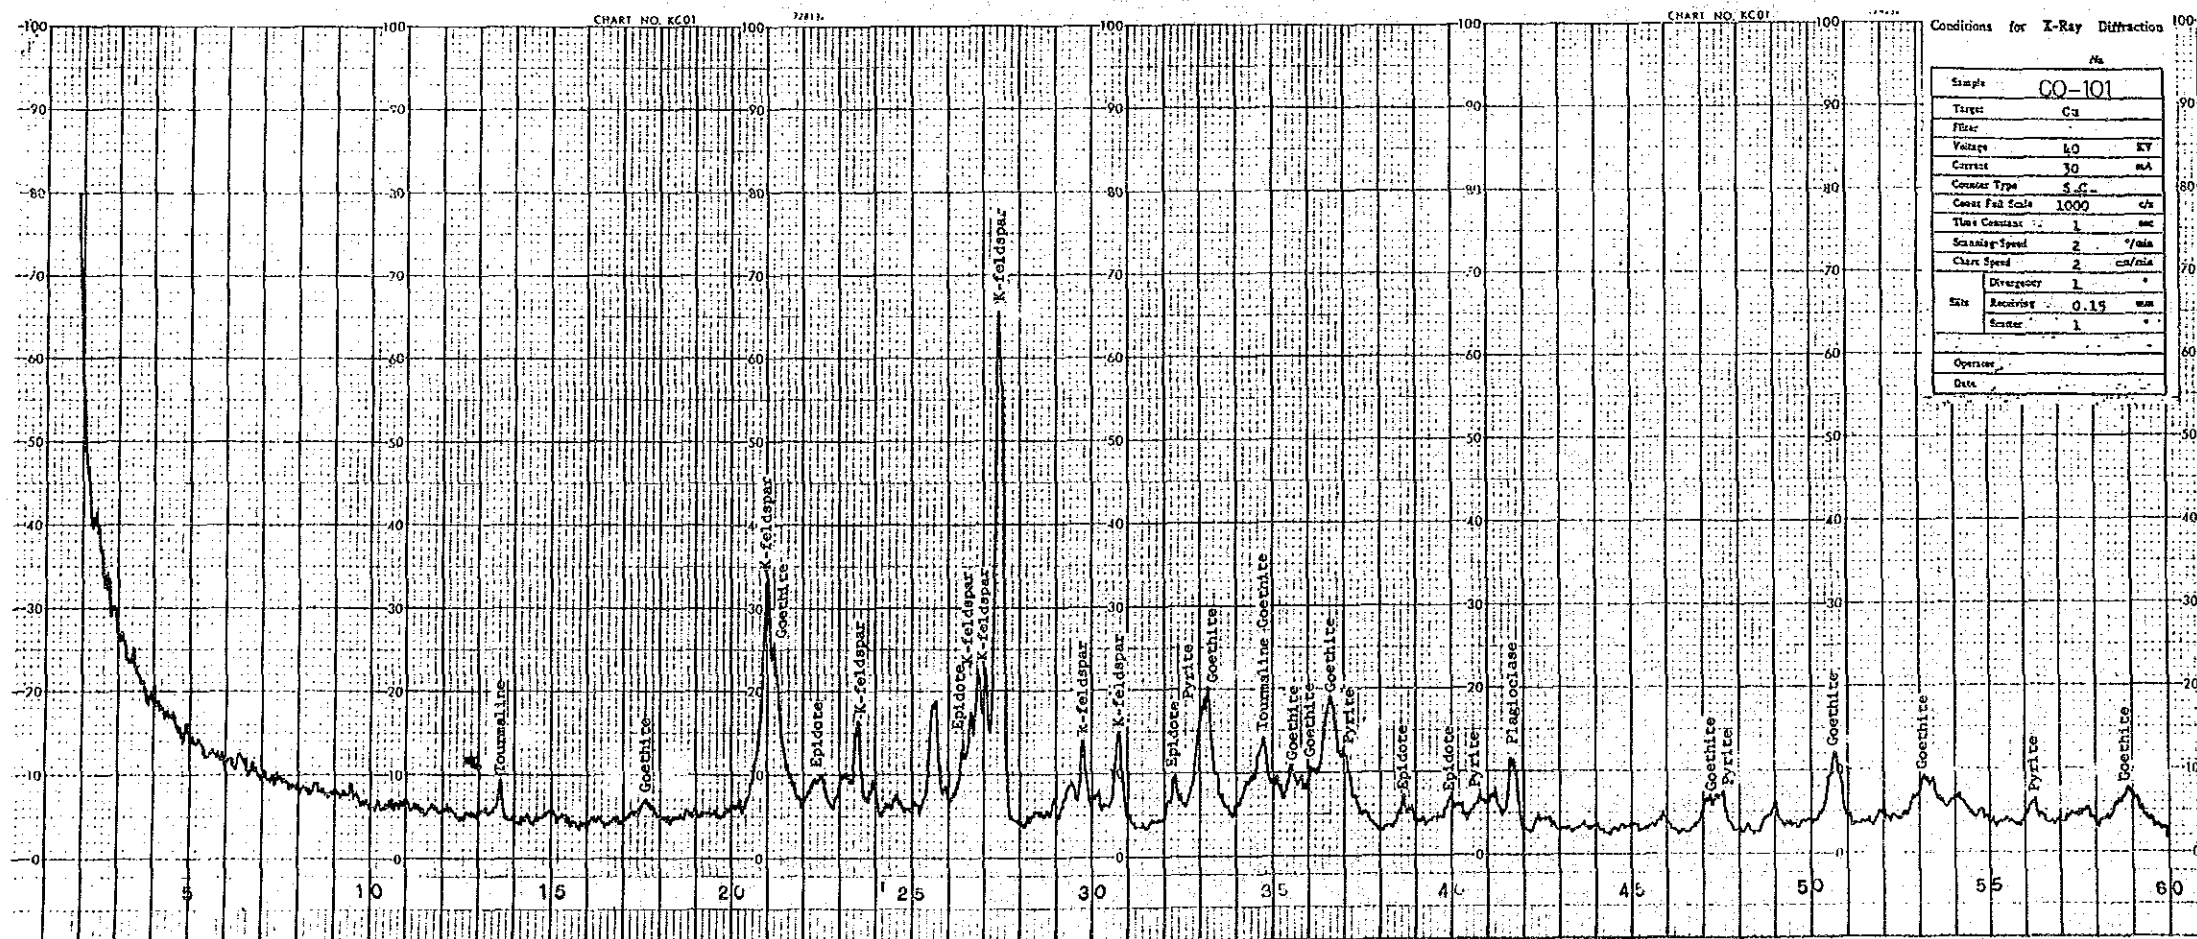
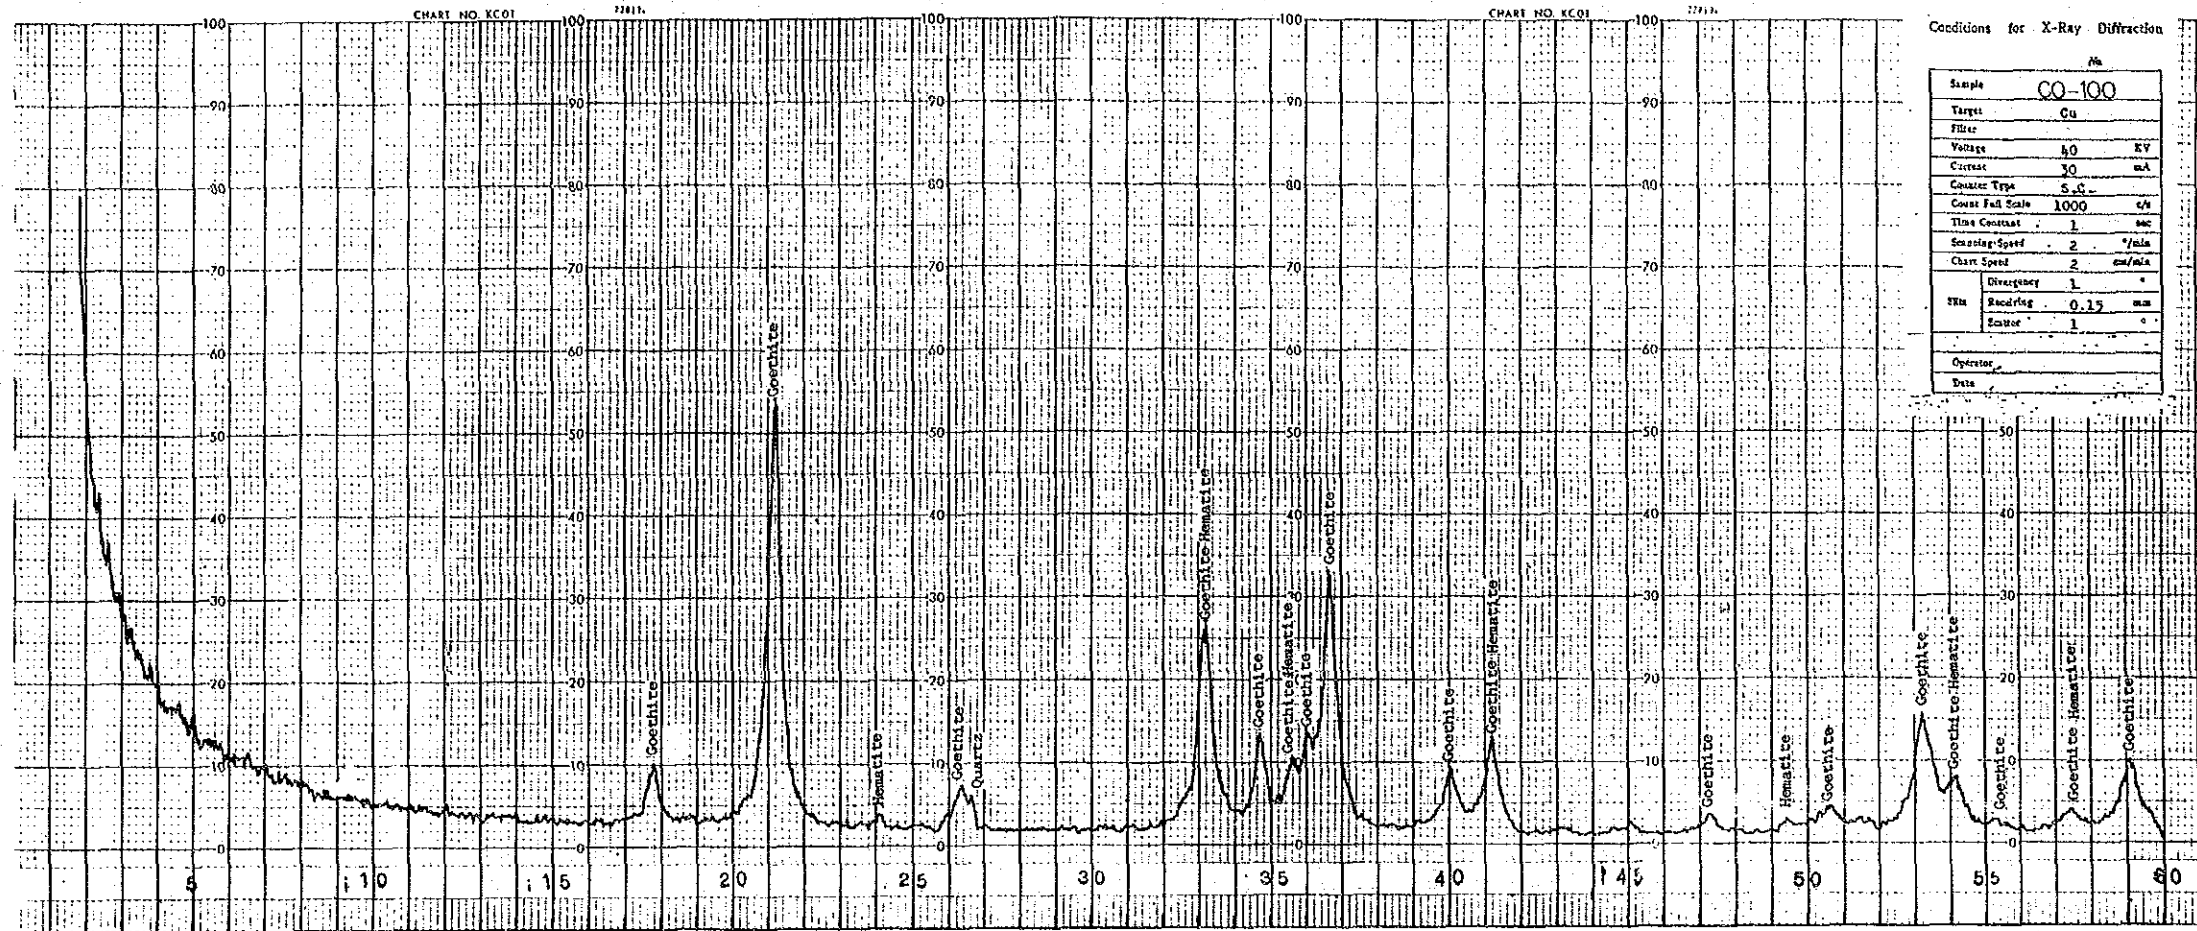


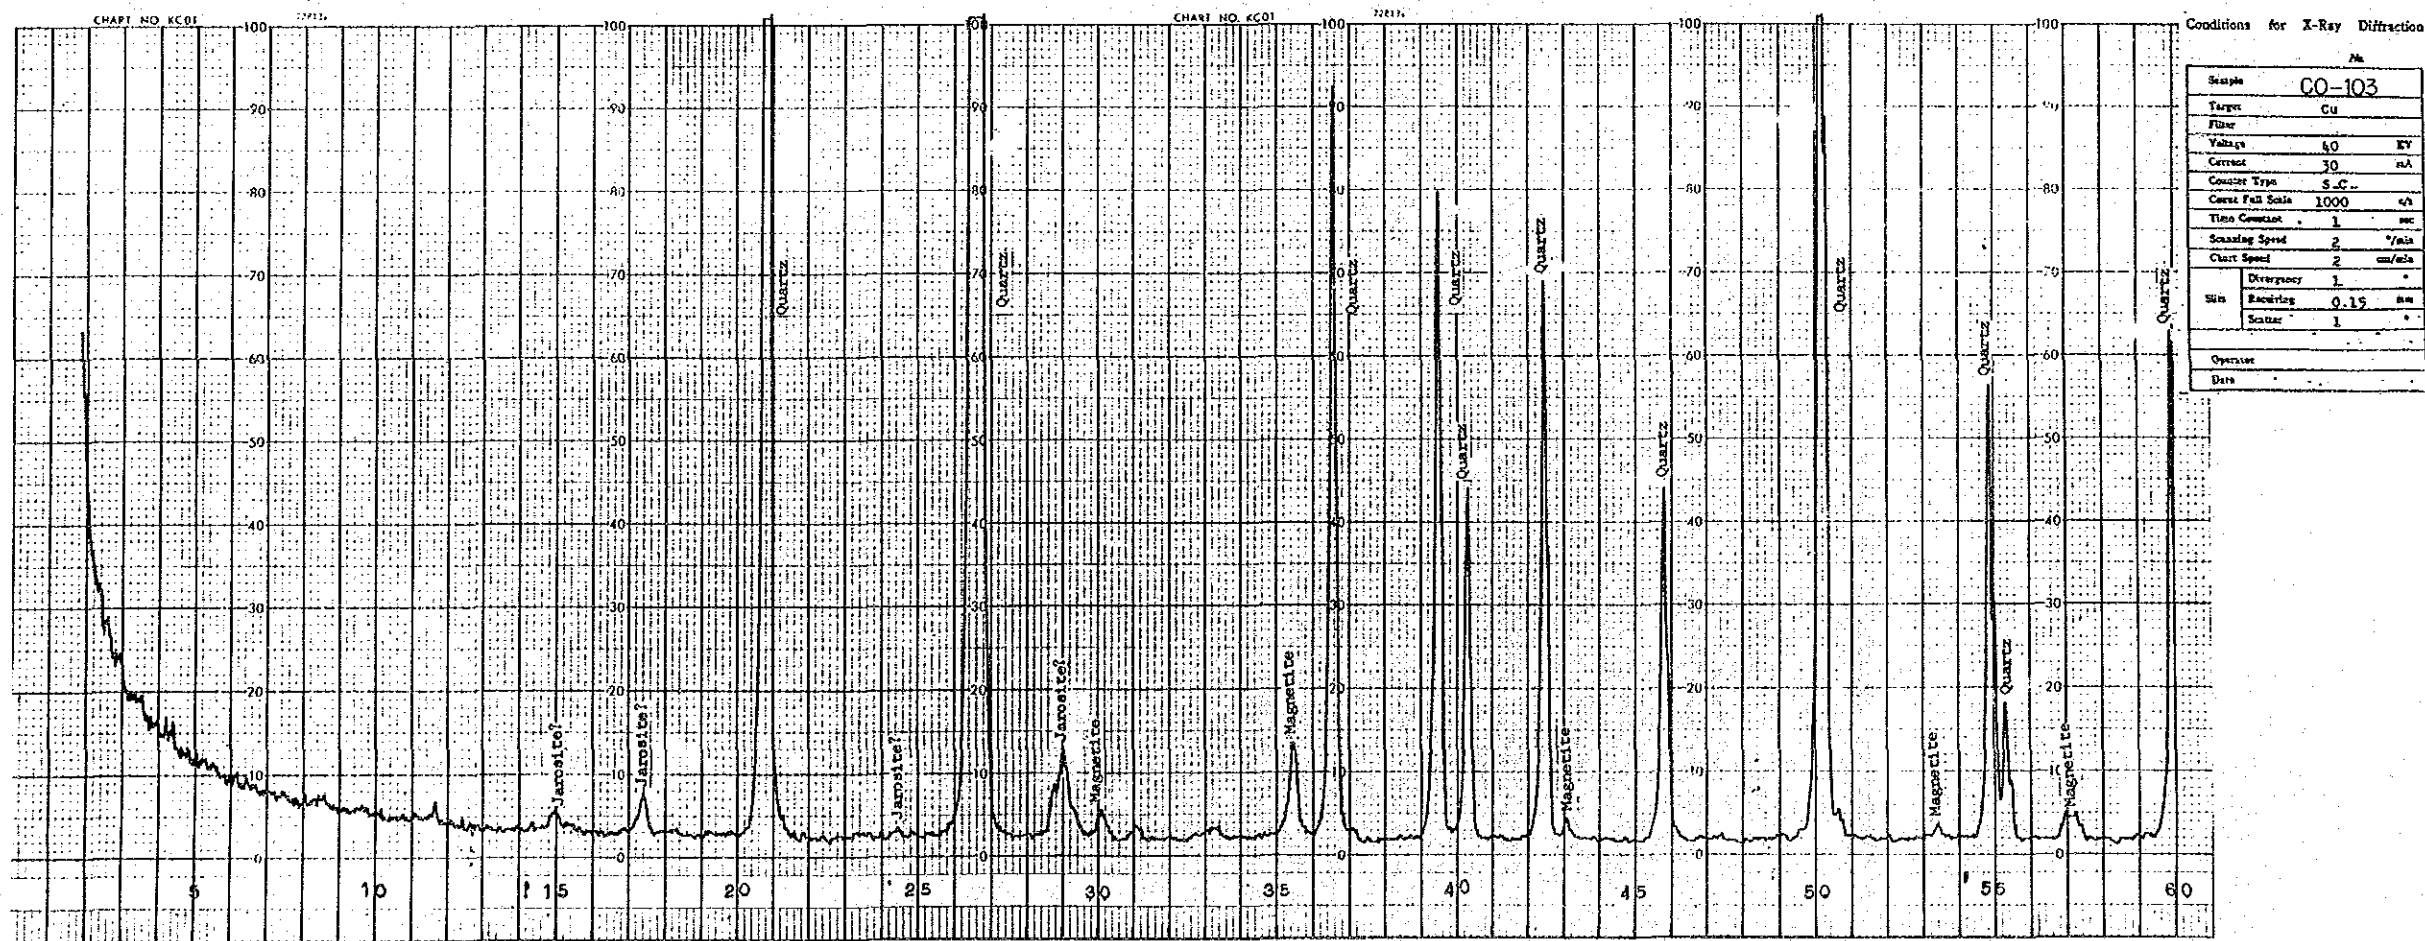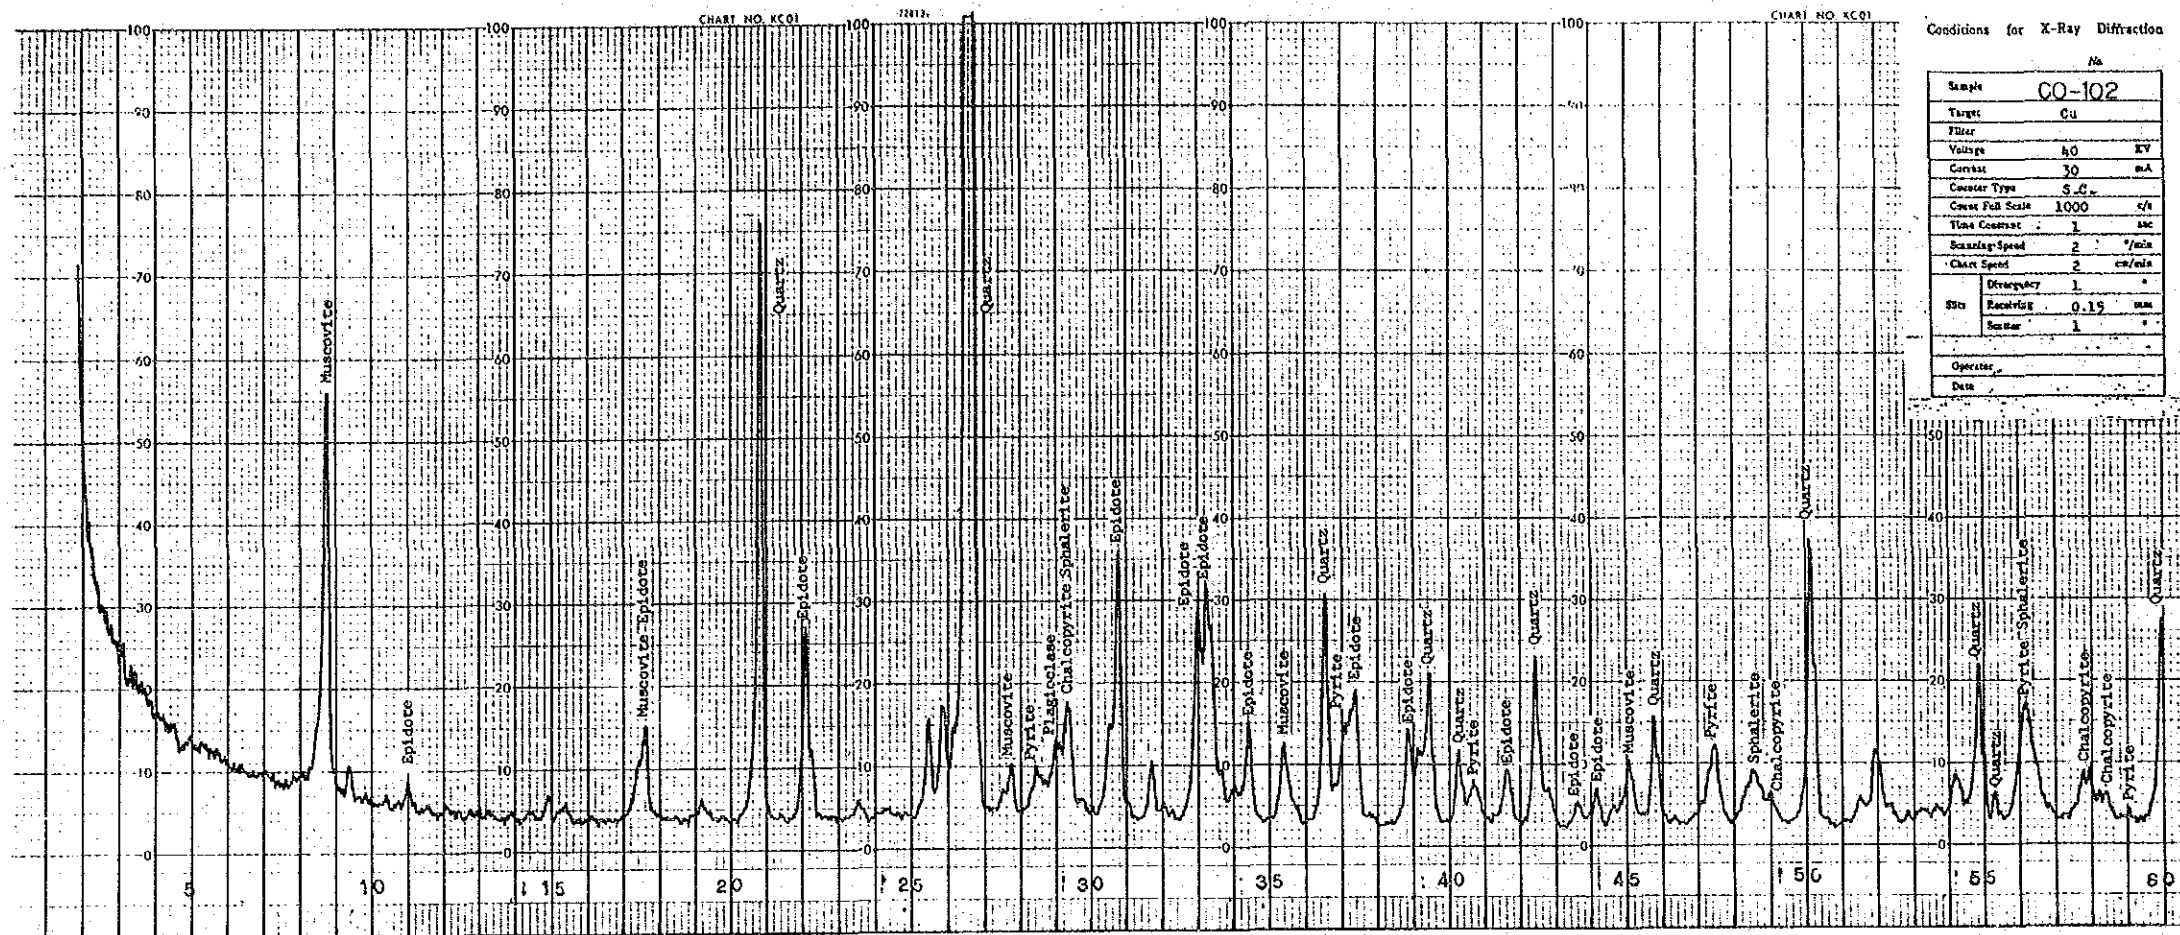

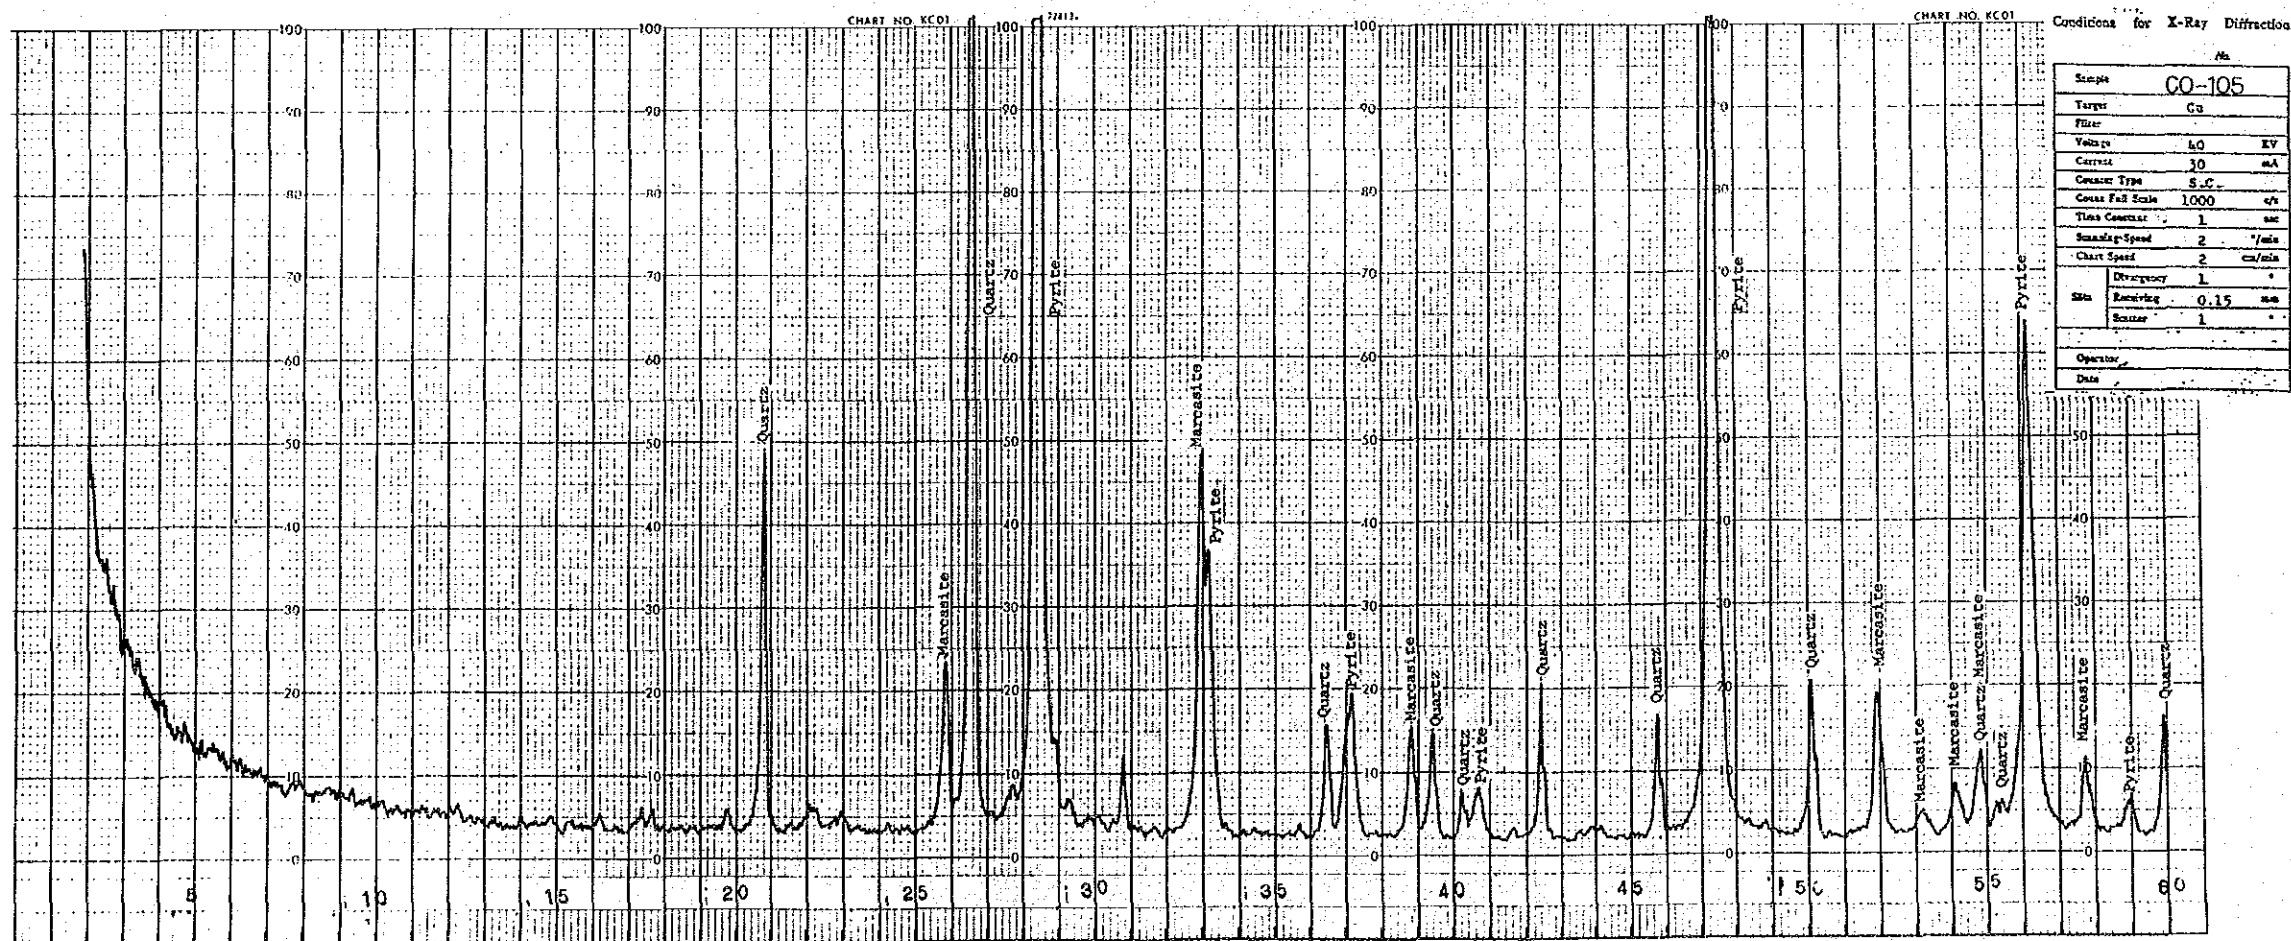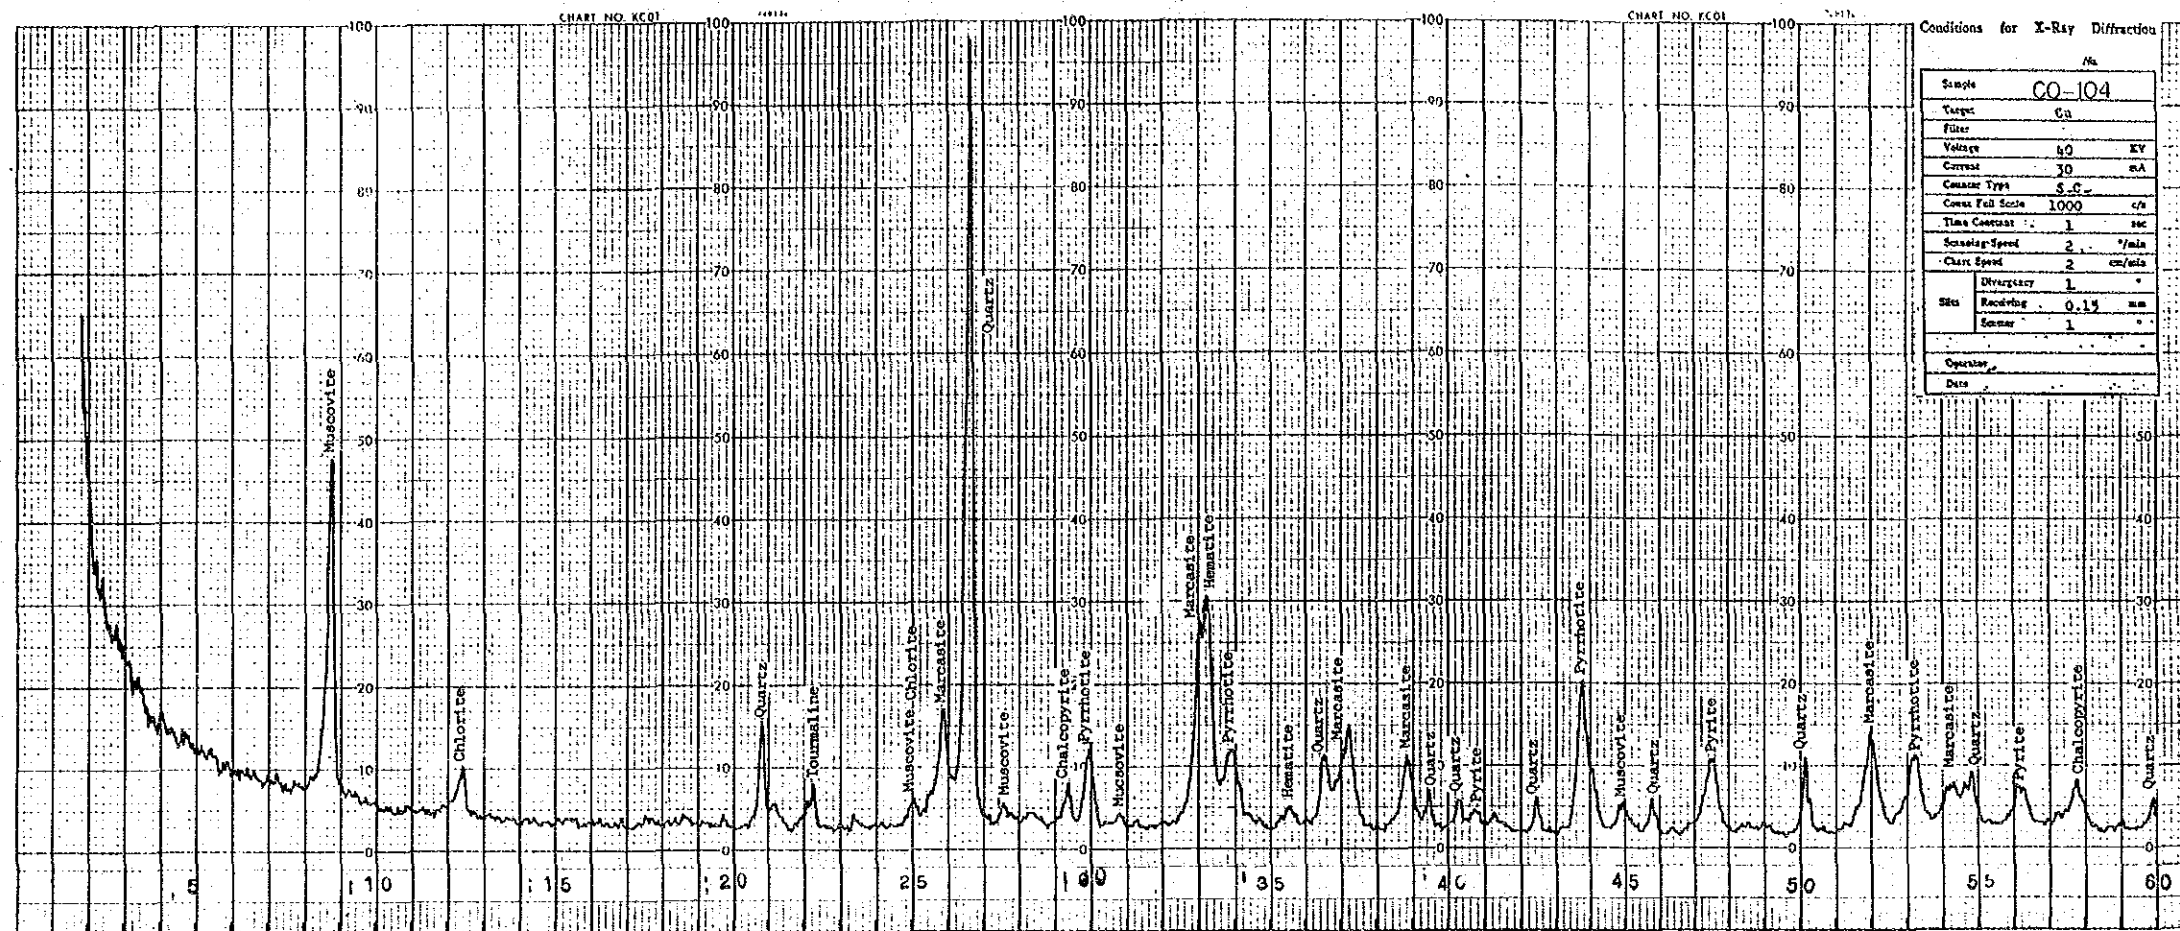



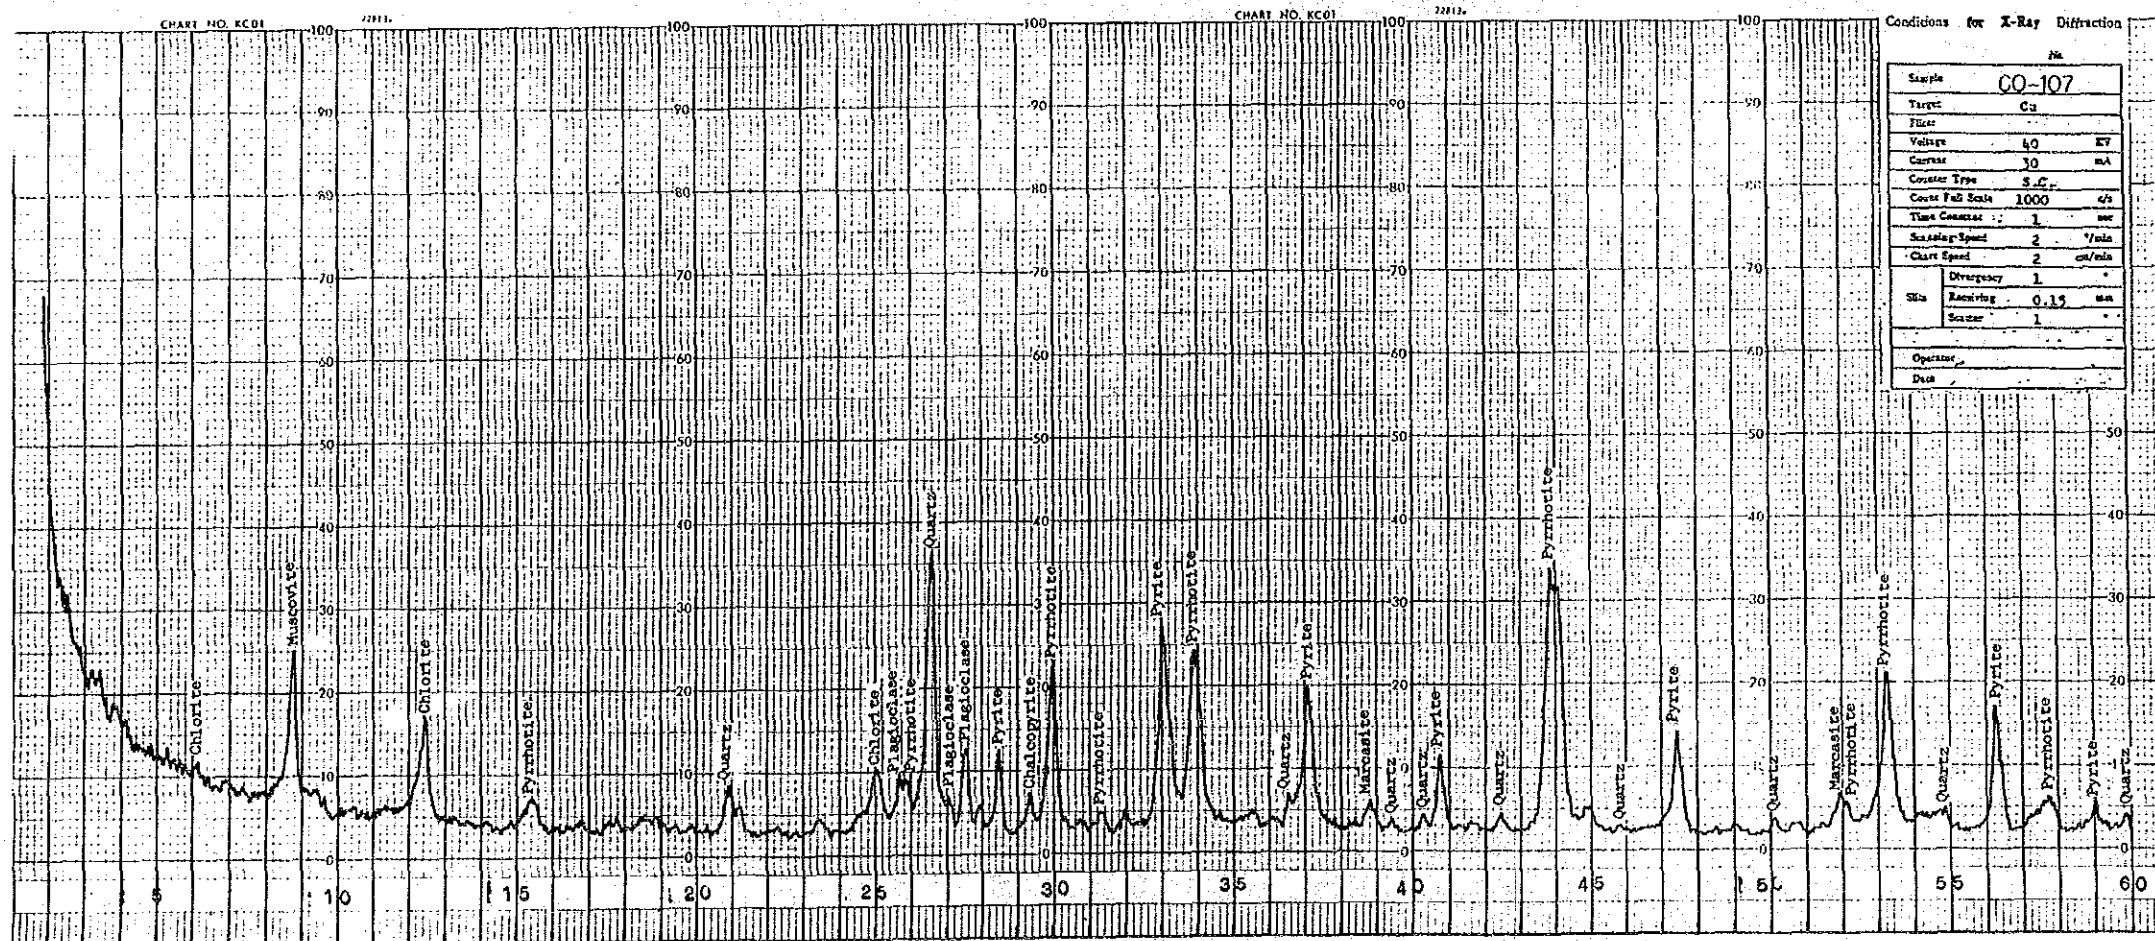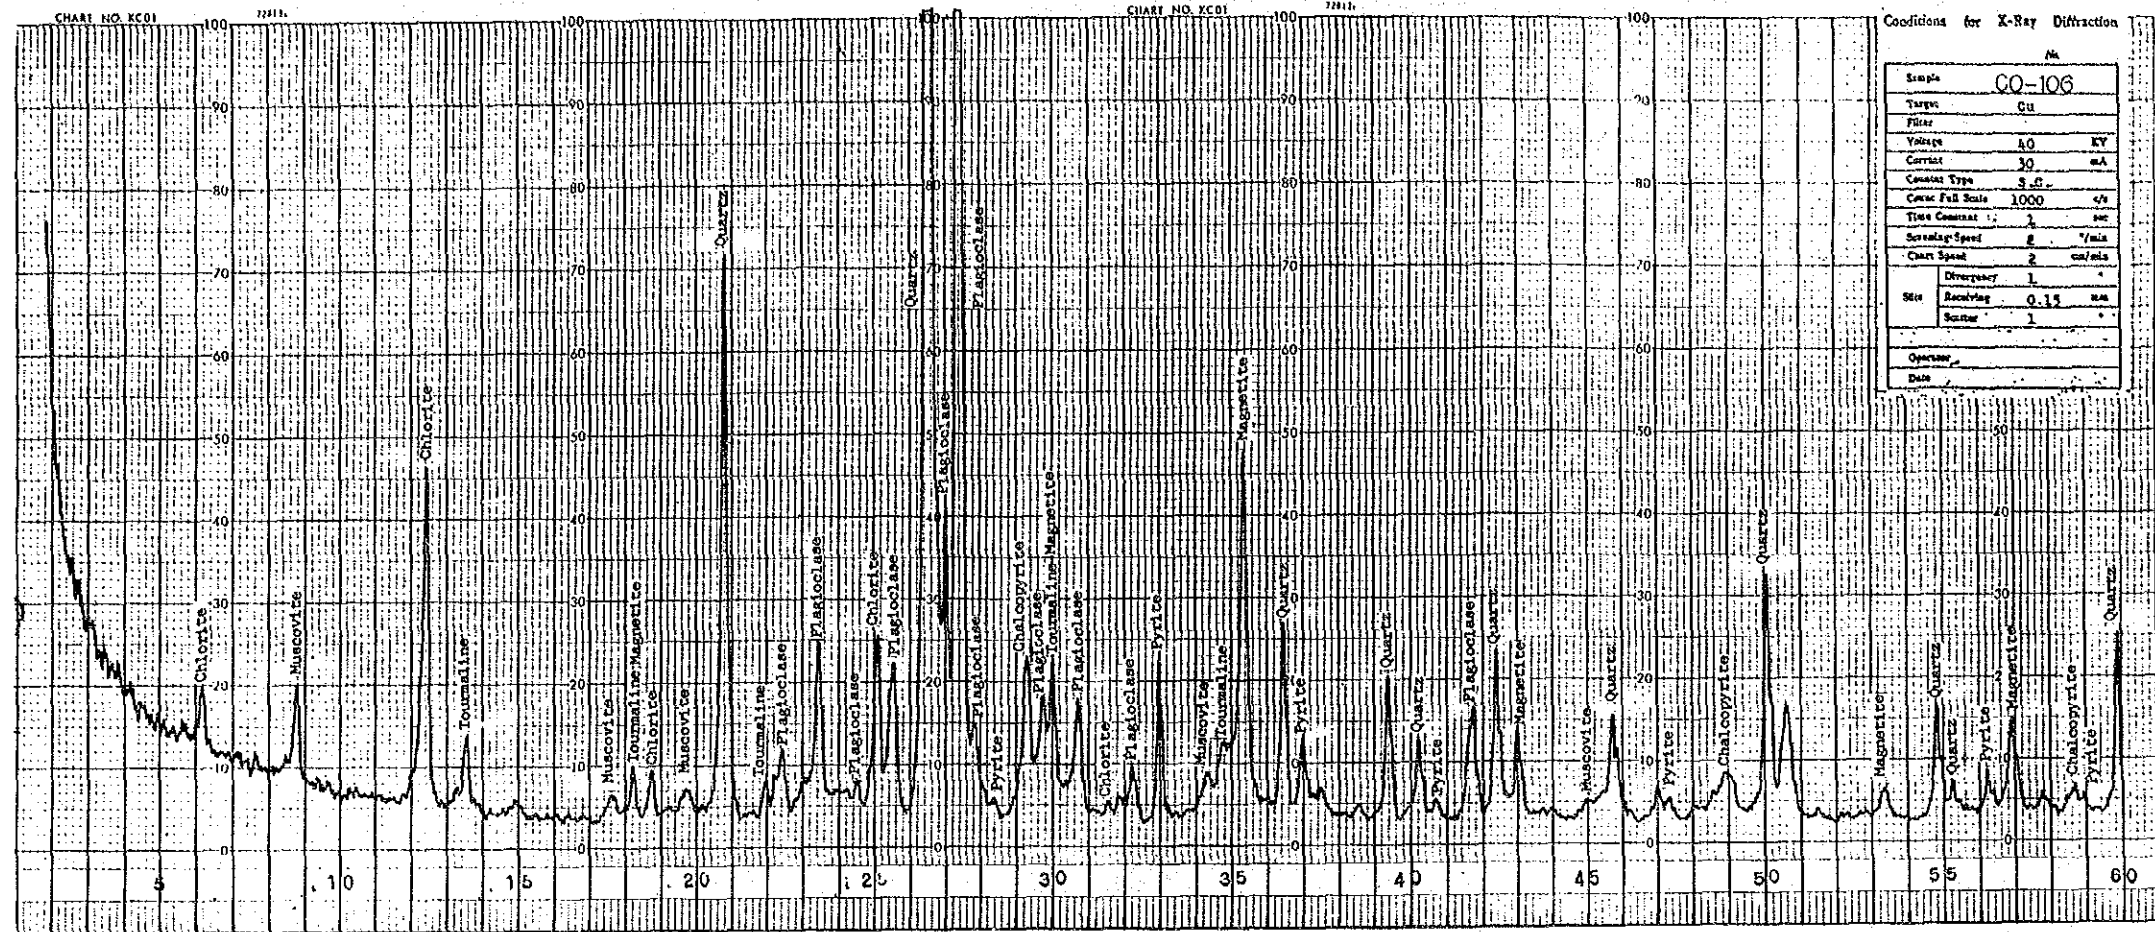

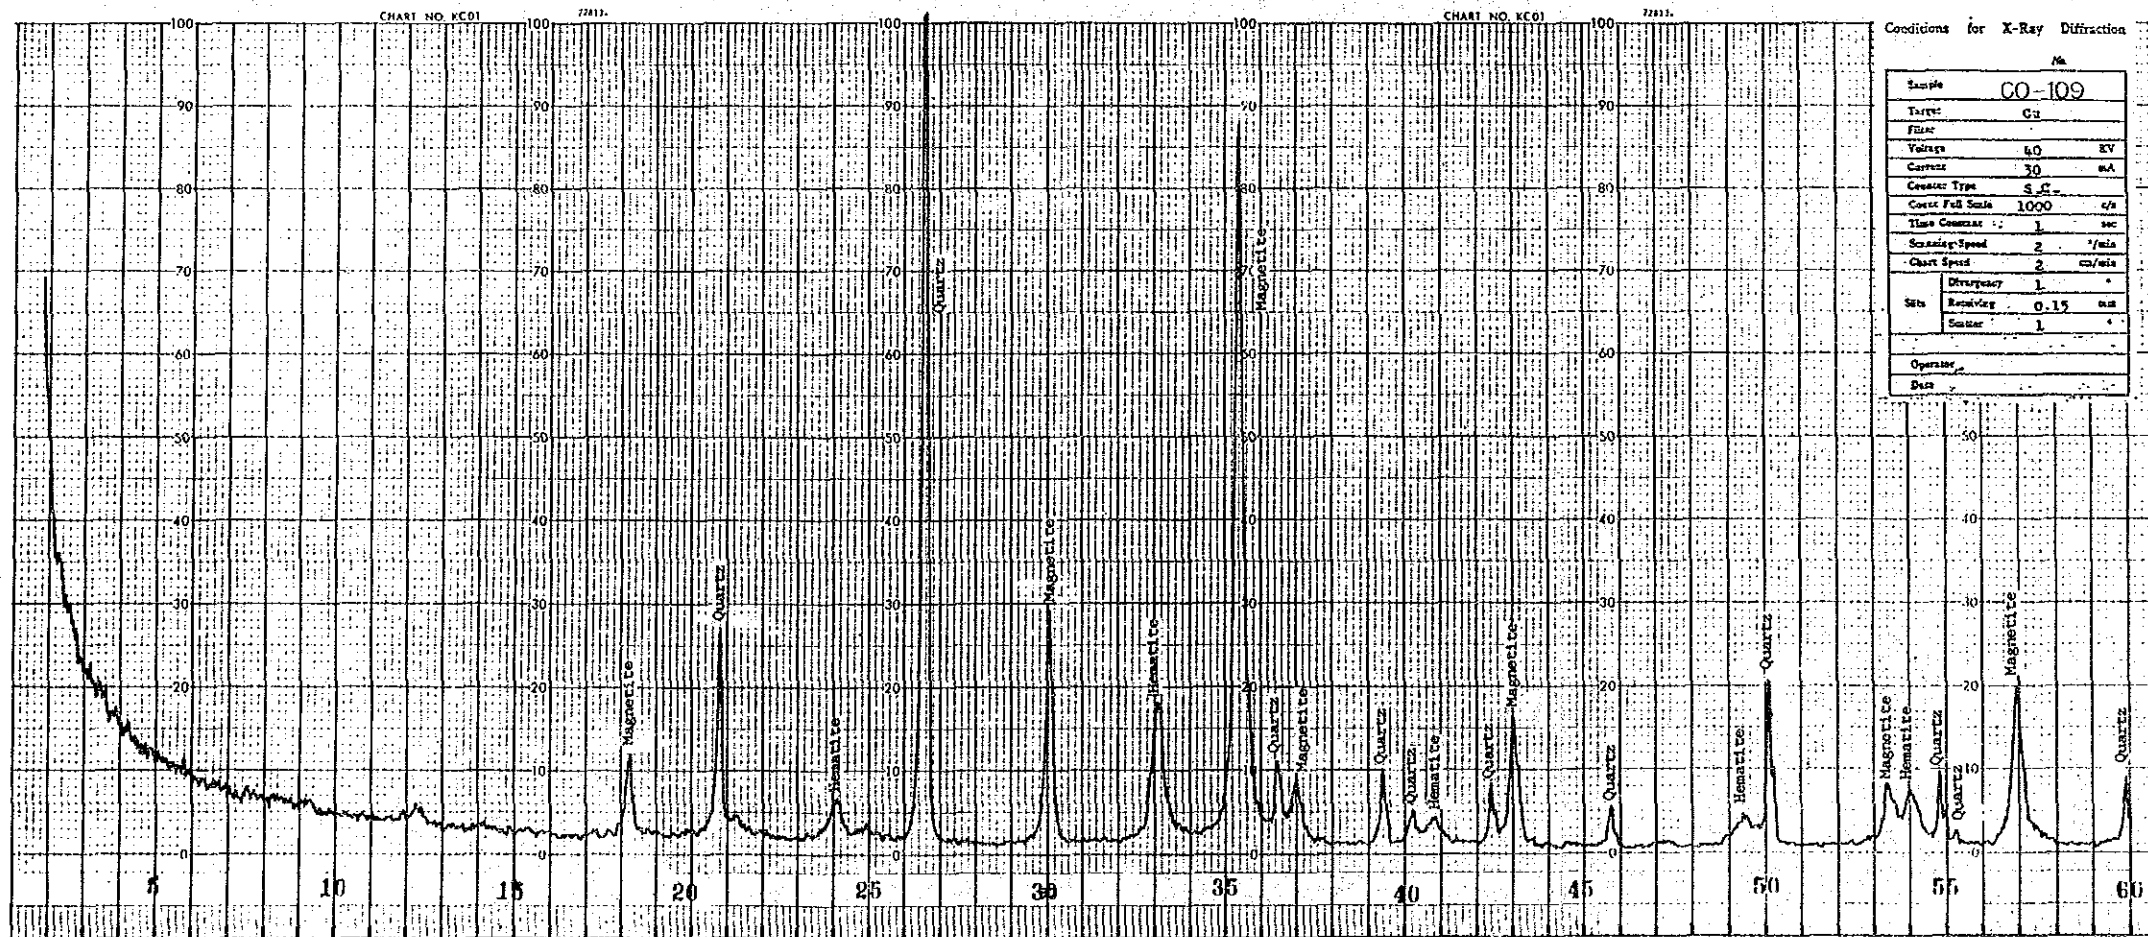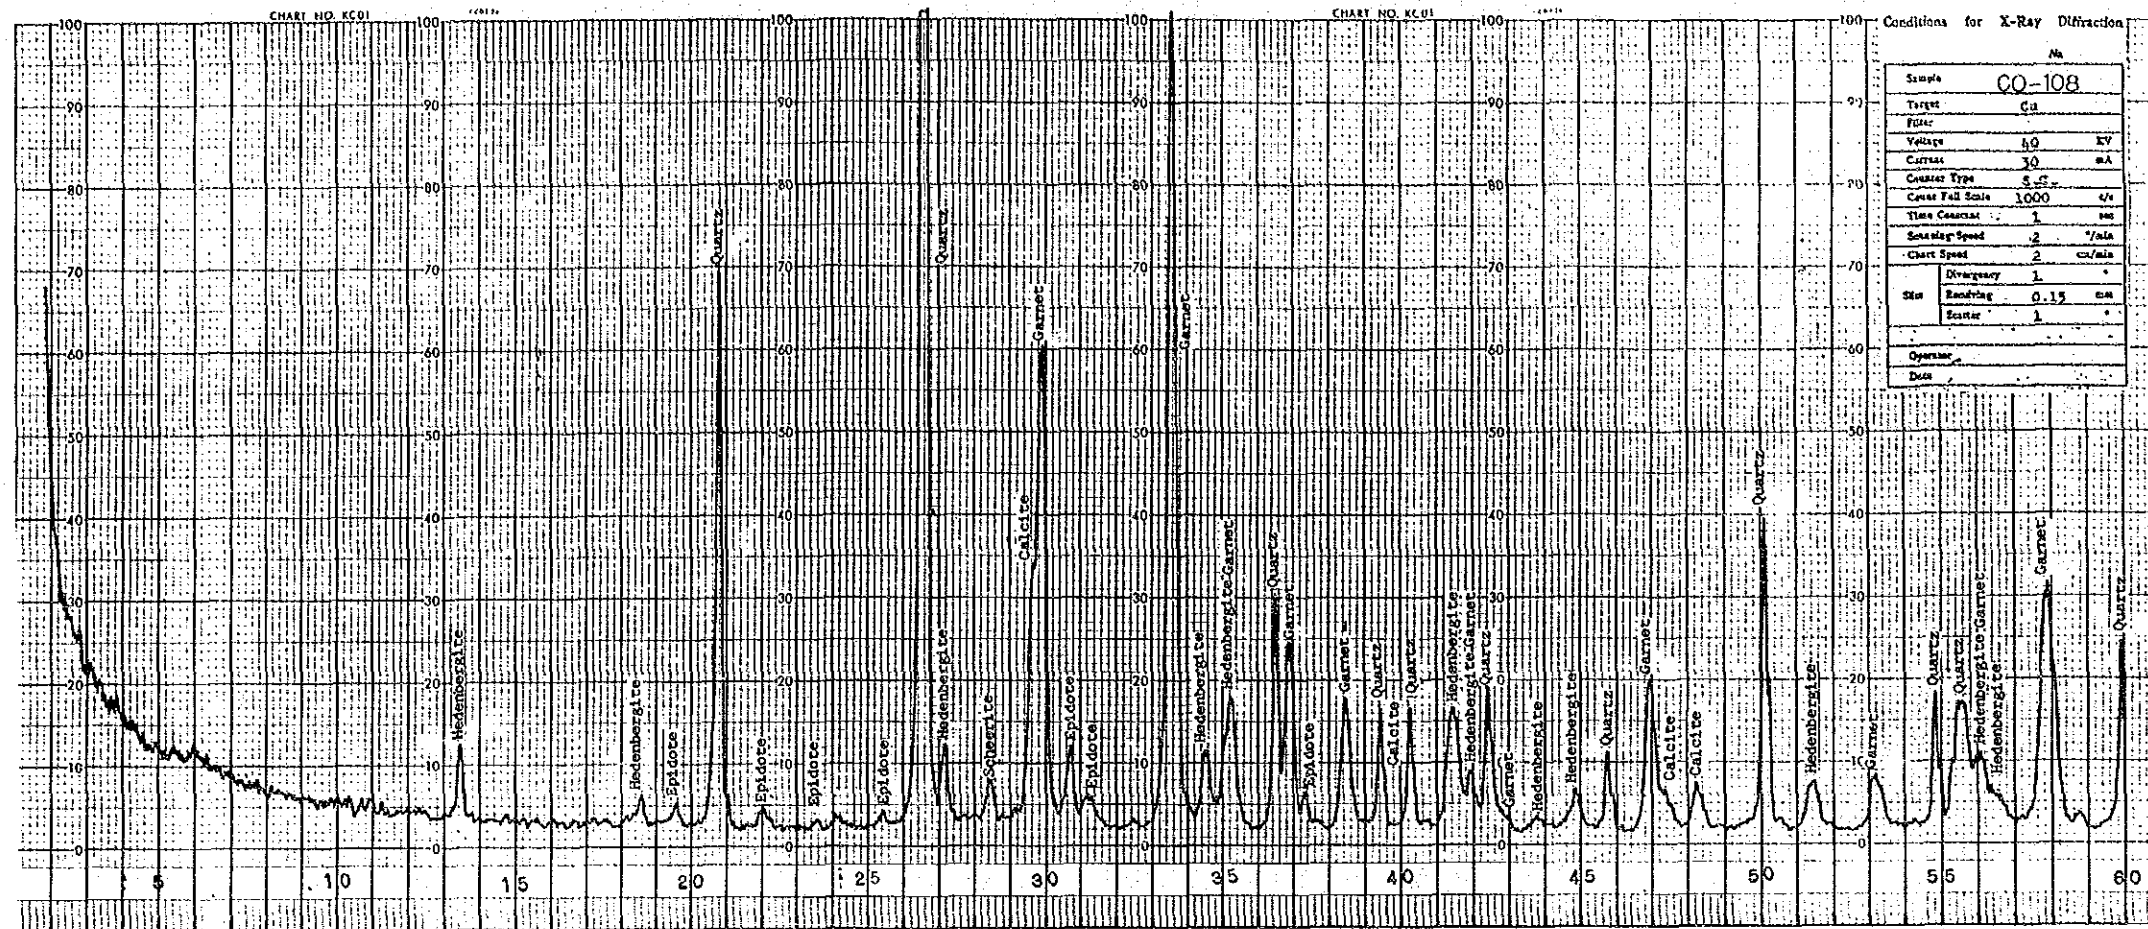

JICA