

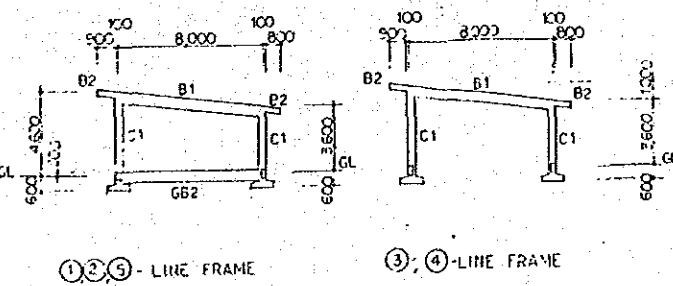
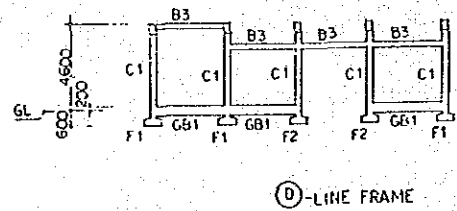
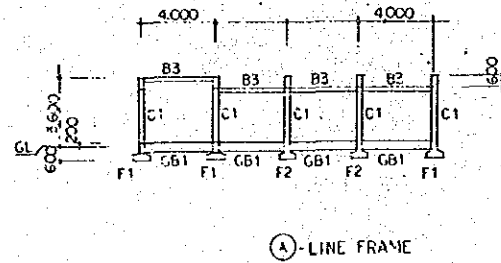
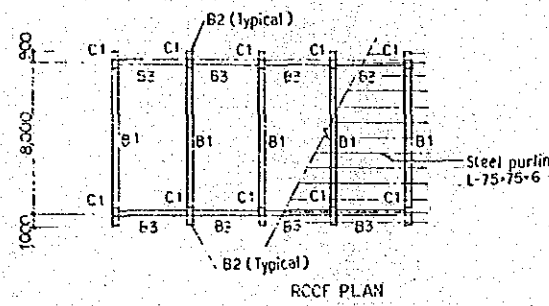


WAREHOUSE

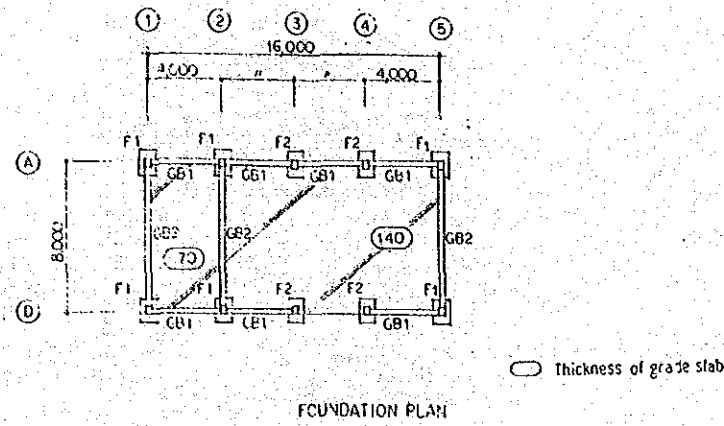


B1		B2	B3	GRADE SLAB (140)
END	CENTER	END & TIP	END & CENTER	GRADE SLAB (70)
				Reinforcing not needed
GB1		GB2		CANOPY
END	CENTER	END	CENTER	
C1		F1 (F2)		
TOP & BOTTOM				

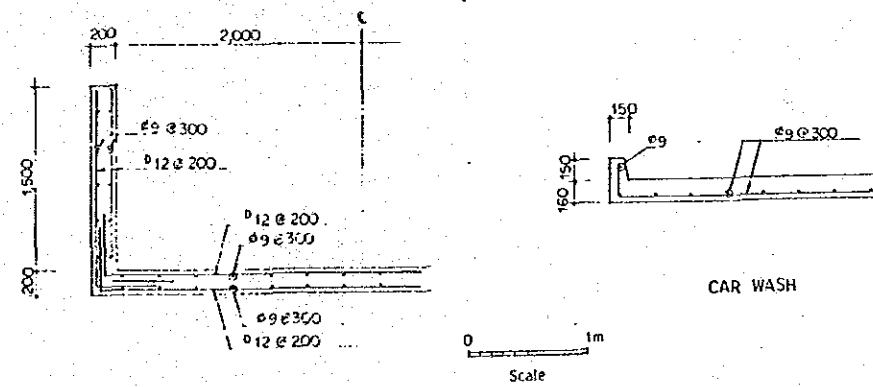



DIRECTORATE GENERAL OF FOOD CROP AGRICULTURE
THE MODEL INFRASTRUCTURE IMPROVEMENT WORKS FOR
THE CENTER FOR DEVELOPMENT OF APPROPRIATE AGRICULTURAL
ENGINEERING TECHNOLOGY (ATA-220)

REINFORCEMENT
FOR WAREHOUSE

JAPAN INTERNATIONAL COOPERATION AGENCY DWG No. 19

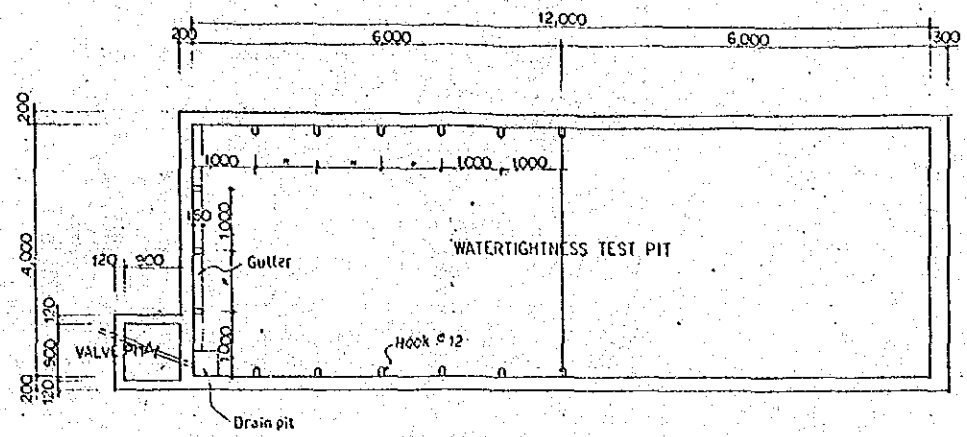


PLAN

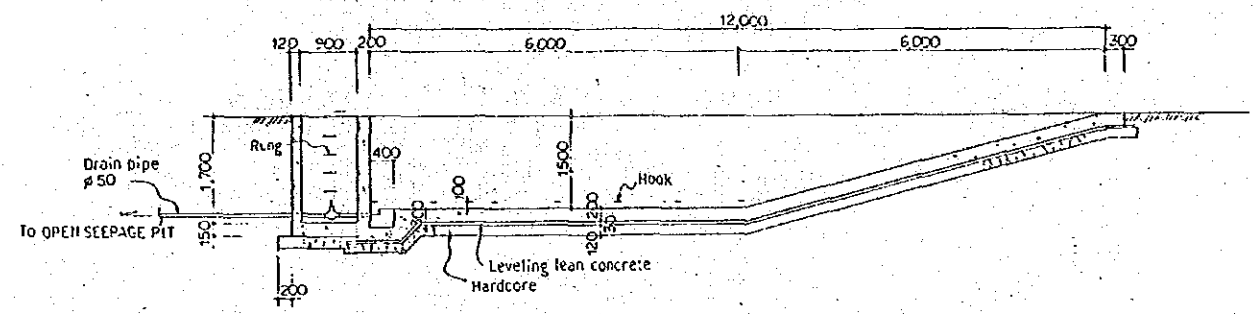



SECTION

WATERTIGHTNESS TEST PIT

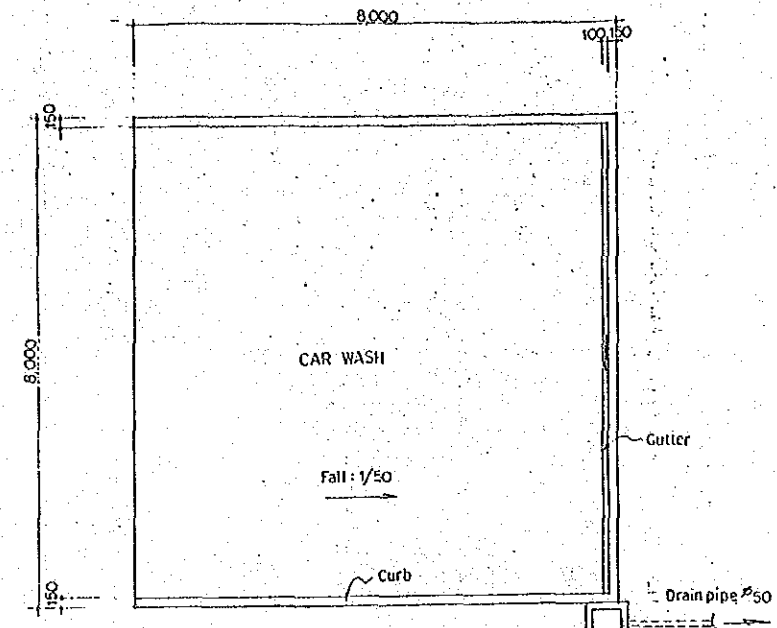

PLAN

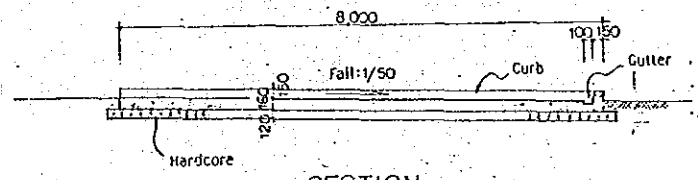


SECTION

CAR WASH

DIRECTORATE GENERAL OF FOOD CROP AGRICULTURE
 THE MODEL INFRASTRUCTURE IMPROVEMENT WORKS FOR
 THE CENTER FOR DEVELOPMENT OF APPROPRIATE AGRICULTURAL
 ENGINEERING TECHNOLOGY (ATA-220)

**WATER TIGHTNESS TEST PIT
 AND CARWASH**

JAPAN INTERNATIONAL COOPERATION AGENCY DWG NO. 20


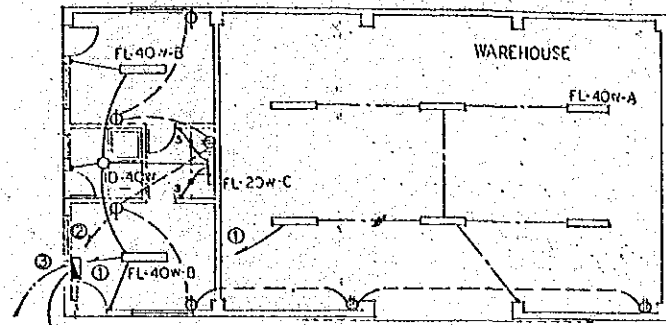


PLAN

LEGEND

- FL Fluorescent lighting fixture
- ID Incandescent lighting fixture
- Single receptacle outlet
- Duplex receptacle outlet
- Waterproof receptacle outlet
- Panelboard
- NYA 2/25 E25 VE 3/4" Ceiling
- NYA 2/25 E2.5 VE 3/4" Floor
- NYM 2C/25 Ceiling
- Outdoor service cable 5.5" (buried in ground)
- Handhole (to be provided as required)


LIGHTING FIXTURES

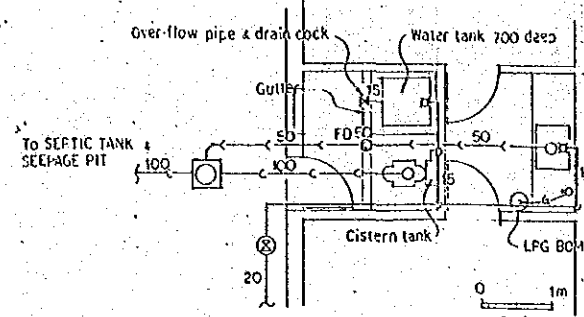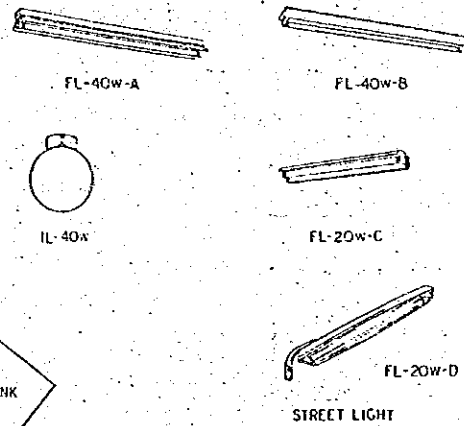

PLAN

LEGEND


- Faucet
- Gas cock
- Drain outlet
- Floor drain
- Sluice valve in casing
- Manhole in soil line w/inverts
- Catch basin in waste water or storm drain line
- Water supply pipe GSP
- Soil pipe PVC
- Waste water or storm drain pipe PVC

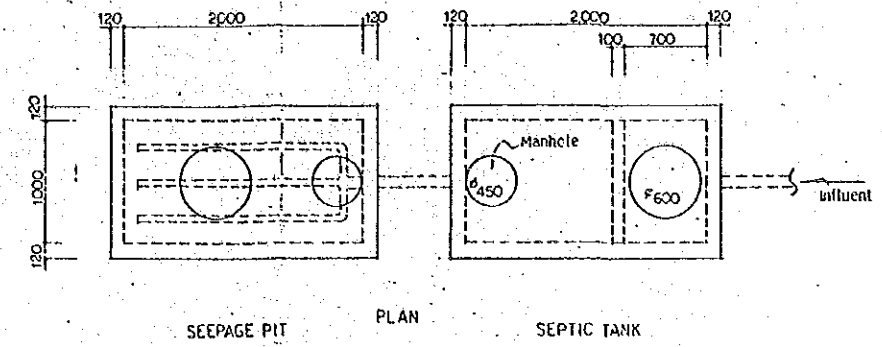

SEEPAGE PIT


PLAN

SEPTIC TANK

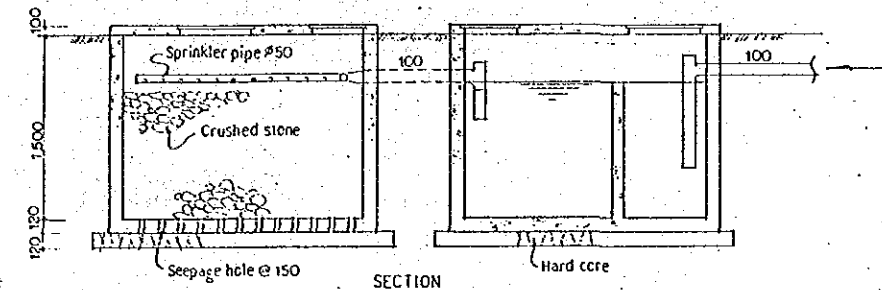


SECTION

SEPTIC TANK & SEEPAGE PIT

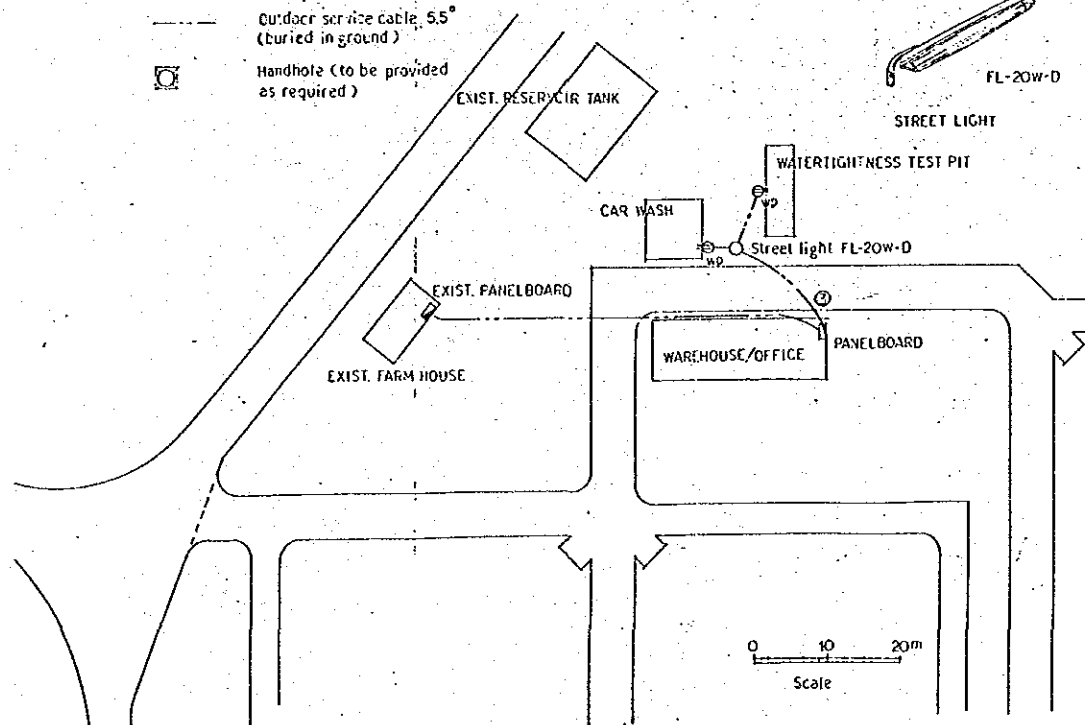

ELECTRIC INSTALLATIONS

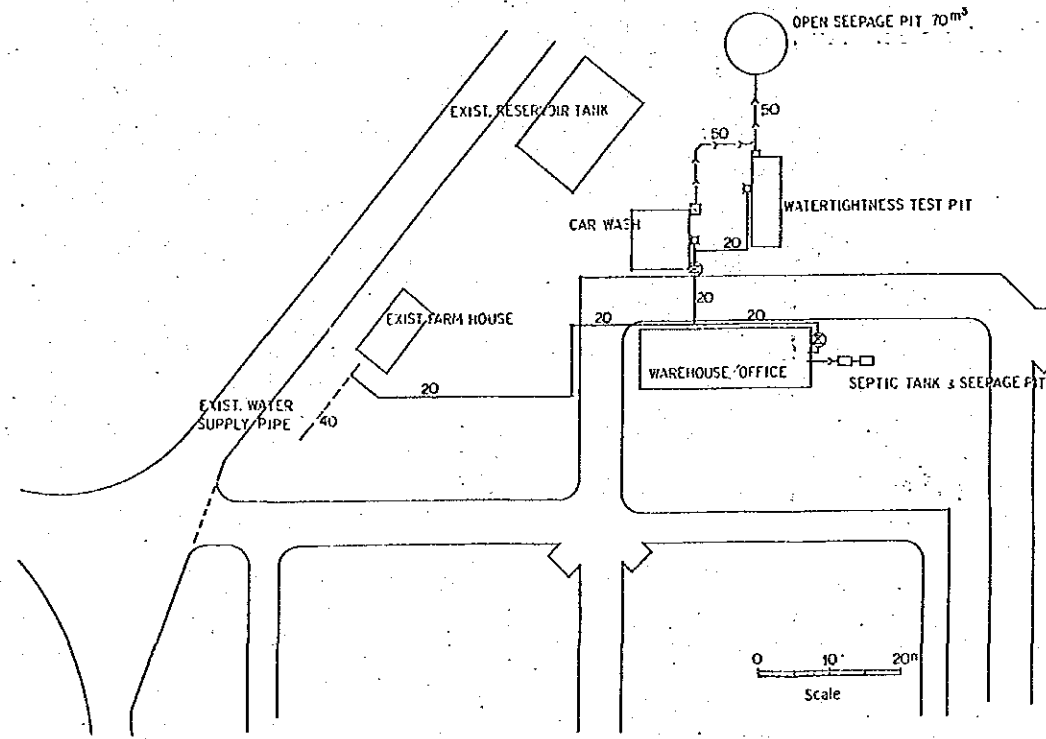

PLUMBING INSTALLATIONS

DIRECTORATE GENERAL OF FOOD CROP AGRICULTURE
THE MODEL INFRASTRUCTURE IMPROVEMENT WORKS FOR
THE CENTER FOR DEVELOPMENT OF APPROPRIATE AGRICULTURAL
ENGINEERING TECHNOLOGY (ATA-220)

**ELECTRIC AND PLUMBING
INSTALLATIONS**

JAPAN INTERNATIONAL COOPERATION AGENCY DWG NO. 21

CHAPTER 7 OTHER RELATED DATA, ARTICLE AND DOCUMENTS

7.1 Members' List of the Short-term Experts

Mr. Kenjiro YATABE

Mr. Nobuo NAGAWARA

JAPAN INTERNATIONAL COOPERATION AGENCY
(JICA)

DETAIL DESIGN SURVEY TEAM
FOR
THE PROJECT OF THE CENTER FOR DEVELOPMENT OF
APPROPRIATE AGRICULTURAL ENGINEERING TECHNOLOGY (C.A.A.E.)
(ATA-220)

12th September, 1988

Dr. Ir. A. Muin Pabinru
Director General of Food Crop Agriculture,
Ministry of Agriculture

Dear Sir,

Re: The model infrastructure work for the Project of the Center for
Development of Appropriate Agricultural Engineering Technology
(ATA-220)

We, the Detail Design Survey Team, have been organized by JICA for the purpose of promoting infrastructure improvement work which is as stipulated in the clause V of the Annex of the Attached Document to the Record of Discussions between the authorities concerned of the Government of Japan and the Government of the Republic of Indonesia on the Japanese Technical Cooperation for the Project of the Center for Development of Appropriate Agricultural Engineering Technology (AT-220) signed on 7th February, 1988.

The Team has, so far, made a series of site reconnaissances and discussions with your staff concerned in order to fix and determine the scales and sizes of expected facilities.

We would like to hereby confirm the matters which were mutually understood and agreed through discussions and site reconnaissances as per the attachment.

In accordance with the above confirmed items, we will proceed with your staff to further field surveys and investigations at the site and to make the detail design on the basis of the result of those surveys, though some revisions might be necessary in relation with costs incurred. After the completion of detail design and assessment of its costs estimated by JICA, you will be informed its result through the JICA Indonesia office.

Further, for the timely commencement of the construction we would like to request you to take the necessary formalities in due consultation with the JICA Indonesia office.

Lastly, we would like to appreciate for kind cooperation of your staff during the survey work.

Sincerely yours,



MICHIO IRIE
Team Leader

- c.c.:
- Director of Production
 - Embassy of Japan

FIELD REPORT OF THE JICA EXPERTS
(Information of Outline on Construction Work)

I. Introduction

This Report was prepared in accordance with the attached documents (outline of the schedule on the project) of our letter dated 12th September, 1988. This presents an information of outline on the construction work for infrastructure improvement for the Center for Development of Appropriate Agricultural Engineering Technology.

During the Team's stay in Indonesia, it made a series of field surveys, investigations and discussions with Indonesian and Japanese staff concerned. The Team, so far, made rough design on the basis of the result of those surveys and discussions as will be stated hereinafter.

In accordance with the rough design, the detail design will be made in Japan. After the completion of detail design and assessment of its costs estimated by Japan International Cooperation Agency (JICA), the Government of the Republic of Indonesia will be informed its result through the JICA Indonesia office.

It is noted that views and opinions of personnel concerned were reflected in the process of the determination-making on the location and scale of the facilities.

II. On-farm Development

- 1) The area which can be used for agricultural purpose is approximately 2.9 ha, which can be categorized into two, existing upland field with approximately 1.6 ha located on the south of the existing road, and newly developed field with approximately 1.3 ha situated in the north of the said road.

The former is not proposed to be graded since irrigation will not be made by gravity. The latter is further divided into two, the upland field with 0.8 ha and wetland (rice) field with 0.5 ha. Both fields of the

latter will be levelled because irrigation will be performed by gravity or by ponding water.

- 2) Three types of road are proposed to be constructed. One is asphalt paved road which is facilitated to access the structures to be constructed such as carwash, warehouse, office, etc. This road is designed to be 5 m wide. The other two are designated as farm road which will be constructed to access each farm lot. Two types of farm road are proposed to be provided according to the intensity of traffic. One is 5 m wide and the other is 3 m wide. The 5 m wide road will be paved with gravel.

III. Irrigation and Drainage Facilities

- 1) A deep well will be drilled near the existing water tank to supply water to all the field lots. The well will be approximately 200 m deep. The well will be equipped with a submergible motor pump to lift up water to the said tank. The water stored in the tank will be boosted by another volute pump which will be connected with PVC pipeline that conveys water to each field lot. The pipeline will be equipped with hydrants. To operate the two pumps electric wires will be furnished from the control panel located in the existing laboratory and testing.

Deep well	
- Depth	: Approx. 200 m
Submergible motor pump	
- Total pump head	: 80 m
- Capacity	: 330 liter/min.
Volute pump	
- Total pump head	: 25 m
- Capacity	: 500 liter/min
PVC pipeline	
- Length	: 480 m
- Diameter	: ϕ 3"
Steel pipe	
- Length	: 52 m
- Diameter	: ϕ 3"
- Hydrant	: 15 nos.
- Air valve	: 2 nos.
Electric wire	
- Length	: Approx. 450 m

- 2) Drainage canals will be excavated to collect excess water. The water collected by the canals will be drained into five pits which will be excavated in the low lying area. The design is made to drain water of 100 mm/day.

IV. Other Facilities to be provided in the Center.

Water tightness test pit	:	4 m x 12 m
Warehouse	:	8 m x 20 m
Office	:	8 m x 4 m
Carwash	:	8 m x 8 m

JAPAN INTERNATIONAL COOPERATION AGENCY
(JICA)

DETAIL DESIGN SURVEY TEAM
FOR
THE PROJECT OF THE CENTER FOR DEVELOPMENT OF
APPROPRIATE AGRICULTURAL ENGINEERING TECHNOLOGY (C.A.A.E.)
(ATA-220)

30th September, 1988

Dr. Ir. A. Muin Pabinru
Director General of Food Crops Agriculture,
Ministry of Agriculture

Dear Sir,

Re: The model infrastructure work for the Project of the Center for
Development of Appropriate Agricultural Engineering Technology
(ATA-220)

This is to inform you that the Detail Design Survey Team organized by JICA which came to Indonesia for the purpose of promoting infrastructure work of the Center for Development of Appropriate Agricultural Engineering Technology (AT-220) will terminate its assignment in Indonesia on 1st October, 1988.

During the Team's stay in Indonesia, it made a series of field surveys, investigations and discussions with your staff concerned. The Team, so far, made rough design on the basis of the result of those surveys and discussions as per the attachment.

In accordance with the rough design, the detail design will be made in Japan. After the completion of detail design and assessment of its costs estimated by JICA, you will be informed its result through the JICA Indonesia office.

It is, however, noted that some revisions might become necessary during the course of detail design in relation with cost incurred.

Further, for the timely commencement of the construction we would like to request you to take the necessary formalities in due consultation with the JICA Indonesia office.

Lastly, we would like to appreciate kind cooperation of your staff during the survey work.

Sincerely yours,



MICHIO IRIE
Team Leader

c.c.:

- Director of Production
- Embassy of Japan

FIELD REPORT OF THE JICA EXPERTS
(Information of Outline on Construction Work)

I. Introduction

This Report was prepared in accordance with the attached documents (outline of the schedule on the project) of our letter dated 12th September, 1988. This presents an information of outline on the construction work for infrastructure improvement for the Center for Development of Appropriate Agricultural Engineering Technology.

During the Team's stay in Indonesia, it made a series of field surveys, investigations and discussions with Indonesian and Japanese staff concerned. The Team, so far, made rough design on the basis of the result of those surveys and discussions as will be stated hereinafter.

In accordance with the rough design, the detail design will be made in Japan. After the completion of detail design and assessment of its costs estimated by Japan International Cooperation Agency (JICA), the Government of the Republic of Indonesia will be informed its result through the JICA Indonesia office.

It is noted that views and opinions of personnel concerned were reflected in the process of the determination-making on the location and scale of the facilities.

II. On-farm Development

- 1) The area which can be used for agricultural purpose is approximately 2.9 ha, which can be categorized into two, existing upland field with approximately 1.6 ha located on the south of the existing road, and newly developed field with approximately 1.3 ha situated in the north of the said road.

The former is not proposed to be graded since irrigation will not be made by gravity. The latter is further divided into two, the upland field with 0.8 ha and wetland (rice) field with 0.5 ha. Both fields of the

latter will be levelled because irrigation will be performed by gravity or by ponding water.

- 2) Three types of road are proposed to be constructed. One is asphalt paved road which is facilitated to access the structures to be constructed such as carwash, warehouse, office, etc. This road is designed to be 5 m wide. The other two are designated as farm road which will be constructed to access each farm lot. Two types of farm road are proposed to be provided according to the intensity of traffic. One is 5 m wide and the other is 3 m wide. The 5 m wide road will be paved with gravel.

III. Irrigation and Drainage Facilities

- 1) A deep well will be drilled near the existing water tank to supply water to all the field lots. The well will be approximately 200 m deep. The well will be equipped with a submergible motor pump to lift up water to the said tank. The water stored in the tank will be boosted by another volute pump which will be connected with PVC pipeline that conveys water to each field lot. The pipeline will be equipped with hydrants. To operate the two pumps electric wires will be furnished from the control panel located in the existing laboratory and testing.

Deep well	
- Depth	: Approx. 200 m
Submergible motor pump	
- Total pump head	: 80 m
- Capacity	: 330 liter/min.
Volute pump	
- Total pump head	: 25 m
- Capacity	: 500 liter/min
PVC pipeline	
- Length	: 480 m
- Diameter	: ϕ 3"
Steel pipe	
- Length	: 52 m
- Diameter	: ϕ 3"
- Hydrant	: 15 nos.
- Air valve	: 2 nos.
Electric wire	
- Length	: Approx. 450 m

- 2) Drainage canals will be excavated to collect excess water. The water collected by the canals will be drained into five pits which will be excavated in the low lying area. The design is made to drain water of 100 mm/day.

IV. Other Facilities to be provided in the Center.

Water tightness test pit	:	4 m x 12 m
Warehouse	:	8 m x 20 m
Office	:	8 m x 4 m
Carwash	:	8 m x 8 m

7.4 Itinerary of the Short-term Experts

ITINERARY OF THE DETAIL DESIGN SURVEY TEAM

Date	Activity
Aug. 24 (Wed)	Arrival at JKT from TYO by GA-873
Aug. 25 (Thu)	Visit to JICA JKT, CP Experts and CDAET
Aug. 26 (Fri)	Collecting Data in JKT, preparation for Topographic Survey
Aug. 27 (Sat)	Preparation for Topographic Survey in JKT
Aug. 28 (Sun)	Establishment of Work Schedule in JKT
Aug. 29 (Mon)	Preliminary Meeting with Japanese Experts, Reconnaissance Survey at CDAET
Aug. 30 (Tue)	Traverse Survey at CDAET
Aug. 31 (Wed)	Traverse Survey and Result Arrangement, Preparation of Mesh-Level Survey at CDAET
Sept. 1 (Thu)	Mesh-Level Survey at CDAET
Sept. 2 (Fri)	- do -
Sept. 3 (Sat)	- do - Plane Table Survey at CDAET
Sept. 4 (Sun)	Plane Table Survey at CDAET
Sept. 5 (Mon)	Preparation of Basic Layout at CDAET
Sept. 6 (Tue)	Data collection of Deep Well at IRIGASI-II in JKT, Internal Meeting on Basic Layout at CDAET
Sept. 7 (Wed)	Meeting with Japanese Experts of CDAET on Basic Layout, Rearrangement of Layout
Sept. 8 (Thu)	Data Collection of Construction Cost at Construction Guidance Service Center in Bekasi, at PU and at JICA in JKT
Sept. 9 (Fri)	Preparation of Layout and Basic Plan of Work, Meeting on Layout with Indonesian Staff of CDAET
Sept. 10 (Sat)	Basic Design, B/Q of Architectural and Electrical Structures, Study on Unit Price
Sept. 11 (Sun)	- do -
Sept. 12 (Mon)	Data Collection of Deep Well, Unit Price at PU, DKI, IRIGASI-II in JKT, Interview with General Contractors and Pump Makers

Date		Activity
Sept. 13	(Tue)	Discussion on Work Progress at CDAET, Collecting Data at JICA in JKT
Sept. 14	(Wed)	Work Volume Calculation at CDAET
Sept. 15	(Thu)	- do - Bearing Capacity Survey at CDAET
Sept. 16	(Fri)	Data Collection of Price for Pump in JKT
Sept. 17	(Sat)	Data Collection of Unit Price in JKT, Study on Unit Price and Work Volume Calculation at CDAET
Sept. 18	(Sun)	Study on Unit Prices and Rough Estimation of Work Quantity at CDAET
Sept. 19	(Mon)	Interview with General Contractor at JKT, Submission of "Basic Plan of Work" at CDAET
Sept. 20	(Tue)	Preparation of General Layout
Sept. 21	(Wed)	Soil Investigation at CDAET. Visit to Embassy of Japan
Sept. 22	(Thu)	Visit to Directorate of Food Crops Production Development Unit Price Survey in JKT
Sept. 23	(Fri)	Unit Price Survey in JKT, Work Quantity Estimate at CDAET
Sept. 24	(Sat)	Unit Price Survey and Collected Data Arrangement in JKT
Sept. 25	(Sun)	Preparation of Field Report of the Experts at CDAET
Sept. 26	(Mon)	Unit Price Survey in JKT, Preparation of "Field Reports of the Experts" at CDAET
Sept. 27	(Tue)	Rough Estimate of Construction Cost at CDAET
Sept. 28	(Wed)	Preparation of "Field Report of the Experts", Rough Estimate of Construction Cost at CDAET
Sept. 29	(Thu)	Preparation of "Field Report of the Experts" at CDAET
Sept. 30	(Fri)	Meeting with staff of CDAET on "Field Report of the Experts", modification and submission of the Report
Oct. 1	(Sat)	Visit to JICA JKT and other persons concerned, Departure to TYO by GA-872
Oct. 2	(Sun)	Arrival at TYO

7.5 List of the Personnel Concerned

LIST OF PERSONNEL CONCERNED

Directorate of Food Crops Protection

Ir. Thamrin Bastari

Director for Food Crops Protection
Development

Center for Development of Appropriate Agricultural Engineering Technology

Ir. R. Dadang Tarmana

Project Director for the Center

Ir. B. Gultom

Chief of Test and Evaluation

Ir. Zaidir S.

Chief of Systems Analysis

Ir. Wahyu S.

Chief Design, Development and
Improvement

Ir. Rachman M.

Chief of Training

Ir. Agung H.

Counterpart

Directorate of Irrigation-2

Ir. Hendratno Remiel

Ir. Suratmo

Construction Guidance Service Center

Ir. Jorgis Sirait

Drs. Rimdani

Embassy of Japan

Mr. Goichiro Yukawa

First Secretary

JICA Indonesia Office

Mr. Yasuo Kitano

Resident Representative

Mr. Mikiharu Sato

Deputy Resident Representative

Mr. Manabu Aiba

Assistant Resident Representative

Japanese Expert of the Center for Development of Appropriate Agricultural Engineering Technology

Mr. Michio Irie	Team Leader
Mr. Yasuhiro Kimura	Coordinator/Liaison Officer
Mr. Tadashi Watahiki	Design, Development and Improvement
Mr. Hidaki Takeshima	- do -
Mr. Motomu Masuzawa	Test and Evaluation
Mr. Mitsuo Suzuki	Systems Analysis

Directorate General of Water Resources Development, Ministry of Public Works

Mr. Katsuhiko Kimura	Directorate of Planning and Programming, Team Leader
Mr. Yoshimi Dokyu	Colombo Plan Expert, Directorate of Irrigation-1
Mr. Yasuo Nakajima	Colombo Plan Expert, Construction Guidance Service Center
Mr. Koichi Imai	- do -
Mr. Koji Imai	Colombo Plan Expert, Directorate of Irrigation-2

7-6 List of the Data Collected

1. Water Quality Analysis Data at the Center Feb. 1988
2. Meteorological Data
 - Daily Rainfall at Serpong 1974-88
 - Monthly Relative Humidity at Curug 1976-85
 - Monthly Wind Velocity at Curug 1976-85
 - Monthly Temperature at Curug 1976-85
 - Monthly Sunshine Duration at Curug 1976-85
3. Topographic Map (1/50,000)
4. As-built Drawing of the Center by Sozosha
5. Feasibility Study Report on the Cisadane River Basin Development Project Sep. 1987
 - Vol.1 Main Report
 - Vol.2 Hydrology
 - Vol.3 Groundwater
 - Vol.4 Groundwater Data Reports
 - Vol.5 Geotechnical Investigations
 - Vol.6 Dam Design
 - Vol.7 Agriculture/Irrigation/Fisheries
 - Vol.8 Topographic Surveys & Mapping
 - Vol.9 Urban Water Supply
 - Vol.10 Socio-economic Survey
 - Vol.11 Environmental Impact
 - Vol.12 Water Management Planning & Economic Analysis
6. Quotations on Drilling of Well by IRIGASI-II
7. Unit Price by Public Works
 - Collection of Material and Labor Cost in Indonesia 1988
 - List of Building/Construction Material Unit Price Jun. & Jul. 1988
 - Standard Unit Price of Labor Cost on Construction Contract (Jakarta Government) Aug. 1988
 - List of Labor Cost (Unit Price) in Indonesia 1988/1989
 - Standard Unit Price of Labor Cost on Physical Construction (Jakarta Government) Jan. 1988
8. Quotations on Pumps
9. Report on the Infrastructure Improvement Works for the Food Crop Protection Project (2nd Phase of ATA-162) JICA
10. Catalogs on Pipe & Electric Cable

Pipeline Hydraulic Calculation

Section	Distance m	Reduced Distance m	Proposed Ground Level m	Pipe Center Level m	Head Loss m	Dynamic Water Pressure m	Dynamic Water Level m	Discharge l/s	Hydraulic Gradient	Diameter mm	Velocity m/s	Hydrostatic Pressure m	Remarks
PL-1									0/00	mm	m/s	m	
No. 0 (BP)	0.00	0.00	18.60	17.60	0.66	25.40	43.00	500	13.26	dia. 100	1.06	30.40	BP of PL-2
No. 1 + 24.50	49.50	49.50	20.43	19.20	0.07	23.06	42.34	do	do	do	do	28.80	Hyd-1
No. 2 + 4.50	5.00	54.50	20.43	19.21	0.52	22.44	41.75	do	do	do	do	28.79	Hyd-2
No. 3 + 19.00	39.50	94.00	20.43	19.31	0.53	21.82	41.22	do	do	do	do	28.69	Hyd-3
No. 5 + 9.00	40.00	134.00	21.06	19.40	0.21	22.31	41.01	do	do	do	do	28.60	Asphalt Road
No. 5 + 24.50	15.50	149.50	19.90	18.70	0.43	21.98	40.58	do	do	do	do	29.30	DD-5 Crossing
No. 7 + 7.00	32.50	182.00	20.00 (19.11)	18.60	0.64	20.14	39.94	do	do	do	do	28.20	Hyd. 4 & 5
No. 9 + 5.50	48.50	230.50	20.85	19.80	0.57	18.11	39.37	do	do	do	do	26.74	Hyd. 6 & 7
No. 10 + 23.50	43.00	273.50	22.40	21.26	0.17	17.50	39.20	do	do	do	do	26.30	Hyd. 8 & 9
No. 11 + 11.50	13.00	286.50	22.70	21.70	0.57	18.43	38.63	do	do	do	do	27.80	Hyd. 10 & 11
No. 13 + 4.50 (EP)	43.00	329.50	21.25	20.20									
PL-2													
No. 0 (BP)	0.00	0.00	20.43	19.20	0.57	23.14	42.34	500	13.26	dia. 100	1.06	28.80	Hyd. 1
No. 1 + 17.00	42.00	42.00	20.37	19.40	0.28	22.37	41.77	do	do	do	do	28.60	Hyd. 2
No. 2 + 13.00	21.00	63.00	18.48	17.50	0.29	23.99	41.49	do	do	do	do	30.50	Hyd. 3
No. 3 + 9.50	21.50	84.50	18.48	17.46	0.84	23.74	41.20	do	do	do	do	30.54	Hyd. 4
No. 5 + 22.50 (EP)	63.00	147.50	16.18	15.20		25.16	40.36	do	do	do	do	32.80	

Note 1) Hydraulic formula: Hazen - Williams Formula

2) Hydrostatic level: $18.0 + 25.0 + 5.0 = 48.0$ m

3) Hydraulic gradient: Total loss = $1.1 \times$ friction loss

ANNEX B STRUCTURAL CALCULATION SHEETS OF PIPELINES

-- for Steel Pipe --

dx1: Deflection due to long term load

dx2: Deflection due to short term load

M : Maximum bending moment due to outer pressure

dx : Total horizontal deflection

-- for Reinforced Concrete Pipe --

P1 : Horizontal load at pipe top

P2 : Horizontal load at pipe bottom

Pc : Breaking or cracking outer pressure in case of zero inner pressure

Hc : Breaking or cracking inner pressure in case of zero outer pressure

Ph : Outer pressure

D_o : Nominal diameter of pipe
 D : Inner diameter of pipe
 D_c : Outer diameter of pipe
 T : Thickness of pipe
 R : Mean radius of pipe
 W_p : Self weight of pipe
 W_s : Unit weight of soil
 Φ : Angle of internal friction
 B : Excavation width at pipe top
T-9: 9 ton truck load / D-11: 11ton bulldozer
 K : Rankin's coefficient of earth pressure
 e' : Soil coefficient of passive resistance
 r_{sd} : Settlement ratio
 p : Projection ratio
 C : Coefficient of earth pressure for design
 C_d : Coefficient of earth pressure for ditch type
 C_c : Coefficient of earth pressure for projection type

 H : Depth to pipe top from surface of backfill or embankment
 H_e : Depth to pipe top from isometric settlement plane
 W_v : Vertical earth pressure
 P_v : Horizontal earth pressure
 M_1 : Maximum bending moment due to long term load
 i : Shock factor
 α : Vertical load factor due to truck load
 W_w : Vertical load due to truck load
 P_w : Horizontal load due to road surface load
 M_2 : Maximum bending moment due to short term load
 H_1 : Allowable hydrostatic pressure
 H_2 : Allowable water hammer pressure

*** 管体構造計算 (とう性管) ***

ケース: 管種: V.P

呼内径	Do = 100 (mm)	重量	300 (kg/m ²)
呼外径	D = 100.8 (mm)	群埋設	形
管厚	Dc = 114.0 (mm)	埋設	90° (度) 自由支承
平均半径	T = 6.6 (mm)	支持角	K = 0.333
管自重	R = 53.7 (kg/m)	係数	e' = 28.0
土の単位重量	WP = 3.2 (kg/m ³)	比	rsd = -0.10
内部摩擦角	φ = 30 (度)	比	P = 1.0
管頂埋深	B = 0.610 (m)	比	

* 1: C=Cd 2: C=Cc 3: C=1
ポンプ---管路---水槽系

H (m)	He (m)	C	*	Wv (kg/cm ²)	Pv (kg/cm ²)	M1 (kg·cm/cm)	i	Alpha (1/cm)	Ww (kg/cm ²)	Pw (kg/cm ²)	M2 (kg·cm/cm)	タワミ率 (%)	H1 (kg/cm ²)	H2 (kg/cm ²)	許容内圧 (kg/cm ²)
0.60	0.08	1.000	3	0.1080	0.0000	1.045	0.0	0.000	0.0300	0.0000	0.272	0.22	14.94	8.97	23.91
0.80	0.08	1.000	3	0.1440	0.0000	1.371	0.0	0.000	0.0300	0.0000	0.272	0.27	14.71	9.83	23.54
1.00	0.08	1.000	3	0.1800	0.0000	1.697	0.0	0.000	0.0300	0.0000	0.272	0.33	14.49	8.69	23.18
1.20	0.08	1.000	3	0.2160	0.0000	2.023	0.0	0.000	0.0300	0.0000	0.272	0.38	14.26	8.55	22.81
1.50	0.07	1.000	3	0.2700	0.0000	2.512	0.0	0.000	0.0300	0.0000	0.272	0.46	13.91	8.35	22.26
2.00	0.07	1.000	3	0.3600	0.0000	3.327	0.0	0.000	0.0300	0.0000	0.272	0.60	13.34	8.00	21.34
2.50	0.07	1.000	3	0.3600	0.0000	3.327	0.0	0.000	0.0300	0.0000	0.272	0.50	13.34	8.00	21.34
3.00	0.07	1.000	3	0.3600	0.0000	3.327	0.0	0.000	0.0300	0.0000	0.272	0.60	13.34	8.00	21.34

*** 管体構造計算 (とう性管) ***

ケース: 管種: A.Z

呼内径	Do = 100 (mm)	重量	300 (kg/m ²)
呼外径	D = 105.0 (mm)	群埋設	形
管厚	Dc = 114.0 (mm)	埋設	90° (度) 自由支承
平均半径	T = 4.5 (mm)	支持角	K = 0.333
管自重	R = 54.8 (kg/m)	係数	e' = 28.0
土の単位重量	WP = 2.2 (kg/m ³)	比	rsd = -0.10
内部摩擦角	φ = 30 (度)	比	P = 1.0
管頂埋深	B = 0.610 (m)	比	

* 1: C=Cd 2: C=Cc 3: C=1
ポンプ---管路---水槽系

H (m)	He (m)	C	*	Wv (kg/cm ²)	Pv (kg/cm ²)	M1 (kg·cm/cm)	i	Alpha (1/cm)	Ww (kg/cm ²)	Pw (kg/cm ²)	M2 (kg·cm/cm)	タワミ率 (%)	H1 (kg/cm ²)	H2 (kg/cm ²)	許容内圧 (kg/cm ²)
0.60	0.08	1.000	3	0.1080	0.0000	1.082	0.0	0.000	0.0300	0.0000	0.282	0.45	9.09	5.45	14.54
0.80	0.08	1.000	3	0.1440	0.0000	1.420	0.0	0.000	0.0300	0.0000	0.282	0.56	8.75	5.25	14.00
1.00	0.08	1.000	3	0.1800	0.0000	1.759	0.0	0.000	0.0300	0.0000	0.282	0.67	8.41	5.05	13.46
1.20	0.08	1.000	3	0.2160	0.0000	2.098	0.0	0.000	0.0300	0.0000	0.282	0.78	8.08	4.85	12.92
1.50	0.07	1.000	3	0.2700	0.0000	2.606	0.0	0.000	0.0300	0.0000	0.282	0.95	7.57	4.54	12.12
2.00	0.07	1.000	3	0.3600	0.0000	3.453	0.0	0.000	0.0300	0.0000	0.282	1.23	6.42	3.50	9.92
2.50	0.07	1.000	3	0.3600	0.0000	3.453	0.0	0.000	0.0300	0.0000	0.282	1.23	6.42	3.50	9.92
3.00	0.07	1.000	3	0.3600	0.0000	3.453	0.0	0.000	0.0300	0.0000	0.282	1.23	6.42	3.50	9.92

*** 管体構造計算(とう性管) ***

ケース: VP 管種: VP

H (m)	He (m)	C	*	wv (kg/cm ²)	Pv (kg/cm ²)	M1 (kg/cm/cm)	i	Alpha (1/cm ²)	wv (kg/cm ²)	Pw (kg/cm ²)	M2 (kg/cm/cm)	タワミ率 (%)	H1 (kg/cm ²)	H2 (kg/cm ²)	許容内圧 (kg/cm ²)
0.60	0.08	1.000	3	0.1980	0.0000	0.995	0.0	0.000	0.1607	0.0000	1.455	0.41	22.32	13.39	35.71
0.80	0.08	1.000	3	0.1440	0.0000	1.321	0.0	0.000	0.1419	0.0000	1.285	0.43	22.17	13.30	35.47
1.00	0.08	1.000	3	0.1800	0.0000	1.647	0.0	0.000	0.1419	0.0000	1.285	0.49	21.94	13.16	35.10
1.20	0.08	1.000	3	0.2160	0.0000	1.973	0.0	0.000	0.1419	0.0000	1.285	0.54	21.71	13.03	34.74
1.50	0.07	1.000	3	0.2700	0.0000	2.462	0.0	0.000	0.1419	0.0000	1.285	0.63	21.37	12.82	34.19
2.00	0.07	1.000	3	0.3600	0.0000	3.277	0.0	0.000	0.1196	0.0000	1.083	0.73	20.89	12.53	33.42
2.50	0.07	1.000	3	0.3600	0.0000	3.277	0.0	0.000	0.0977	0.0000	0.885	0.69	20.98	12.59	33.57
3.00	0.07	1.000	3	0.3600	0.0000	3.277	0.0	0.000	0.0826	0.0000	0.748	0.67	21.05	12.63	33.60

径 Do=100 (mm)
 内径 D=100.8 (mm)
 管厚 T=6.6 (mm)
 平均半径 R=53.7 (mm)
 管自重 WP=3.2 (kg/m)
 土の単位重量 Ws=1800 (kg/m³)
 内部摩擦角 φ=30 (度)
 管頂埋埋巾 B=0.610 (m)

路面荷重 : 普通 (溝形) 自由支承
 埋設土抵抗係数 K=0.333
 埋設土抵抗係数 e'=28.0
 埋設土抵抗係数 rsd=-0.10
 埋設土抵抗係数 P=1.0
 埋設土抵抗係数 * 1:C=Cd 2:C=Cc 3:C=C1
 埋設土抵抗係数 ボンブー管路-水槽系

路面荷重 : 普通 (溝形) 自由支承
 埋設土抵抗係数 K=0.333
 埋設土抵抗係数 e'=28.0
 埋設土抵抗係数 rsd=-0.10
 埋設土抵抗係数 P=1.0
 埋設土抵抗係数 * 1:C=Cd 2:C=Cc 3:C=C1
 埋設土抵抗係数 ボンブー管路-水槽系

*** 管体構造計算(とう性管) ***

ケース: AZ 管種: AZ

H (m)	He (m)	C	*	wv (kg/cm ²)	Pv (kg/cm ²)	M1 (kg/cm/cm)	i	Alpha (1/cm ²)	wv (kg/cm ²)	Pw (kg/cm ²)	M2 (kg/cm/cm)	タワミ率 (%)	H1 (kg/cm ²)	H2 (kg/cm ²)	許容内圧 (kg/cm ²)
0.60	0.08	1.000	3	0.1080	0.0000	1.029	0.0	0.000	0.1607	0.0000	1.513	0.84	13.48	8.09	21.57
0.80	0.08	1.000	3	0.1440	0.0000	1.368	0.0	0.000	0.1419	0.0000	1.336	0.89	13.27	7.96	21.22
1.00	0.08	1.000	3	0.1800	0.0000	1.707	0.0	0.000	0.1419	0.0000	1.336	1.00	12.93	7.76	20.69
1.20	0.08	1.000	3	0.2160	0.0000	2.045	0.0	0.000	0.1419	0.0000	1.336	1.11	12.59	7.56	20.15
1.50	0.07	1.000	3	0.2700	0.0000	2.554	0.0	0.000	0.1419	0.0000	1.336	1.28	12.09	7.25	19.34
2.00	0.07	1.000	3	0.3600	0.0000	3.401	0.0	0.000	0.1196	0.0000	1.126	1.49	11.39	6.83	18.22
2.50	0.07	1.000	3	0.3600	0.0000	3.401	0.0	0.000	0.0977	0.0000	0.920	1.42	11.53	6.92	18.45
3.00	0.07	1.000	3	0.3600	0.0000	3.401	0.0	0.000	0.0826	0.0000	0.777	1.38	11.63	6.98	18.60

径 Do=100 (mm)
 内径 D=105.0 (mm)
 管厚 T=4.5 (mm)
 平均半径 R=54.8 (mm)
 管自重 WP=2.2 (kg/m)
 土の単位重量 Ws=1800 (kg/m³)
 内部摩擦角 φ=30 (度)
 管頂埋埋巾 B=0.610 (m)

路面荷重 : 普通 (溝形) 自由支承
 埋設土抵抗係数 K=0.333
 埋設土抵抗係数 e'=28.0
 埋設土抵抗係数 rsd=-0.10
 埋設土抵抗係数 P=1.0
 埋設土抵抗係数 * 1:C=Cd 2:C=Cc 3:C=C1
 埋設土抵抗係数 ボンブー管路-水槽系

路面荷重 : 普通 (溝形) 自由支承
 埋設土抵抗係数 K=0.333
 埋設土抵抗係数 e'=28.0
 埋設土抵抗係数 rsd=-0.10
 埋設土抵抗係数 P=1.0
 埋設土抵抗係数 * 1:C=Cd 2:C=Cc 3:C=C1
 埋設土抵抗係数 ボンブー管路-水槽系

ケース: VP 管種: VP *** 管体構造計算 (とう性管) ***

呼吸内外管平均管士の内部管頂間巾
 Do=100 (mm) 径
 D=114.0 (mm) 径
 T=6.6 (mm) 厚
 R=53.7 (mm) 半径
 WP=3.2 (kg/m) 自重
 ws=1800 (kg/m²) 土の単位重量
 φ=30 (度) 内部摩擦角
 B=0.610 (m) 管頂間巾

路面埋設土抵抗下出突
 荷状: 未舗装 (溝形) 自由支承
 面状: 90 (度) 系掘り
 支持係数: K=0.333
 係数: e'=28.0
 比: rsd=-0.10
 比: P=1.0

* 1:C=Cd 2:C=Cc 3:C=1
 ポンプ--管路--水槽 系

H (m)	He (m)	C	*	Wv (kg/cm ²)	Pv (kg/cm ²)	ML (kg·cm/cm)	i	Alpha (1/cm)	Ww (kg/cm ²)	Pw (kg/cm ²)	M2 (kg·cm/cm)	タワミ率 (%)	H1 (kg/cm ²)	H2 (kg/cm ²)	許容内圧 (kg/cm ²)
0.60	0.08	1.000	3	0.1080	0.0000	1.045	0.4	0.874	0.4405	0.0000	3.988	0.84	13.16	7.90	21.06
0.80	0.08	1.000	3	0.1440	0.0000	1.371	0.4	0.571	0.2879	0.0000	2.607	0.66	13.60	8.16	21.75
1.00	0.08	1.000	3	0.1800	0.0000	1.697	0.4	0.398	0.2004	0.0000	1.815	0.58	13.75	8.25	21.99
1.20	0.08	1.000	3	0.2160	0.0000	2.023	0.4	0.290	0.1459	0.0000	1.321	0.56	13.75	8.25	22.00
1.50	0.07	1.000	3	0.2700	0.0000	2.512	0.3	0.223	0.1043	0.0000	0.945	0.58	13.59	8.15	21.74
2.00	0.07	1.000	3	0.3600	0.0000	3.327	0.3	0.154	0.0719	0.0000	0.651	0.66	13.16	7.89	21.05
2.50	0.07	1.000	3	0.3600	0.0000	3.327	0.2	0.111	0.0481	0.0000	0.436	0.63	13.26	7.95	21.21
3.00	0.07	1.000	3	0.3600	0.0000	3.327	0.2	0.084	0.0362	0.0000	0.328	0.61	13.31	7.99	21.30

ケース: AZ 管種: AZ *** 管体構造計算 (とう性管) ***

呼吸内外管平均管士の内部管頂間巾
 Do=100 (mm) 径
 D=105.0 (mm) 径
 T=4.5 (mm) 厚
 R=54.6 (mm) 半径
 WP=2.2 (kg/m) 自重
 ws=1800 (kg/m²) 土の単位重量
 φ=30 (度) 内部摩擦角
 B=0.610 (m) 管頂間巾

路面埋設土抵抗下出突
 荷状: 未舗装 (溝形) 自由支承
 面状: 90 (度) 系掘り
 支持係数: K=0.333
 係数: e'=28.0
 比: rsd=-0.10
 比: P=1.0

* 1:C=Cd 2:C=Cc 3:C=1
 ポンプ--管路--水槽 系

H (m)	He (m)	C	*	Wv (kg/cm ²)	Pv (kg/cm ²)	ML (kg·cm/cm)	i	Alpha (1/cm)	Ww (kg/cm ²)	Pw (kg/cm ²)	M2 (kg·cm/cm)	タワミ率 (%)	H1 (kg/cm ²)	H2 (kg/cm ²)	許容内圧 (kg/cm ²)
0.60	0.08	1.000	3	0.1080	0.0000	1.082	0.4	0.874	0.4405	0.0000	4.146	1.72	6.06	3.50	9.56
0.80	0.08	1.000	3	0.1440	0.0000	1.420	0.4	0.571	0.2879	0.0000	2.710	1.36	6.95	3.50	10.45
1.00	0.08	1.000	3	0.1800	0.0000	1.758	0.4	0.398	0.2004	0.0000	1.886	1.20	7.26	3.50	10.76
1.20	0.08	1.000	3	0.2160	0.0000	2.098	0.4	0.290	0.1459	0.0000	1.374	1.14	7.28	3.50	10.78
1.50	0.07	1.000	3	0.2700	0.0000	2.606	0.3	0.223	0.1043	0.0000	0.982	1.18	6.94	3.50	10.44
2.00	0.07	1.000	3	0.3600	0.0000	3.453	0.3	0.154	0.0719	0.0000	0.677	1.36	6.04	3.50	9.54
2.50	0.07	1.000	3	0.3600	0.0000	3.453	0.2	0.111	0.0481	0.0000	0.453	1.28	6.26	3.50	9.76
3.00	0.07	1.000	3	0.3600	0.0000	3.453	0.2	0.084	0.0362	0.0000	0.341	1.25	6.36	3.50	9.86

*** 管体構造計算 (とう性管) ***

ケース: VU 管種: VU

呼内径	Do=100 (mm)	路面	路埋設	重量	T-9 (ton)	1台
外径	D=107.8 (mm)	埋設	埋設	形状	未舗装	
管厚	Dc=114.0 (mm)	埋設	埋設	支持角	90度	自由支承
平均半径	R=55.5 (mm)	埋設	埋設	係数	K=0.333	
自重	WP=1.5 (kg/m)	埋設	埋設	比	e'=28.0	
土の単位重量	Ws=1800 (kg/m ³)	埋設	埋設	比	rsd=-0.10	
内部摩擦角	φ=30 (度)	埋設	埋設	比	P=1.0	
管頂埋削巾	B=0.610 (m)	埋設	埋設	比		

* 1:C=Cd 2:C=Cc 3:C=C1
ポンプ—管段—水槽系

H (m)	He (m)	C	*	Wv (kg/cm ²)	Pv (kg/cm ²)	M1 (kg·cm/cm)	i	Alpha (1/cm ²)	Ww (kg/cm ²)	Pw (kg/cm ²)	M2 (kg·cm/cm)	タワミ率 (%)	H1 (kg/cm ²)	H2 (kg/cm ²)	許容内圧 (kg/cm ²)
0.60	0.08	1.000	3	0.1080	0.0000	1.106	0.4	0.874	0.4405	0.0000	4.252	2.48	1.12	1.12	2.24
0.80	0.08	1.000	3	0.1440	0.0000	1.454	0.4	0.571	0.2879	0.0000	2.779	1.96	1.09	1.09	3.78
1.00	0.08	1.000	3	0.1800	0.0000	1.801	0.4	0.398	0.2004	0.0000	1.935	1.73	2.16	2.16	4.31
1.20	0.08	1.000	3	0.2160	0.0000	2.149	0.4	0.290	0.1459	0.0000	1.409	1.65	2.17	2.17	4.33
1.50	0.07	1.000	3	0.2700	0.0000	2.670	0.3	0.223	0.1043	0.0000	1.007	1.70	1.88	1.88	3.75
2.00	0.07	1.000	3	0.3600	0.0000	3.539	0.2	0.134	0.0719	0.0000	0.694	1.96	1.10	1.10	2.21
2.50	0.07	1.000	3	0.3600	0.0000	3.539	0.2	0.111	0.0481	0.0000	0.465	1.85	1.29	1.29	2.58
3.00	0.07	1.000	3	0.3600	0.0000	3.539	0.2	0.084	0.0362	0.0000	0.350	1.80	1.38	1.38	2.76

*** 管体構造計算 (とう性管) ***

ケース: VP 管種: VP

呼内径	Do=75 (mm)	路面	路埋設	重量	T-9 (ton)	1台
外径	D=80.9 (mm)	埋設	埋設	形状	未舗装	
管厚	Dc=89.0 (mm)	埋設	埋設	支持角	90度	自由支承
平均半径	R=42.5 (mm)	埋設	埋設	係数	K=0.333	
自重	WP=1.5 (kg/m)	埋設	埋設	比	e'=28.0	
土の単位重量	Ws=1800 (kg/m ³)	埋設	埋設	比	rsd=-0.10	
内部摩擦角	φ=30 (度)	埋設	埋設	比	P=1.0	
管頂埋削巾	B=0.590 (m)	埋設	埋設	比		

* 1:C=Cd 2:C=Cc 3:C=C1
ポンプ—管段—水槽系

H (m)	He (m)	C	*	Wv (kg/cm ²)	Pv (kg/cm ²)	M1 (kg·cm/cm)	i	Alpha (1/cm ²)	Ww (kg/cm ²)	Pw (kg/cm ²)	M2 (kg·cm/cm)	タワミ率 (%)	H1 (kg/cm ²)	H2 (kg/cm ²)	許容内圧 (kg/cm ²)
0.60	0.06	1.000	3	0.1080	0.0000	0.643	0.4	0.876	0.4416	0.0000	2.502	1.37	8.74	5.24	13.98
0.80	0.06	1.000	3	0.1440	0.0000	0.847	0.4	0.572	0.2883	0.0000	1.633	1.08	9.29	5.57	14.86
1.00	0.06	1.000	3	0.1800	0.0000	1.051	0.4	0.398	0.2006	0.0000	1.136	0.95	9.48	5.69	15.17
1.20	0.06	1.000	3	0.2160	0.0000	1.255	0.4	0.290	0.1460	0.0000	0.827	0.91	9.49	5.69	15.18
1.50	0.06	1.000	3	0.2700	0.0000	1.561	0.3	0.223	0.1044	0.0000	0.591	0.94	9.28	5.57	14.85
2.00	0.06	1.000	3	0.3600	0.0000	2.071	0.3	0.154	0.0719	0.0000	0.407	1.08	8.73	5.24	13.97
2.50	0.06	1.000	3	0.3600	0.0000	2.071	0.2	0.111	0.0481	0.0000	0.273	1.02	8.86	5.32	14.18
3.00	0.06	1.000	3	0.3600	0.0000	2.071	0.2	0.084	0.0362	0.0000	0.205	0.99	8.93	5.36	14.28

*** 管体構造計算 (とう性管) ***

ケース: 管種: VU,

径 Do = 100 (mm)	壁厚 T = 3.1 (mm)	平均半径 R = 55.5 (mm)	管自重 WP = 1.5 (kg/m)	土の単位重量 WS = 1800 (kg/m ³)	内部摩擦角 φ = 30 (度)	管頂埋深 B = 0.610 (m)	管種: C	*	Wv (kg/cm ²)	Pv (kg/cm ²)	M1 (kg·cm/cm)	i	Alpha (1/cm ²)	Ww (kg/cm ²)	Pw (kg/cm ²)	M2 (kg·cm/cm)	タワミ率 (%)	H1 (kg/cm ²)	H2 (kg/cm ²)	許容内圧 (kg/cm ²)
0.60	0.08	0.08	0.1080	0.0000	1.106	0.0	1.000	3	0.0300	0.0000	1.454	0.0	0.000	0.0300	0.0000	0.290	0.64	4.29	4.29	6.58
0.80	0.08	0.08	0.1440	0.0000	1.454	0.0	1.000	3	0.0300	0.0000	1.801	0.0	0.000	0.0300	0.0000	0.290	0.80	3.88	3.88	7.76
1.00	0.08	0.08	0.1800	0.0000	1.801	0.0	1.000	3	0.0300	0.0000	2.149	0.0	0.000	0.0300	0.0000	0.290	1.13	3.47	3.47	6.94
1.20	0.07	0.07	0.2160	0.0000	2.149	0.0	1.000	3	0.0300	0.0000	2.670	0.0	0.000	0.0300	0.0000	0.290	1.37	3.06	3.06	6.12
1.50	0.07	0.07	0.2700	0.0000	2.670	0.0	1.000	3	0.0300	0.0000	3.539	0.0	0.000	0.0300	0.0000	0.290	1.77	2.45	2.45	4.90
2.00	0.07	0.07	0.3600	0.0000	3.539	0.0	1.000	3	0.0300	0.0000	3.539	0.0	0.000	0.0300	0.0000	0.290	1.77	1.43	1.43	2.86
2.50	0.07	0.07	0.3600	0.0000	3.539	0.0	1.000	3	0.0300	0.0000	3.539	0.0	0.000	0.0300	0.0000	0.290	1.77	1.43	1.43	2.86
3.00	0.07	0.07	0.3600	0.0000	3.539	0.0	1.000	3	0.0300	0.0000	3.539	0.0	0.000	0.0300	0.0000	0.290	1.77	1.43	1.43	2.86

* 1 : C=Cd 2 : C=Cc 3 : C=C1
 ポンプー管路ー水槽系

路面集荷重 : 300 (kg/m²)
 群理設 : 柔掘り (溝形)
 型敷計 : 90 (度) 自由支承
 土圧係数 K = 0.333
 抵抗係数 e' = 28.0
 下出比 rsd = -0.10
 突出比 P = 1.0

*** 管体構造計算 (とう性管) ***

ケース: 管種: SP

径 Do = 80 (mm)	壁厚 T = 4.2 (mm)	平均半径 R = 41.5 (mm)	管自重 WP = 4.5 (kg/m)	土の単位重量 WS = 1800 (kg/m ³)	内部摩擦角 φ = 30 (度)	管頂埋深 B = 0.590 (m)	管種: C	*	Wv (kg/cm ²)	Pv (kg/cm ²)	M1 (kg·cm/cm)	i	Alpha (1/cm ²)	Ww (kg/cm ²)	Pw (kg/cm ²)	M2 (kg·cm/cm)	タワミ率 (%)	H1 (kg/cm ²)	H2 (kg/cm ²)	許容内圧 (kg/cm ²)
0.60	0.06	0.06	0.1080	0.0000	1.106	0.0	1.000	3	0.0300	0.0000	1.454	0.0	0.000	0.0300	0.0000	0.290	0.64	4.29	4.29	6.58
0.80	0.06	0.06	0.1440	0.0000	1.454	0.0	1.000	3	0.0300	0.0000	1.801	0.0	0.000	0.0300	0.0000	0.290	0.80	3.88	3.88	7.76
1.00	0.06	0.06	0.1800	0.0000	1.801	0.0	1.000	3	0.0300	0.0000	2.149	0.0	0.000	0.0300	0.0000	0.290	1.13	3.47	3.47	6.94
1.20	0.06	0.06	0.2160	0.0000	2.149	0.0	1.000	3	0.0300	0.0000	2.670	0.0	0.000	0.0300	0.0000	0.290	1.37	3.06	3.06	6.12
1.50	0.06	0.06	0.2700	0.0000	2.670	0.0	1.000	3	0.0300	0.0000	3.539	0.0	0.000	0.0300	0.0000	0.290	1.77	2.45	2.45	4.90
2.00	0.06	0.06	0.3600	0.0000	3.539	0.0	1.000	3	0.0300	0.0000	3.539	0.0	0.000	0.0300	0.0000	0.290	1.77	1.43	1.43	2.86
2.50	0.06	0.06	0.3600	0.0000	3.539	0.0	1.000	3	0.0300	0.0000	3.539	0.0	0.000	0.0300	0.0000	0.290	1.77	1.43	1.43	2.86
3.00	0.06	0.06	0.3600	0.0000	3.539	0.0	1.000	3	0.0300	0.0000	3.539	0.0	0.000	0.0300	0.0000	0.290	1.77	1.43	1.43	2.86

* 1 : C=Cd 2 : C=Cc 3 : C=C1
 ポンプー管路ー水槽系

路面集荷重 : 300 (kg/m²)
 群理設 : 柔掘り (溝形)
 型敷計 : 90 (度) 自由支承
 土圧係数 K = 0.333
 抵抗係数 e' = 28.0
 下出比 rsd = -0.10
 突出比 P = 1.0

*** 管体構造計算 (とう性管) ***

ケース: 管種: SP

呼内径 Do (mm)	呼外径 Dc (mm)	管厚 T (mm)	平均半径 R (mm)	自重 WP (kg/m)	土の単位重量 ws (kg/m ³)	内部摩擦角 φ (度)	管頂埋削付 B (m)	H (m)	He (m)	C	*	WV (kg/cm ²)	dx1 (cm)	Pv (kg/m ²)	i	Alpha (1/cm ²)	Hw (kg/cm ²)	dx2 (cm)	Pw (kg/m ²)	M (kg-cm/cm)	dx (cm)	タワミ率 (%)	許容内圧 (kg/cm ²)
80	89.7	4.2	41.5	4.5	1800	30	0.590	0.60	0.06	1.000	3	0.1080	0.00	0.0000	0.4	0.876	0.4416	0.01	0.0000	3.0	0.02	0.19	55.02
80	89.7	4.2	41.5	4.5	1800	30	0.590	0.80	0.06	1.000	3	0.1440	0.00	0.0000	0.4	0.572	0.2883	0.01	0.0000	2.4	0.01	0.15	58.01
1.00	0.06	1.000	3	0.1800	0.01	0.0000	0.4	1.20	0.06	1.000	3	0.2160	0.01	0.0000	0.4	0.398	0.2006	0.01	0.0000	2.1	0.01	0.13	59.33
1.50	0.06	1.000	3	0.2700	0.01	0.0000	0.3	1.50	0.06	1.000	3	0.2700	0.01	0.0000	0.3	0.223	0.1460	0.00	0.0000	2.0	0.01	0.13	59.81
2.00	0.06	1.000	3	0.3600	0.01	0.0000	0.3	2.00	0.06	1.000	3	0.3600	0.01	0.0000	0.3	0.154	0.1044	0.00	0.0000	2.1	0.01	0.13	59.49
2.50	0.06	1.000	3	0.3600	0.01	0.0000	0.2	2.50	0.06	1.000	3	0.3600	0.01	0.0000	0.2	0.111	0.0719	0.00	0.0000	2.4	0.01	0.15	58.02
3.00	0.06	1.000	3	0.3600	0.01	0.0000	0.2	3.00	0.06	1.000	3	0.3600	0.01	0.0000	0.2	0.084	0.0481	0.00	0.0000	2.2	0.01	0.14	58.63
																	0.0362	0.00	0.0000	2.2	0.01	0.14	58.93

路面荷重 : T-9 (ton) 1 台
 路面形状 : 未舗装
 埋設角度 : 90 (度) 自由支承
 設計支持係数 : K=0.333
 土抵抗係数 : e'=28.0
 下出比 : rsd=-0.10
 突出比 : P=1.0
 * 1:C=Cd 2:C=Cc 3:C=I

*** 管体構造計算 (とう性管) ***

ケース: 管種: SP

呼内径 Do (mm)	呼外径 Dc (mm)	管厚 T (mm)	平均半径 R (mm)	自重 WP (kg/m)	土の単位重量 ws (kg/m ³)	内部摩擦角 φ (度)	管頂埋削付 B (m)	H (m)	He (m)	C	*	WV (kg/cm ²)	dx1 (cm)	Pv (kg/m ²)	i	Alpha (1/cm ²)	Hw (kg/cm ²)	dx2 (cm)	Pw (kg/m ²)	M (kg-cm/cm)	dx (cm)	タワミ率 (%)	許容内圧 (kg/cm ²)
80	89.7	4.2	41.5	4.5	1800	30	0.590	0.60	0.06	1.000	3	0.1080	0.00	0.0000	0.0	0.900	0.1607	0.00	0.0000	1.5	0.01	0.09	96.92
80	89.7	4.2	41.5	4.5	1800	30	0.590	0.80	0.06	1.000	3	0.1440	0.00	0.0000	0.0	0.600	0.1419	0.00	0.0000	1.6	0.01	0.10	96.40
1.00	0.06	1.000	3	0.1800	0.01	0.0000	0.0	1.00	0.06	1.000	3	0.2160	0.01	0.0000	0.0	0.600	0.1419	0.00	0.0000	1.8	0.01	0.11	95.56
1.20	0.06	1.000	3	0.2160	0.01	0.0000	0.0	1.20	0.06	1.000	3	0.2160	0.01	0.0000	0.0	0.600	0.1419	0.00	0.0000	1.9	0.01	0.13	94.64
1.50	0.06	1.000	3	0.2700	0.01	0.0000	0.0	1.50	0.06	1.000	3	0.2700	0.01	0.0000	0.0	0.600	0.1419	0.00	0.0000	2.2	0.01	0.14	93.26
2.00	0.06	1.000	3	0.3600	0.01	0.0000	0.0	2.00	0.06	1.000	3	0.3600	0.01	0.0000	0.0	0.600	0.1196	0.00	0.0000	2.6	0.01	0.17	91.53
2.50	0.06	1.000	3	0.3600	0.01	0.0000	0.0	2.50	0.06	1.000	3	0.3600	0.01	0.0000	0.0	0.600	0.0977	0.00	0.0000	2.5	0.01	0.16	92.09
3.00	0.06	1.000	3	0.3600	0.01	0.0000	0.0	3.00	0.06	1.000	3	0.3600	0.01	0.0000	0.0	0.600	0.0826	0.00	0.0000	2.4	0.01	0.15	92.48

路面荷重 : D-11 (ton) 施工時
 路面形状 : 普通
 埋設角度 : 90 (度) 自由支承
 設計支持係数 : K=0.333
 土抵抗係数 : e'=28.0
 下出比 : rsd=-0.10
 突出比 : P=1.0
 * 1:C=Cd 2:C=Cc 3:C=I

*** 管体構造計算 (不とう性管) ***

管種: RCP - 2K

ケース:

径 Do = 300 (mm)
 外径 D = 300.0 (mm)
 管厚 Dc = 360.0 (mm)
 平均半径 T = 30.0 (mm)
 管土の自重 WP = 165.0 (kg/m)
 内部摩擦角 Ws = 1800 (kg/m³)
 管頂埋深 φ = 30 (度)
 管頂埋深中 B = 1.310 (m)

路面荷重 : T-9 (ton) 1台
 埋設形状 : 未舗装
 設計支持角 : 素掘り (溝形) 自由支承
 抵抗係数 K = 0.333
 突下比 e' = 28.0
 安全率 P = 1.0
 * 1 : C=Cd 2 : C=Cc 3 : C=1

H (m)	He (m)	C	* Wv (kg/cm²)	P1 (kg/cm²)	P2 (kg/cm²)	i	Alpha (1/cm)	Ww (kg/cm²)	Pc (kg/cm)	Hc (kg/cm/cm)	M (kg/cm/cm)	Ph (kg/cm)	許容内圧 (kg/cm²)
0.60	0.60	2.337	2	0.1514	0.0000	0.4	0.826	0.4164	19.0	2.0	50.0	9.53	0.46
0.80	0.63	3.419	2	0.2215	0.0000	0.4	0.552	0.2784	19.0	2.0	44.2	8.42	0.61
1.00	0.54	4.314	2	0.2795	0.0000	0.4	0.389	0.1960	19.0	2.0	42.1	8.02	0.66
1.20	0.51	5.201	2	0.3370	0.0000	0.4	0.286	0.1439	19.0	2.0	42.6	8.11	0.65
1.50	0.49	6.532	2	0.4233	0.0000	0.3	0.221	0.1034	19.0	2.0	46.5	8.66	0.55
2.00	0.47	8.744	2	0.5666	0.0000	0.2	0.153	0.0715	19.0	2.0	56.0	10.67	0.30
2.50	0.46	10.958	2	0.7101	0.0000	0.2	0.111	0.0480	19.0	2.0	66.2	12.62	0.01
3.00	0.46	13.165	2	0.8531	0.0000	0.2	0.084	0.0361	19.0	2.0	77.5	14.76	-0.34

*** 管体構造計算 (不とう性管) ***

管種: RCP - 2K

ケース:

径 Do = 300 (mm)
 外径 D = 360.0 (mm)
 管厚 Dc = 360.0 (mm)
 平均半径 T = 30.0 (mm)
 管土の自重 WP = 165.0 (kg/m)
 内部摩擦角 Ws = 1800 (kg/m³)
 管頂埋深 φ = 30 (度)
 管頂埋深中 B = 1.310 (m)

路面荷重 : D-11 (ton) 施工時
 埋設形状 : 素掘り (溝形) 自由支承
 設計支持角 K = 0.333
 抵抗係数 e' = 28.0
 突下比 rsd = 0.70
 安全率 P = 1.0
 * 1 : C=Cd 2 : C=Cc 3 : C=1

H (m)	He (m)	C	* Wv (kg/cm²)	P1 (kg/cm²)	P2 (kg/cm²)	i	Alpha (1/cm)	Ww (kg/cm²)	Pc (kg/cm)	Hc (kg/cm/cm)	M (kg/cm/cm)	Ph (kg/cm)	許容内圧 (kg/cm²)
0.60	0.60	2.337	2	0.1514	0.0000	0.0	0.000	0.1607	19.0	2.0	26.7	5.09	1.72
0.80	0.63	3.419	2	0.2215	0.0000	0.0	0.000	0.1419	19.0	2.0	31.1	5.92	1.65
1.00	0.54	4.314	2	0.2795	0.0000	0.0	0.000	0.1419	19.0	2.0	36.0	6.87	1.57
1.20	0.51	5.201	2	0.3370	0.0000	0.0	0.000	0.1419	19.0	2.0	40.9	7.80	1.47
1.50	0.49	6.532	2	0.4233	0.0000	0.0	0.000	0.1419	19.0	2.0	48.3	9.21	1.33
2.00	0.47	8.744	2	0.5666	0.0000	0.0	0.000	0.1196	19.0	2.0	58.7	11.18	1.10
2.50	0.46	10.958	2	0.7101	0.0000	0.0	0.000	0.0977	19.0	2.0	69.1	13.16	0.85
3.00	0.46	13.165	2	0.8531	0.0000	0.0	0.000	0.0826	19.0	2.0	80.0	15.24	0.56

*** 管体構造計算 (不とう性管) ***

管種: RCP ~ 2K

ケース:


呼内径 Do = 300 (mm)
 外径 D = 300.0 (mm)
 管壁厚 T = 30.0 (mm)
 平均半径 R = 165.0 (mm)
 管自重 WP = 76.2 (kg/m)
 土の単位重量 $\gamma_s = 1800$ (kg/m³)
 内部摩擦角 $\phi = 30$ (度)
 管頂掘削巾 B = 1.310 (m)

路面荷重 300 (kg/m²)
 群埋設 90 (度) 形
 設計支脚角 自由支承
 土抵抗係数 K = 0.333
 突出下比 e' = 28.0
 抵抗下比 rsd = 0.70
 突出比 P = 1.0
 * 1 : C = Cd, 2 : C = Cc, 3 : C = 1
 安全率 S = 1.5


H (m)	He (m)	C	* Wv (kg/cm ²)	P1 (kg/cm ²)	P2 (kg/cm ²)	i	Alpha (1/cm ²)	Ww (kg/cm ²)	Pc (kg/cm ²)	Hc (kg/cm ²)	M (kg·cm/cm)	Ph (kg/cm)	許容内圧 (kg/cm ²)
0.60	0.60	2.337	2 0.1514	0.0000	0.0000	0.0	0.000	0.0300	19.0	2.0	16.9	3.23	1.16
0.80	0.63	3.419	2 0.2215	0.0000	0.0000	0.0	0.000	0.0300	19.0	2.0	22.9	4.37	1.06
1.00	0.54	4.314	2 0.2795	0.0000	0.0000	0.0	0.000	0.0300	19.0	2.0	27.9	5.32	0.97
1.20	0.51	5.201	2 0.3370	0.0000	0.0000	0.0	0.000	0.0300	19.0	2.0	32.8	6.25	0.87
1.50	0.49	6.532	2 0.4233	0.0000	0.0000	0.0	0.000	0.0300	19.0	2.0	40.2	7.66	0.71
2.00	0.47	8.744	2 0.5666	0.0000	0.0000	0.0	0.000	0.0300	19.0	2.0	52.4	10.00	0.40
2.50	0.46	10.959	2 0.7101	0.0000	0.0000	0.0	0.000	0.0300	19.0	2.0	64.7	12.33	0.05
3.00	0.46	13.165	2 0.8531	0.0000	0.0000	0.0	0.000	0.0300	19.0	2.0	76.9	14.66	-0.33

WAREHOUSE


1. 等分体图

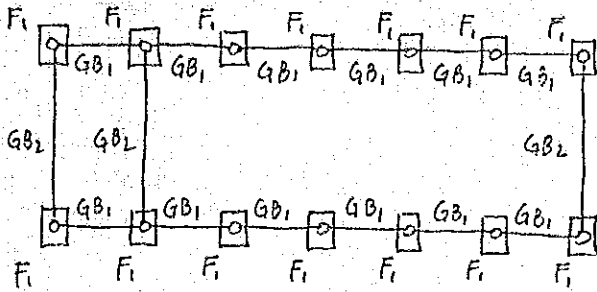

基础伏图

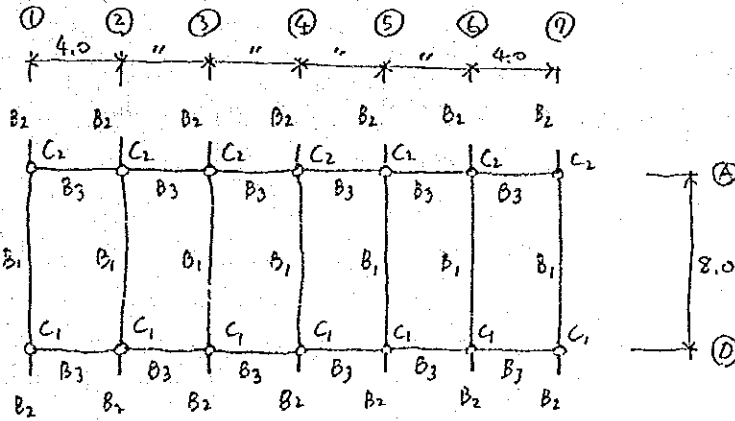


屋根伏图

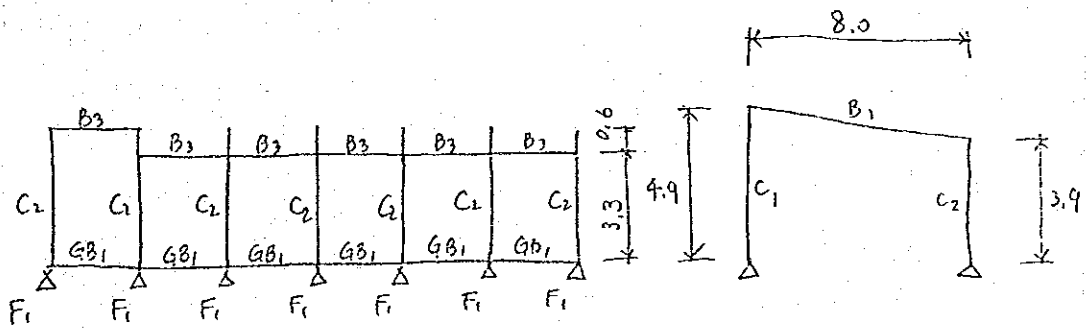

① - 轴组图

③ ~ ⑥ - 轴组图

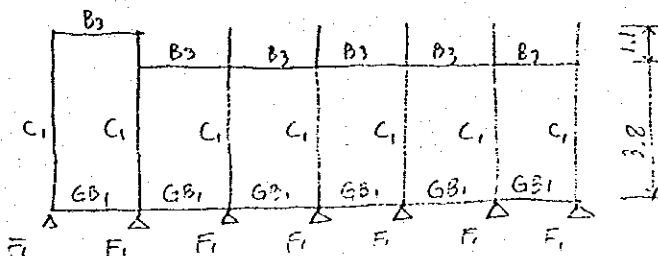

④ - 轴组图

2. 部材断面仮定


	$b \times D$	$I (bd^3/12)$	l	K	k
C ₁	26 × 40	138,667	490	283	1
C ₂	26 × 40	138,667	390	356	1.26
B ₁	26 × 50	270,833	800	339	1.20
B ₂	26 × 25				
B ₃	20 × 30				
GB ₁	30 × 45				
GB ₂	30 × 70				

3. 荷重

③ ~ ⑥ $\bar{r}-x>1 = 7.12$

屋根	波形スレート	$20 \text{ kg/m}^2 \times 4 \text{ m} =$	80
	母屋 L-75×75×6	$9.96 \text{ kg/m} \times 1/0.85 \times 4 \text{ m} =$	47
	L.L.	$60 \text{ kg/m}^2 \times 4$	= 240
	2×77-1梁 $0.26 \times 0.50 \times 2.4 =$		<u>312</u>
			679 $\text{kg/m} \rightarrow 680$

4. ③ ~ ⑥ $\bar{r}-x>9$ 応力計算
仮想仕事方法を使用

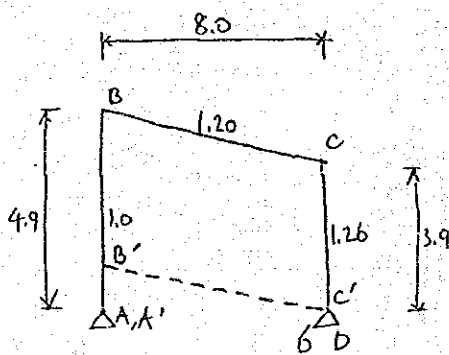

独立部材数 部材総数 - 2 × 閉鎖形数
= 3 - 2 × 1 = 1

柱 CD を独立部材とする。

部材角の関係

$$R_{DC} = 1 - \frac{D'C'}{DC} = 1 - 0 = +1.0$$

$$R_{AB} = 1 - \frac{A'B'}{AB} = 1 - \frac{1.0}{4.9} = +0.80$$

$$R_{BC} = 1 - \frac{B'C'}{BC} = 1 - 1 = 0$$

各部材の固定モーメント

	R	R	RR	-100 kgR
AB	1.0	+0.80	+0.80	-80
BC	1.2	0	0	0
CD	1.26	+1.0	+1.26	-126

上記の図はモーメントを分配する。

	B (1.20)		C	
	0.455	0.545	0.488	0.512
	-80			-126
	36.4	43.6	61.5	64.5
		30.8	21.8	
(1.0)	-14.0	-16.8	-10.6	-11.2
		-5.3	-8.4	
	2.4	2.9	4.1	4.3
		2.1	1.5	
	-1.0	-1.1	-0.7	-0.8
		-0.4	-0.6	
	0.2	0.2	0.3	0.3
	A	0.2	D	0.1
	-56.0	56.2	69.0	-68.9

各部材のモーメント総和 ΣMR

	R	M	ΣM	ΣMR
AB	+0.80	-56.0	-56.0	-44.8
BC	0	-	-	-
CD	+1.0	-69.0	-69.0	-69.0
				Σ -113.8

荷重 (3-項) によるモーメント分配

	0.455	0.545	0.488	0.512
		-3.63	3.63	
1.65		1.98	-1.97	-1.86
		-0.89	0.99	
0.40		0.49	-0.48	-0.51
		-0.24	0.25	
0.11		0.13	-0.12	-0.13
		-0.06	0.07	
0.03		0.03	-0.03	-0.04
		-0.02	-0.02	
	2.19	-2.21	2.52	-2.54
	2.20		2.53	

B, C 端の C, M₀, θ₀

$$C = \frac{wl^2}{12} = \frac{0.68 \times 8^2}{12} = 3.63$$

$$M_0 = \frac{wl^2}{8} = \frac{0.68 \times 8^2}{8} = 5.44 \text{ tm}$$

$$\theta_0 = \frac{wl}{2} = \frac{0.68 \times 8}{2} = 2.72 \text{ t}$$

各部位のモーメント 総和 ΣMR :


	R	m	ΣM	ΣMR
AB	+0.80	+2.20	+2.20	+1.76
BC	0	-	-	-
CD	+1.0	-2.53	-2.53	-2.53
			Σ	-0.97

釣合方程式 $\Sigma MRX + (\Sigma PC + \Sigma MR + \Sigma MR) = 0$
 $-113.8x + (-0.97) = 0 \quad \therefore x = -0.0068$

各部位底力 $[m] + (-0.0068)[M]$

部位端	m	-0.0068M	m
BA	+2.20	+0.38	+2.58
BC	-2.20	-0.38	-2.58
CB	+2.53	+0.47	+3.00
CD	-2.53	-0.47	-3.00

応力図

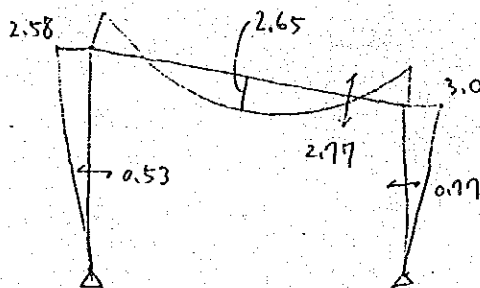

$$M_c = 5.44 - \frac{2.77}{2} (2.58 + 3.0) = 2.65$$

$$\theta_e = 2.72 + \frac{3 - 2.58}{8} = 2.77$$

5. 部材の配筋

B₁: 26 × 50

$$j = \frac{7}{8}d = \frac{7}{8} \times 46 = 40.3, \quad M = 3.0, \quad f_t = 1.6$$

$$a_t = \frac{100M}{f_t j} = \frac{300}{1.6 \times 40.3} = 4.7 \text{ cm} \rightarrow \underline{\underline{3 - \phi 16}}$$

$$c = \frac{a}{b_j} = \frac{2.770}{26 \times 40.3} = 2.6 < 6.0 \text{ O.K.}$$

C₁ : 26 × 40

$bD = 26 \times 40 = 1040, \quad bD^2 = 26 \times 40^2 = 41600$

頂部

$P_t = 2.77^t, \quad M_t = 3.0^{tm}$

$P_t / bD = 2.770 / 1040 = 2.7$

$M / bD^2 = 300000 / 41600 = 7.2$

$P_t = 0.5\% \quad a_t = 1040 \times 0.005 = 5.2 \text{ cm}^2 \rightarrow \underline{3-D16}$

底部

$P_b = 2.77 + 0.26 \times 0.4 \times 2.4 \times 3.9 + 0.2 \times 0.3 \times 2.4 \times 4 = 4.32^t$

$M_b = 0$

$P_b / bD = 4.320 / 1040 = 4.2 \quad M_b / bD^2 = 0 \quad P_t = 0.5\%$


C₁ : 26 × 40

C₂ と同様

6. 地中梁 a 設計

GB₁ : 30 × 45

$j = \frac{7}{8} \times 38 = 33$



$w = \text{自重 } 0.3 \times 0.45 \times 2.4 = 0.324$
 $\text{土圧 } (0.38 + 0.08) \times 3.1 = 1.886$

土圧 1/2 B. a 場合

↓

$\frac{0.324}{2.21 \text{ t/m}} \quad \frac{0.837}{1.16 \text{ t/m}}$

$M = \frac{wl^2}{10} = \frac{2.21 \times 16}{10} = 3.54 \text{ tm}$

$= \frac{1.16 \times 16}{10} = 1.86 \text{ tm}$

$a_t = \frac{354}{1.6 \times 33} = 6.7 \text{ cm}^2 \rightarrow \underline{4-D16} = \frac{186}{1.6 \times 33} = 3.5 \text{ cm}^2$


↓
2-D16

$\theta = \frac{wl}{2} = \frac{2.21 \times 4}{2} = 4.42^t$

$\tau = \frac{4420}{30 \times 33} = 4.5 < 6.0 \quad \text{o.k.}$

GB₂ : 30 × 70

$j = \frac{7}{8} \times 63 = 55 \text{ cm}$



$w = \text{自重 } 0.3 \times 0.7 \times 2.4 = 0.504$

0.504

$\text{土圧 } 0.46 \times 3.4 = 1.564$

$0.27 \times 3.4 = 0.918$

$\frac{2.07}{\text{t/m}}$

$\frac{1.422}{\text{t/m}}$

$$M = \frac{wl^2}{8} = \frac{2.07 \times 8^2}{8} = 16.6 \text{ tm} \quad , \quad \theta = \frac{wl}{2} = \frac{2.07 \times 8}{2} = 6.28 \text{ t} = \frac{1.42 \times 8^2}{8} = 11.36 \text{ tm}$$

$$At = \frac{1660}{1.6 \times 55} = 18.9 \text{ cm}^2 \rightarrow \underline{9-016}$$

$$Z = \frac{8280}{30 \times 55} = 5.0 < 6.0 \text{ o.k.}$$

$$\frac{1136}{1.6 \times 55} = 12.9 \rightarrow \underline{6-014}$$

B3 : 20 x 30

$$j = \frac{7}{8} \times 26 = 22.8 \text{ cm}$$

ω : 自重 0.2 x 0.3 x 2.4 = 0.144

壁 0.46 x 1.1 = 0.506

扉 0.150
0.8 t/m

$$M = \frac{wl^2}{10} = \frac{0.8 \times 16}{10} = 1.28 \text{ tm}$$

$$\theta = \frac{wl}{2} = \frac{0.8 \times 4}{2} = 1.6 \text{ t} = \frac{0.591 \times 16}{10} = 0.95$$


$$At = \frac{128}{1.6 \times 22.8} = 3.5 \rightarrow \underline{2-016}$$

$$Z = \frac{1600}{20 \times 22.8} = 3.5 < 6.0 \text{ o.k.}$$

$$\begin{aligned} &0.144 \\ &0.29 \times 1.1 = 0.291 \\ &0.150 \\ &\hline &0.591 \end{aligned}$$

$$\frac{0.95}{1.6 \times 22.8} = 2.6 \rightarrow \underline{2-016}$$

7. 母屋設計



ω = 2L-t 20 kg/m² x 0.85 = 17.0

母屋 L-75² x 6 9.96 kg/m = 9.96

L.L. 60 kg/m² x 0.85 = 51
98.0 kg/m

$$M = \frac{wl^2}{8} = \frac{98 \times 4^2}{8} = 156 \text{ kg m}$$

$$Z = \frac{15600}{1600} = 9.75 \text{ cm}^3 \rightarrow L-75 \times 75 \times 9 (=12.1 \text{ cm}^3)$$

L.L. 30 kg/m² x 3

ω = 17 + 10 + 25.5 = 52.5 kg/m

$$M = \frac{52.5 \times 4^2}{8} = 105 \text{ kg m}$$

$$Z = \frac{10500}{1600} = 6.6 \text{ cm}^3 \rightarrow L-75 \times 75 \times 6 (=8.47 \text{ cm}^3)$$

8. 基礎の設計


最大荷重基礎 → ②-⑩ 基礎

N:	B ₁	0.26 × 0.5 × 2.4 × 4	= 1.248	}	"	
	C ₁	0.26 × 0.4 × 2.4 × 4.4	= 1.098			"
	B ₃	0.2 × 0.3 × 2.4 × 4	= 0.576			"
	GB ₁	0.3 × 0.45 × 2.4 × 4	= 1.296			"
	GB ₂	0.3 × 0.7 × 2.4 × 4	= 2.016			"
	L>加壁	0.46 × 3.9 × 4	= 7.176			0.27 × 3.9 × 4 = 4.212
		0.46 × 3.9 × 4	= 7.176			0.27 × 3.9 × 4 = 4.212
	柱根	0.02 × 4 × 5	= 0.400			"
		0.00996 × 1/0.85 × 4 × 5	= 0.226			"
		0.06 × 4 × 5	= 1.200			"
			P' = 22.412 t	16.484 t		

地面耐力 15 t/m² と仮定

必要底面積 A_r = 22.4 / 15 = 1.49 m²



A_r = 16.49 / 15 = 1.1 m²



左図に於て A = 1.6 × 1.0 = 1.6 > 1.49 o.k

l/a = 160/40 = 4

Q_F/P' = 0.234, M_F/P'a = 0.21



Q_F = 22.4 t × 0.234 = 5.24 t

M_F = 22.4 t × 0.26 × 0.21 = 1.22 tm

D = 40 cm, b' = 26 + 80 = 106 cm

j = 7/8 × 33 = 28.9 cm

z = Q_F/b'j = 5240 / (106 × 28.9) = 1.7 < 6.0 o.k

必要鉄筋同長

ψ = Q_F/f_bj = 5240 / (10.8 × 28.9) = 16.8 cm

φ9 使用 (φ = 2.83 cm)

@ = b'/ψ/2.83 = 106/16.8/2.83 = 17.9 cm

φ12 使用 (φ = 3.97 cm)

@ = 106/16.8/3.97 = 23.8 cm

必要 鉄筋断面

$$a_t = \frac{MF}{f_t j} = \frac{122}{1.6 \times 28.9} = 2.64 \text{ cm}^2$$


鉄筋間隔 (φ9 使用)

$$c = \frac{b'}{a_t / 0.64} = \frac{106}{2.64 / 0.64} = 25.7 \text{ cm} > 17.9 \text{ cm OK}$$

通常基礎 (A-③ ~ ⑥)

N:	B ₁	= 1.248		"
	L ₁	= 1.098		"
	B ₃	= 0.576		"
	G B ₁	= 1.246		"
	L ₂ 加壁	0.46 × 2.5 × 4 = 4.600		0.27 × 2.5 × 4 = 2.70
	屋根	= 1.826		"
		P' = 10.64 t		8.75 t


必要底面積 $A_r = 10.64 / 15.0 = 0.71 \text{ m}^2$ | $A_r = 8.75 / 15 = 0.58$

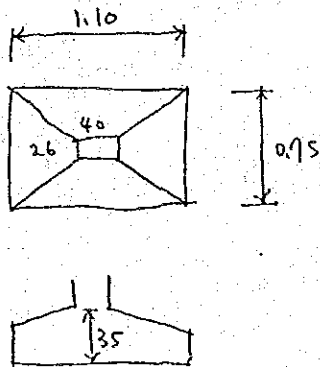

左図に於て $A = 1.1 \times 0.75 = 0.83 \text{ m}^2 > 0.71 \text{ OK}$

$$\frac{l}{a} = \frac{110}{40} = 2.75$$

$$\frac{\theta F}{P'} = 0.217, \quad \frac{MF}{P'a} = 0.11$$

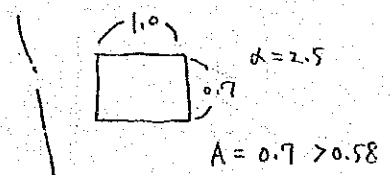

$$\theta F = 0.217 \times 10.64 = 2.31 \text{ t}$$

$$MF = 0.11 \times 10.64 = 1.17 \text{ tm}$$

$$D = 35 \text{ cm}, \quad b' = 26 + 70 = 96 \text{ cm}$$

$$j = \frac{7}{8} \times 28 = 24.5 \text{ cm}$$

$$z = \frac{2310}{96 \times 24.5} = 0.98 < 6.0 \text{ OK}$$

必要鉄筋周長

$$\psi = \frac{2310}{10.8 \times 24.5} = 8.7 \text{ cm}$$

φ9 使用 (ψ = 2.83 cm)

$$c = \frac{96}{8.7 / 2.83} = 31.2 \text{ cm}$$

必要鉄筋断面

$$a_t = \frac{117}{1.6 \times 24.5} = 2.98 \text{ cm}^2$$

$$c = \frac{96}{2.98 / 0.64} = 20.6 \text{ cm}$$

9. 地震力の検討

地震加速度 $a_t = k_i \cdot k_d \cdot k_t$

$\therefore a_t = 0.1$

- k_i : 耐震係数 = 0.1
- k_d : 地域係数 = 1.0
- k_t : 地盤係数 = 1.0

(1) X方向 (A ~ D列) はLが壁が耐震壁として働くものとす。

(2) ①, ②, ⑦列のLもLが壁が耐震壁として働くものとす。

(3) ③ ~ ⑥のLのY方向について検討す。

L.L. は存在しないとす。


柱高の半分が地震対象荷重とす。

①-③柱について検討


W ; C2	$0.26 \times 0.4 \times 2.4 \times (2.8 + 0.6) \times \frac{1}{2}$	= 0.424
B1	$0.26 \times 0.5 \times 2.4 \times 4$	= 1.248
B3	$0.2 \times 0.3 \times 2.4 \times 4$	= 0.576
Lが壁	$0.46 \times 4 \times 1.3$	= 2.392
屋根	$0.02 \times 4 \times 5$	= 0.400
	$0.00996 \times \frac{1}{0.85} \times 4 \times 5$	= 0.234
		<u>5.274 t</u>

水平力 $H = 5.274 \text{ t} \times 0.1 = 527 \text{ kg}$

簡略した各高平均のL-Lとす、平均高 $R = 4.4$

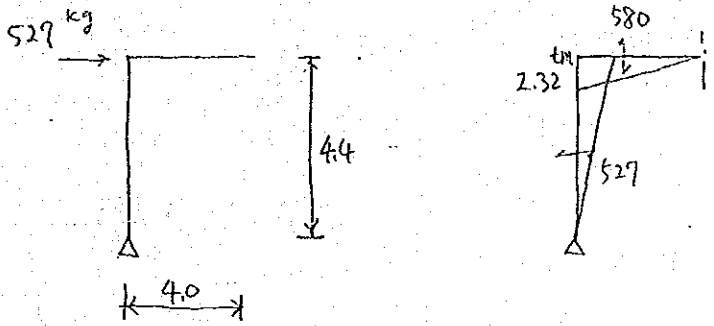

長期との合成応力図

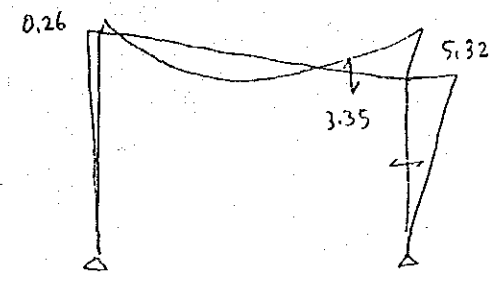

B. a 核定

$$M = 5.32 \text{ tm} \quad \theta = 3.35^\circ$$

$$a_t = 532 / (2.4 \times 40.3) = 5.5 \text{ cm}^2 \rightarrow 3-016$$

$$Z = 3350 / (26 \times 40.3) = 3.2 < 12 \text{ O.K}$$

C. 2 a 核定

$$M_t = 5.32 \text{ tm}$$

$$P_t : \text{波形スレ} \quad 20 \text{ kg/m}^2 \times 4 \times 5 = \quad = 400$$

$$\text{母屋 } 1.75 \times 75 \times 6 \quad 9.96 \text{ kg/m}^2 \times 1/0.85 \times 4 \times 5 = 234$$

$$\text{2>711-ト梁} \quad 0.26 \times 0.5 \times 24 \times 4 = 1.248$$


$$0.2 \times 0.3 \times 2.4 \times 4 = 0.576$$

$$P_t = 2.458 \text{ t}$$

$$\frac{P_t}{bD} = \frac{2458}{1040} = 2.4 \quad \frac{M_t}{bD^2} = \frac{532000}{41600} = 12.8$$

$$P_t = 0.63 \% \quad a_t = 1040 \times 0.0063 = 6.6 \text{ cm}^2 \rightarrow 3-016$$

WATERTIGHTNESS TEST PIT

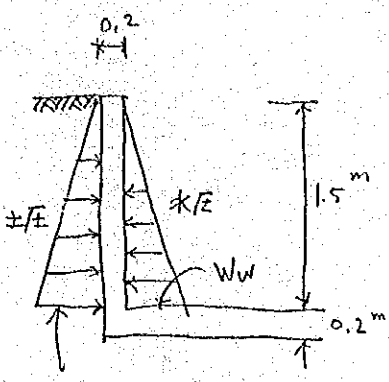

$Ws \quad j = \frac{7}{8} \times 13 = 11.4 \text{ cm}$

(1) 水が満湛で土圧がない場合を想定


$Ww = 1.5 \text{ t/m}^2$
 $M = \frac{Ww l^2}{6} = \frac{1.5 \times 1.5^2}{6} = 0.56 \text{ tm}$
 $at = 56 / (1.6 \times 11.4) = 3.1 \text{ cm}^2 \rightarrow 3 - \phi 13$

(2) 砂が空で土圧がかかるとき

土の単位重量 $w_s = 1.8 \text{ t/m}^3$ (規定)
 土の主仰土圧係数 $K_a = 0.5$ (規定)
 主仰土圧力 $P_0 = 1.8 \times 0.5 = 0.9 \text{ t/m}^2$
 水圧の場合と同じ。

(3) 浮力に対する検討

砂が空で、地下水位が GL-500 を想定




浮力 = $6.2 \times 4.4 \times 1.2 + 4.3 \times 4.4 \times 1.2 \times 1/2 = 44.1 \text{ t}$
 砂の躯体重量

$V: 0.2 \times 4.4 \times 12.9 = 11.18$
 $0.2 \times 1.5 \times (6.1 + 6.1 + 4.2) = 4.92$
 $0.2 \times 1.5 \times 6.0 \times 1/2 \times 2 = 1.8$
 17.9 m^3

$W = 17.9 \times 2.4 = 60.9 \text{ t} > 44.1 \text{ OK}$

砂が底スラブの検討



端部の支持状態を半固定と考へる。

$M = \frac{wl^2}{10} = \frac{(1.2 - 0.2 \times 2.4) \times 4^2}{10} = 1.15 \text{ tm}$

$at = 115 / (1.6 \times 11.4) = 6.3 \rightarrow 6 - \phi 12$

JICA