

## *Appendices*

### Appendix-1: Characteristic Value Subsoil Layer

CAN THO BRIDGE CONSTRUCTION

e - Log P Curves (C1)

Segment	Layer	No	Lab No	Bore No	Depth (m)	Void ratio	P (kPa)						Cc
							10.0	20.0	50.0	100.0	200.0	400.0	
I	C1-U	1	801	Br-D-1	2.0 - 3.0	1.538	1.480	1.414	1.303	1.175	1.053	0.914	0.462
		2	802	Br-D-1	9.0 - 9.5	1.445	1.417	1.389	1.315	1.198	0.996	0.781	0.714
		5	66	Br-D-2	3.0 - 4.0	1.491	1.413	1.375	1.305	1.226	1.134	1.016	0.392
		6	67	Br-D-2	8.0 - 9.0	1.587	1.565	1.526	1.445	1.337	1.213	1.070	0.475
		12	173	Br-D-3	7.0 - 8.0	2.165	1.995	1.926	1.785	1.609	1.423	1.208	0.714
		15	192	Br-D-4	7.0 - 8.0	1.514	1.479	1.452	1.387	1.288	1.142	0.972	0.565
		18	971	Br-D-5	3.0 - 4.0	1.637	1.568	1.549	1.468	1.384	1.277	1.153	0.412
		19	972	Br-D-5	10.5 - 11.5	1.562	1.543	1.524	1.461	1.347	1.171	0.983	0.625
		25	931	Br-D-6	10.0 - 11.0	1.670	1.655	1.641	1.579	1.476	1.288	1.068	0.731
		28	859	Br-D-7	5.0 - 6.0	1.903	1.862	1.836	1.771	1.695	1.594	1.407	0.621
		29	860	Br-D-7	8.0 - 9.0	1.832	1.811	1.773	1.666	1.529	1.373	1.151	0.737
		31	806	Br-D-8	3.0 - 3.5	1.389	1.350	1.326	1.266	1.190	1.045	0.881	0.545
		32	807	Br-D-8	10.5 - 11.5	1.596	1.580	1.553	1.478	1.388	1.261	1.107	0.512
		34	869	Br-D-9	2.0 - 3.0	1.414	1.396	1.381	1.348	1.315	1.275	1.225	0.166
			Average				1.625	1.583	1.552	1.477	1.379	1.245	1.082
I	C1-L	3	803	Br-D-1	19.0 - 20.0	1.152	1.123	1.096	1.039	0.966	0.849	0.718	0.435
		7	68	Br-D-2	22.0 - 22.3	1.205	1.163	1.123	1.042	0.962	0.870	0.771	0.329
		13	174	Br-D-3	15.0 - 16.0	1.402	1.337	1.305	1.224	1.142	1.021	0.882	0.462
		14	175	Br-D-3	20.0 - 21.0	1.053	1.019	1.004	0.965	0.903	0.815	0.712	0.342
		20	973	Br-D-5	17.0 - 18.0	1.468	1.454	1.438	1.397	1.325	1.142	0.936	0.684
		24	930	Br-D-6	17.5 - 18.5	1.215	1.202	1.187	1.150	1.101	0.976	0.769	0.688
		30	861	Br-D-7	18.0 - 19.0	1.468	1.449	1.422	1.357	1.284	1.190	1.066	0.412
		33	808	Br-D-8	19.0 - 20.0	1.514	1.499	1.486	1.444	1.380	1.263	1.016	0.821
	Average				1.306	1.278	1.255	1.201	1.131	1.013	0.847	0.553	
III	C1-U	73	749	Br-D-18	8.0 - 9.0	1.862	1.806	1.765	1.663	1.496	1.300	1.086	0.711
		74	750	Br-D-18	13.0 - 14.0	1.872	1.832	1.794	1.682	1.512	1.298	1.052	0.817
		78	742	Br-D-19	4.0 - 4.5	2.092	2.047	2.007	1.891	1.716	1.501	1.266	0.781
		79	747	Br-D-19	12.0 - 13.0	1.491	1.475	1.454	1.398	1.315	1.151	0.973	0.591
		83	836	Br-D-20	9.0 - 10.0	1.700	1.676	1.656	1.591	1.454	1.207	0.939	0.890
		87	847	Br-D-21	11.0 - 12.0	1.423	1.407	1.383	1.315	1.212	1.057	0.877	0.598
		Average				1.740	1.707	1.677	1.590	1.451	1.252	1.032	0.731
	C1-L	75	751	Br-D-18	18.0 - 19.0	1.381	1.358	1.333	1.266	1.176	1.077	0.963	0.379
		80	744	Br-D-19	19.0 - 20.0	1.269	1.221	1.200	1.149	1.091	1.009	0.913	0.319
		84	837	Br-D-20	19.0 - 20.0	1.102	1.086	1.068	1.021	0.964	0.883	0.794	0.296
88		848	Br-D-21	19.0 - 20.0	1.426	1.393	1.368	1.320	1.261	1.181	1.063	0.392	
	Average				1.295	1.265	1.242	1.189	1.123	1.038	0.933	0.347	
IV	C1	38	342	Br-D-10	6.0 - 7.0	1.956	1.922	1.889	1.798	1.654	1.482	1.281	0.668
		93	372	Br-D-22	3.0 - 4.0	1.956	1.913	1.875	1.751	1.584	1.388	1.190	0.658
		94	373	Br-D-22	8.0 - 9.0	1.547	1.455	1.420	1.342	1.225	1.083	0.938	0.482
		98	26	Br-D-23	6.0 - 7.0	1.360	1.338	1.310	1.249	1.152	0.960	0.756	0.678
		104	305	Br-D-24	4.0 - 5.0	1.765	1.735	1.703	1.616	1.487	1.324	1.145	0.595
		105	306	Br-D-24	11.0 - 12.0	1.557	1.505	1.473	1.398	1.297	1.158	1.007	0.502
		109	52	Br-D-25	9.0 - 10.0	1.538	1.523	1.499	1.435	1.341	1.146	0.928	0.724
		110	53	Br-D-25	12.0 - 13.0	1.538	1.490	1.459	1.397	1.316	1.204	1.085	0.395
		115	259	Br-D-26	3.0 - 4.0	2.241	2.126	2.077	1.941	1.724	1.440	1.152	0.957
		118	985	Br-D-27	4.0 - 4.5	1.381	1.364	1.344	1.299	1.243	1.165	1.061	0.345
		121	8	Br-D-28	8.0 - 9.0	1.528	1.467	1.423	1.340	1.182	1.001	0.796	0.681
		122	9	Br-D-28	12.0 - 13.0	1.319	1.299	1.276	1.225	1.148	1.033	0.909	0.412
		128	354	Br-D-29	5.0 - 6.0	1.423	1.396	1.372	1.301	1.194	1.041	0.871	0.565
	Average				1.624	1.579	1.548	1.469	1.350	1.187	1.009	0.589	

CAN THO BRIDGE CONSTRUCTION

e - Log P Curves (C2)

Segment	Layer	No	Lab No	No Bore.	Depth (m)	Void ratio	P (kPa)							Cc
							10	20	50	100	200	400	800	
I	C2	8	69	Br-D-2	41.0 - 41.5	1.195	1.134	1.103	1.052	0.974	0.889	0.792	0.322	
		16	194	Br-D-4	30.5 - 31.0	1.078	1.049	1.036	1.007	0.966	0.904	0.821	0.276	
		21	974	Br-D-5	27.5 - 28.0	1.102		1.043	1.013	0.969	0.914	0.843	0.760	0.276
		22	975	Br-D-5	32.0 - 32.5	1.023		0.981	0.954	0.914	0.862	0.801	0.732	0.229
		26	933	Br-D-6	26.5 - 27.0	1.261		1.234	1.206	1.170	1.093	0.946	0.791	0.515
	Average					1.132	1.092	1.079	1.046	0.999	0.932	0.841	0.761	0.324
III	C2	76	752	Br-D-18	39.0 - 39.5	0.784		0.749	0.730	0.704	0.671	0.633	0.578	0.183
		81	746	Br-D-19	30.0 - 30.5	0.739		0.718	0.694	0.667	0.631	0.588	0.536	0.173
		85	838	Br-D-20	28.0 - 28.5	0.839		0.829	0.820	0.794	0.758	0.713	0.654	0.196
		86	839	Br-D-20	40.0 - 40.5	0.870		0.845	0.820	0.789	0.745	0.692	0.623	0.229
		89	849	Br-D-21	24.0 - 24.5	0.890		0.884	0.863	0.820	0.763	0.699	0.622	0.256
		90	850	Br-D-21	34.4 - 34.8	0.745		0.728	0.714	0.690	0.660	0.626	0.585	0.136
	91	851	Br-D-21	41.0 - 41.5	0.971		0.957	0.940	0.919	0.891	0.851	0.784	0.223	
Average					0.834	0.816	0.797	0.769	0.731	0.686	0.626	0.199		
IV	C2	39	346	Br-D-10	33.0 - 33.5	0.812		0.802	0.789	0.777	0.759	0.726	0.665	0.203
		95	375	Br-D-22	16.0 - 16.5	0.815		0.810	0.805	0.793	0.772	0.746	0.705	0.136
		96	377	Br-D-22	34.0 - 34.5	0.653		0.647	0.641	0.631	0.615	0.592	0.559	0.110
		99	27	Br-D-23	10.0 - 11.0	1.345	1.314	1.288	1.223	1.128	1.000	0.860		0.463
		100	29	Br-D-23	18.0 - 18.5	0.675		0.669	0.661	0.650	0.632	0.608	0.569	0.130
		101	30	Br-D-23	27.5 - 28.0	0.703		0.692	0.680	0.657	0.627	0.595	0.548	0.156
		102	31	Br-D-23	37.0 - 37.5	0.606			0.592	0.578	0.559	0.534	0.502	0.153
		106	308	Br-D-24	23.5 - 24.0	0.964		0.953	0.935	0.908	0.868	0.820	0.751	0.229
		111	54	Br-D-25	18.0 - 18.5	0.773		0.763	0.749	0.732	0.703	0.666	0.615	0.169
		112	55	Br-D-25	27.5 - 28.0	0.702		0.685	0.668	0.652	0.626	0.587	0.539	0.159
		113	56	Br-D-25	33.0 - 33.5	0.784		0.763	0.754	0.737	0.717	0.686	0.633	0.176
		116	262	Br-D-26	17.0 - 17.5	0.877		0.866	0.849	0.828	0.799	0.762	0.707	0.183
		117	263	Br-D-26	25.0 - 25.5	0.734		0.724	0.710	0.690	0.659	0.620	0.567	0.176
		119	986	Br-D-27	12.5 - 13.0	0.791		0.777	0.771	0.764	0.749	0.724	0.684	0.133
		123	10	Br-D-28	17.0 - 17.5	0.909		0.896	0.885	0.871	0.844	0.796	0.733	0.209
		124	11	Br-D-28	23.5 - 24.0	0.796		0.775	0.749	0.718	0.675	0.625	0.567	0.193
	125	12	Br-D-28	27.0 - 27.5	0.750		0.743	0.736	0.726	0.708	0.675	0.628	0.156	
126	13	Br-D-28	38.0 - 38.5	0.881		0.853	0.841	0.819	0.792	0.754	0.692	0.206		
129	356	Br-D-29	16.0 - 16.5	0.745		0.738	0.725	0.709	0.685	0.649	0.602	0.156		
130	357	Br-D-29	30.0 - 30.5	0.688		0.669	0.646	0.623	0.589	0.545	0.490	0.183		
Average					0.794	0.779	0.765	0.747	0.720	0.681	0.628	0.177		

**CAN THO BRIDGE CONSTRUCTION**

**Log Cv - Log P Curves (C1)**

Segment	Layer	No	Lab No	Bore No	Depth (m)		P (kPa) / Cv (cm <sup>2</sup> /s)						
							5	15	35	75	150	300	600
I	C1-U	1	801	Br-D-1	2.0	3.0	1.525	1.221	1.090	0.948	0.924	0.895	
		2	802	Br-D-1	9.0	9.5	1.510	1.452	0.979	0.748	0.527	0.504	
		5	66	Br-D-2	3.0	4.0	1.185	1.209	1.343	1.204	1.188	1.129	
		6	67	Br-D-2	8.0	9.0	0.781	0.478	0.464	0.451	0.449	0.437	
		12	173	Br-D-3	7.0	8.0	0.291	0.274	0.250	0.309	0.440	0.334	
		15	192	Br-D-4	7.0	8.0	0.759	0.777	1.195	0.828	0.721	0.667	
		18	971	Br-D-5	3.0	4.0	0.929	0.589	0.454	0.449	0.431	0.422	
		19	972	Br-D-5	10.5	11.5	0.873	0.881	1.027	0.605	0.600	0.586	
		25	931	Br-D-6	10.0	11.0	1.292	1.491	1.364	1.095	0.986	0.951	
		28	859	Br-D-7	5.0	6.0	1.420	1.378	1.331	1.273	1.118	0.557	
		29	860	Br-D-7	8.0	9.0	1.452	1.160	0.996	0.970	0.956	0.928	
		31	806	Br-D-8	3.0	3.5	1.447	1.144	1.101	0.843	0.745	0.718	
		32	867	Br-D-8	10.5	11.5	1.091	0.912	0.812	0.623	0.596	0.595	
	34	869	Br-D-9	2.0	3.0	1.550	1.585	1.643	1.457	1.419	1.387		
	35	870	Br-D-9	9.0	10.0	1.472	1.245	1.188	1.151	0.882	0.833		
	Average							1.172	1.053	1.016	0.864	0.799	0.730
								101	91	88	75	69	63
	C1-L	3	803	Br-D-1	19.0	20.0	1.856	1.384	1.326	0.852	0.791	0.748	
		7	68	Br-D-2	22.0	22.3	0.291	0.334	0.346	0.429	0.415	0.385	
		13	174	Br-D-3	15.0	16.0	0.669	0.486	0.440	0.437	0.480	0.439	
14		175	Br-D-3	20.0	21.0	1.096	0.830	0.784	0.773	0.783	0.672		
20		973	Br-D-5	17.0	18.0	1.176	1.021	0.971	0.953	0.407	0.394		
30		861	Br-D-7	18.0	19.0	0.799	0.997	0.964	0.913	0.907	0.891		
33		808	Br-D-8	19.0	20.0	1.287	1.376	1.560	1.371	0.964	0.945		
36		871	Br-D-9	17.0	18.0	1.506	0.781	0.559	0.463	0.374	0.369		
Average							1.085	0.901	0.869	0.774	0.640	0.605	
							94	78	75	67	55	52	
III	C1-U	73	749	Br-D-18	8.0	9.0	0.970	0.646	0.610	0.445	0.422	0.396	
		74	750	Br-D-18	13.0	14.0	0.953	0.685	0.582	0.462	0.427	0.398	
		78	742	Br-D-19	4.0	4.5	0.840	0.678	0.541	0.499	0.469	0.415	
		79	747	Br-D-19	12.0	13.0	0.940	0.712	0.694	0.586	0.478	0.453	
		83	836	Br-D-20	9.0	10.0	1.351	1.236	1.060	0.540	0.449	0.418	
	87	847	Br-D-21	11.0	12.0	0.722	0.668	0.620	0.395	0.364	0.357		
	Average							0.963	0.771	0.685	0.488	0.435	0.406
								83	67	59	42	38	35
	C1-L	75	751	Br-D-18	18.0	19.0	0.902	0.706	0.653	0.610	0.588	0.571	
		80	744	Br-D-19	19.0	20.0	0.427	0.553	0.669	0.631	0.618	0.606	
84		837	Br-D-20	19.0	20.0	1.087	0.981	0.946	0.851	0.846	0.821		
88		848	Br-D-21	19.0	20.0	0.905	1.095	1.012	1.009	0.795	0.581		
Average							0.830	0.834	0.820	0.775	0.712	0.645	
							72	72	71	67	61	56	
IV	C1	38	342	Br-D-10	6.0	7.0	1.570	1.272	1.107	1.105	1.092	1.051	
		93	372	Br-D-22	3.0	4.0	1.191	1.282	0.845	0.408	0.297	0.290	
		94	373	Br-D-22	8.0	9.0	1.184	1.043	0.975	0.801	0.745	0.714	
		98	26	Br-D-23	6.0	7.0	0.775	0.834	0.962	0.711	0.590	0.559	
		104	305	Br-D-24	4.0	5.0	1.080	0.959	0.937	0.722	0.589	0.563	
		105	306	Br-D-24	11.0	12.0	0.768	0.725	0.720	0.665	0.537	0.532	
		109	52	Br-D-25	9.0	10.0	1.033	1.035	1.184	0.869	0.567	0.555	
		110	53	Br-D-25	12.0	13.0	2.027	1.536	1.514	1.356	1.377	1.346	
		115	259	Br-D-26	3.0	4.0	0.391	0.441	0.404	0.369	0.423	0.388	
		118	985	Br-D-27	4.0	4.5	0.942	1.328	1.283	1.267	1.222	1.212	
		121	8	Br-D-28	8.0	9.0	1.130	0.614	0.600	0.525	0.473	0.450	
		122	9	Br-D-28	12.0	13.0	0.701	0.629	0.623	0.496	0.473	0.450	
		128	354	Br-D-29	5.0	6.0	0.764	0.630	0.617	0.470	0.462	0.451	
	Average							1.058	0.948	0.905	0.751	0.681	0.659
							91	82	78	65	59	57	

## CAN THO BRIDGE CONSTRUCTION

### Log Cv - Log P Curves (C2)

Segment	Layer	No	Lab No	Bore No	Depth (m)	P (kPa) / Cv (cm <sup>2</sup> /s)							
						5	15	35	75	150	300	600	
I	C2	8	69	Br-D-2	41.0 - 41.5	0.703	0.698	0.634	0.644	0.620	0.609		
		16	194	Br-D-4	30.5 - 31.0	1.384	1.136	1.300	1.540	1.501	1.398		
		21	974	Br-D-5	27.5 - 28.0	0.725	0.725	1.345	1.416	1.579	1.723		
		22	975	Br-D-5	32.0 - 32.5	1.493	1.493	1.734	1.871	1.802	1.789		
		26	933	Br-D-6	26.5 - 27.0	2.625	2.911	2.417	1.700	1.695	1.591		
	Average					cm <sup>2</sup> /sx10 <sup>-3</sup>	1.386	1.393	1.486	1.434	1.439	1.422	
					cm <sup>2</sup> /day	120	120	128	124	124	123		
III	C2	76	752	Br-D-18	39.0 - 39.5	0.970	0.646	0.618	0.445	0.422	0.396		
		81	746	Br-D-19	30.0 - 30.5	1.225	1.225	1.456	1.342	1.275	1.152	1.071	
		85	838	Br-D-20	28.0 - 28.5	0.288	0.288	0.290	0.299	0.321	0.318	0.312	
		86	839	Br-D-20	40.0 - 40.5		0.952	1.207	1.403	1.347	1.326	1.195	
		89	849	Br-D-21	24.0 - 24.5	0.469	0.469	0.198	0.152	0.138	0.125	0.108	
		90	850	Br-D-21	34.4 - 34.8	1.715	1.715	1.868	2.074	1.866	1.826	1.528	
		91	851	Br-D-21	41.0 - 41.5	1.163	1.163	1.173	1.318	1.431	1.430	1.232	
	Average					cm <sup>2</sup> /sx10 <sup>-3</sup>	0.972	0.923	0.973	1.005	0.971	0.939	0.908
					cm <sup>2</sup> /day	84	80	84	87	84	81	78	
IV	C2	39	346	Br-D-10	33.0 - 33.5	3.862	3.862	2.856	2.448	1.382	0.936		
		95	375	Br-D-22	16.0 - 16.5	0.622	0.622	0.598	0.380	0.364	0.454	0.445	
		96	377	Br-D-22	34.0 - 34.5	0.440	0.440	0.368	0.301	0.340	0.233	0.218	
		99	27	Br-D-23	10.0 - 11.0	0.504	0.558	0.534	0.444	0.432	0.411		
		100	29	Br-D-23	18.0 - 18.5	0.362	0.362	0.234	0.396	0.412	0.343	0.338	
		101	30	Br-D-23	27.5 - 28.0	0.811	0.811	1.388	1.746	1.341	1.292	1.282	
		102	31	Br-D-23	37.0 - 37.5			1.395	1.613	1.526	1.466	1.169	
		106	308	Br-D-24	23.5 - 24.0	0.773	0.773	0.693	0.418	0.397	0.350	0.325	
		111	54	Br-D-25	18.0 - 18.5	0.755	0.561	0.510	0.439	0.428	0.419		
		112	55	Br-D-25	27.5 - 28.0	1.712	2.138	2.080	1.811	1.707	1.644		
		113	56	Br-D-25	33.0 - 33.5	1.560	1.847	2.190	2.787	2.213	1.889		
		116	262	Br-D-26	17.0 - 17.5	0.998	0.912	0.935	1.142	1.418	1.184		
		117	263	Br-D-26	25.0 - 25.5	1.790	1.790	1.841	1.897	1.979	1.942	1.906	
		119	986	Br-D-27	12.5 - 13.0	1.138	1.138	1.074	0.907	0.883	0.865	0.749	
		123	10	Br-D-28	17.0 - 17.5	1.257	1.257	0.618	0.554	0.448	0.379	0.354	
		124	11	Br-D-28	23.5 - 24.0	1.134	1.134	1.614	1.471	1.389	1.374	1.360	
		125	12	Br-D-28	27.0 - 27.5	0.520	0.520	0.622	0.640	0.464	0.460	0.439	
		126	13	Br-D-28	38.0 - 38.5	2.124	2.124	2.861	2.363	2.073	2.017	1.813	
	129	356	Br-D-29	16.0 - 16.5	0.628	0.628	0.599	0.490	0.449	0.427			
130	357	Br-D-29	30.0 - 30.5	0.961	0.961	1.281	1.169	1.084	1.070	1.028			
Average					cm <sup>2</sup> /sx10 <sup>-3</sup>	1.109	1.109	1.238	1.085	0.970	0.942	0.957	
					cm <sup>2</sup> /day	96	96	107	94	84	81	83	

**CAN THO BRIDGE CONSTRUCTION**  
Unit Weight of C1, C2 Layer

Segment	Layer name	No	Borehole symbol	Laboratory No	Sample depth m	Soil Name (ASTM D2487-83)	Water content	Unit weight
							W	g
							%	kN/m <sup>3</sup>
1	C1 -U	1	Br-D-1	801	2.0 - 3.0	CL : Lean CLAY	53.4	16.00
	C1 -U	2	Br-D-1	802	9.0 - 9.5	CH : Fat CLAY	45.9	15.70
	C1 -U	6	Br-D-2	66	3.0 - 4.0	CL : Sandy CLAY	52.4	16.20
	C1 -U	7	Br-D-2	67	8.0 - 9.0	CH : Fat CLAY	58.5	16.20
	C1 -U	18	Br-D-4	191	1.0 - 2.0	CH : Fat CLAY	56.9	16.20
	C1 -U	23	Br-D-5	971	3.0 - 4.0	CH : Fat CLAY	60.8	16.10
	C1 -U	24	Br-D-5	972	10.5 - 11.5	CH : Fat CLAY	57.1	16.20
	C1 -U	34	Br-D-7	859	5.0 - 6.0	CH : Fat CLAY	68.7	15.40
	C1 -U	35	Br-D-7	860	8.0 - 9.0	CH : Fat CLAY	65.7	15.40
	C1 -U	37	Br-D-8	806	3.0 - 3.5	CL : Sandy CLAY	42.0	15.80
	Average						56.1	15.90
	C1 -L	3	Br-D-1	803	19.0 - 20.0	CL : Lean CLAY	42.0	17.40
	C1 -L	8	Br-D-2	68	22.0 - 23.0	CL : Lean CLAY	41.4	16.90
	C1 -L	14	Br-D-3	174	15.0 - 16.0	CH : Fat CLAY	51.7	16.70
	C1 -L	15	Br-D-3	175	20.0 - 21.0	CL : Lean CLAY	38.9	17.80
	C1 -L	20	Br-D-4	193	15.0 - 16.0	CH : Fat CLAY	58.7	15.90
	C1 -L	25	Br-D-5	973	17.0 - 18.0	CH : Fat CLAY	52.2	16.30
	C1 -L	31	Br-D-6	932	17.5 - 18.5	CL : Sandy CLAY	39.7	16.60
	C1 -L	36	Br-D-7	861	18.0 - 19.0	CL : Lean CLAY	53.8	16.40
	C1 -L	39	Br-D-8	808	19.0 - 20.0	CH : Fat CLAY	54.4	16.20
Average						48.1	16.70	
C2	9	Br-D-2	69	41.0 - 41.5	CH : Fat CLAY	41.9	17.20	
C2	26	Br-D-5	974	27.5 - 28.0	CL : Lean CLAY	37.8	17.30	
C2	27	Br-D-5	975	32.0 - 32.50	CL : Lean CLAY	37.5	17.90	
C2	32	Br-D-6	933	26.5 - 27.0	CL : Lean CLAY	43.2	16.80	
Average						40.1	17.30	
3	C1 -U	111	Br-D-18	749	8.0 - 9.0	CH : Fat CLAY	69.2	15.60
	C1 -U	112	Br-D-18	750	13.0 - 14.0	CH : Fat CLAY	69.5	15.70
	C1 -U	119	Br-D-19	742	4.0 - 5.0	CH : Fat CLAY	77.4	15.20
	C1 -U	120	Br-D-19	747	12.0 - 13.0	CH : Fat CLAY	51.8	16.10
	C1 -U	124	Br-D-20	835	2.0 - 3.0	CH : Fat CLAY	73.8	15.20
	C1 -U	125	Br-D-20	836	9.0 - 10.0	CH : Fat CLAY	58.4	15.50
	C1 -U	129	Br-D-21	846	6.0 - 7.0	CH : Fat CLAY	81.8	15.00
	C1 -U	130	Br-D-21	847	11.0 - 12.0	CL : Lean CLAY	49.3	16.30
	Average						66.4	15.60
	C1 -L	113	Br-D-18	751	18.0 - 19.0	CL : Lean CLAY	40.3	16.90
	C1 -L	121	Br-D-19	744	19.0 - 20.0	CL : Lean CLAY	44.1	16.80
	C1 -L	126	Br-D-20	837	19.0 - 20.0	CL : Lean CLAY	36.4	17.20
	C1 -L	131	Br-D-21	848	19.0 - 20.0	CH : Fat CLAY	54.2	16.30
	Average						43.8	16.80
	C2	114	Br-D-18	752	39.0 - 39.5	CL : Lean CLAY	28.8	19.30
	C2	122	Br-D-19	746	30.0 - 31.0	CL : Lean CLAY	26.4	19.50
	C2	127	Br-D-20	838	28.0 - 28.5	CH : Fat CLAY	29.2	18.90
	C2	128	Br-D-20	839	40.0 - 40.50	CL : Lean CLAY	29.5	18.50
C2	132	Br-D-21	849	24.0 - 24.5	CH : Fat CLAY	30.9	18.60	
C2	134	Br-D-21	851	41.0 - 41.5	CL : Lean CLAY	34.8	18.10	
Average						29.9	18.80	

**CAN THO BRIDGE CONSTRUCTION**  
Unit Weight of C1, C2 Layer

Segment	Layer name	No	Borehole symbol	Laboratory No	Sample depth m	Soil Name (ASTM D2487-83)	Water content	Unit weight
							W	g
							%	kN/m <sup>3</sup>
	C1	137	Br-D-22	372	3.0 - 4.0	MH :Elastic SILT	65.1	14.80
	C1	138	Br-D-22	373	8.0 - 9.0	CH : Fat CLAY	54.6	16.10
	C1	139	Br-D-22	374	12.0 - 13.0	CH : Fat CLAY	63.8	15.90
	C1	145	BR-D-23	26	6.0 - 7.0	CL : Sandy CLAY	42.0	15.90
	C1	155	BR-D-24	305	4.0 - 5.0	CH : Fat CLAY	64.0	15.80
	C1	156	BR-D-24	306	11.0 - 12.0	CL : Lean CLAY	57.1	16.30
	C1	164	Br-D-25	51	4.0 - 5.0	CH : Fat CLAY	74.3	15.20
	C1	172	Br-D-26	259	3.0 - 4.0	CH : Fat CLAY	80.4	14.70
	C1	173	Br-D-26	260	7.0 - 8.0	CH : Fat CLAY	69.9	15.50
	C1	174	Br-D-26	261	11.0 - 12.0	CH : Fat CLAY	77.6	15.20
	C1	177	BR-D-27	985	4.0 - 4.5	CH : Fat CLAY	51.1	16.70
	C1	185	Br-D-28	7	3.0 - 4.0	CH : Fat CLAY	79.2	14.60
	C1	187	Br-D-28	9	12.0 - 13.0	CL : Lean CLAY	46.2	16.70
	C1	194	Br-D-29	354	5.0 - 6.0	CL : Lean CLAY	49.9	16.30
	C1	195	Br-D-29	355	10.0 - 11.0	CH : Fat CLAY	60.2	14.40
	Average						62.4	15.60
	C2	63	Br-D-13	761	29.0 - 29.5	CL : Lean CLAY	38.7	17.90
	C2	64	Br-D-13	762	44.5 - 45.0	CL : Lean CLAY	34.2	17.90
	C2	47	Br-D-10	344	16.0 - 16.5	CL : Sandy CLAY	26.4	19.10
	C2	48	Br-D-10	346	33.0 - 33.5	CL : Lean CLAY	30.1	19.00
	C2	49	Br-D-10	349	47.0 - 47.5	CL : Lean CLAY	21.6	20.10
	C2	74	Br-D-14	147	16.0 - 16.5	CL : Lean CLAY	28.3	18.70
	C2	75	Br-D-14	148	22.5 - 23.0	CL : Lean CLAY	29.2	0.00
	C2	76	Br-D-14	149	28.0 - 28.5	CL : Lean CLAY	33.0	18.50
	C2	77	Br-D-14	150	40.5 - 41.0	CL : Lean CLAY	22.2	20.30
	C2	87	Br-D-15	239	20.0 - 20.5	CL : Lean CLAY	42.6	17.50
	C2	88	Br-D-15	240	25.0 - 25.5	CH : Fat CLAY.	39.9	17.70
	C2	89	Br-D-15	241	28.0 - 28.5	CL : Lean CLAY	31.0	18.90
	C2	90	Br-D-15	242	31.5 - 32.0	CL : Lean CLAY	21.6	18.50
	C2	91	Br-D-15	243	40.0 - 40.5	CL : Lean CLAY	34.2	18.40
	C2	99	Br-D-16	367	25.5 - 26.0	MH :Elastic SILT	52.3	16.40
	C2	107	Br-D-17	286	18.0 - 19.0	CL : Lean CLAY	36.7	17.80
	C2	140	Br-D-22	375	16.0 - 16.5	CH : Fat CLAY	27.2	18.80
	C2	142	Br-D-22	377	34.0 - 34.5	ML : SILT	22.9	19.90
	C2	146	BR-D-23	27	10.0 - 11.0	CH : Fat CLAY	48.4	16.40
	C2	147	BR-D-23	28	13.5 - 14.0	CH : Fat CLAY	25.7	19.40
	C2	148	BR-D-23	29	18.0 - 18.5	CL : Lean CLAY	23.2	19.70
	C2	150	BR-D-23	30	27.5 - 28.0	CL : Lean CLAY	25.4	19.40
	C2	157	Br-D-24	307	16.0 - 16.5	CL : Lean CLAY	26.1	19.20
	C2	158	Br-D-24	308	23.5 - 24.0	CH : Fat CLAY	35.7	18.30
	C2	160	Br-D-24	310	30.0 - 30.5	CL : Lean CLAY	26.6	19.50
	C2	161	Br-D-24	311	41.2 - 41.7	CL : Lean CLAY	21.9	19.40
	C2	167	Br-D-25	54	18.0 - 18.5	CL : Lean CLAY	27.4	19.20
	C2	169	Br-D-25	56	33.0 - 33.5	CL : Lean CLAY	28.6	19.30
	C2	170	Br-D-25	57	43.0 - 43.5	CL : Lean CLAY	26.8	19.20
	C2	175	Br-D-26	262	17.0 - 17.5	CH : Fat CLAY	29.3	18.50
	C2	176	Br-D-26	263	25.0 - 25.5	CL : Lean CLAY	24.4	19.30
	C2	178	Br-D-27	986	12.5 - 13.0	CL : Lean CLAY	28.5	19.30
	C2	179	Br-D-27	987	15.0 - 15.5	CH : Fat CLAY	30.2	18.30
	C2	180	Br-D-27	988	19.0 - 19.5	CH : Fat CLAY	34.7	18.10
	C2	181	Br-D-27	989	23.5 - 24.0	CL : Lean CLAY	26.5	19.60
	C2	182	Br-D-27	990	28.0 - 28.5	CL : Sandy CLAY	26.3	18.80
	C2	188	Br-D-28	10	17.0 - 17.5	CH : Fat CLAY	32.3	18.50
	C2	196	Br-D-29	356	16.0 - 16.5	CL : Lean CLAY	26.1	19.40
	C2	197	Br-D-29	357	30.0 - 30.5	CL : Lean CLAY	25.5	19.70
	Average						28.2	19.00

Segment	Name of Layer	Bor, No.	Depth of Sand Layer	Remarks	Average of Sand Layer
			m		
1	C1-U	Br-D-4	7.5		2
		Br-D-5	4.5		
		Br-D-5	5.5		
		Br-D-5	9.5		
		Br-D-6	5.5		
		Br-D-6	10.5		
		Br-D-7	8.5		
		Br-D-7	10.0		
		Br-D-7	14.0		
		Br-D-8	11.0		
		Br-D-8	14.0		
		Br-D-9	9.5		
		Br-D-9	15.0		
		C1-L	Br-D-4	28.0	
	Br-D-7		18.5		
	Br-D-7		20.0		
	Br-D-8		17.5		
	Br-D-8		24.0		
	Br-D-8		31.0		
	Br-D-9		17.5		
	C2	Br-D-1	30.0		2
		Br-D-1	49.0	Bottom of Layer	
		Br-D-5	28.0		
		Br-D-5	49.0		
		Br-D-6	28.5		
		Br-D-6	31.5		
		Br-D-7	38.0		
		Br-D-7	41.4	Thickness = 1.1m	
		Br-D-8	37.0		
		Br-D-8	46.5		
		Br-D-9	37.0		
		Br-D-9	43.5		
	3		Br-D-19	16.0	
4		C1	Br-D-23	6.5	
	Br-D-23		9.5		
	Br-D-24		11.5		
	Br-D-24		13.5		
	Br-D-24		15.0		
	Br-D-25		9.5		
	Br-D-25		12.5		
	Br-D-26		13.5		
	Br-D-28		9.5		






## Appendix-2: Cost Comparison of Embankment Height

Cost Estimate for Study of Abutment Height

ITEM	SPECIFICATION	UNIT	UNIT PRICE	Case-1		Case-2		Case-3		Case-4		Case-5		Case-6		
				Abutment Height	TOTAL COST	Abutment Height	TOTAL COST	Abutment Height	TOTAL COST	Abutment Height	TOTAL COST	Abutment Height	TOTAL COST	Abutment Height	TOTAL COST	
			US\$	QUANTITY		QUANTITY		QUANTITY		QUANTITY		QUANTITY		QUANTITY		
1	Foundation	CCP Dia. 1.5m	18,924	36	681,264	32	605,568	26	492,024	22	416,328			13	246,012	
		L=72m														
2	Substructure	Abutment	48,941	1	48,941											
		H=7.5m	53,854	1	53,854											
		H=8.5m	58,775			1	58,775									
		H=9.5m	63,641							1	63,641					
		H=10.5m	96,602												1	96,602
		H=12.5m	37,580	1	37,580											
		H=7.5m	39,509	1	39,509											
3	Superstructure	Pier	41,437	1	41,437			1	41,437							
		H=8.5m	54,855	1	54,855					1	54,855					
		H=10.5m	56,666	0.5	28,333			0.5	28,333							
		H=11.5m	156,291								128,545					96,602
		Sub - Total										118,496				107,549
4	Earth Work	PC Box	22,258	150	3,338,700	125	2,782,250	100	2,225,800	75	1,669,350			25	556,450	
		Pavement	28	3,075	86,100	2,563	71,750	2,050	57,400	1,538	43,050			513	14,350	
		Road Miscellaneous	106	150	15,900	125	13,250	100	10,600	75	7,950			25	2,650	
		Sub - Total			3,440,700		2,867,250		2,293,800		1,720,350					573,450
		PVD	1,223	0	0	448	548,392	929	1,136,329	1,442	1,763,825				2,565	3,137,456
5	Compensation	Embankment	53	0	0	103	5,466	229	12,160	380	20,156			761	40,355	
		Slope Protection	44	0	0	285	12,540	620	27,280	1,005	44,220				1,925	84,700
		Pavement	29	0	0	578	16,762	1,155	33,495	1,733	50,257				2,888	83,752
		Road Miscellaneous	106	0	0	25	2,650	50	5,300	75	7,950				125	13,250
		Sub - Total			0			585,810		1,214,565		1,886,409				2,622,961
5	Compensation	For bridge	3.8	7,548	28,682	6,290	23,902	5,032	19,122	3,774	14,341			1,258	4,780	
		For Highway	3.8	1,887	7,171	4,240	16,112	6,693	25,433	9,246	35,135			14,652	55,678	
		Sub - Total			35,853		40,014		44,555		49,476				54,967	60,458
Total			US\$	4,314,108	1000US\$/m	4,246,860	28.31	4,173,489	27.82	4,191,059	27.94	4,263,547	28.42	4,336,035	28.91	


Embankment include Drainage Blanket, Surcharge and Subgrade.  
Road Miscellaneous include Concrete Kerb, Median, Railing and Guard Railing.

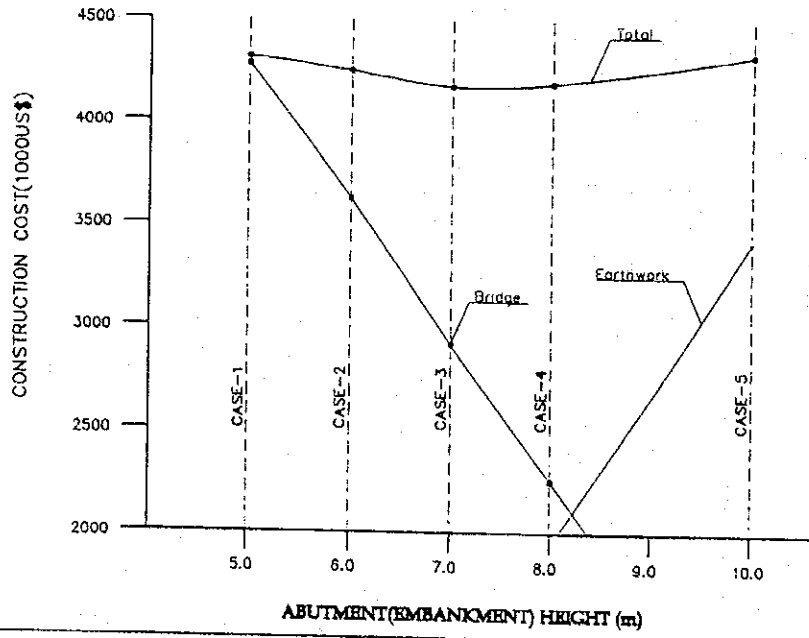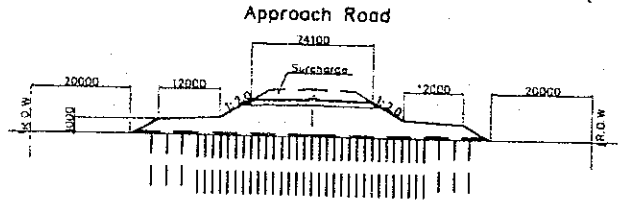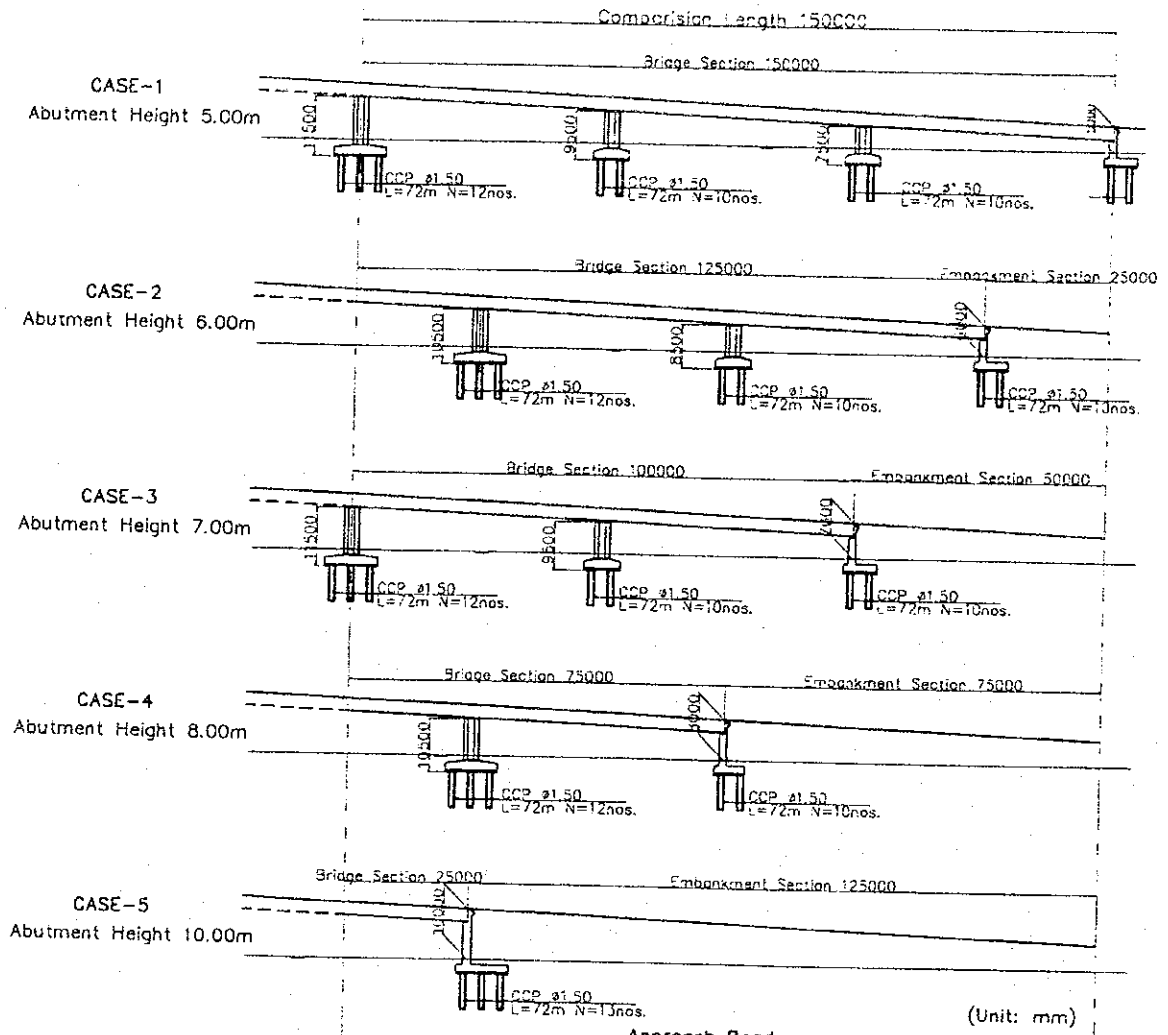

## Appendix-3: Study of Counter Berm Form

# Style of Counter Berm H=6m B=8m Segment 1

S = 1: 1000

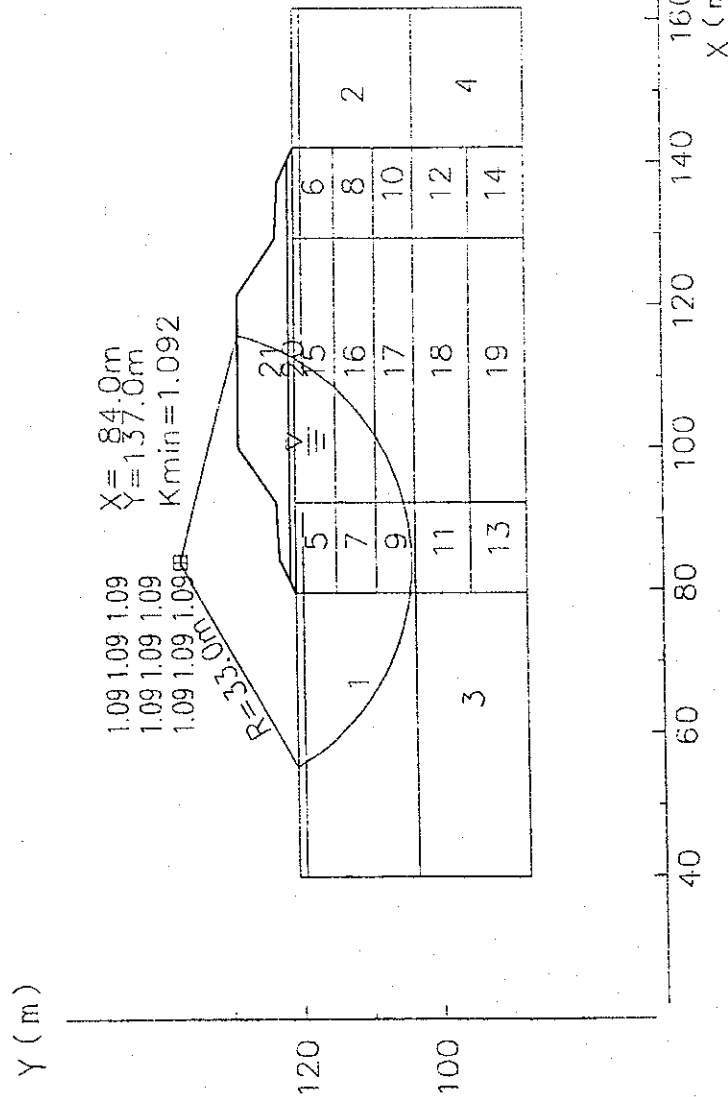


## CHARACTERISTIC VALUE

Layer Number	Saturated Density $kN/m^3$	Wet Density $kN/m^3$	internal Friction Angle	Cohesion $kN/m^2$
1	16.90	15.90	4.00	7.0
2	16.90	15.90	4.00	7.0
3	17.70	16.70	6.00	8.0
4	17.70	16.70	6.00	8.0
5	16.90	15.90	4.00	15.0
6	16.90	15.90	4.00	15.0
7	16.90	15.90	4.00	15.0
8	16.90	15.90	4.00	15.0
9	16.90	15.90	4.00	14.0
10	16.90	15.90	4.00	14.0
11	17.70	16.70	6.00	14.0
12	17.70	16.70	6.00	14.0
13	17.70	16.70	6.00	14.0
14	17.70	16.70	6.00	14.0
15	16.90	15.90	4.00	39.0
16	16.90	15.90	4.00	35.0
17	16.90	15.90	4.00	32.0
18	17.70	16.70	6.00	28.0
19	17.70	16.70	6.00	25.0
20	19.60	18.60	30.00	20.0
21	19.30	18.30	30.00	14.0

# Style of Counter Berm H=6m B=10m Segment 1

S: = 1:1000

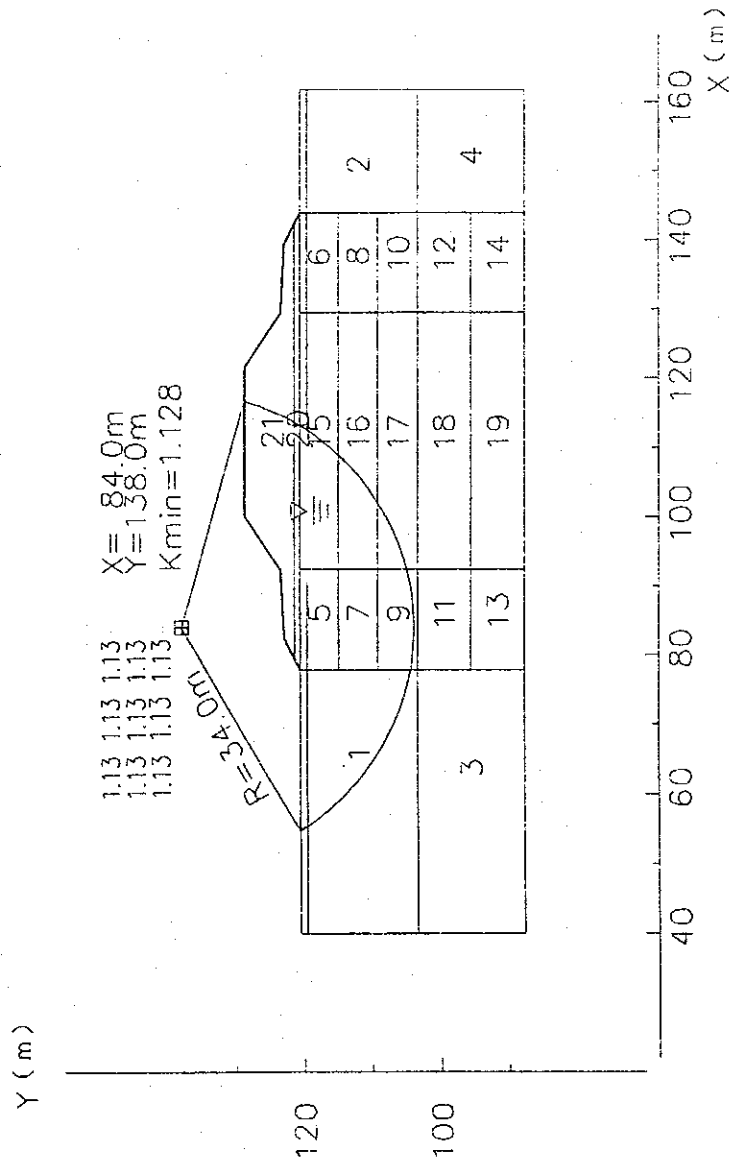


## CHARACTERISTIC VALUE

Layer Number	Saturated Density $kN/m^3$	Wet Density $kN/m^3$	Internal Friction Angle	Cohesion $kN/m^2$
1	16.90	15.90	4.00	7.0
2	16.90	15.90	4.00	7.0
3	17.70	16.70	6.00	8.0
4	17.70	16.70	6.00	8.0
5	16.90	15.90	4.00	15.0
6	16.90	15.90	4.00	15.0
7	16.90	15.90	4.00	15.0
8	16.90	15.90	4.00	15.0
9	16.90	15.90	4.00	15.0
10	16.90	15.90	4.00	15.0
11	17.70	16.70	6.00	14.0
12	17.70	16.70	6.00	14.0
13	17.70	16.70	6.00	14.0
14	17.70	16.70	6.00	14.0
15	16.90	15.90	4.00	40.0
16	16.90	15.90	4.00	36.0
17	16.90	15.90	4.00	33.0
18	17.70	16.70	6.00	28.0
19	17.70	16.70	6.00	25.0
20	19.60	18.60	30.00	20.0
21	19.30	18.30	30.00	14.0

# Style of Counter Berm H=6m B=12m Segment 1

S: 1/1000

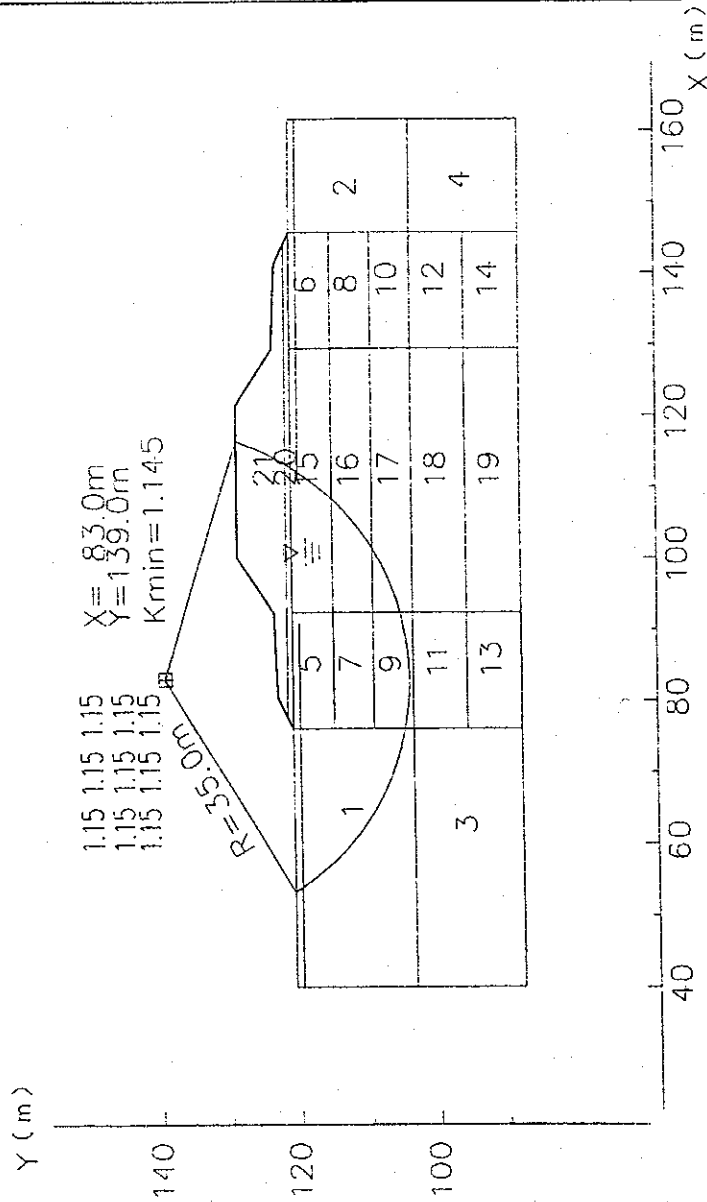


CHARACTERISTIC VALUE

Layer Number	Saturated Density kN/m <sup>3</sup>	Wet Density kN/m <sup>3</sup>	Internal Friction Angle	Cohesion kN/m <sup>2</sup>
1	16.90	15.90	4.00	7.0
2	16.90	15.90	4.00	7.0
3	17.70	16.70	6.00	8.0
4	17.70	16.70	6.00	8.0
5	16.90	15.90	4.00	15.0
6	16.90	15.90	4.00	15.0
7	16.90	15.90	4.00	15.0
8	16.90	15.90	4.00	15.0
9	16.90	15.90	4.00	15.0
10	16.90	15.90	4.00	15.0
11	17.70	16.70	6.00	14.0
12	17.70	16.70	6.00	14.0
13	17.70	16.70	6.00	14.0
14	17.70	16.70	6.00	14.0
15	16.90	15.90	4.00	40.0
16	16.90	15.90	4.00	30.0
17	16.90	15.90	4.00	33.0
18	17.70	16.70	6.00	28.0
19	17.70	16.70	6.00	26.0
20	19.60	18.60	30.00	20.0
21	19.30	18.30	30.00	14.0

# Style of Counter Berm H=8m B=10m Segment 1

S= 1:1000

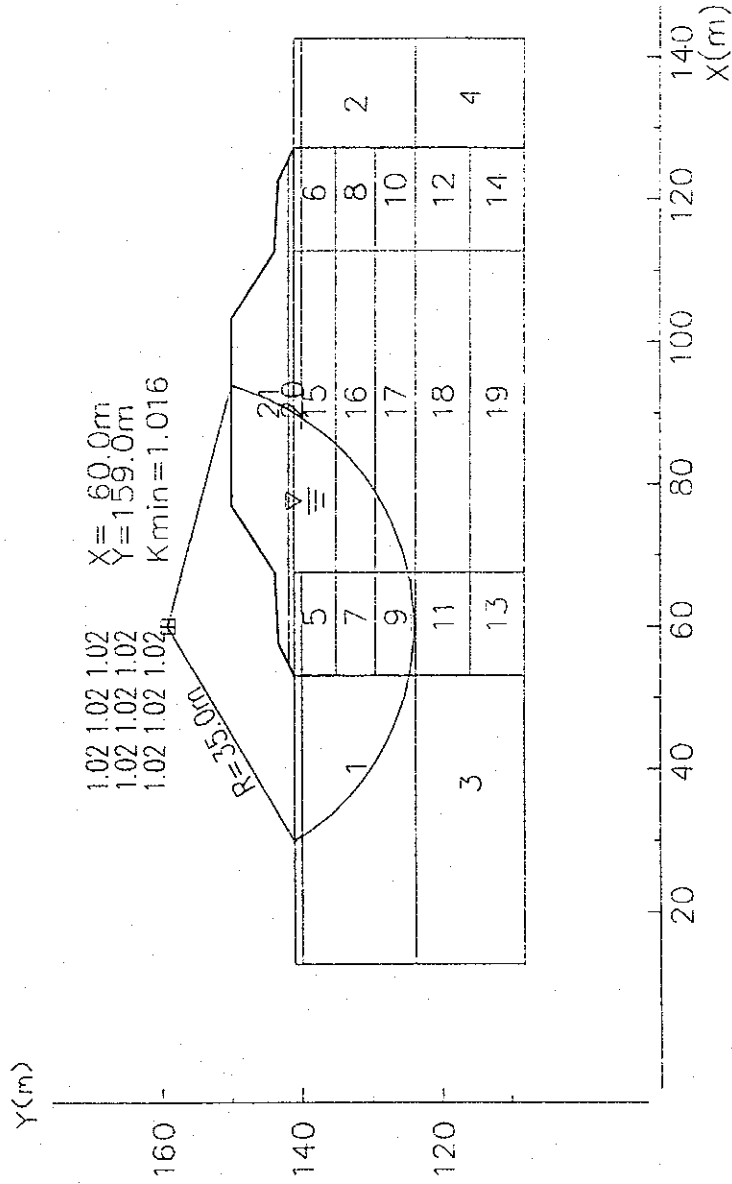


## CHARACTERISTIC VALUE

Layer Number	Saturated Density $kN/m^3$	Wet Density $kN/m^3$	Internal friction Angle	Cohesion $kN/m^2$
1	16.90	15.90	4.00	7.0
2	16.90	15.90	4.00	7.0
3	17.70	16.70	6.00	8.0
4	17.70	16.70	6.00	8.0
5	16.90	15.90	4.00	16.0
6	16.90	15.90	4.00	16.0
7	16.90	15.90	4.00	16.0
8	16.90	15.90	4.00	16.0
9	16.90	15.90	4.00	17.0
10	16.90	15.90	4.00	17.0
11	17.70	16.70	6.00	16.0
12	17.70	16.70	6.00	16.0
13	17.70	16.70	6.00	16.0
14	17.70	16.70	6.00	16.0
15	16.90	15.90	4.00	39.0
16	16.90	15.90	4.00	34.0
17	16.90	15.90	4.00	30.0
18	17.70	16.70	6.00	25.0
19	17.70	16.70	6.00	22.0
20	19.60	18.60	30.00	20.0
21	19.30	18.30	30.00	14.0



# Style of Counter Berm H=8m B=12m Segment 1

S= 1:1000

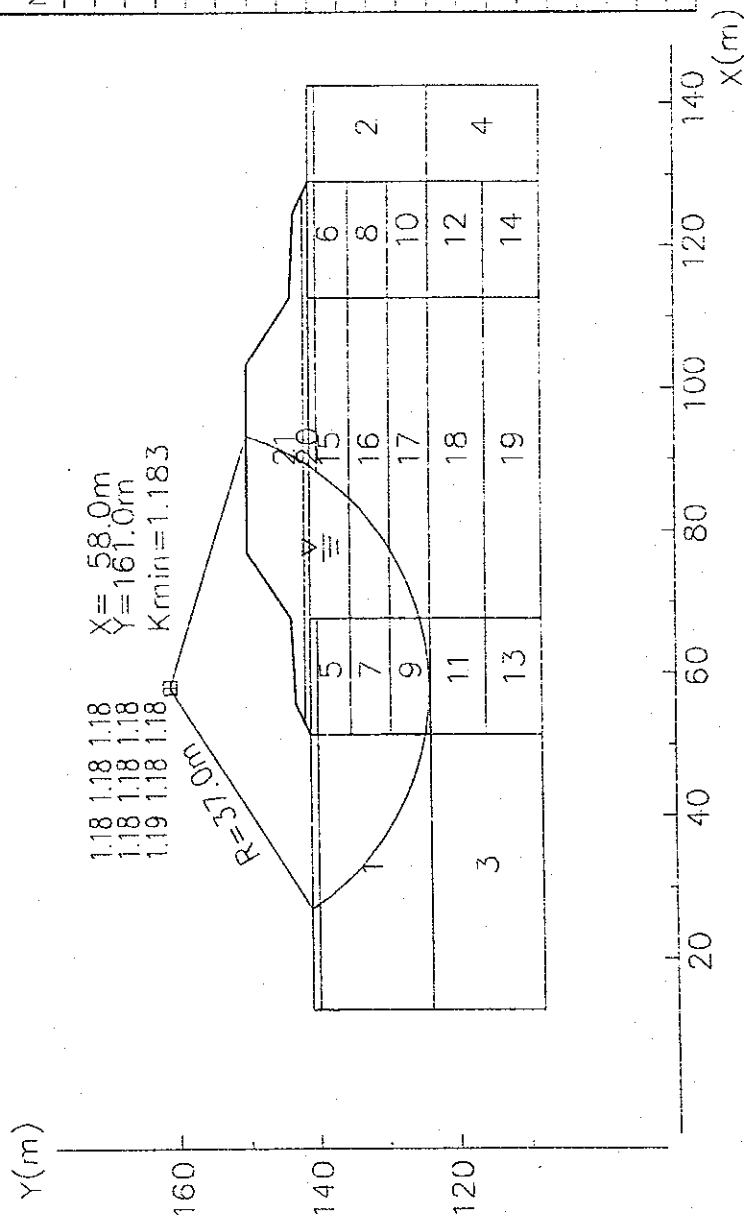


CHARACTERISTIC VALUE

Layer Number	Saturated Density kN/m <sup>3</sup>	Wet Density kN/m <sup>3</sup>	Internal Friction Angle	Cohesion kN/r <sup>2</sup>
1	16.90	15.90	4.00	7.0
2	16.90	15.90	4.00	7.0
3	17.70	16.70	6.00	8.0
4	17.70	16.70	6.00	8.0
5	16.90	15.90	4.00	16.0
6	16.90	15.90	4.00	16.0
7	16.90	15.90	4.00	16.0
8	16.90	15.90	4.00	16.0
9	16.90	15.90	4.00	16.0
10	16.90	15.90	4.00	16.0
11	17.70	16.70	6.00	16.0
12	17.70	16.70	6.00	16.0
13	17.70	16.70	6.00	16.0
14	17.70	16.70	6.00	16.0
15	16.90	15.90	4.00	52.0
16	16.90	15.90	4.00	48.0
17	16.90	15.90	4.00	43.0
18	17.70	16.70	6.00	41.0
19	17.70	16.70	6.00	34.0
20	19.60	18.60	30.00	20.0
21	19.30	18.30	30.00	14.0

# Style of Counter Berm H=8m B=14m Segment 1

S= 1:1000

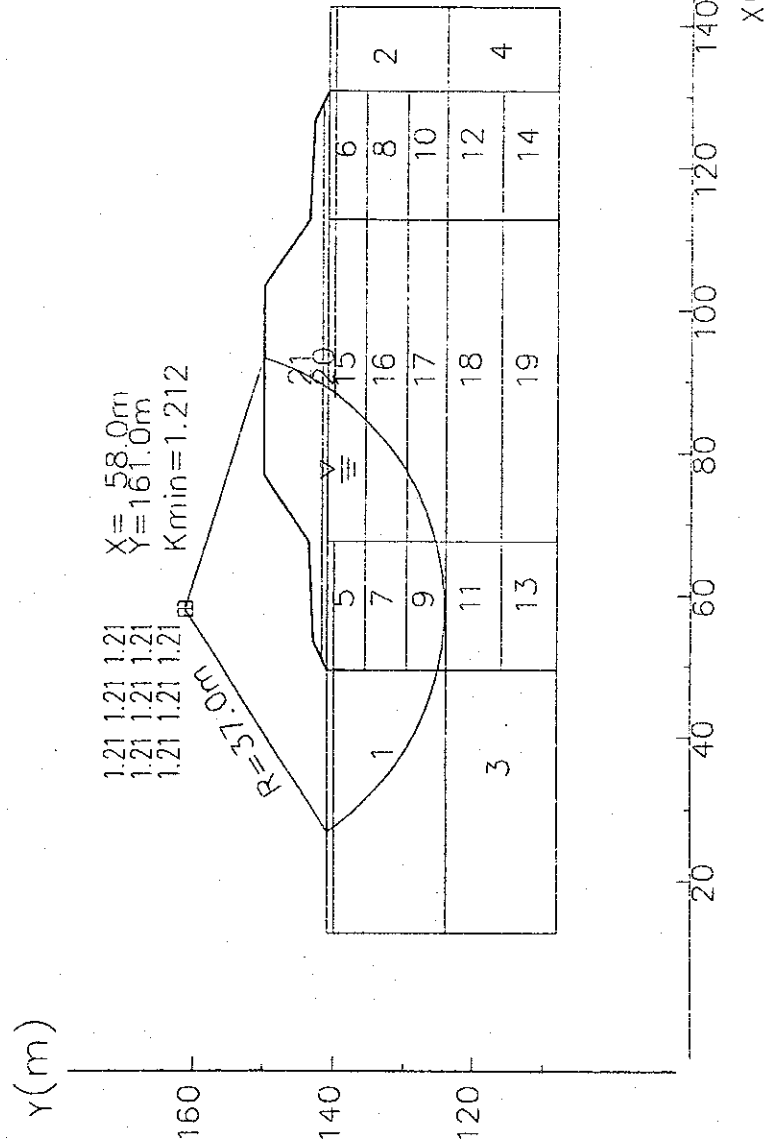


CHARACTERISTIC VALUE

Layer Number	Saturated Density kN/m <sup>3</sup>	Wet Density kN/m <sup>3</sup>	Internal Friction Angle	Cohesion kN/m <sup>2</sup>
1	16.90	15.90	4.00	7.0
2	16.90	15.90	4.00	7.0
3	17.70	16.70	6.00	8.0
4	17.70	16.70	6.00	8.0
5	16.90	15.90	4.00	16.0
6	16.90	15.90	4.00	16.0
7	16.90	15.90	4.00	16.0
8	16.90	15.90	4.00	16.0
9	16.90	15.90	4.00	16.0
10	16.90	15.90	4.00	16.0
11	17.70	16.70	6.00	16.0
12	17.70	16.70	6.00	16.0
13	17.70	16.70	6.00	16.0
14	17.70	16.70	6.00	16.0
15	16.90	15.90	4.00	52.0
16	16.90	15.90	4.00	48.0
17	16.90	15.90	4.00	43.0
18	17.70	16.70	6.00	38.0
19	17.70	16.70	6.00	34.0
20	19.60	18.60	30.00	20.0
21	19.30	18.30	30.00	14.0

## Appendix-4: Study of PVD Arrangement


Arrangement Design of PVD H=4m Segment 1 Spacing  $\Delta 0.8m$

Calculated Section

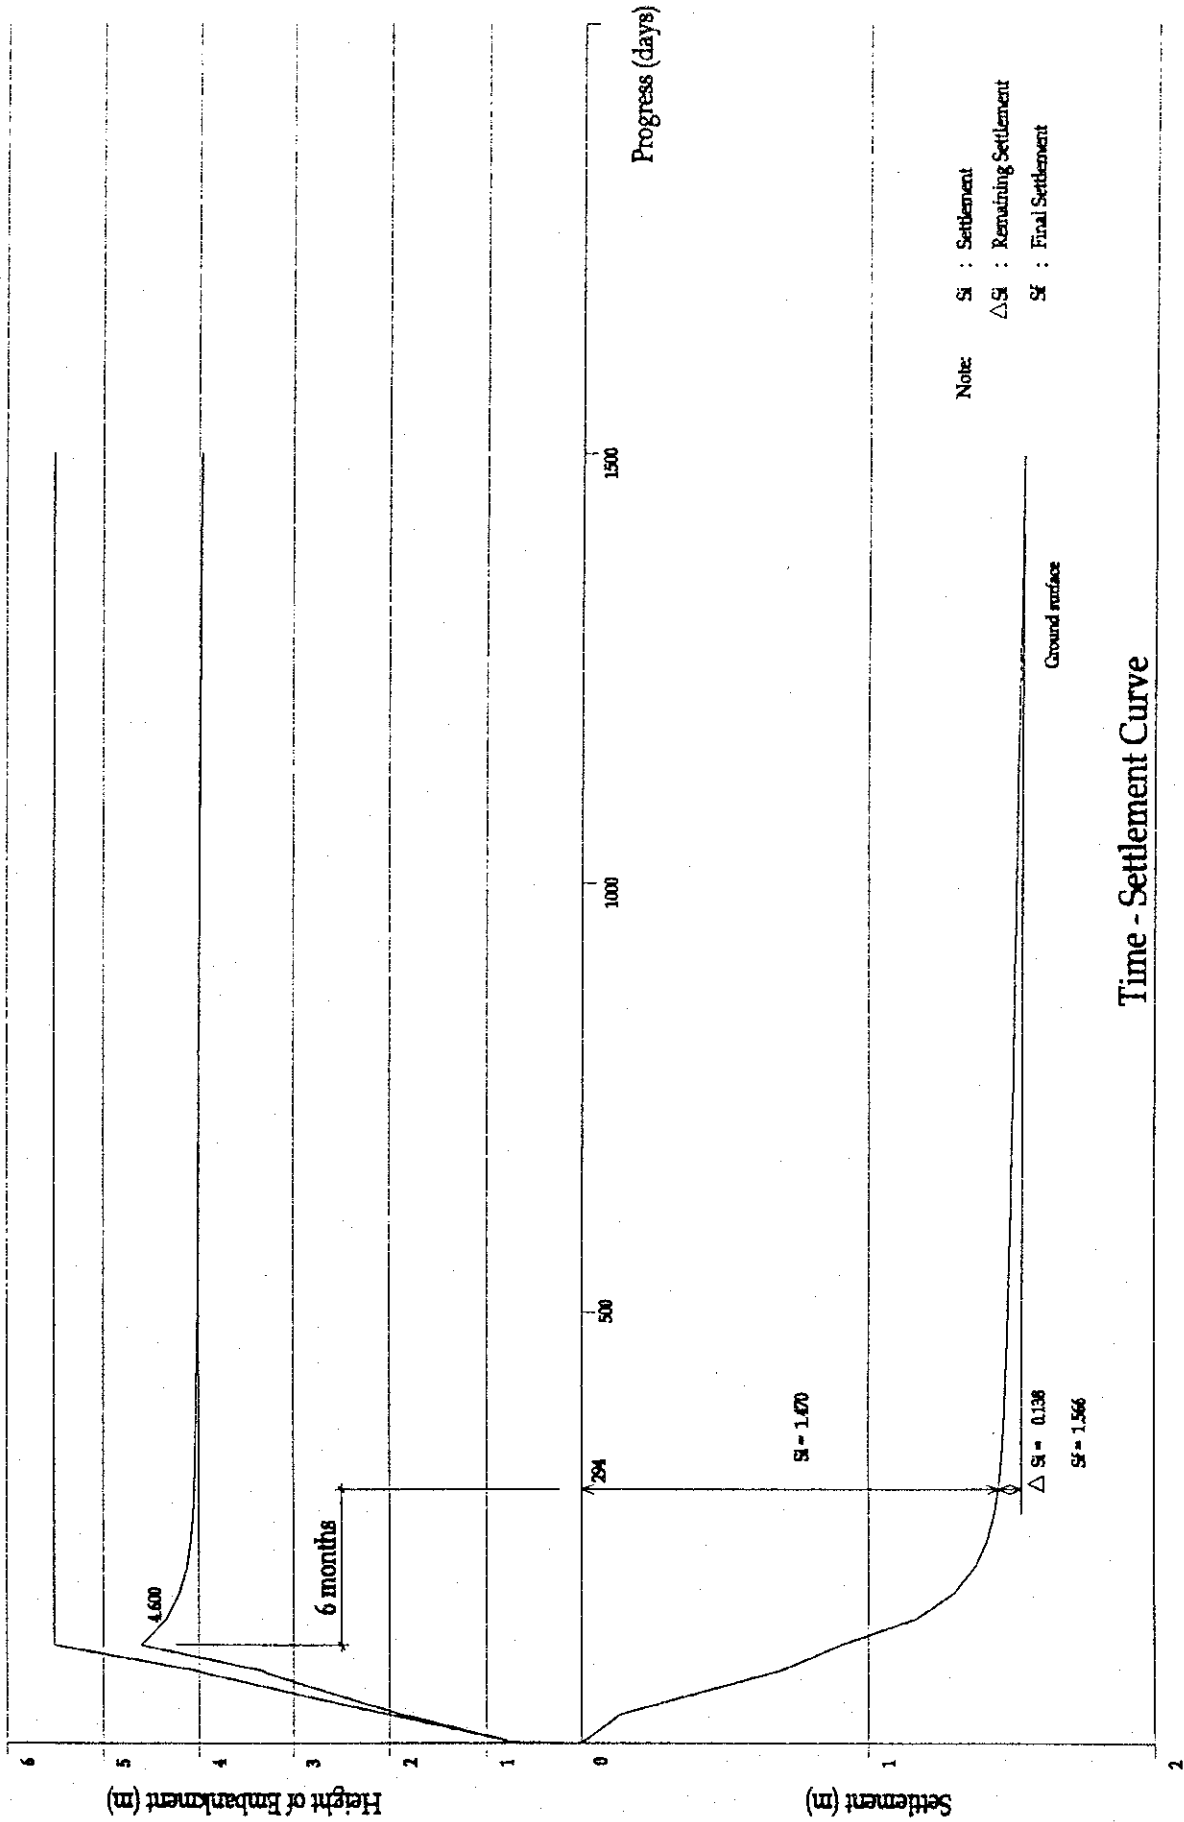

Arrangement Design of PVD H=4m Segment 1  $\Delta$  1.0m


Calculated Section

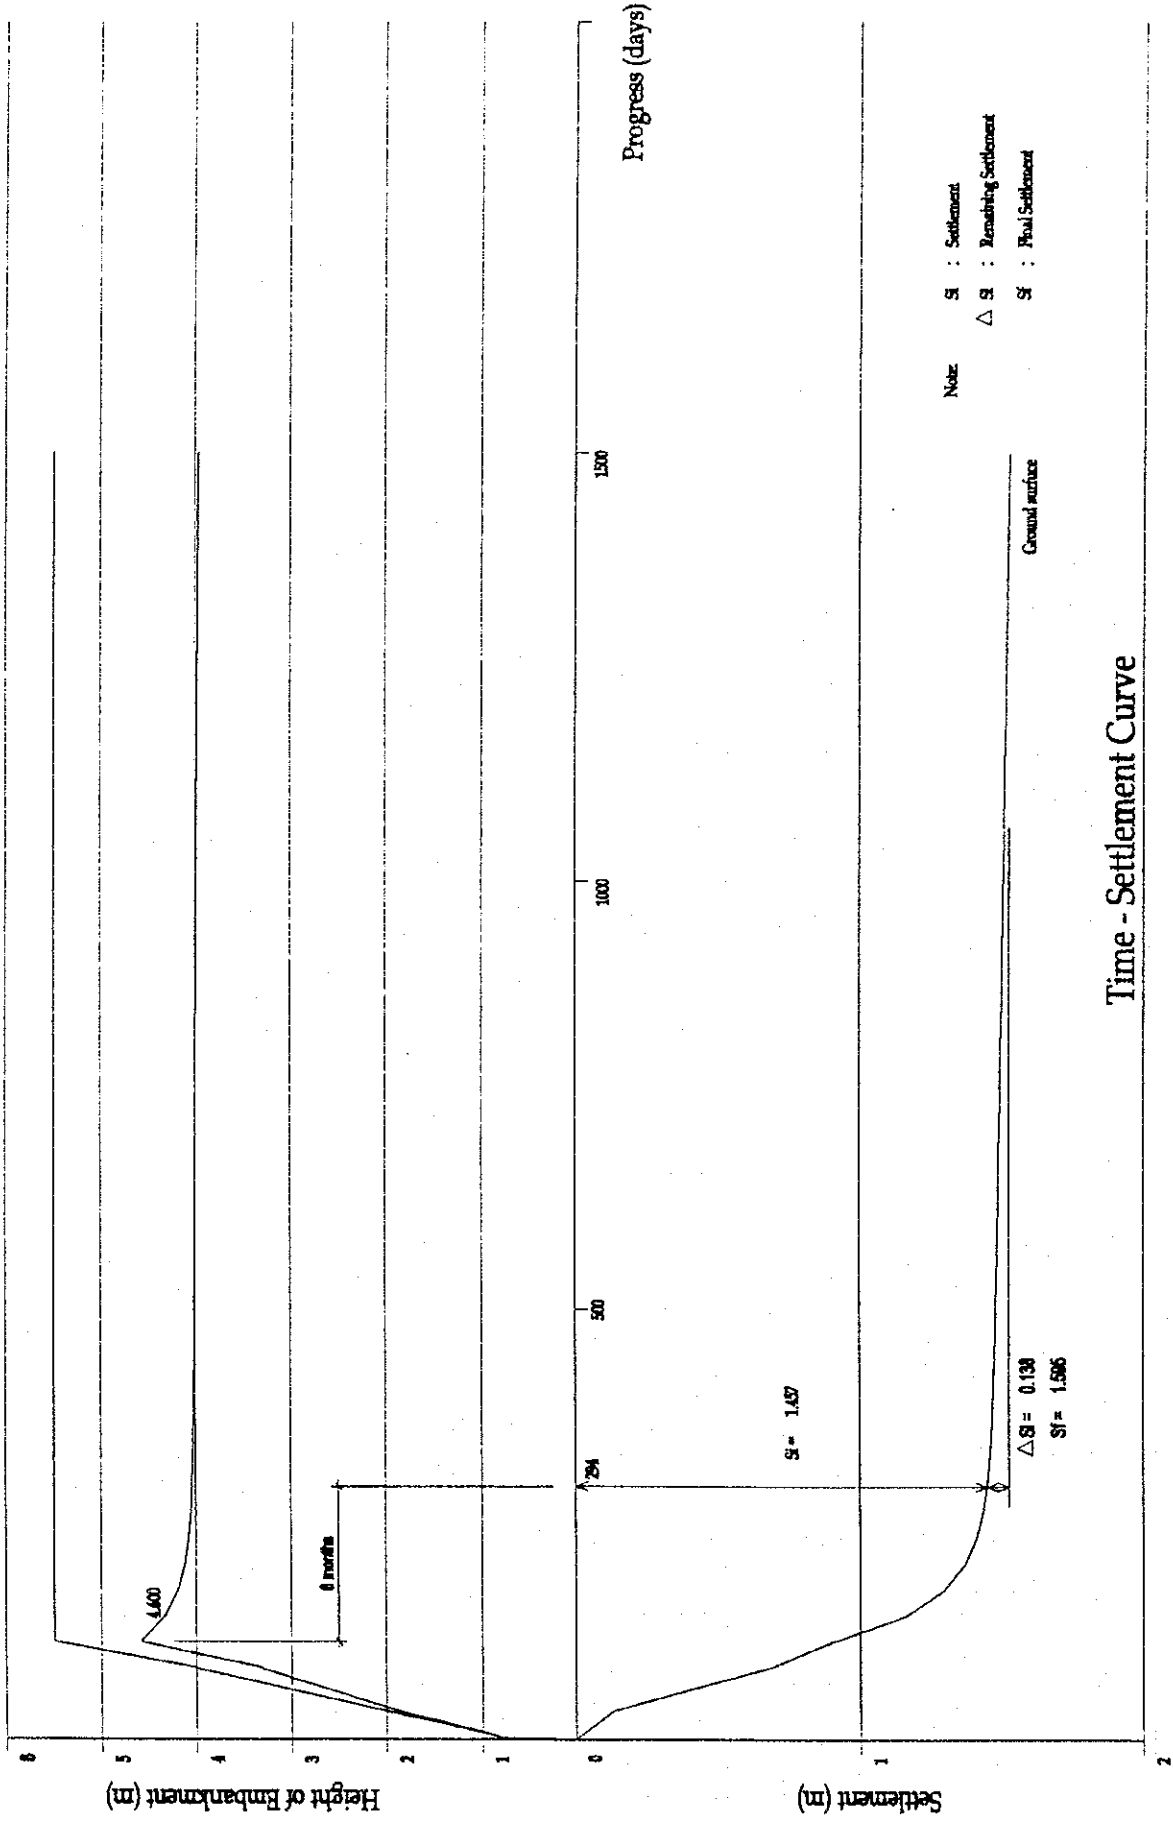

Time - Settlement Curve

Calculated Section

Arrangement Design of PVD H=4m Segment Spacing  $\Delta$  1.2m

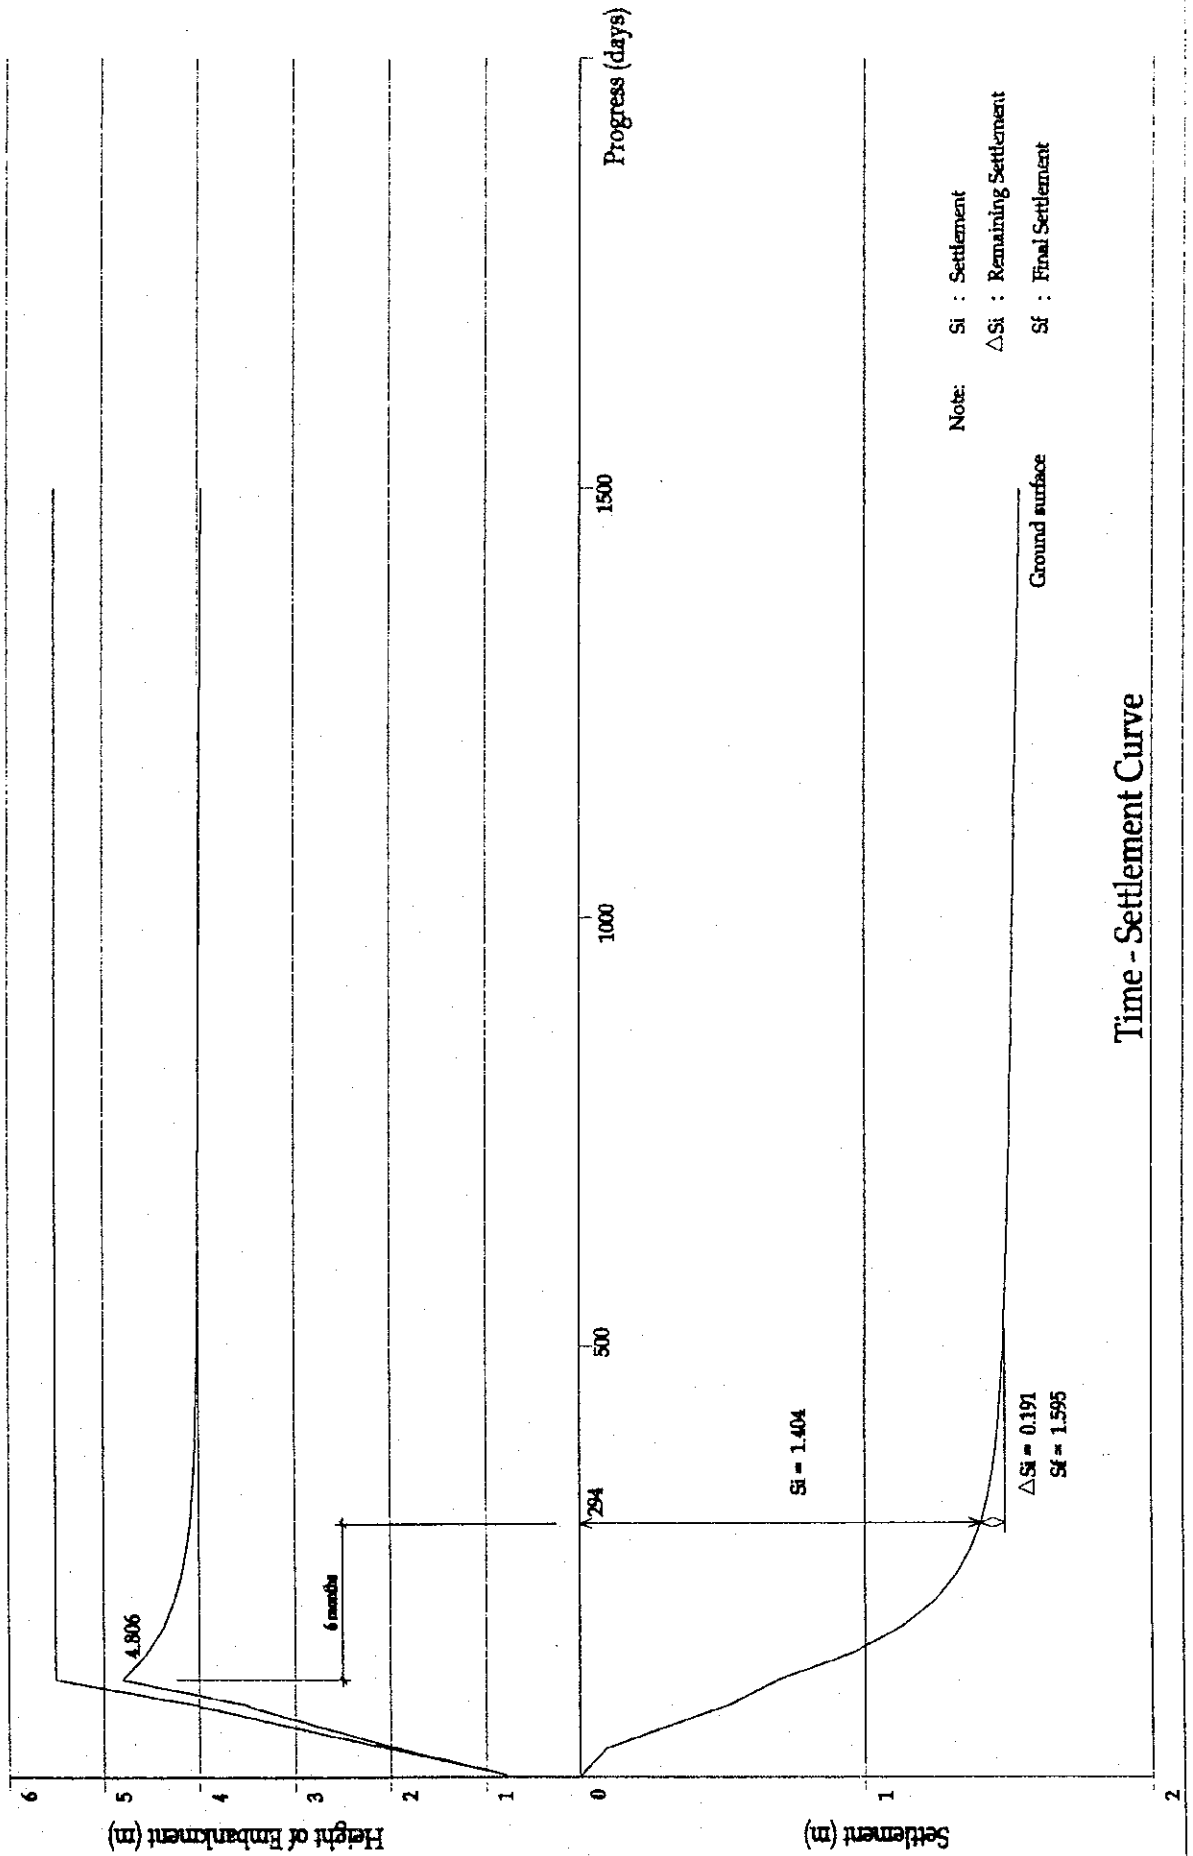


Note: Si : Settlement  
 $\Delta$ Si : Remaining Settlement  
 Sf : Final Settlement

Time - Settlement Curve


Calculated Section

Arrangement Design of PVD H=7m Segment Spacing  $\Delta$  0.8m

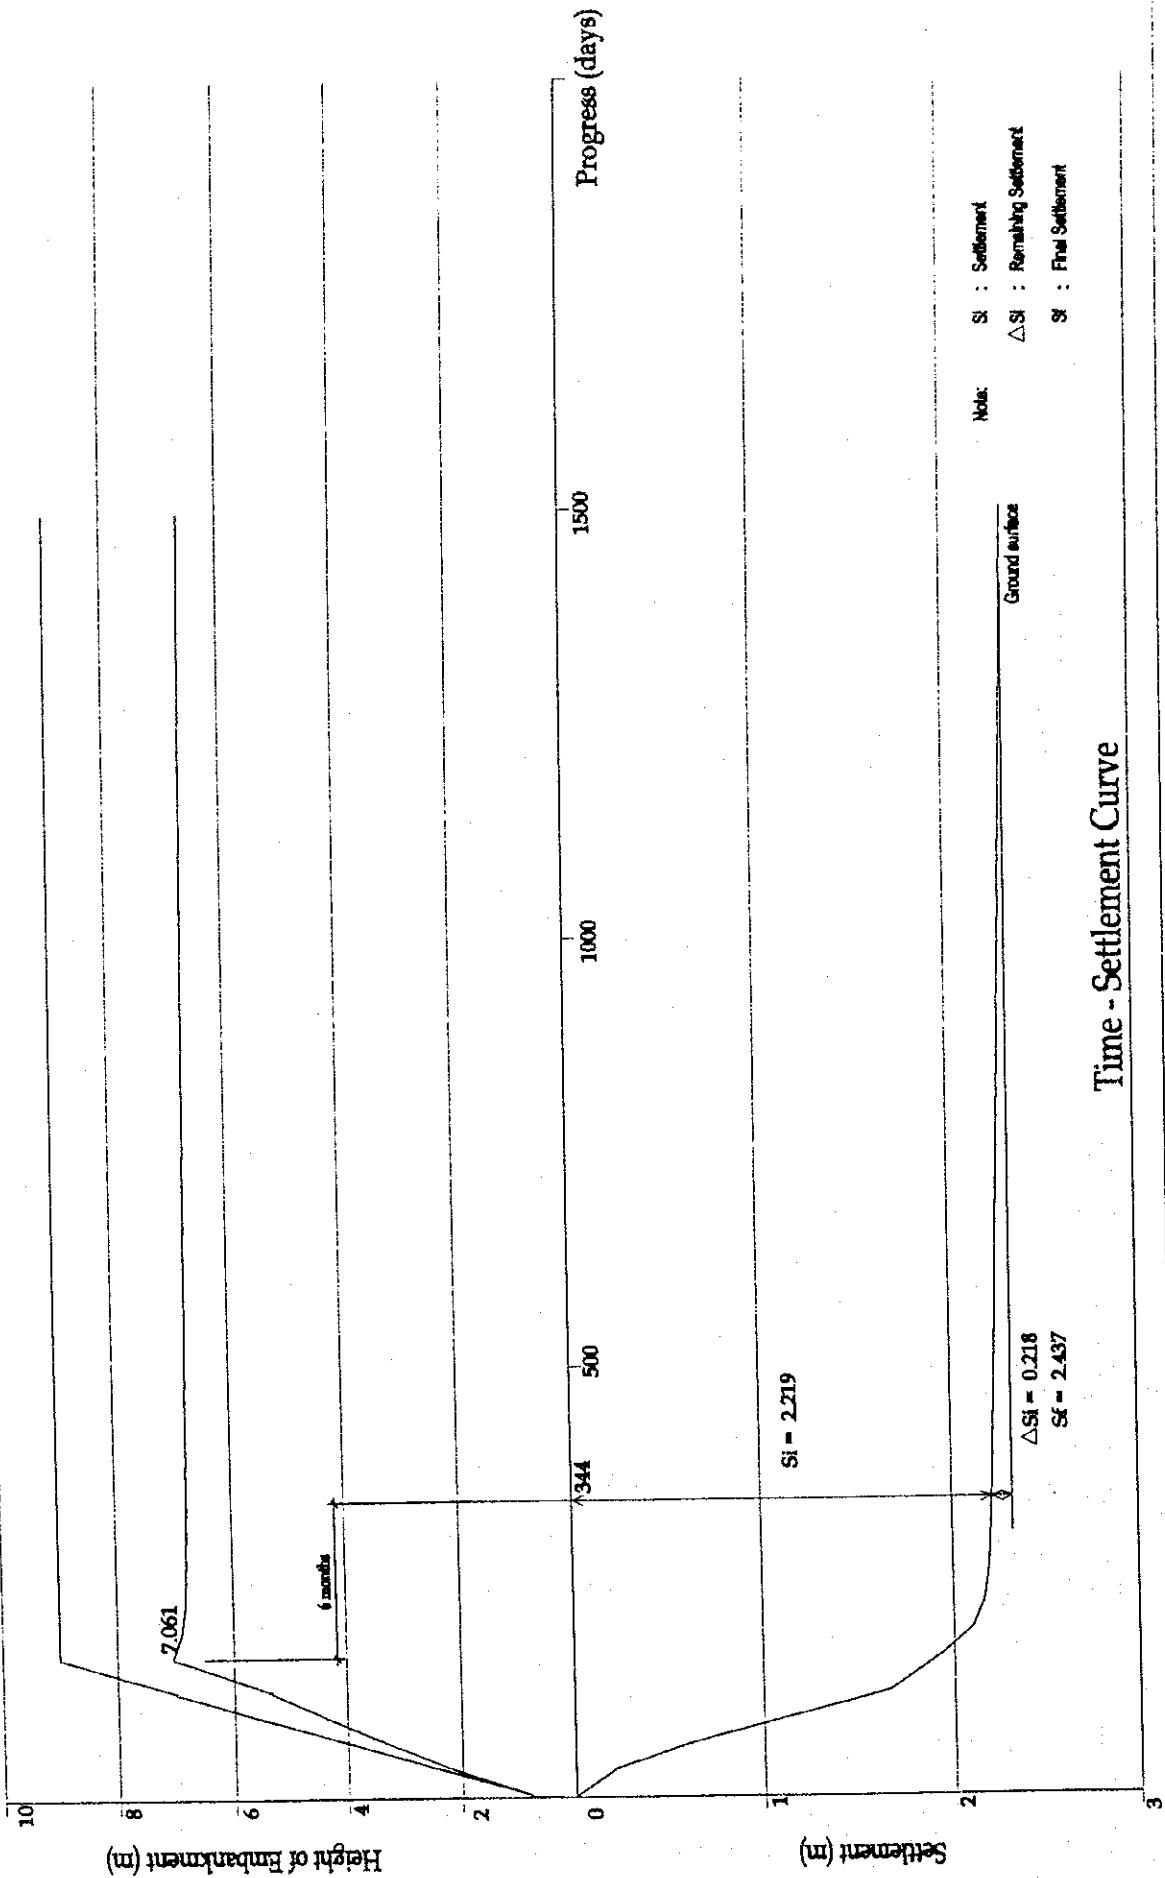

Arrangement Design of PVD H=7m Segment Spacing  $\Delta$  1.0m


Calculated Section

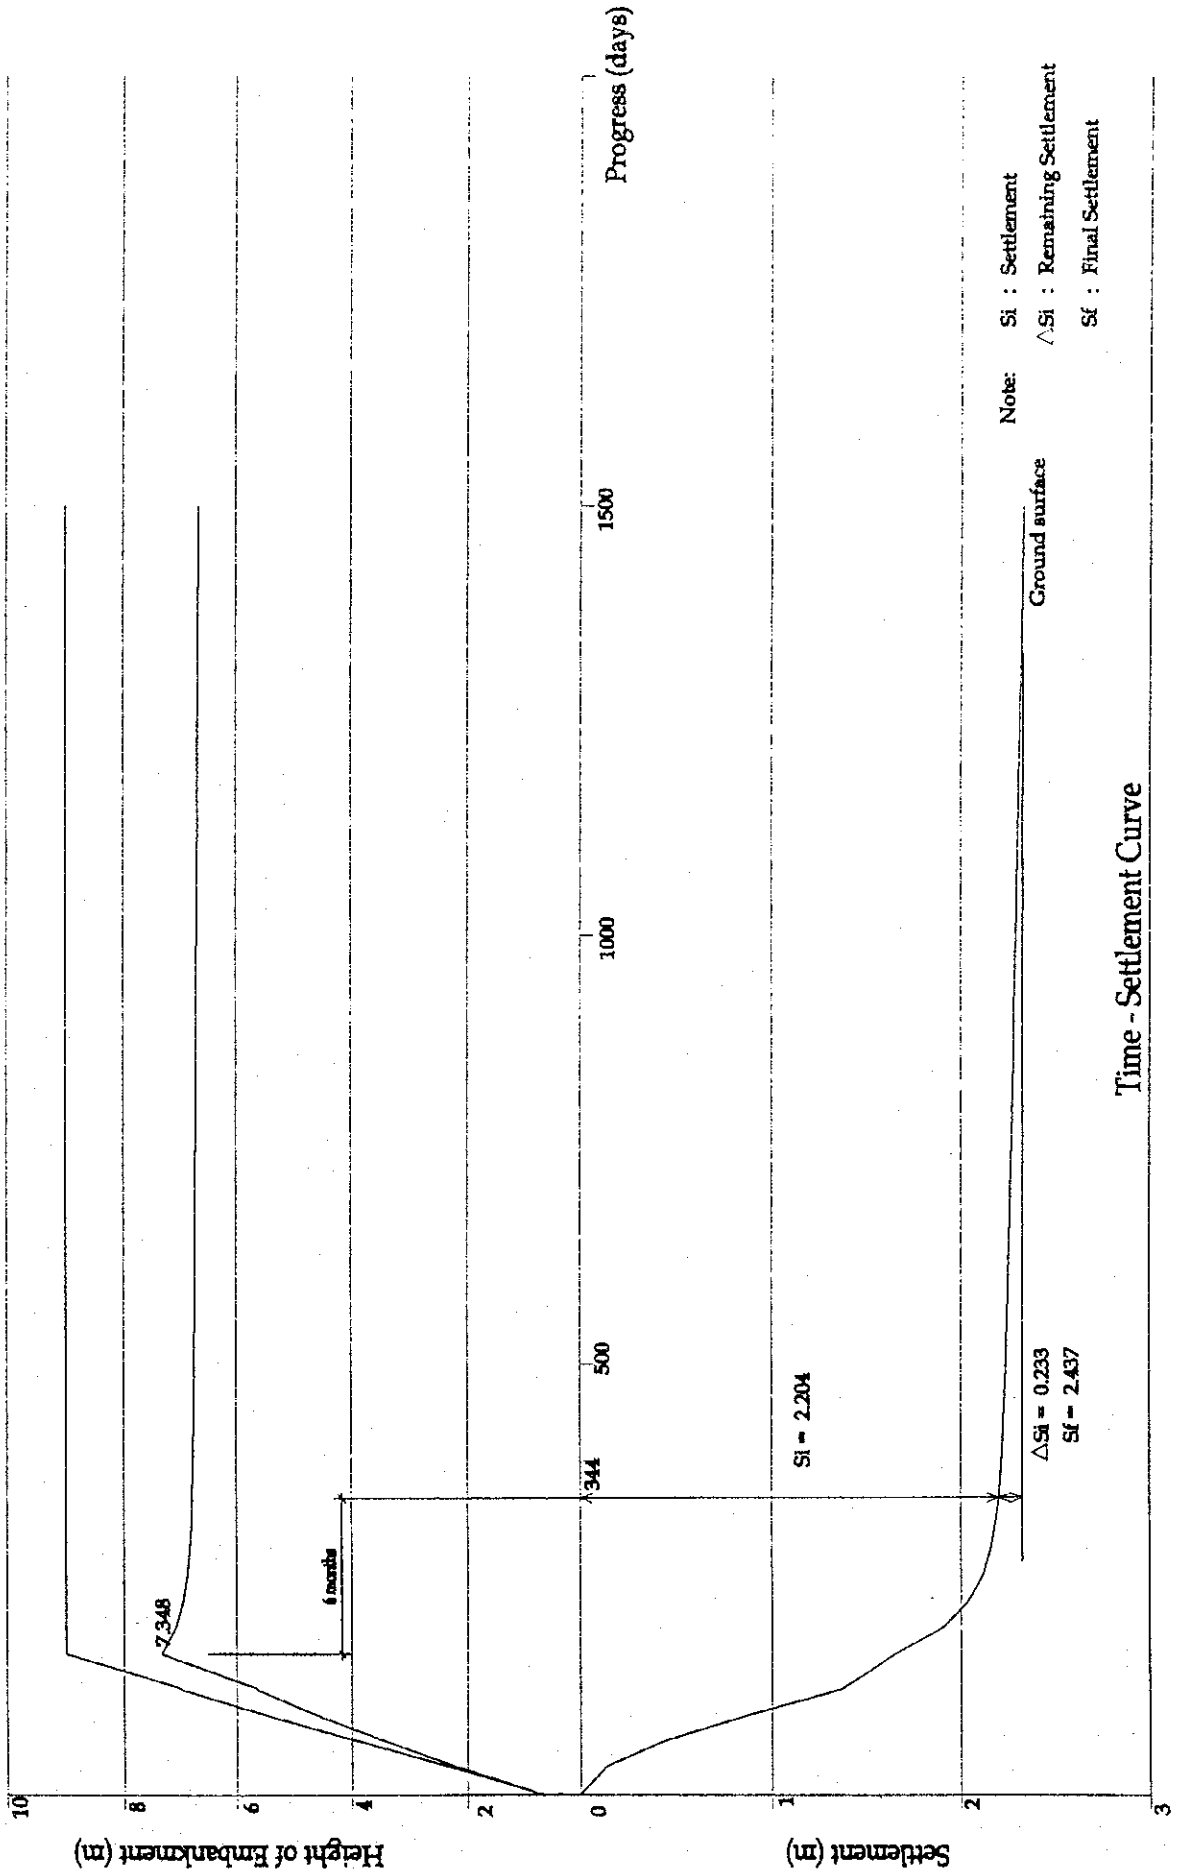



Arrangement Design of PVD H=7m Segment 1 Spacing  $\Delta$  1.2m


Calculated Section

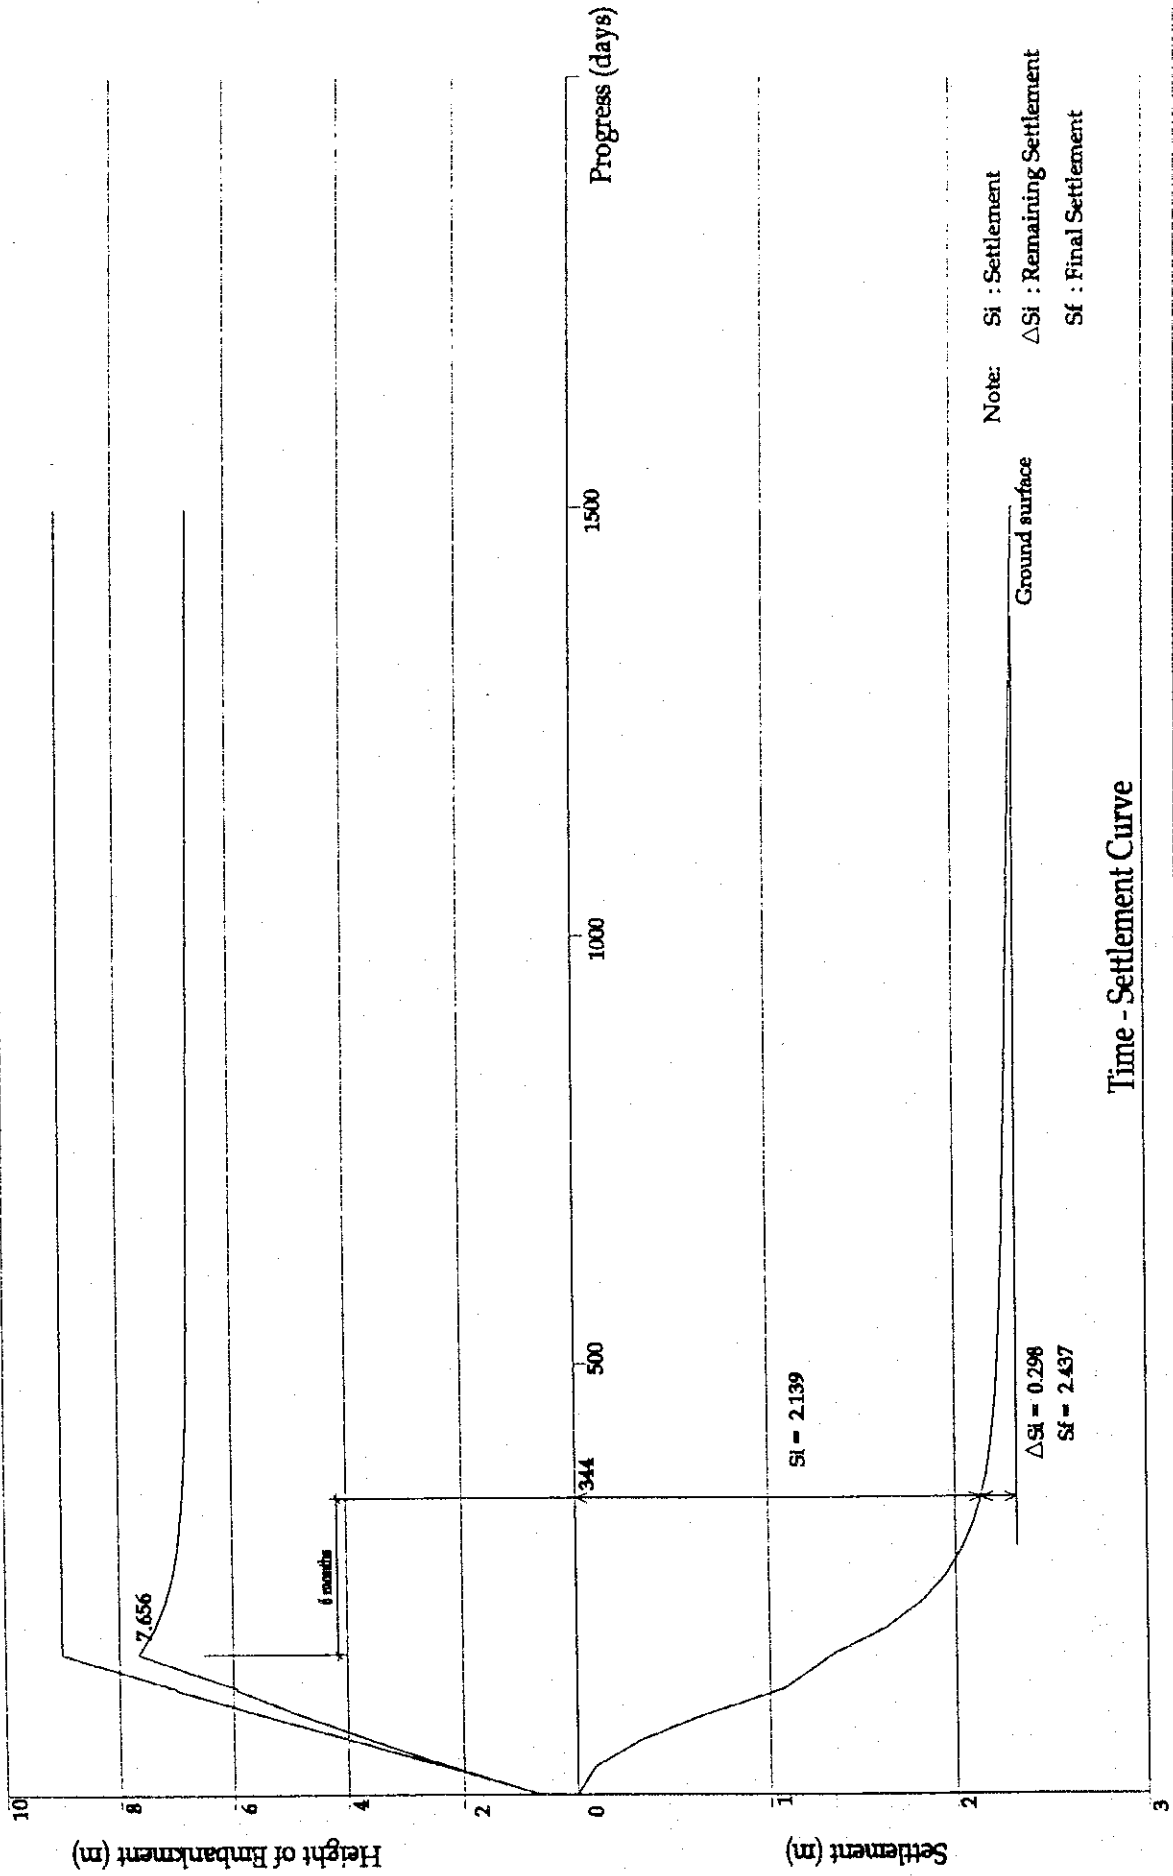

Time - Settlement Curve

Arrangement Design of PVD H=4m Segment 3 Spacing  $\Delta$  0.9m


Calculated Section

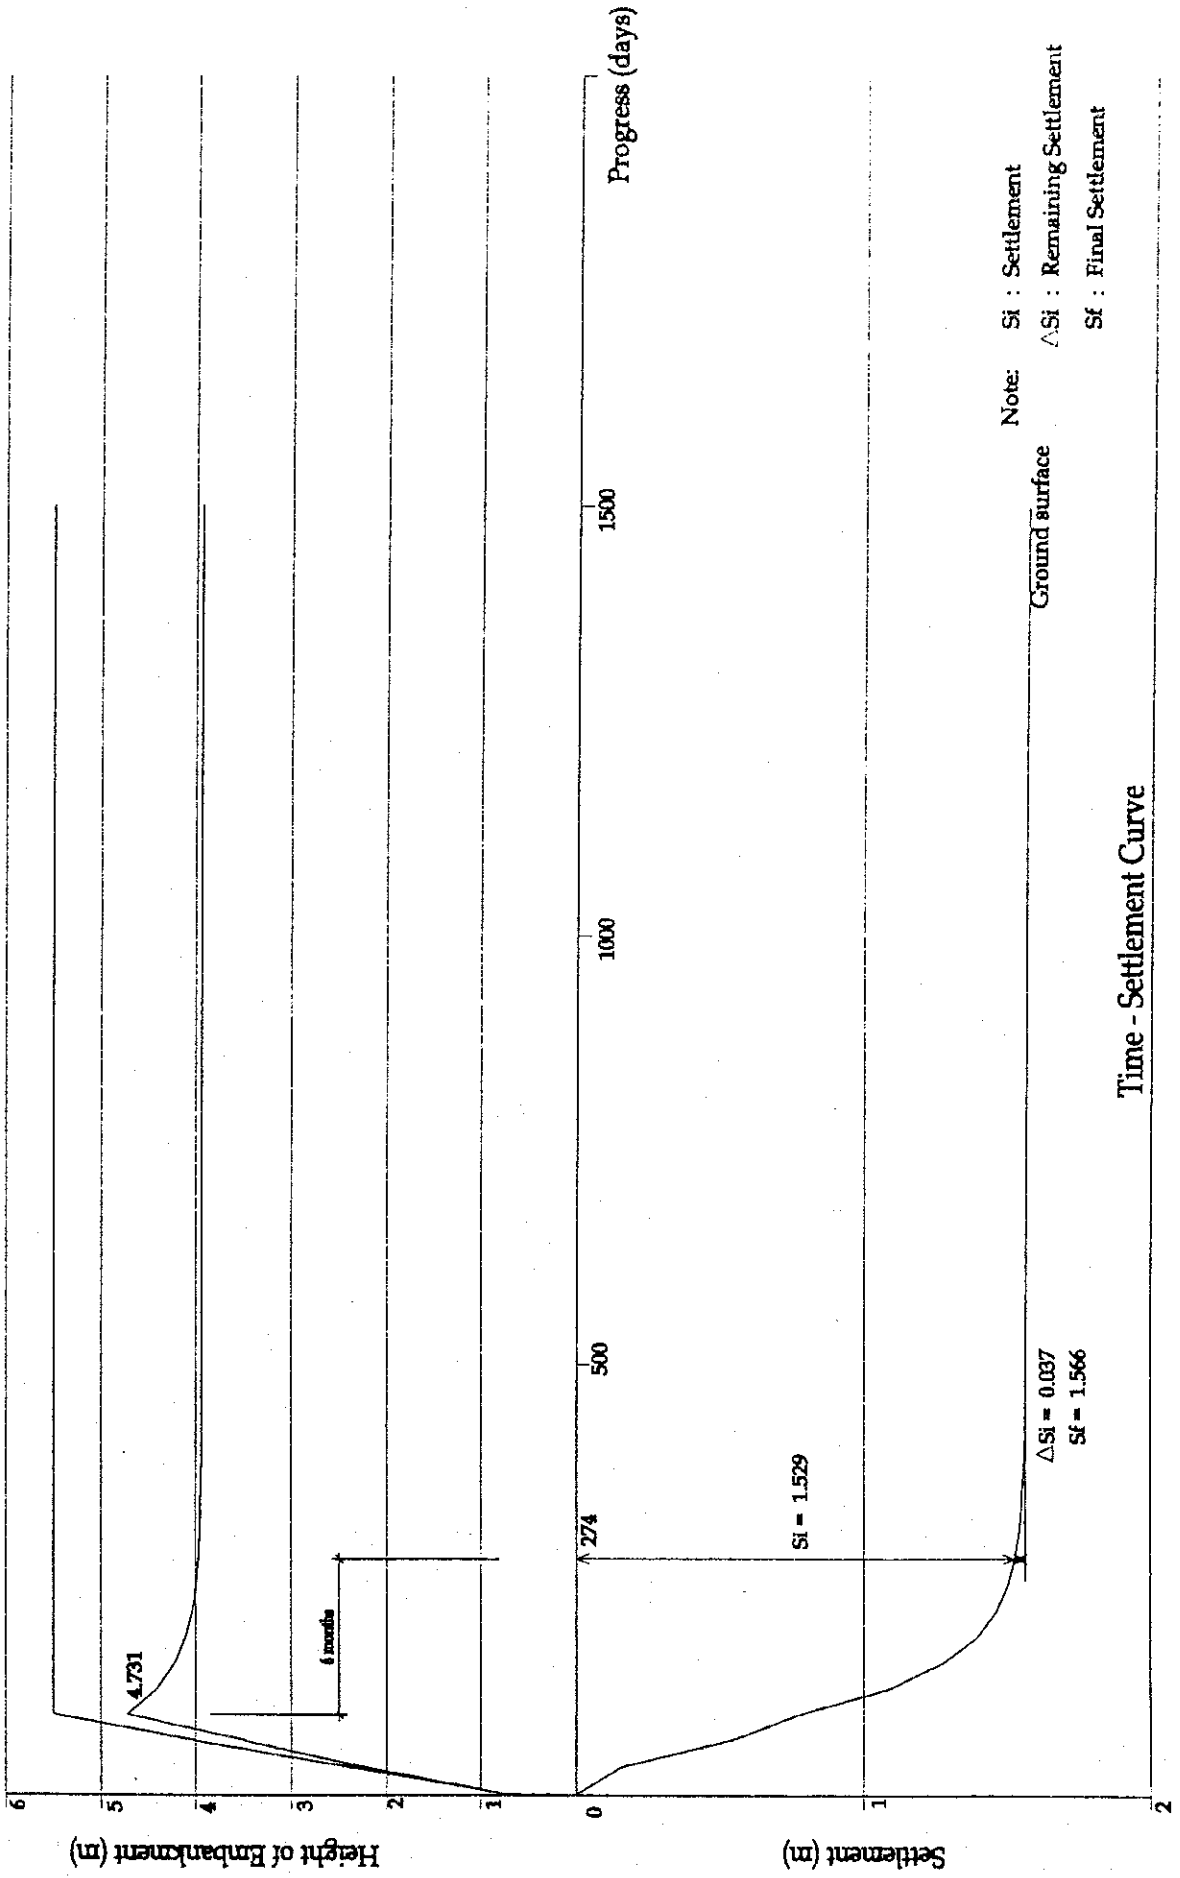

Time - Settlement Curve

Arrangement Design of PVD H=4m Segment 3 Spacing  $\Delta$  1.1m


Calculated Section

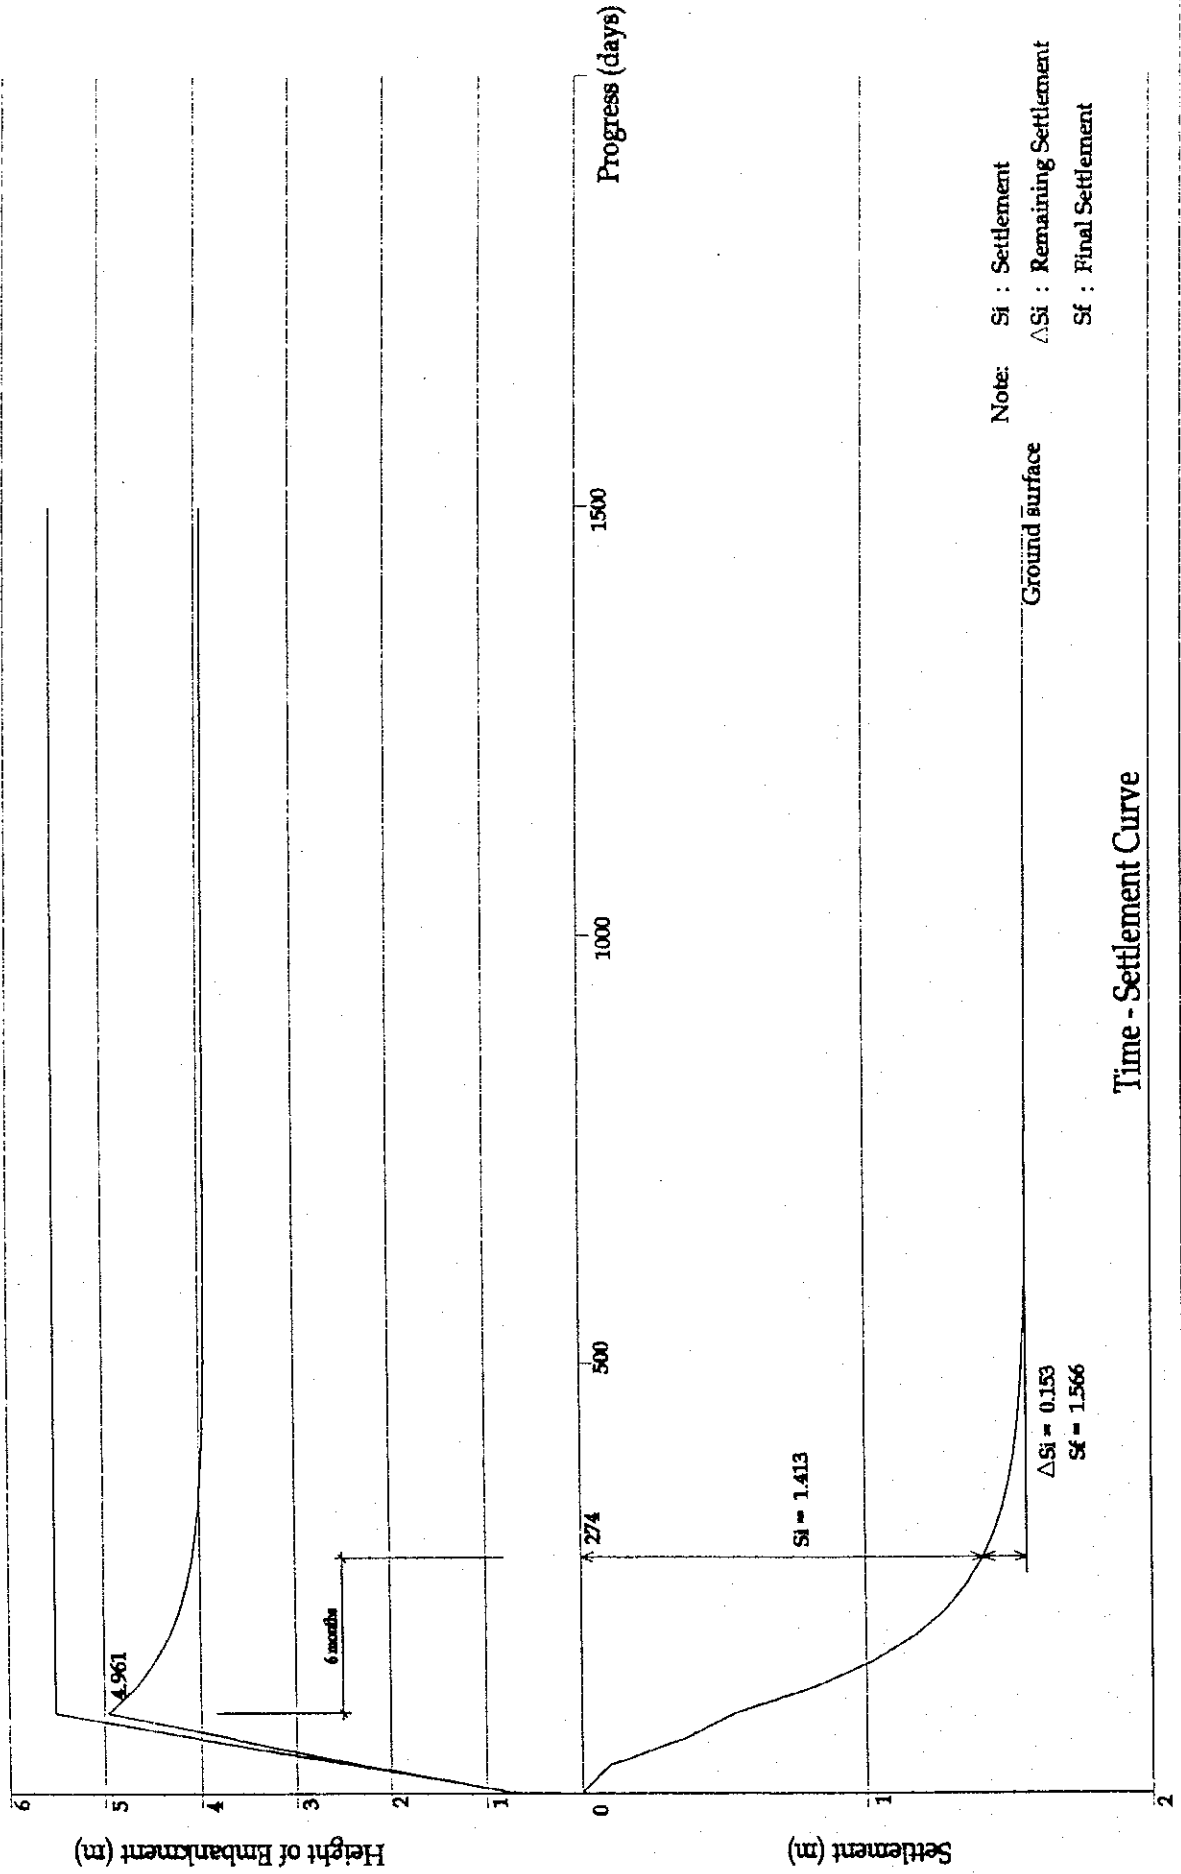

Time - Settlement Curve

Arrangement Design of PVD H=4m Segment 3 Spacing  $\Delta$  1.3m

Calculated Section

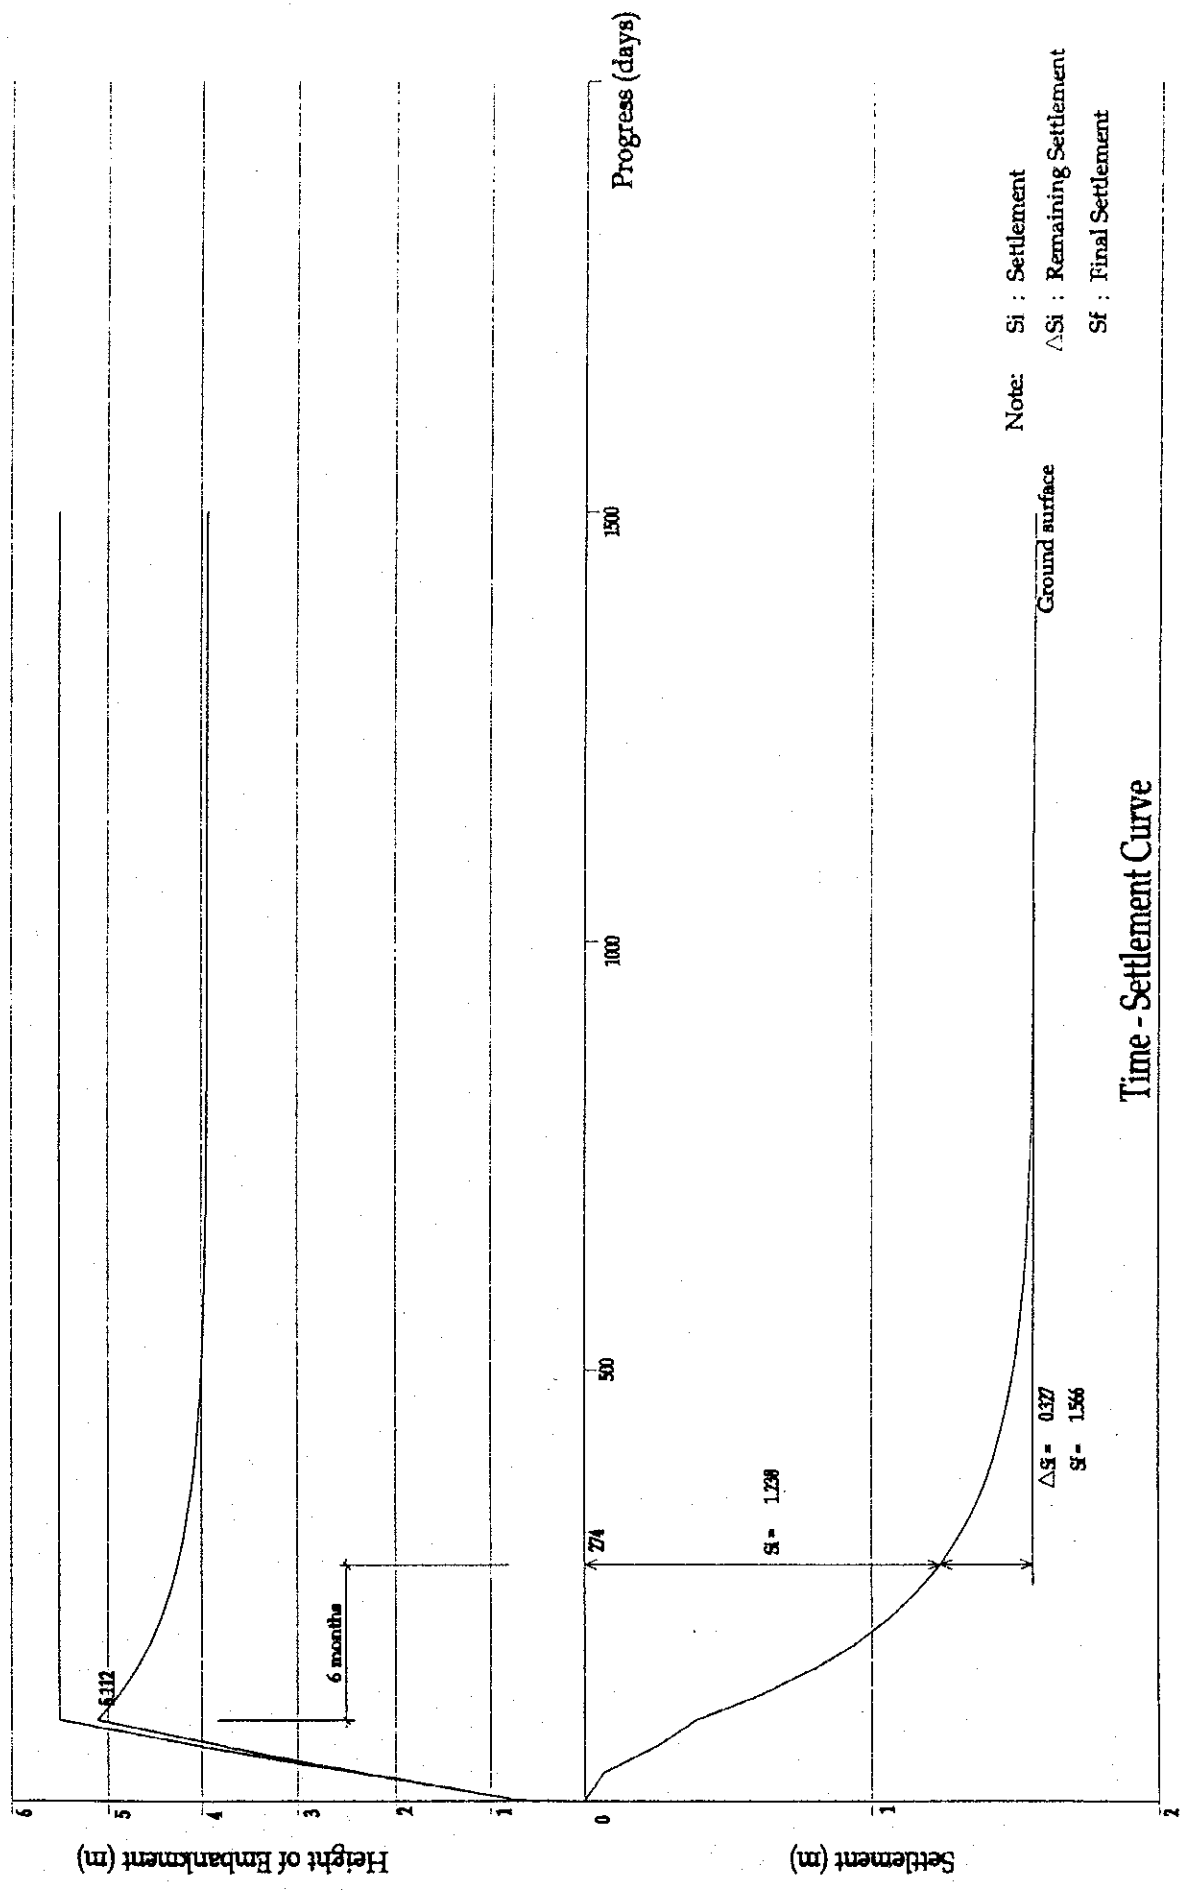



Note:  $S_i$  : Settlement  
 $\Delta S_i$  : Remaining Settlement  
 $S_f$  : Final Settlement

Time - Settlement Curve

Arrangement Design of PVD H=7m Segment 3 Spacing  $\Delta$  0.9m

Calculated Section

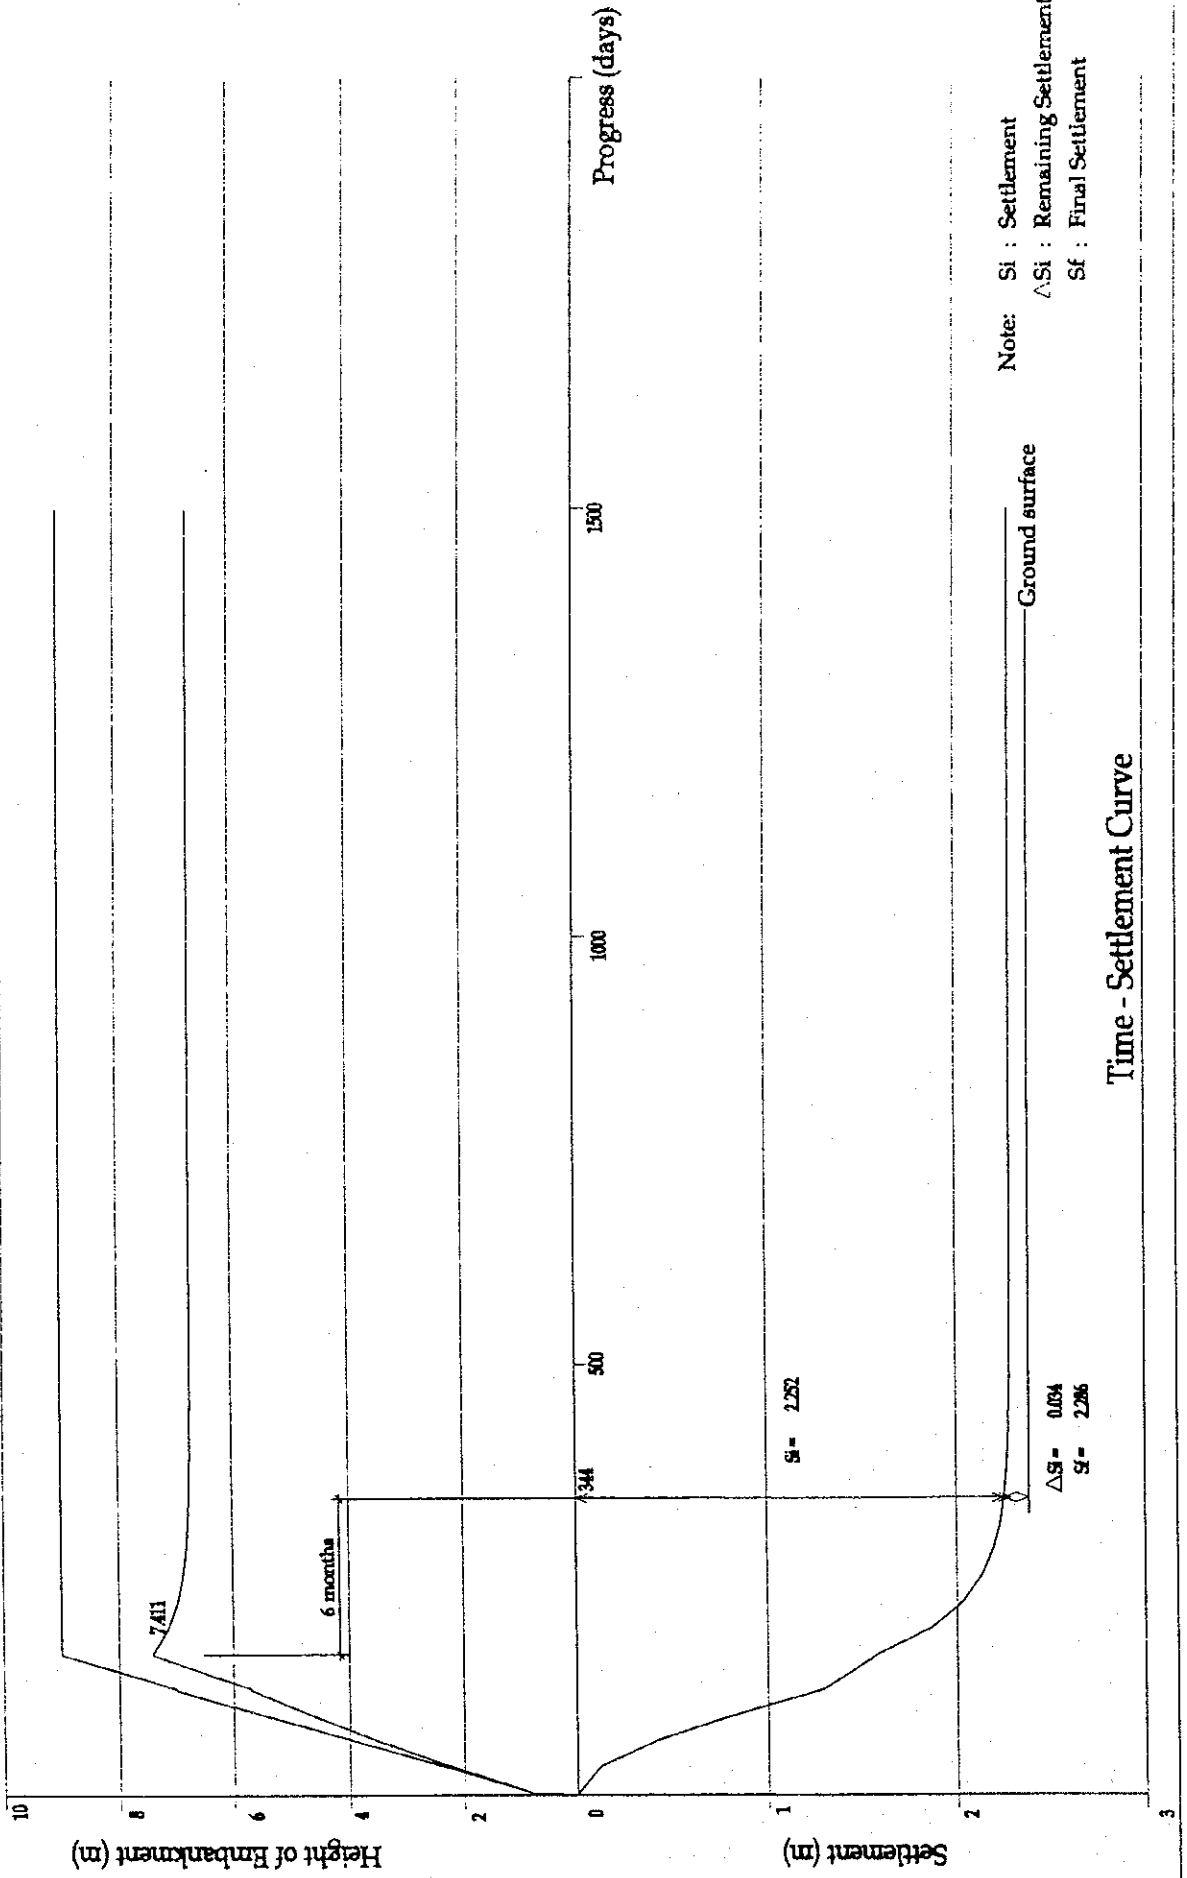


Note: Si : Settlement  
 $\Delta$ Si : Remaining Settlement  
 Sf : Final Settlement

Time - Settlement Curve

Arrangement Design of PVD H=7m Segment 3 Spacing  $\Delta$  1.1m


Calculated Section

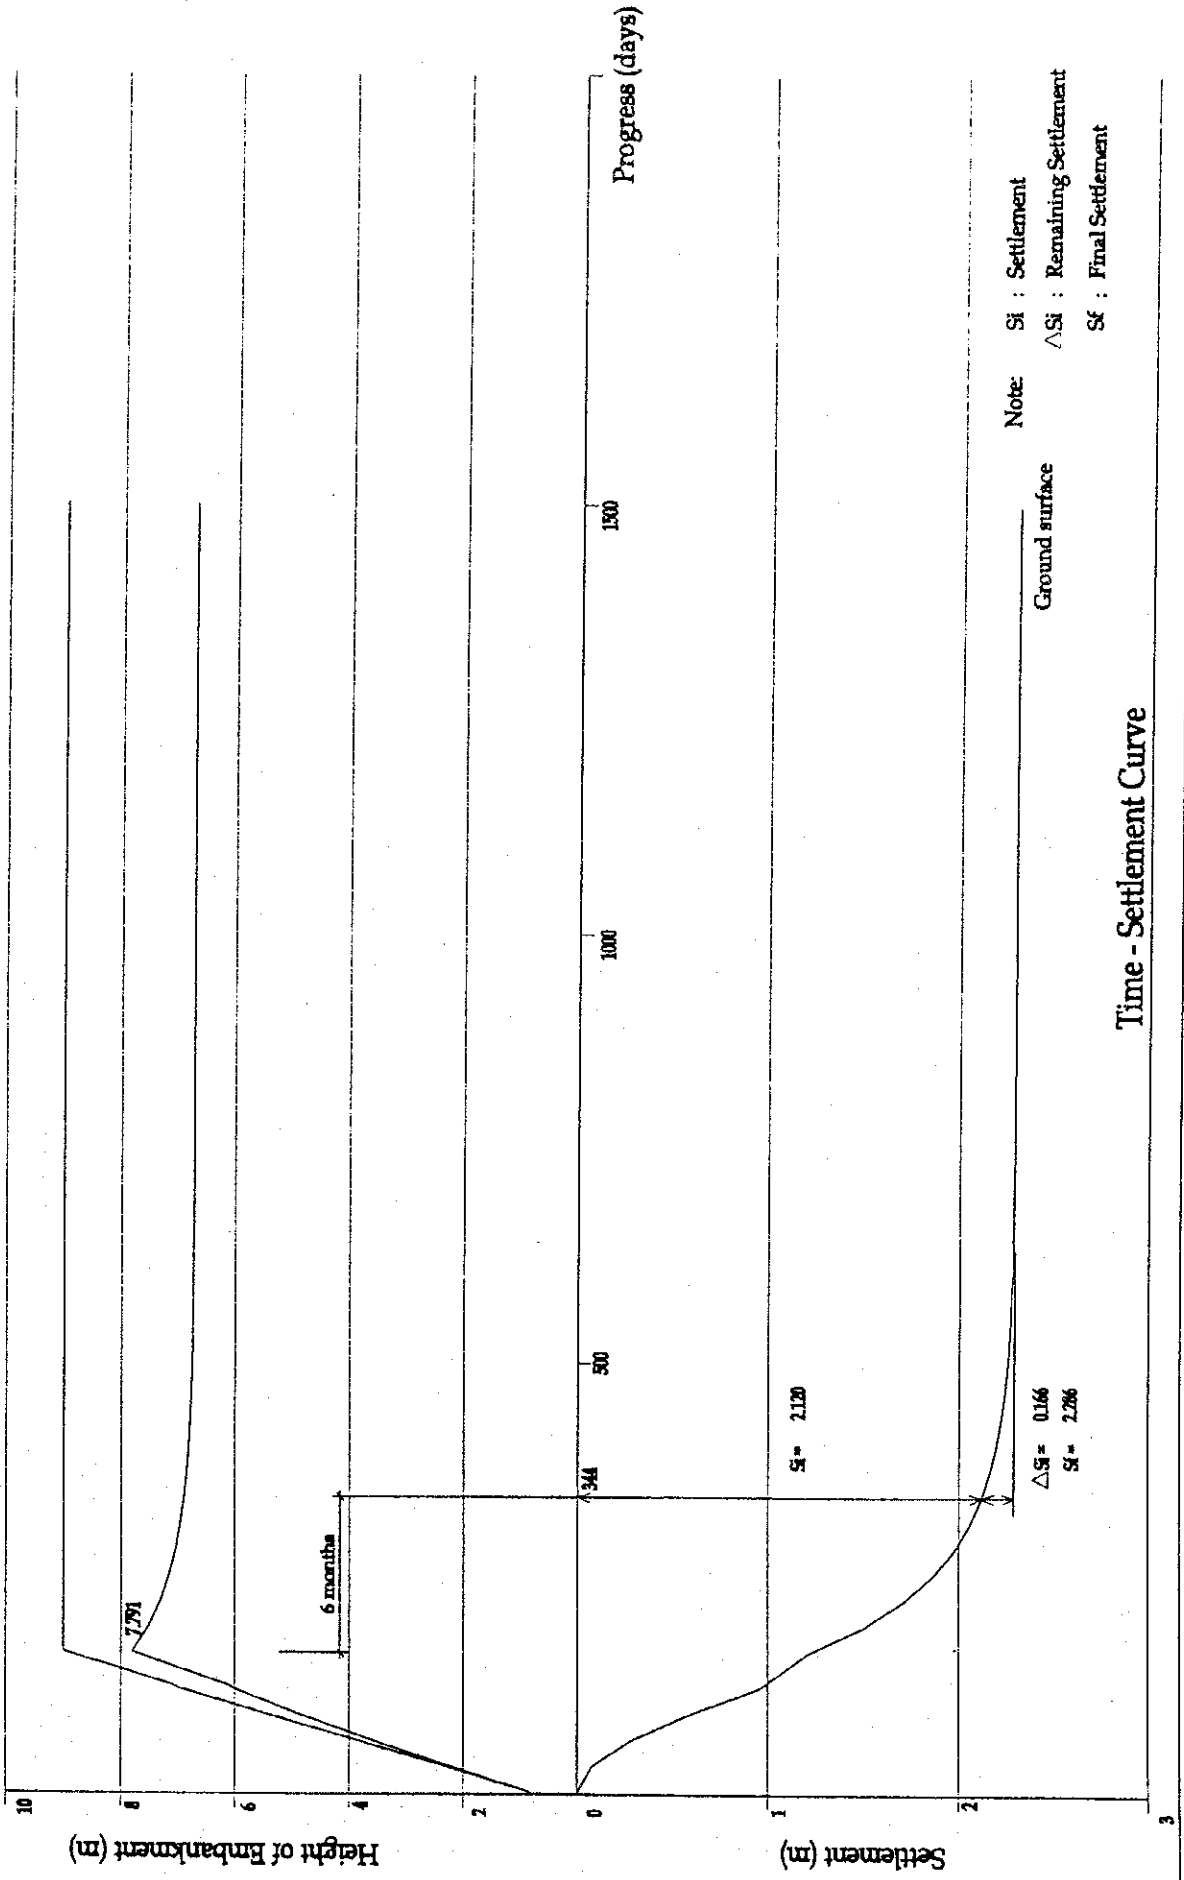

Time - Settlement Curve

Arrangement Design of PVD H=7m Segment 3 Spacing  $\Delta$  1.3m


Calculated Section

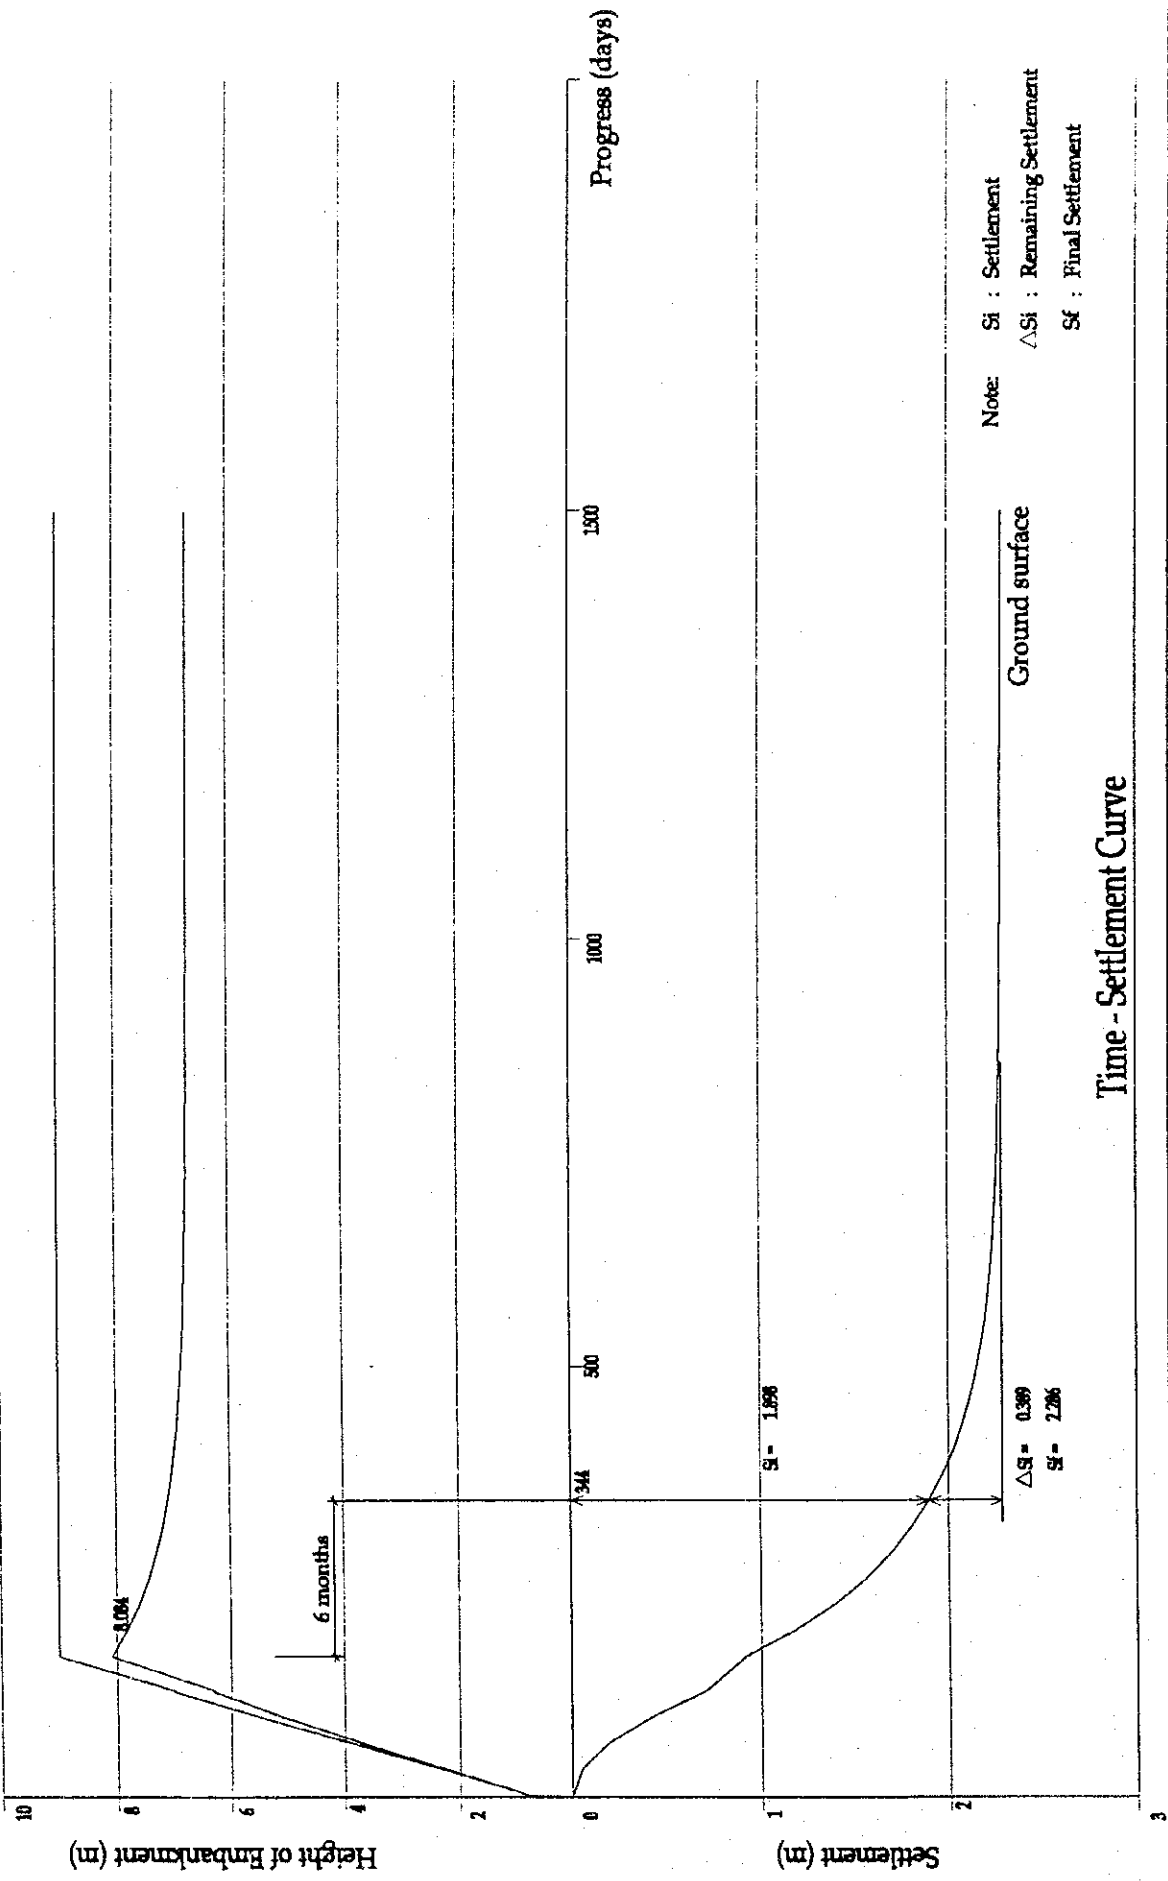

Time - Settlement Curve

Arrangement Design of PVD H=4m Segment 4 Spacing  $\Delta$  1.1m


Calculated Section

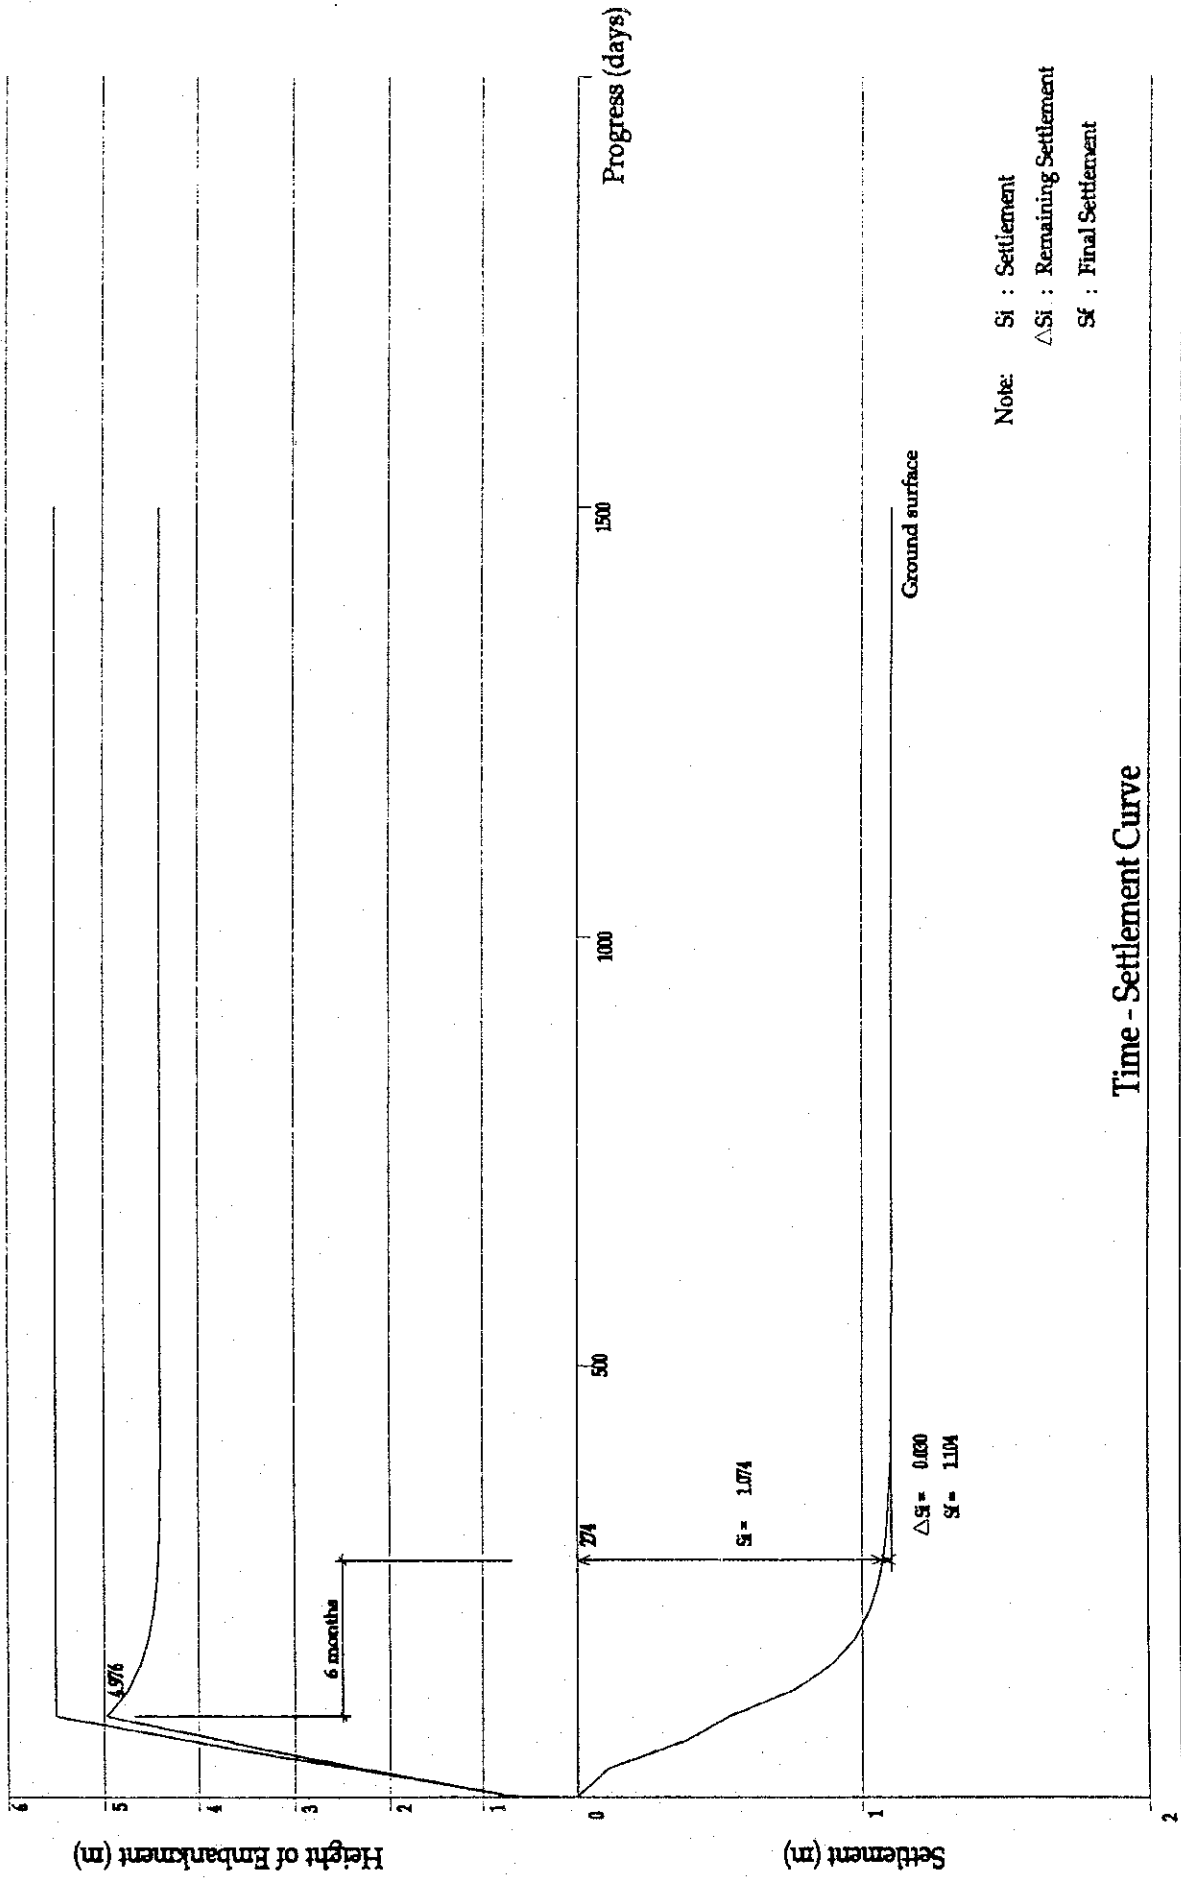



Arrangement Design of PVD H=4m Segment 4 Spacing  $\Delta$  1.3m



Calculated Section

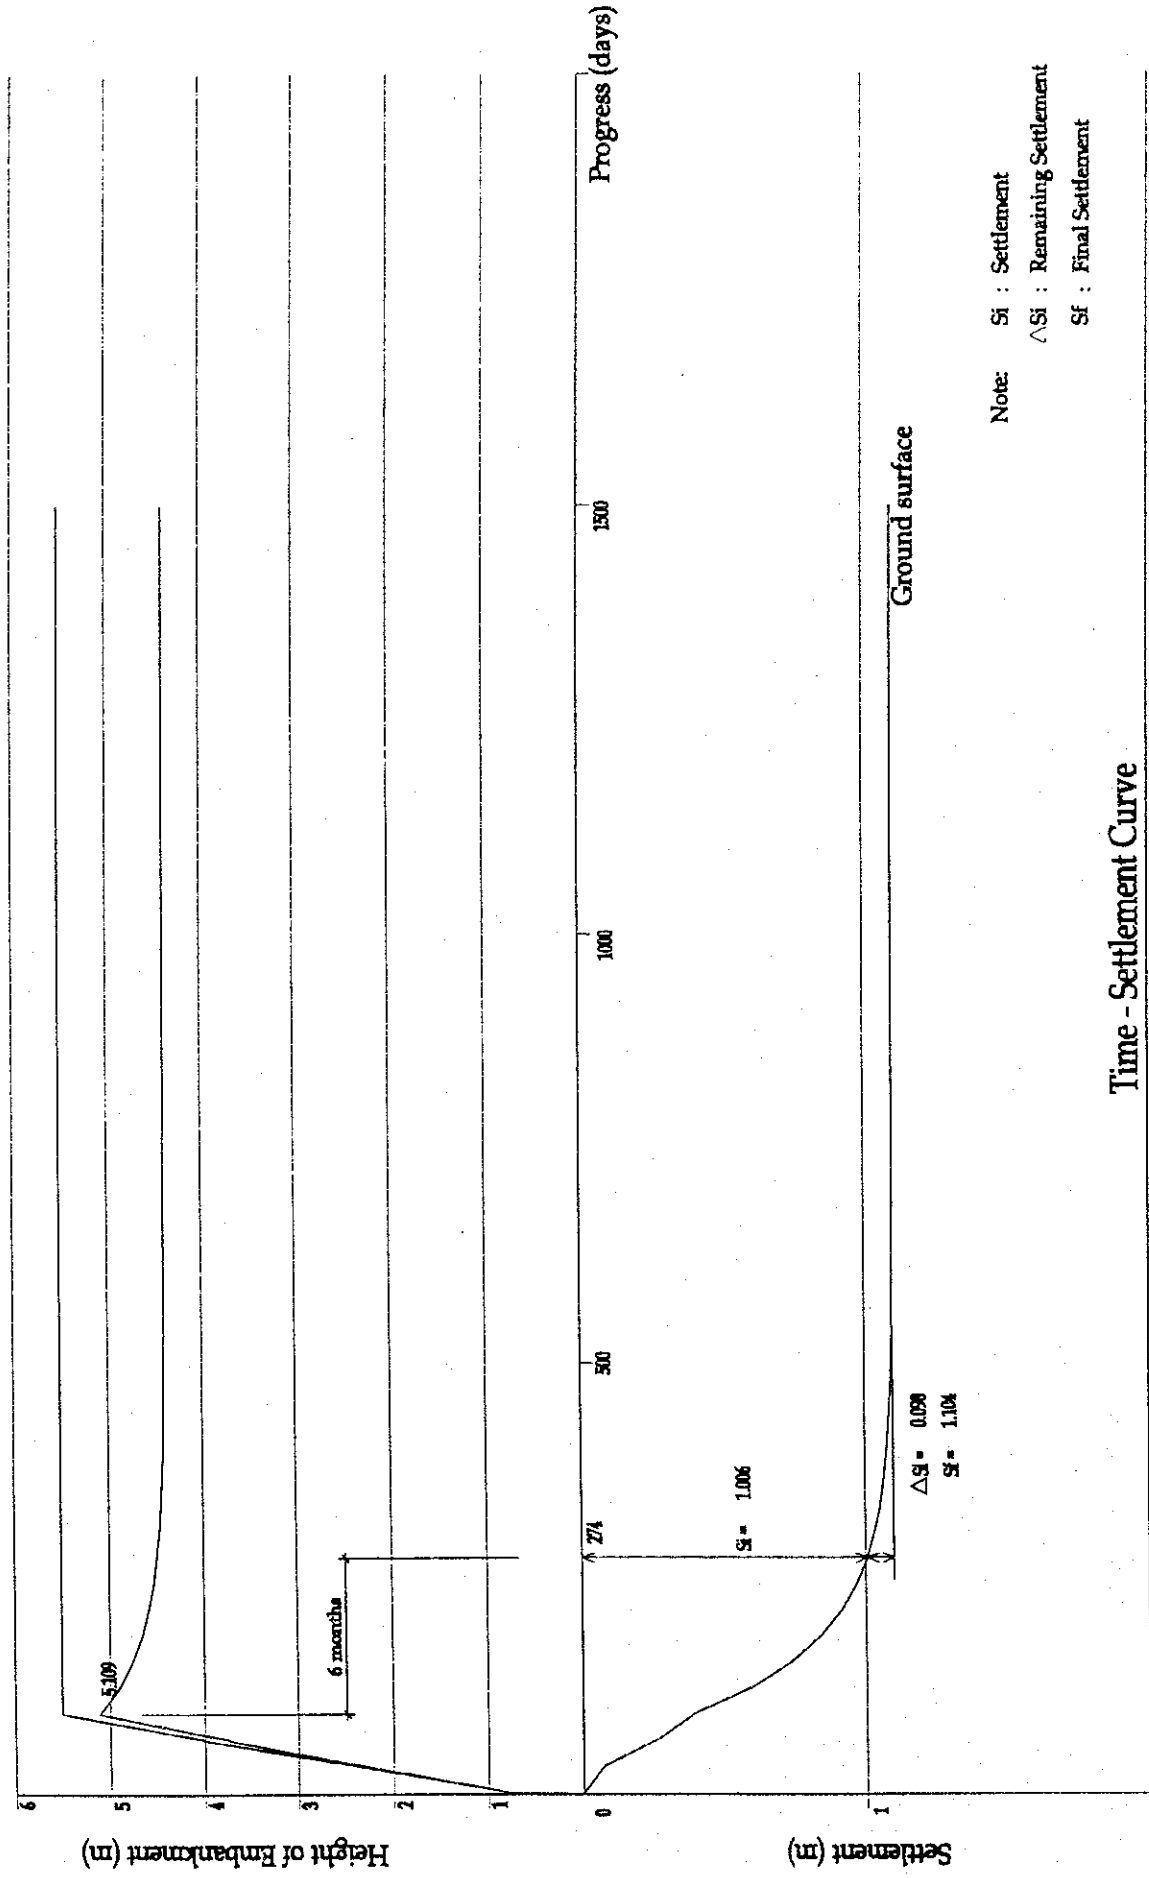

Time - Settlement Curve

Arrangement Design of PVD H=4m Segment 4 Spacing  $\Delta$  1.5m


Calculated Section

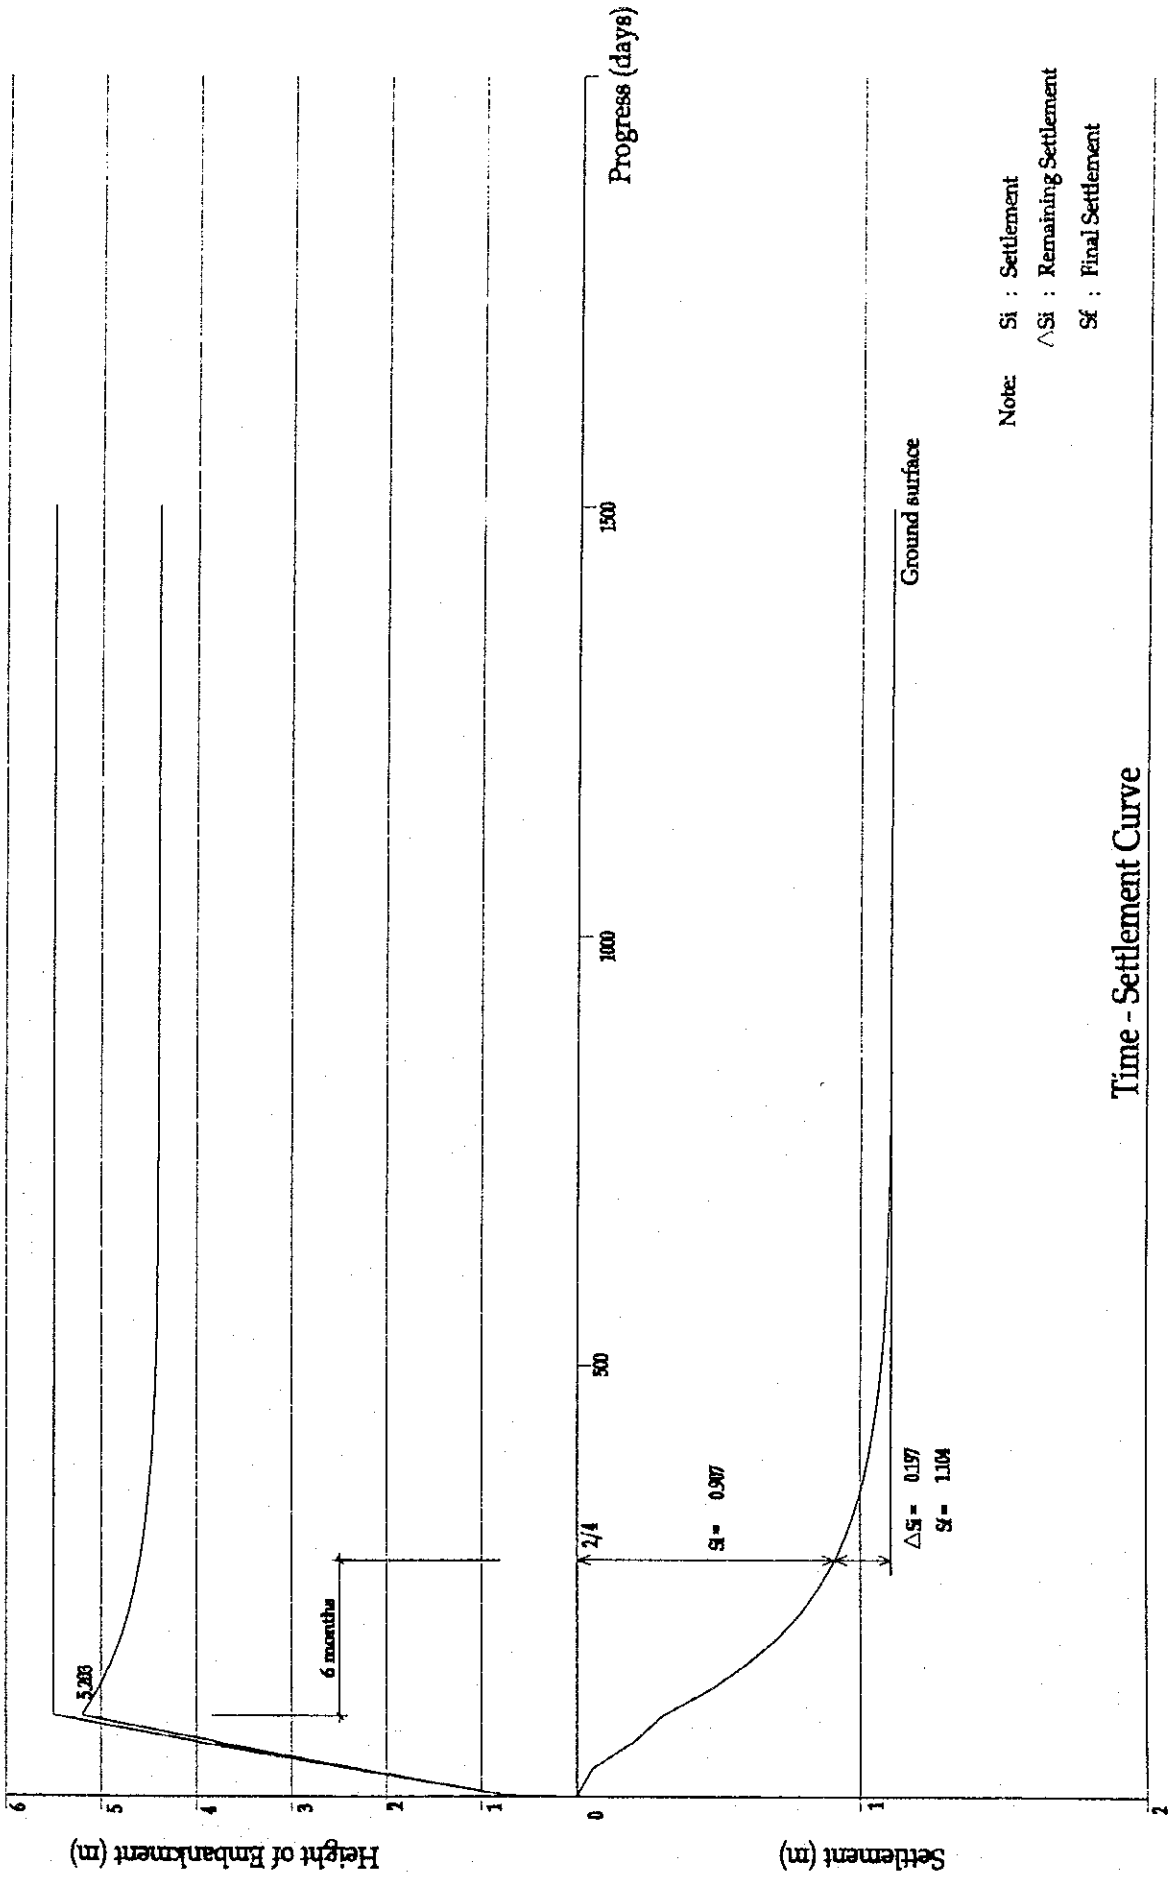

Time - Settlement Curve


Arrangement Design of PVD H=7m Segment 4 Spacing  $\Delta$  1.1m

Calculated Section

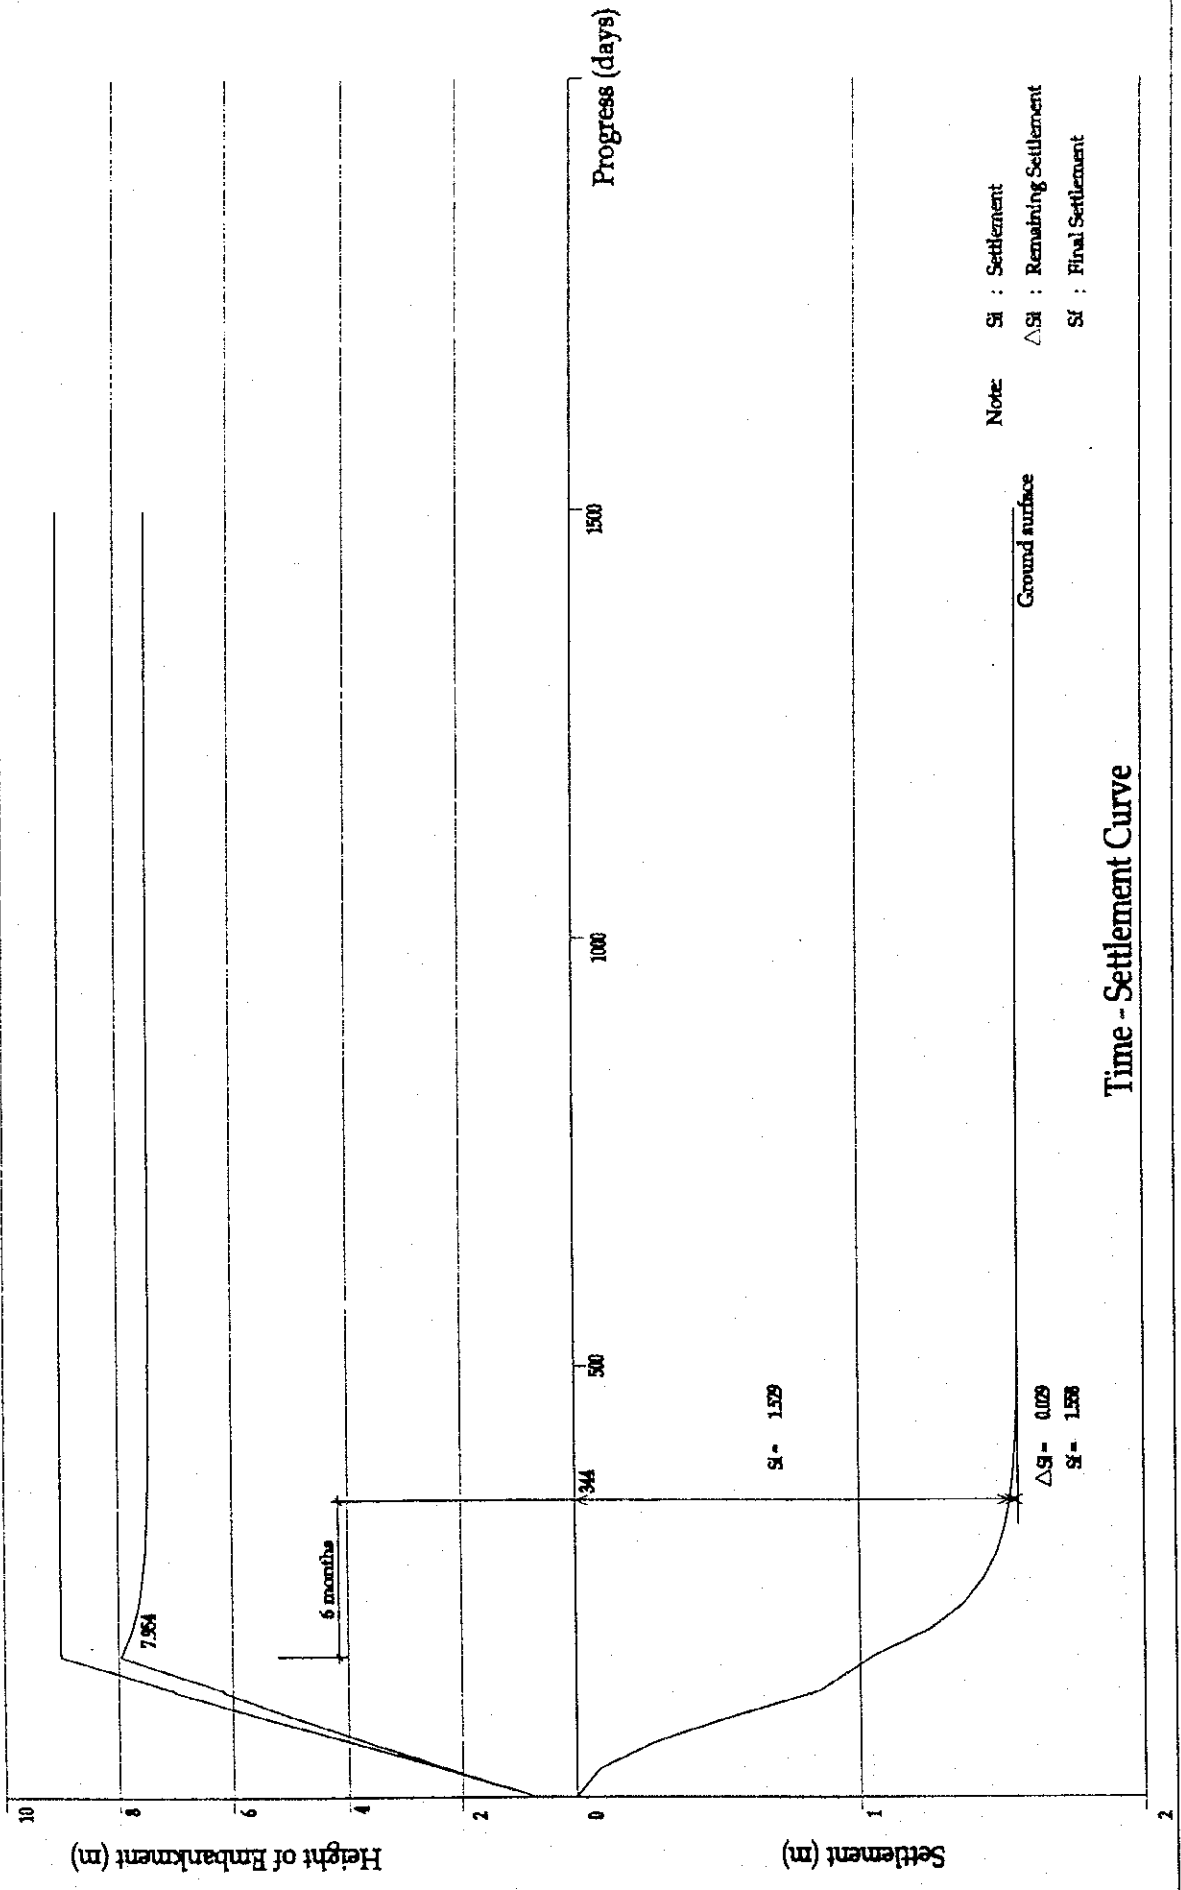

Arrangement Design of PVD H=7m Segment 4 Spacing  $\Delta 1.3m$


Calculated Section

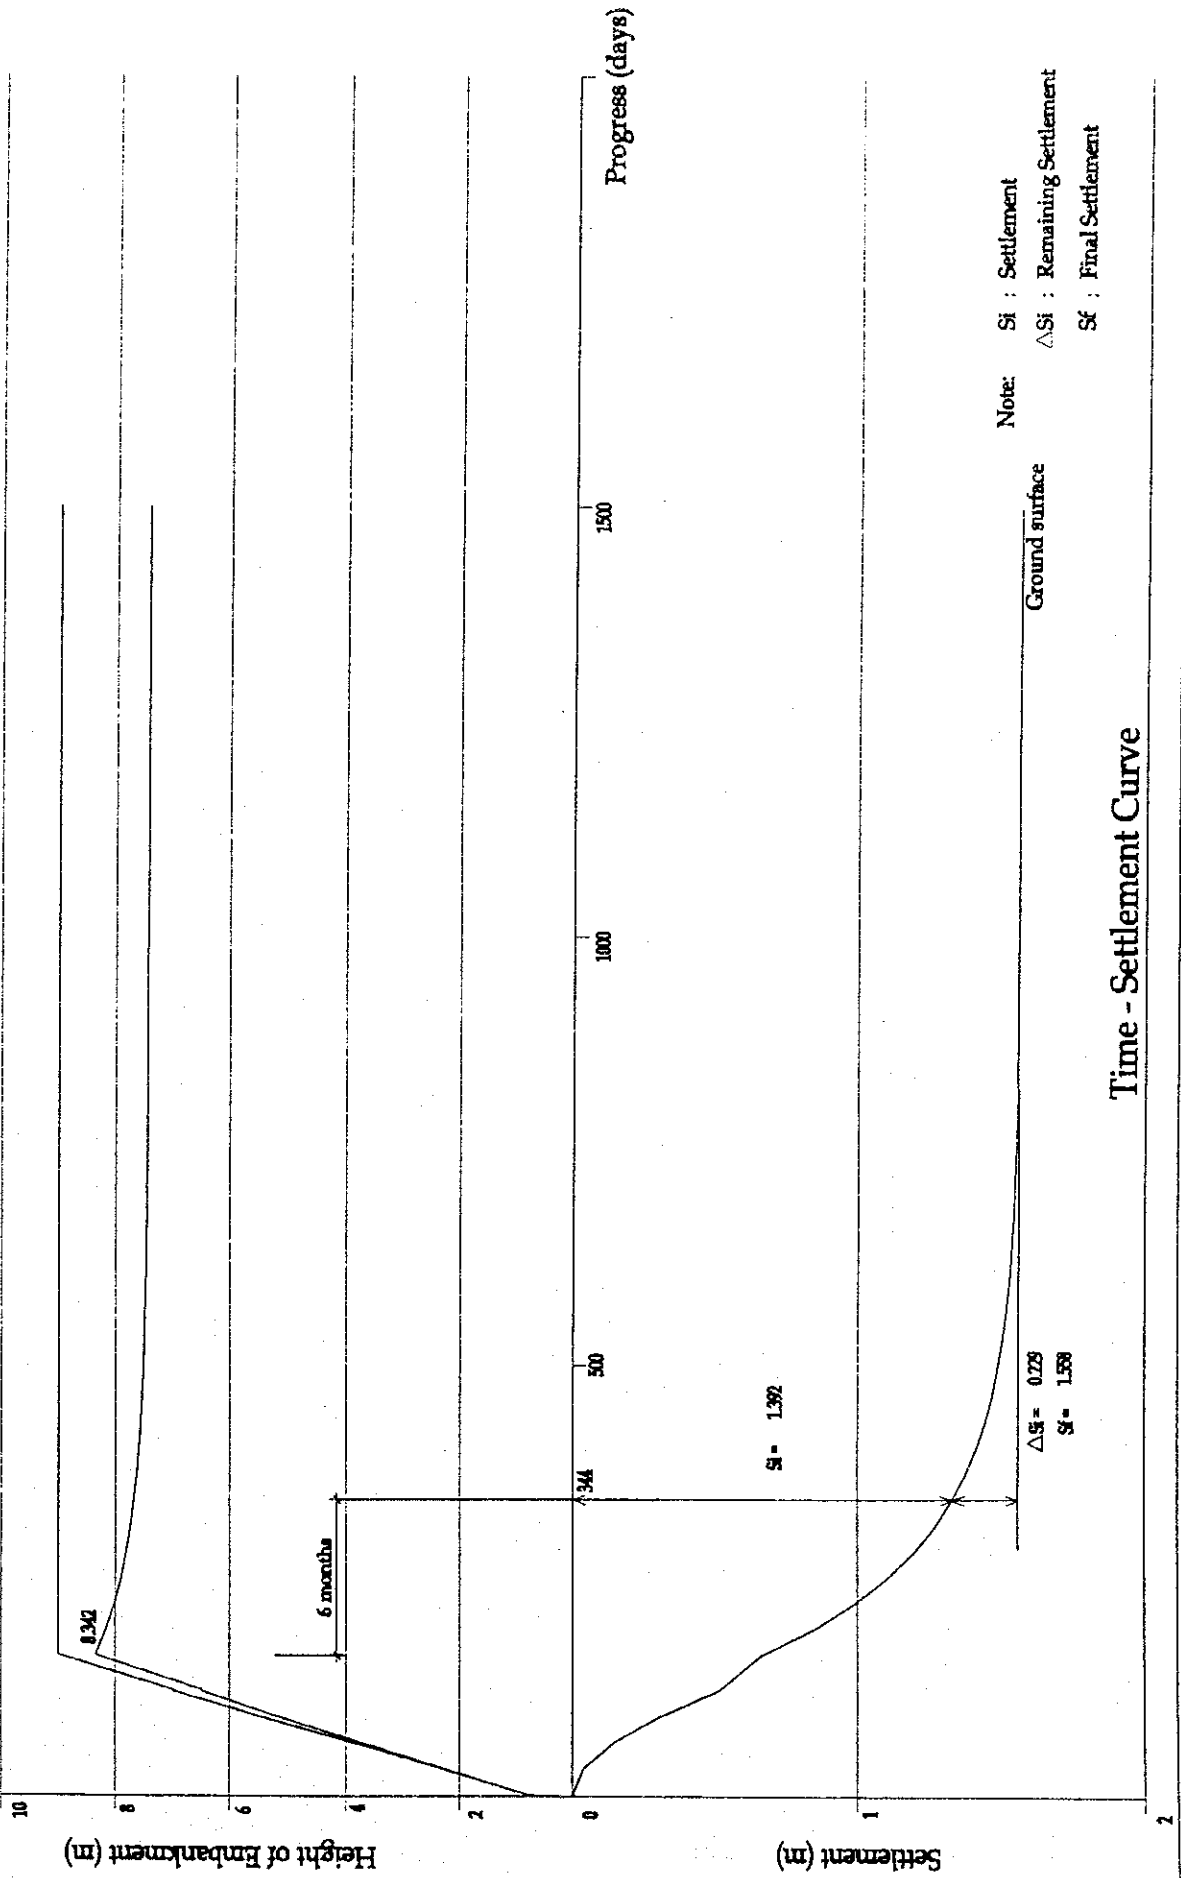

Time - Settlement Curve

Arrangement Design of PVD H=7m Segment 4 Spacing  $\Delta$  1.5m

Calculated Section

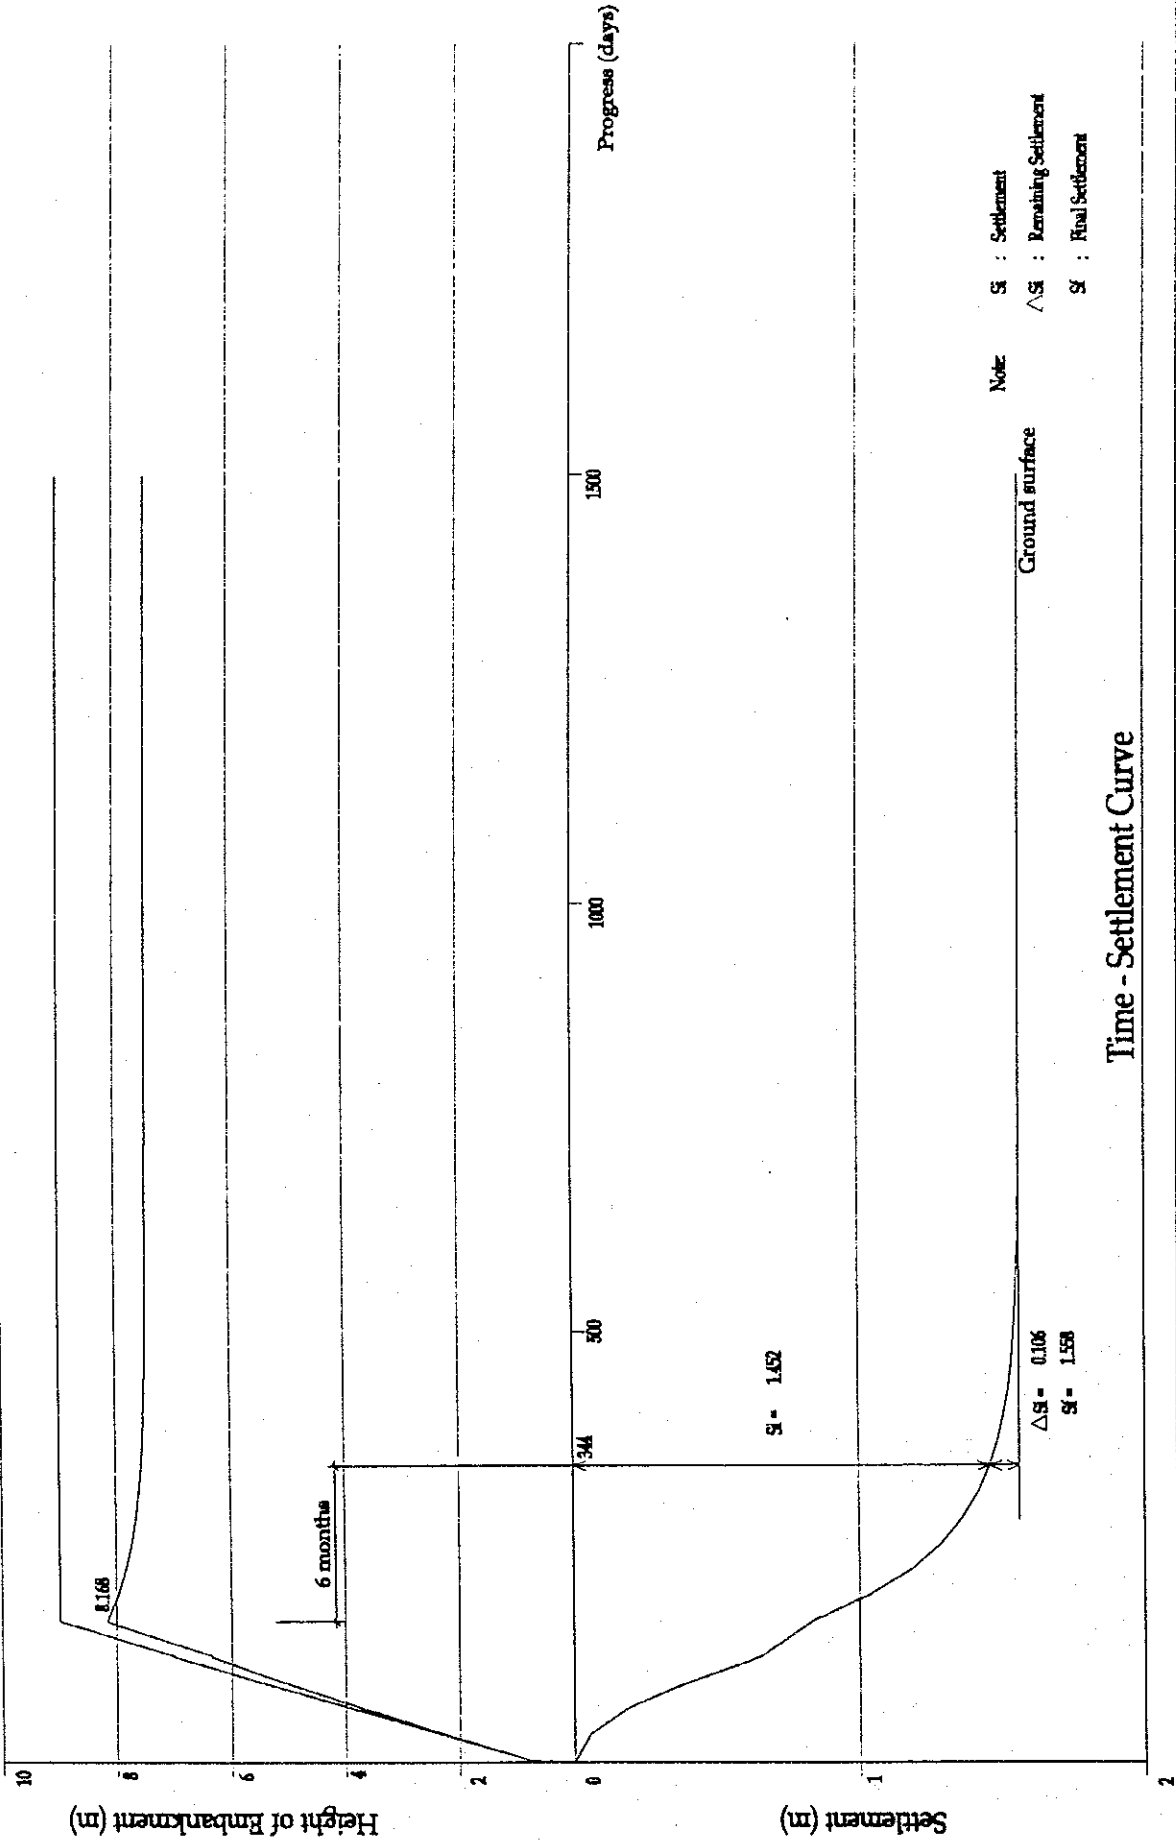


## Appendix-5: Study of Slope Stability

# SLOPE STABILITY SEGMENT 1 H=4m


S = 1:1000

1.17 1.17 1.17  
 1.17 1.16 1.17  
 1.17 1.17 1.17  
 $R=23.000$   
 $X=79.0m$   
 $Y=131.0m$   
 $K_{min}=1.164$

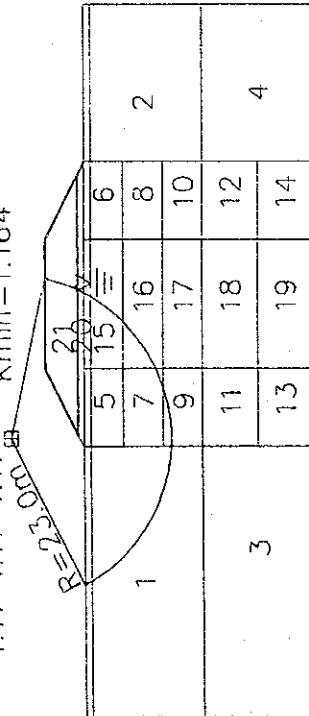

## CHARACTERISTIC VALUE


Layer Number	Saturated Density kN/m <sup>3</sup>	Wet Density kN/m <sup>3</sup>	Internal Friction Angle	Cohesion kN/m <sup>2</sup>
1	16.90	15.90	4.00	7.0
2	16.90	15.90	4.00	7.0
3	17.70	16.70	6.00	8.0
4	17.70	16.70	6.00	8.0
5	16.90	15.90	4.00	21.0
6	16.90	15.90	4.00	21.0
7	16.90	15.90	4.00	18.0
8	16.90	15.90	4.00	18.0
9	16.90	15.90	4.00	17.0
10	16.90	15.90	4.00	17.0
11	17.70	16.70	6.00	16.0
12	17.70	16.70	6.00	16.0
13	17.70	16.70	6.00	15.0
14	17.70	16.70	6.00	15.0
15	16.90	15.90	4.00	26.0
16	16.90	15.90	4.00	23.0
17	16.90	15.90	4.00	20.0
18	17.70	16.70	6.00	18.0
19	17.70	16.70	6.00	17.0
20	19.60	18.60	30.00	20.0
21	19.30	18.30	30.00	14.0



# SLOPE STABILITY SEGMENT 1 H=6m

S = 1:1000

1.13 1.13 1.13 X = 84.0m  
 1.13 1.13 1.13 Y = 138.0m  
 1.13 1.13 1.13 Kmin = 1.128

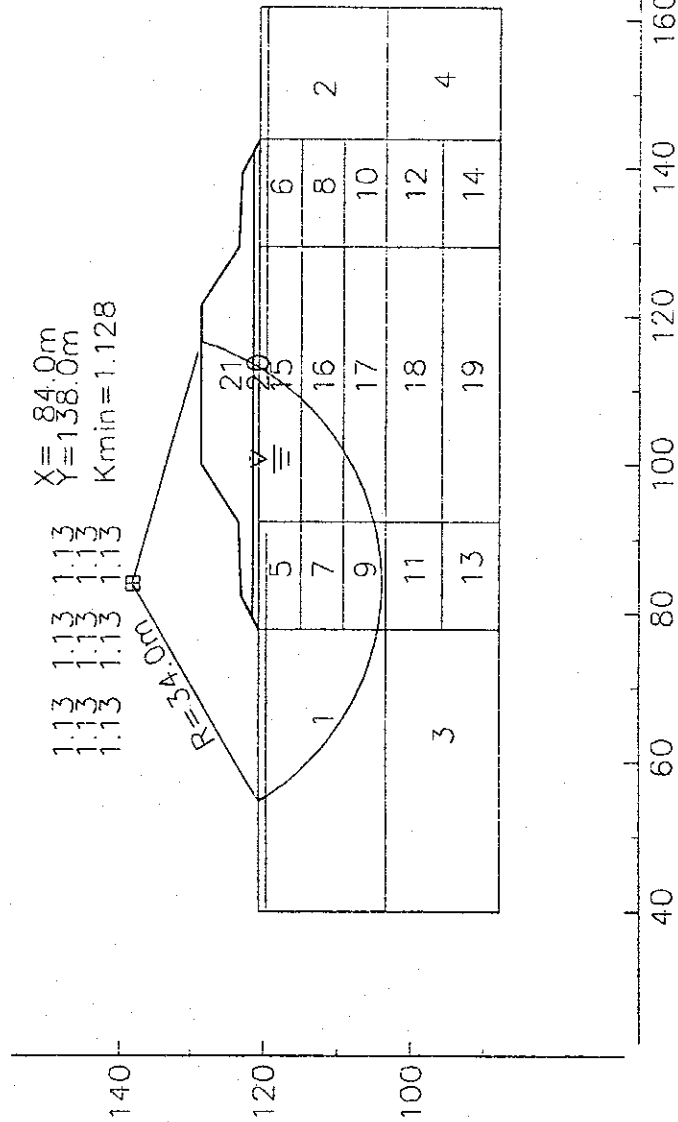

## CHARACTERISTIC VALUE


Layer Number	Saturated Density kN/m <sup>3</sup>	Wet Density kN/m <sup>3</sup>	Internal Friction Angle	Cohesion kN/m <sup>2</sup>
1	16.90	15.90	4.00	7.0
2	16.90	15.90	4.00	7.0
3	17.70	16.70	6.00	8.0
4	17.70	16.70	6.00	8.0
5	16.90	15.90	4.00	15.0
6	16.90	15.90	4.00	15.0
7	16.90	15.90	4.00	15.0
8	16.90	15.90	4.00	15.0
9	16.90	15.90	4.00	15.0
10	16.90	15.90	4.00	15.0
11	17.70	16.70	6.00	14.0
12	17.70	16.70	6.00	14.0
13	17.70	16.70	6.00	14.0
14	17.70	16.70	6.00	14.0
15	16.90	15.90	4.00	40.0
16	16.90	15.90	4.00	36.0
17	16.90	15.90	4.00	33.0
18	17.70	16.70	6.00	28.0
19	17.70	16.70	6.00	25.0
20	19.60	18.60	30.00	20.0
21	19.30	18.30	30.00	14.0



# SLOPE STABILITY SEGMENT 1 H=8m

S = 1:1000

1.18 1.18 1.18 1.18 1.18  
 1.18 1.18 1.18 1.18 1.18  
 1.18 1.18 1.18 1.18 1.18  
 X = 58.0m  
 Y = 161.0m  
 Kmin = 1.183

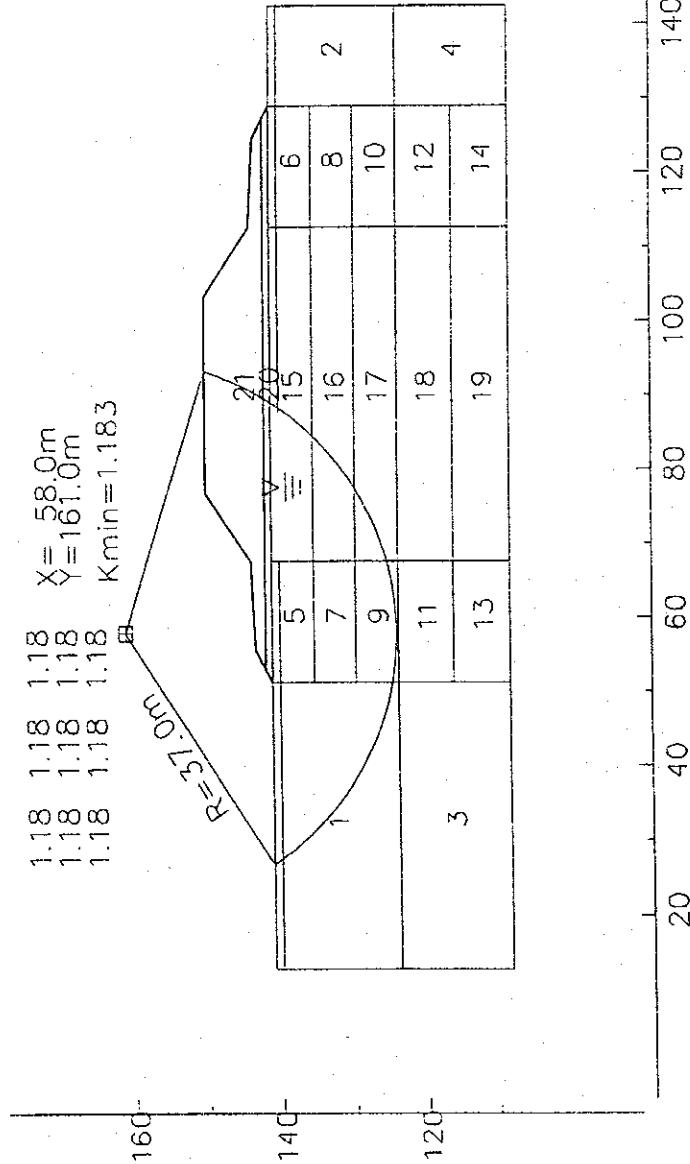

## CHARACTERISTIC VALUE

Layer Number	Saturated Density kN/m <sup>3</sup>	Wet Density kN/m <sup>3</sup>	Internal Friction Angle	Cohesion kN/m <sup>2</sup>
1	16.90	15.90	4.00	7.0
2	16.90	15.90	4.00	7.0
3	17.70	16.70	6.00	8.0
4	17.70	16.70	6.00	8.0
5	16.90	15.90	4.00	16.0
6	16.90	15.90	4.00	16.0
7	16.90	15.90	4.00	16.0
8	16.90	15.90	4.00	16.0
9	16.90	15.90	4.00	16.0
10	16.90	15.90	4.00	16.0
11	17.70	16.70	6.00	16.0
12	17.70	16.70	6.00	16.0
13	17.70	16.70	6.00	16.0
14	17.70	16.70	6.00	16.0
15	16.90	15.90	4.00	52.0
16	16.90	15.90	4.00	48.0
17	16.90	15.90	4.00	43.0
18	17.70	16.70	6.00	41.0
19	17.70	16.70	6.00	34.0
20	19.60	18.60	30.00	20.0
21	19.30	18.30	20.00	14.0

CHARACTERISTIC VALUE

Layer Number	Saturated Density kN/m <sup>3</sup>	Wet Density kN/m <sup>3</sup>	Internal Friction Angle	Cohesion kN/m <sup>2</sup>
1	16.60	15.60	4.00	9.0
2	17.80	16.80	3.00	14.0
3	16.60	15.60	4.00	17.0
4	17.80	16.80	3.00	22.0
5	16.60	15.60	4.00	19.0
6	17.80	16.80	3.00	24.0
7	16.60	15.60	4.00	17.0
8	17.80	16.80	3.00	22.0
9	16.60	15.60	4.00	16.0
10	17.80	16.80	3.00	24.0
11	19.60	18.60	30.00	20.0
12	19.30	18.30	30.00	14.0


**SLOPE STABILITY SEGMENT 3 H=4m**

S = 1:600

1.11 1.11 1.11  
 1.11 1.11 1.11  
 1.11 1.11 1.11

X= 80.0m  
 Y=130.0m

Kmin=1.183

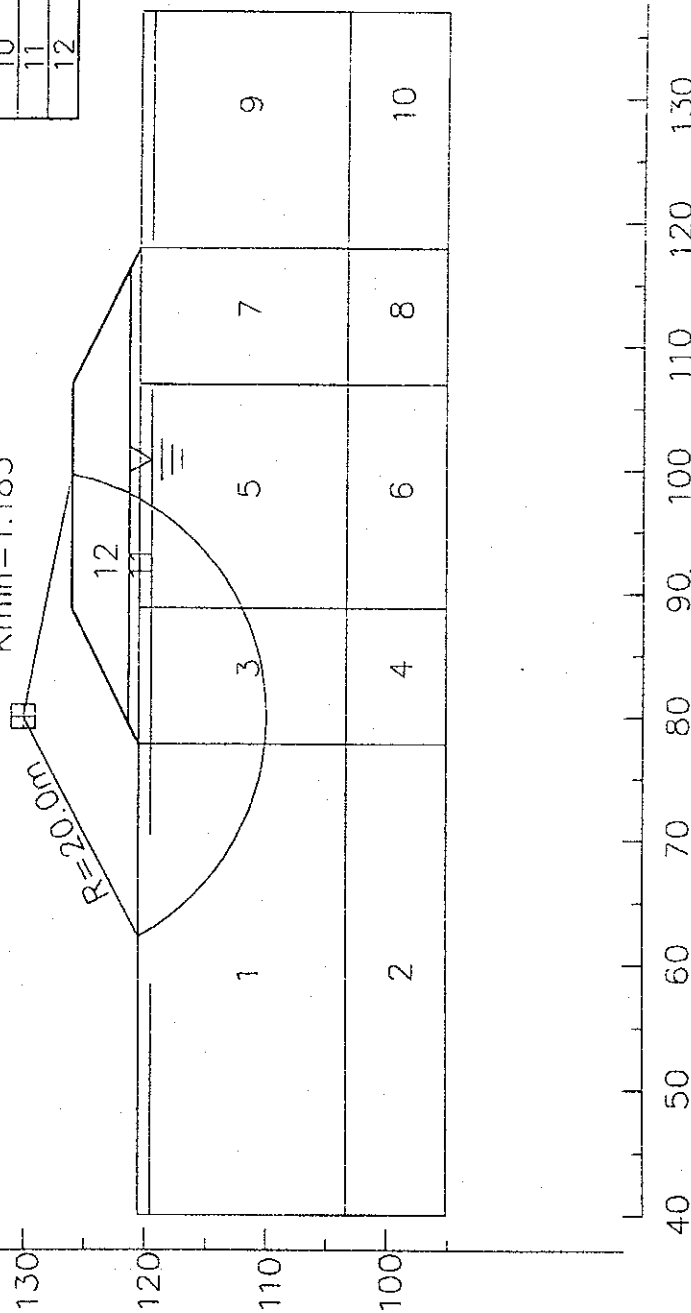


### SLOPE STABILITY SEGMENT 3 H=6m

S = 1:1000

1.13 1.13 1.13  
 1.13 1.13 1.13  
 1.13 1.13 1.13

X = 84.0m  
 Y = 137.0m  
 Kmin = 1.125

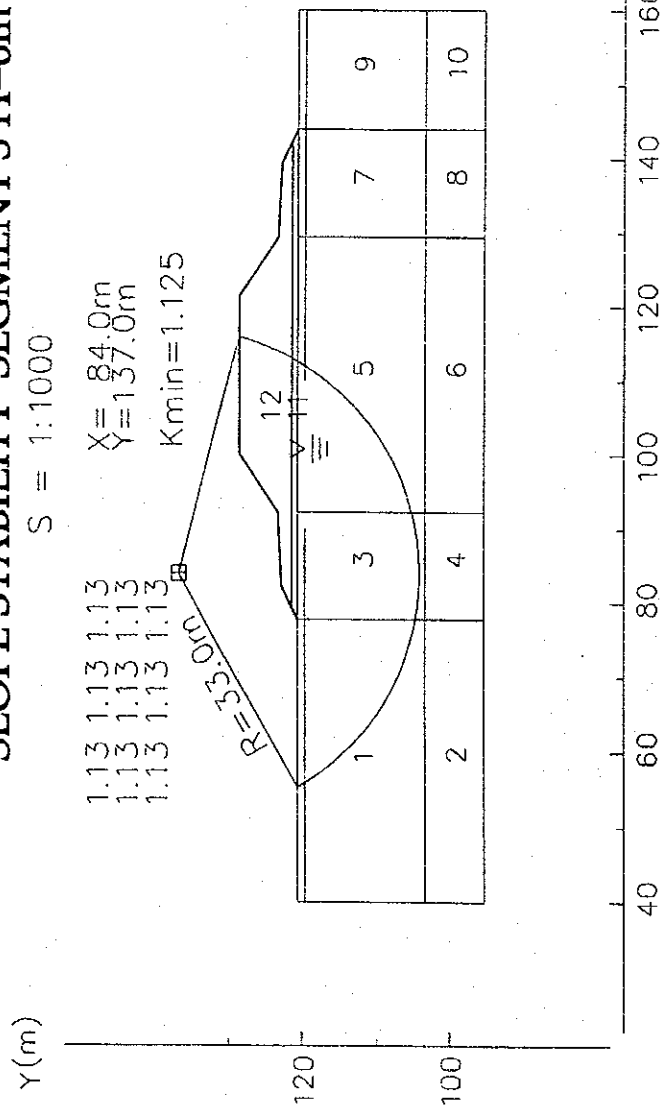


### CHARACTERISTIC VALUE

Layer Number	Saturated Density kN/m <sup>3</sup>	Wet Density kN/m <sup>3</sup>	Internal Friction Angle	Cohesion kN/m <sup>2</sup>
1	16.60	15.60	4.00	9.0
2	17.80	16.80	3.00	14.0
3	16.60	15.60	4.00	15.0
4	17.80	16.80	3.00	22.0
5	16.60	15.60	4.00	34.0
6	17.80	16.80	3.00	38.0
7	16.60	15.60	4.00	15.0
8	17.80	16.80	3.00	22.0
9	16.60	15.60	4.00	9.0
10	17.80	16.80	3.00	14.0
11	19.60	18.60	30.00	20.0
12	19.30	18.30	30.00	14.0

# SLOPE STABILITY SEGMENT 3 H=8m


S = 1:1000

1:21 1.20 1.21  
 1:21 1.20 1.21  
 1:21 1.21 1.21  
 R=36.0m  
 X=58.0m  
 Y=160.0m  
 Kmin=1.204

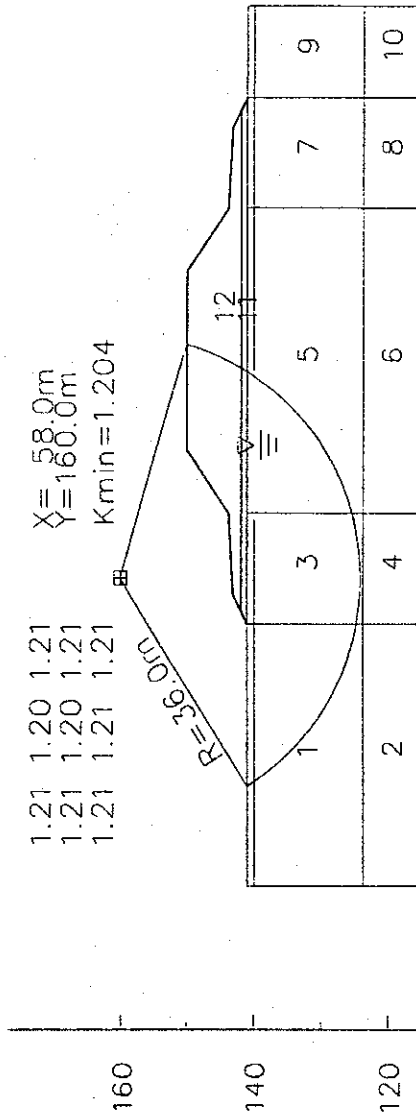

## CHARACTERISTIC VALUE

Layer Number	Saturated Density kN/m <sup>3</sup>	Wet Density kN/m <sup>3</sup>	Internal Friction Angle	Cohesion kN/m <sup>2</sup>
1	16.60	15.60	4.00	9.0
2	17.80	16.80	3.00	14.0
3	16.60	15.60	4.00	16.0
4	17.80	16.80	3.00	24.0
5	16.60	15.60	4.00	46.0
6	17.80	16.80	3.00	48.0
7	16.60	15.60	4.00	16.0
8	17.80	16.80	3.00	24.0
9	16.60	15.60	4.00	9.0
10	17.80	16.80	3.00	14.0
11	19.60	18.60	30.00	20.0
12	19.30	18.30	30.00	14.0



CHARACTERISTIC VALUE

Layer Number	Saturated Density $\text{kN/m}^3$	Wet Density $\text{kN/m}^3$	Internal Friction Angle	Cohesion $\text{kN/m}^2$
1	16.60	15.60	4.00	8.0
2	16.60	15.60	4.00	8.0
3	16.60	15.60	4.00	21.0
4	16.60	15.60	4.00	19.0
5	16.60	15.60	4.00	27.0
6	16.60	15.60	4.00	23.0
7	16.60	15.60	4.00	21.0
8	16.60	15.60	4.00	19.0
9	16.60	15.60	4.00	8.0
10	16.60	15.60	4.00	8.0
11	19.60	18.60	30.00	20.0
12	19.30	18.30	30.00	14.0


**SLOPE STABILITY SEGMENT 4 H=4m**

S = 1:600

1.22 1.22 1.22  
 1.22 1.22 1.22  
 1.22 1.22 1.22

X = 79.0m  
 Y = 131.0m

K<sub>min</sub> = 1.219

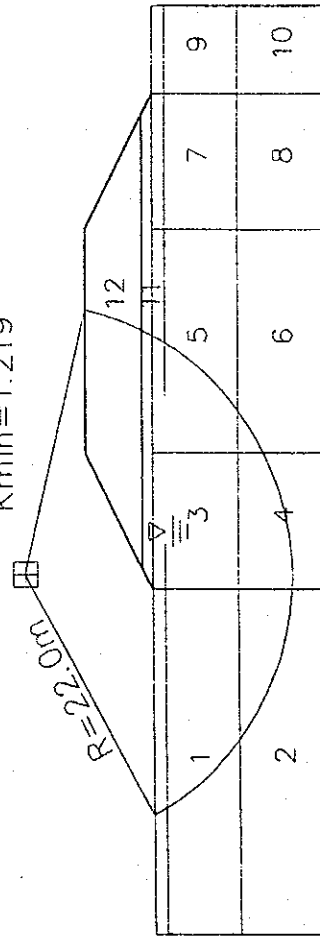


### SLOPE STABILITY SEGMENT 4 H=6m

S = 1:1000

1.13 1.14 1.14  
 1.13 1.13 1.14  
 1.13 1.13 1.14

X = 85.0m  
 Y = 137.0m  
 Kmin = 1.133

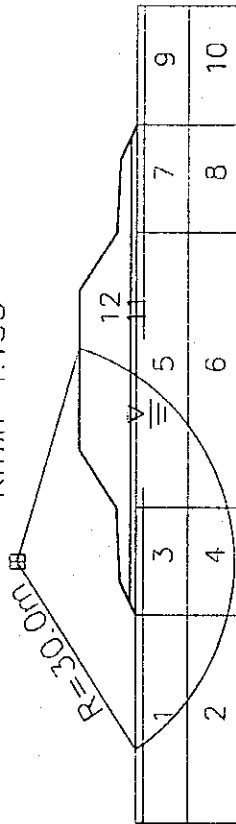

### CHARACTERISTIC VALUE

Layer Number	Saturated Density kN/m <sup>3</sup>	Wet Density kN/m <sup>3</sup>	Internal Friction Angle	Cohesion kN/m <sup>2</sup>
1	16.60	15.60	4.00	8.0
2	16.60	15.60	4.00	8.0
3	16.60	15.60	4.00	15.0
4	16.60	15.60	4.00	14.0
5	16.60	15.60	4.00	38.0
6	16.60	15.60	4.00	34.0
7	16.60	15.60	4.00	15.0
8	16.60	15.60	4.00	14.0
9	16.60	15.60	4.00	8.0
10	16.60	15.60	4.00	8.0
11	19.30	18.60	30.00	20.0
12	19.30	18.30	30.00	14.0

CHARACTERISTIC VALUE

Layer Number	Saturated Density kN/m <sup>3</sup>	Wet Density kN/m <sup>3</sup>	Internal Friction Angle	Cohesion kN/m <sup>2</sup>
1	16.60	15.60	4.00	8.0
2	16.60	15.60	4.00	8.0
3	16.60	15.60	4.00	16.0
4	16.60	15.60	4.00	16.0
5	16.60	15.60	4.00	51.0
6	16.60	15.60	4.00	46.0
7	16.60	15.60	4.00	16.0
8	16.60	15.60	4.00	16.0
9	16.60	15.60	4.00	8.0
10	16.60	15.60	4.00	8.0
11	19.60	18.60	30.00	20.0
12	19.30	18.30	30.00	14.0


SLOPE STABILITY SEGMENT 4 H=8m

S = 1:1000

1.23 1.23 1.23  
 1.23 1.23 1.23  
 1.23 1.23 1.23

X = 59.0m  
 Y = 160.0m

Kmin = 1.230

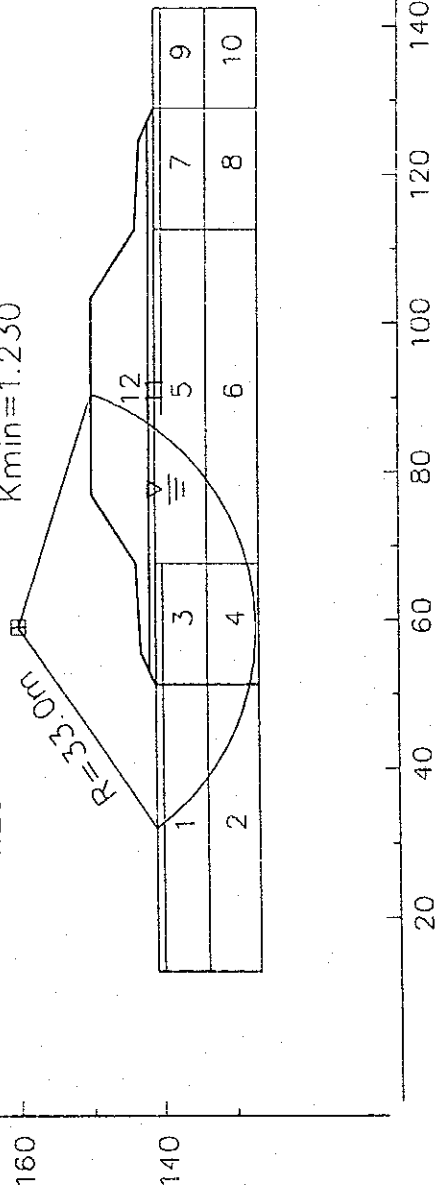


**SLOPE STABILITY**  
**SMALL TRA VA BRIDGE A2-ABUTMENT**

S = 1:800

1.20 1.19 1.19  
 1.20 1.19 1.19  
 1.20 1.19 1.19

X = 64.0m  
 Y = 89.0m

Kmin = 1.193

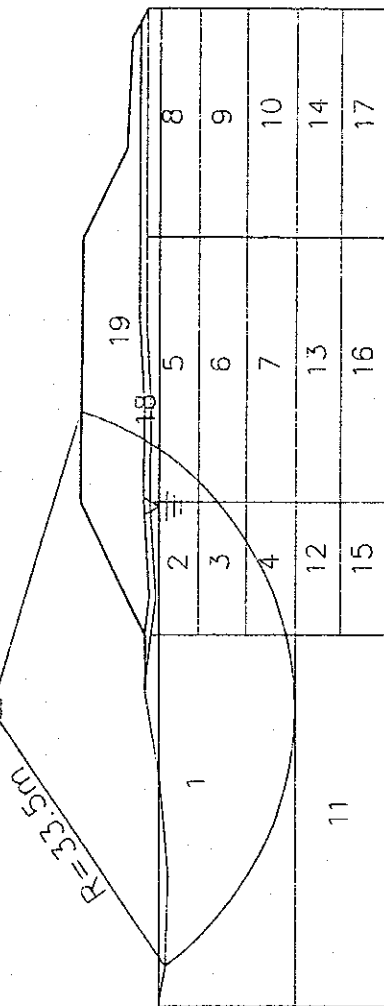

**CHARACTERISTIC VALUE**

Layer Number	Saturated Density $\text{KN/m}^3$	Wet Density $\text{KN/m}^3$	Internal Friction Angle	Cohesion $\text{KN/m}^2$
1	16.90	15.90	4.00	7.0
2	16.90	15.90	4.00	32.0
3	16.90	15.90	4.00	31.0
4	16.90	15.90	4.00	30.0
5	16.90	15.90	4.00	41.0
6	16.90	15.90	4.00	39.0
7	16.90	15.90	4.00	37.0
8	16.90	15.90	4.00	28.0
9	16.90	15.90	4.00	26.0
10	16.90	15.90	4.00	25.0
11	17.70	16.70	6.00	8.0
12	17.70	16.70	6.00	12.0
13	17.70	16.70	6.00	33.0
14	17.70	16.70	6.00	29.0
15	17.70	16.70	6.00	12.0
16	17.70	16.70	6.00	31.0
17	17.70	16.70	0.00	27.0
18	19.60	18.60	30.00	20.0
19	19.30	18.30	30.00	14.0



**SCP CONDITION**

Layer Number	Replace Ratio	Saturated Density $\text{KN/m}^3$	Wet Density $\text{KN/m}^3$	Internal Friction Angle	Stress Share Ratio	Stress Increase Ratio	Degree of Consolidation
2	0.267	19.60	18.60	30.00	3	0.350	100.00
3	0.267	19.60	18.60	30.00	3	0.350	100.00
4	0.267	19.60	18.60	30.00	3	0.350	100.00




**SLOPE STABILITY**  
**CAI NAI BRIDGE A2-ABUTMENT**

S = 1:1000

1.11 1.11 1.11 1.11  
 1.11 1.11 1.11 1.11  
 1.11 1.11 1.11 1.11

X = 71.0m  
 Y = 90.0m

Kmin = 1.105

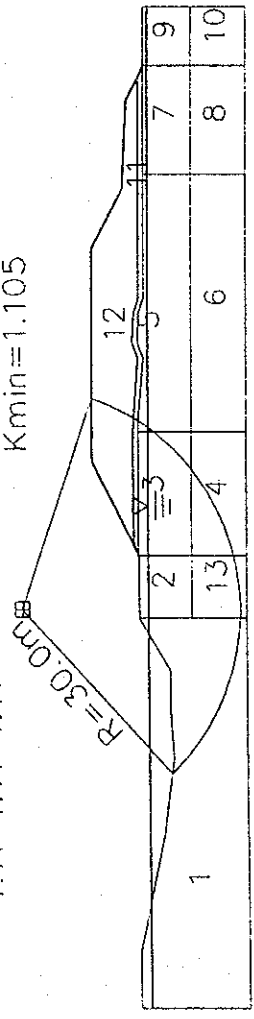

CHARACTERISTIC VALUE

Layer Number	Saturated Density kN/m <sup>3</sup>	Wet Density kN/m <sup>3</sup>	Internal Friction Angle	Cohesion kN/m <sup>2</sup>
1	16.60	15.60	4.00	8.0
2	16.60	15.60	4.00	8.0
3	16.60	15.60	4.00	33.0
4	16.60	15.60	4.00	32.0
5	16.60	15.60	4.00	28.0
6	16.60	15.60	4.00	24.0
7	16.60	15.60	4.00	11.0
8	16.60	15.60	4.00	11.0
9	16.60	15.60	4.00	8.0
10	16.50	15.60	4.00	8.0
11	19.60	18.60	30.00	20.0
12	19.60	18.60	30.00	20.0
13	16.60	15.60	4.00	8.0

X (m)





SCP CONDITION

Layer Number	Replace Ratio	Saturated Density kN/m <sup>3</sup>	Wet Density kN/m <sup>3</sup>	Internal Friction Angle	Stress Share Ratio	Stress Increase Ratio	Degree of Consolidation
3	0.267	20.00	19.00	35.00	4	0.350	99.00
4	0.267	20.00	19.00	35.00	4	0.350	99.00
13	0.267	20.00	19.00	35.00	4	0.000	0.00

## Appendix-6: Calculation of Settlement



# Calculation of Settlement Segment 1 H=3m

Calculated Section

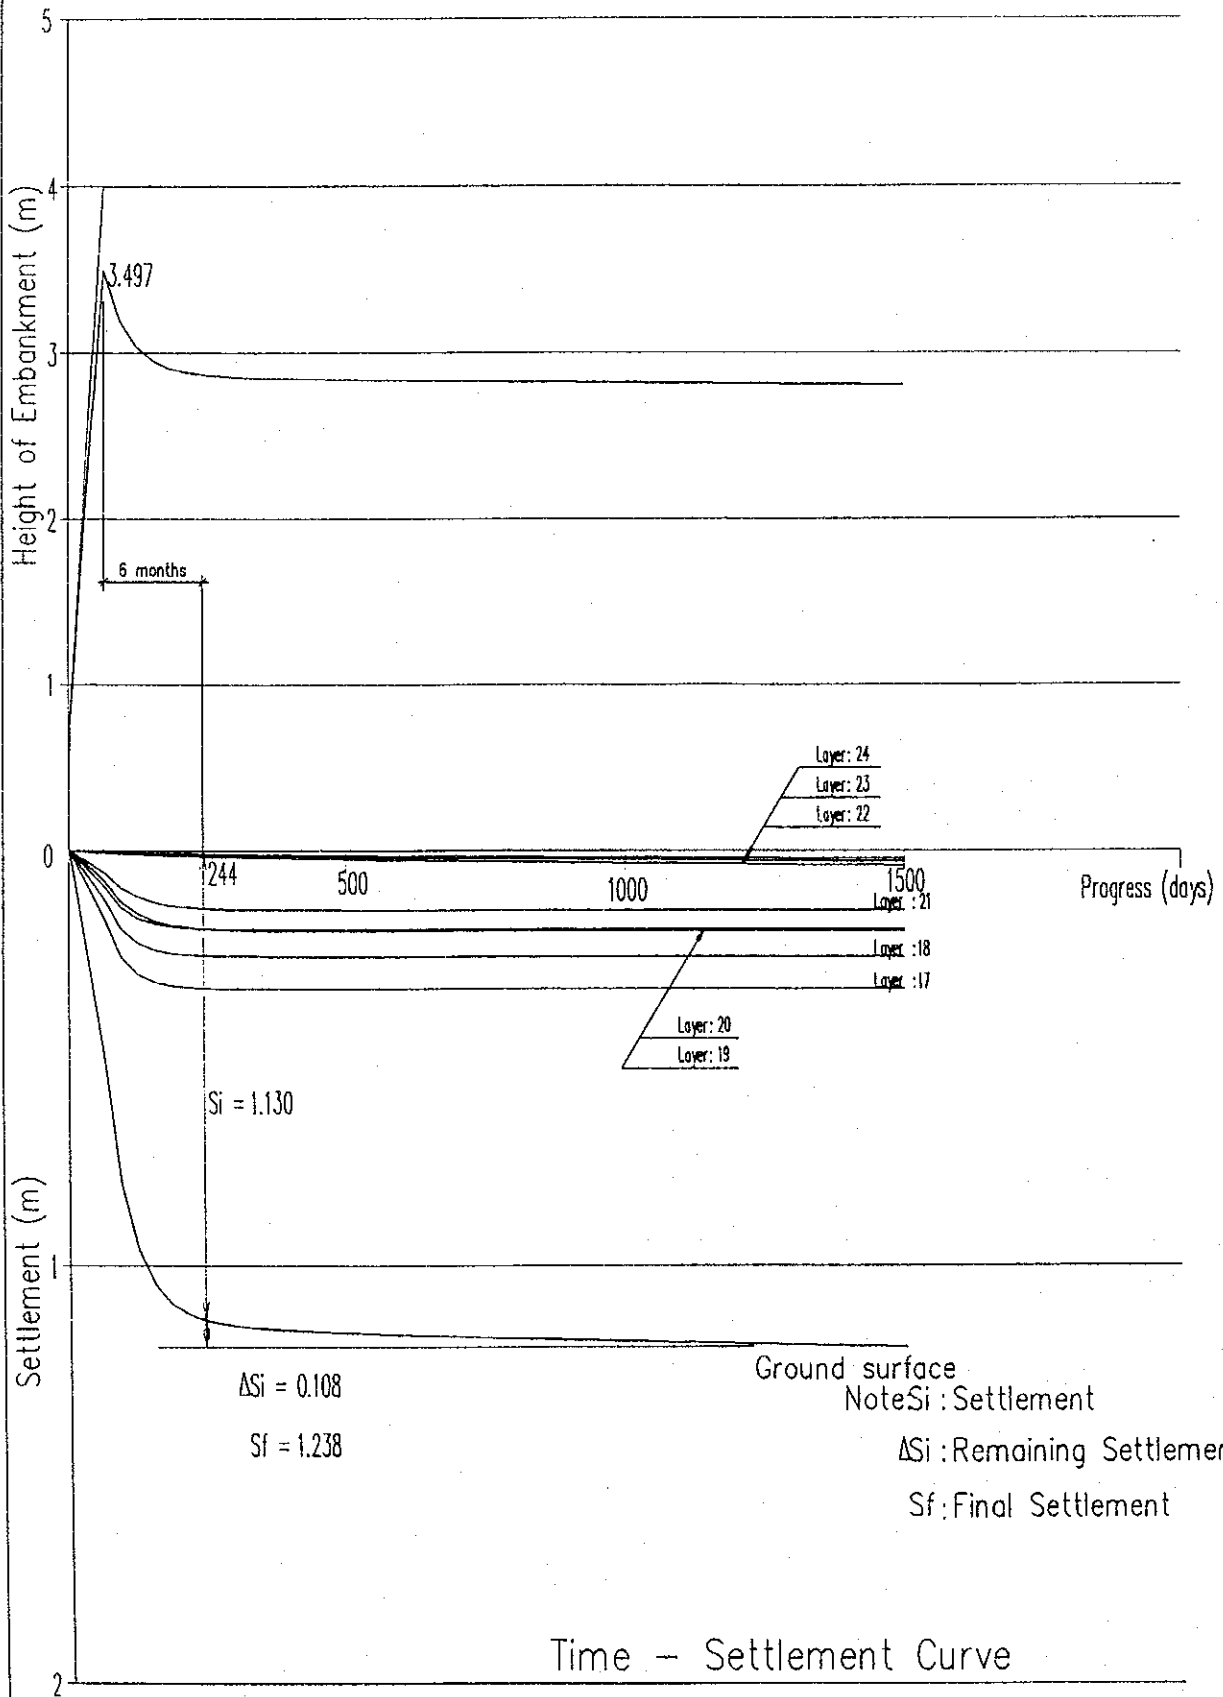



# Calculation of Settlement Segment 1 H=4m

Calculated Section

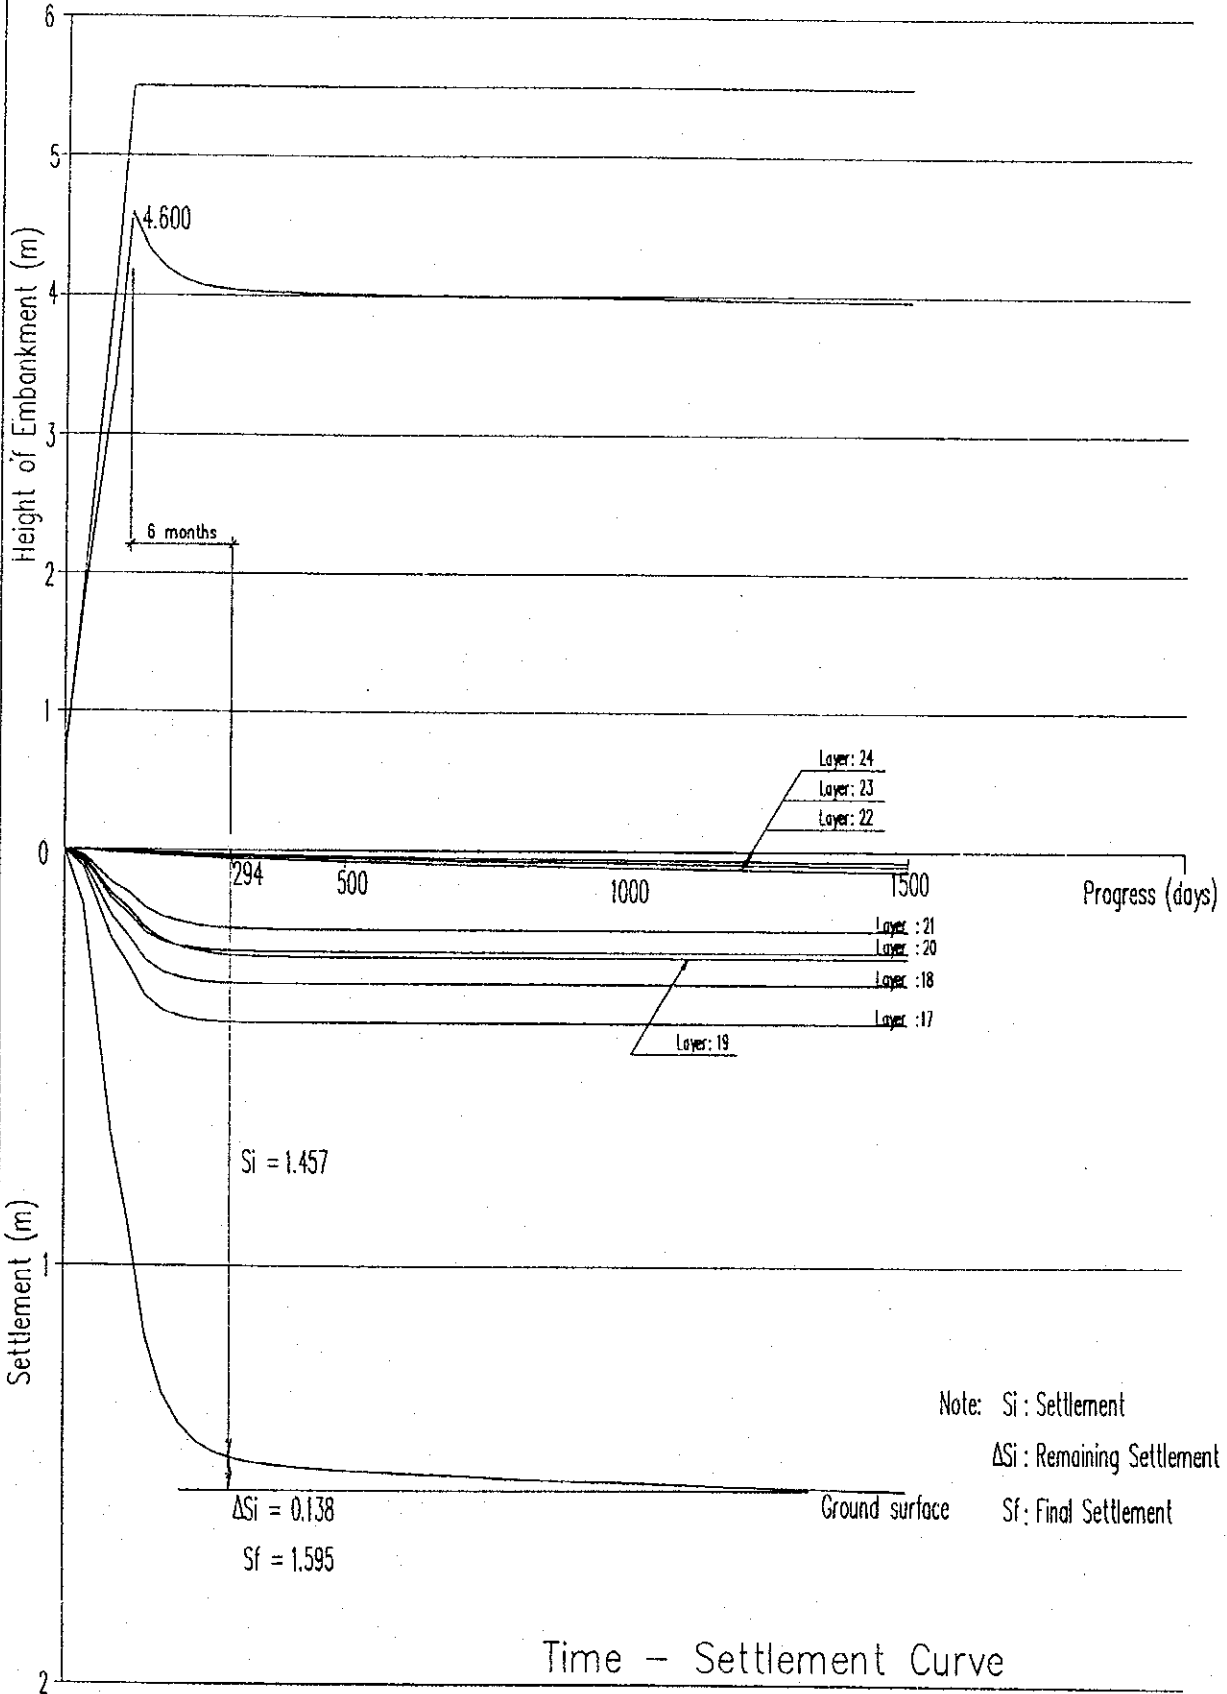



# Calculation of Settlement Segment 1 H=5m

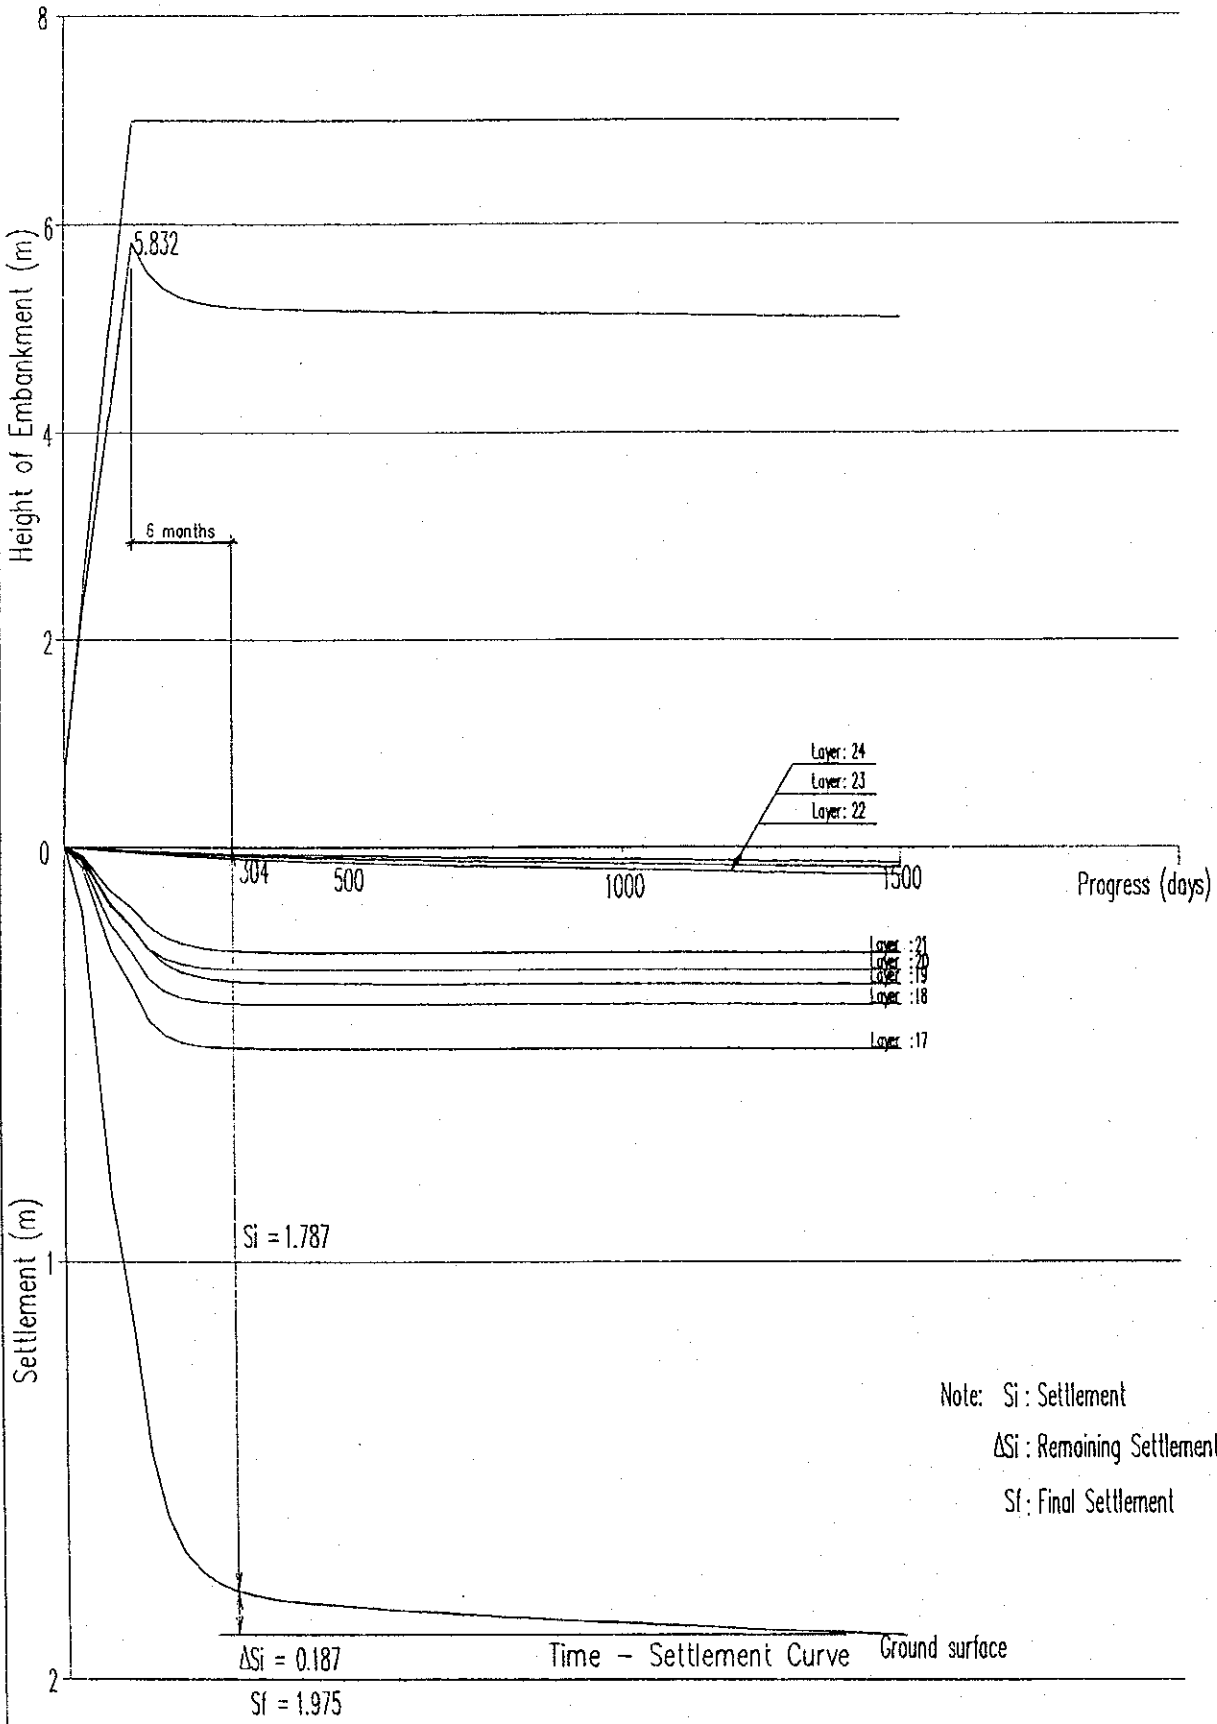



# Calculation of Settlement Segment 1 H=6

Calculated Section

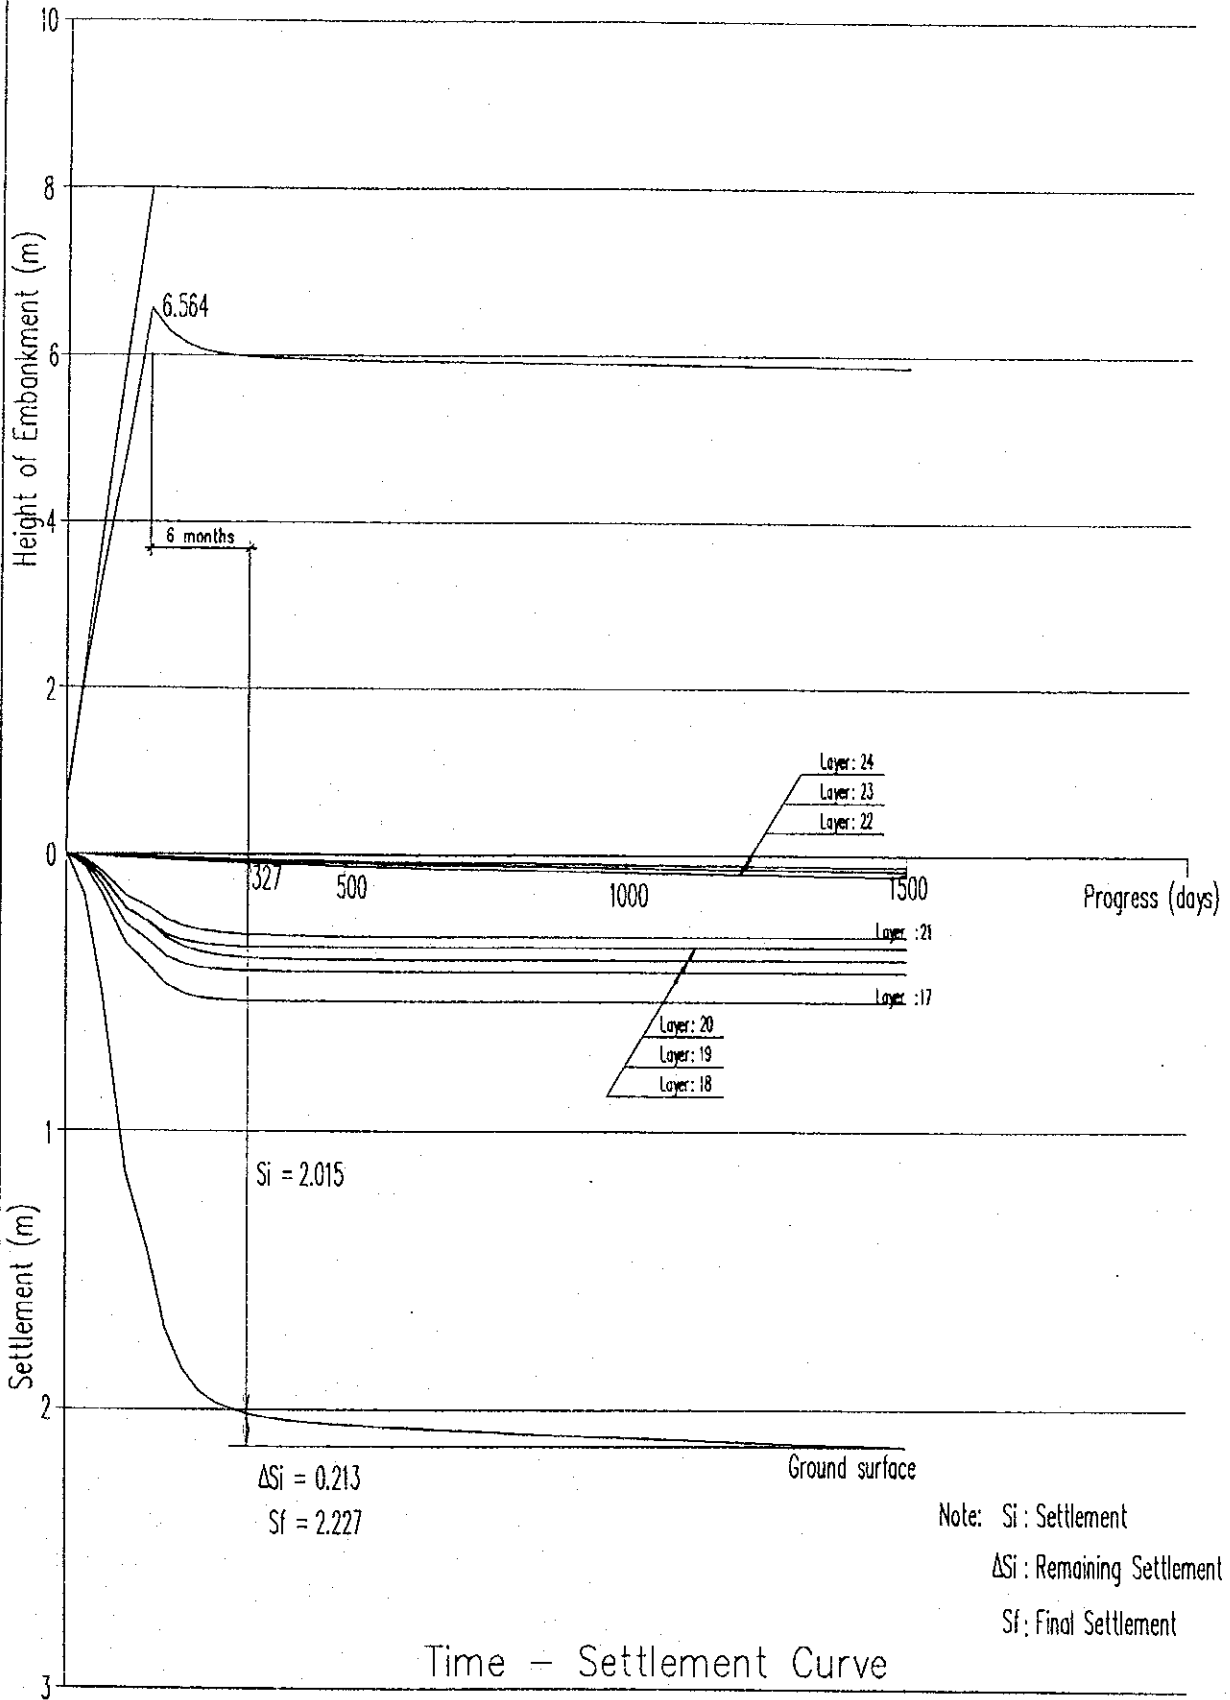



# Calculation of Settlement Segment 1 H=7m

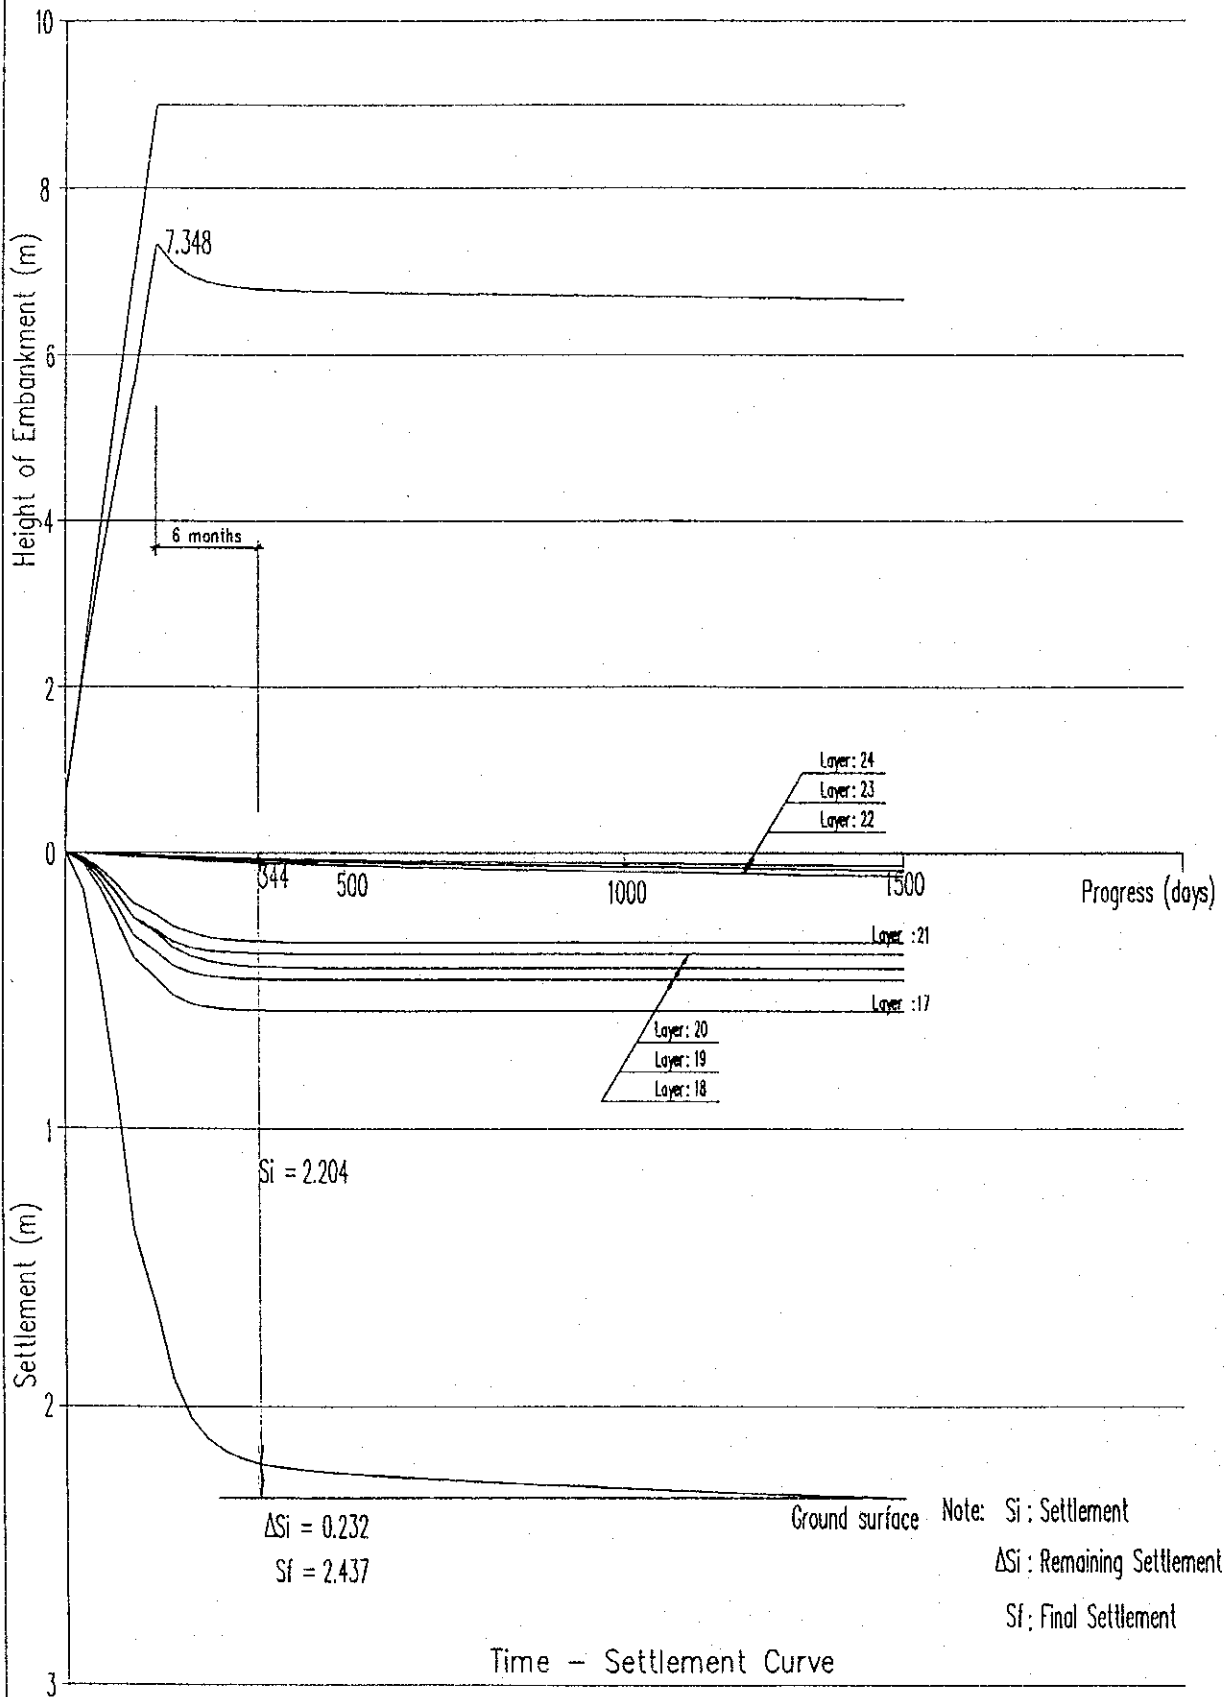



# Calculation of Settlement Segment 1 H=8m

Calculated Section

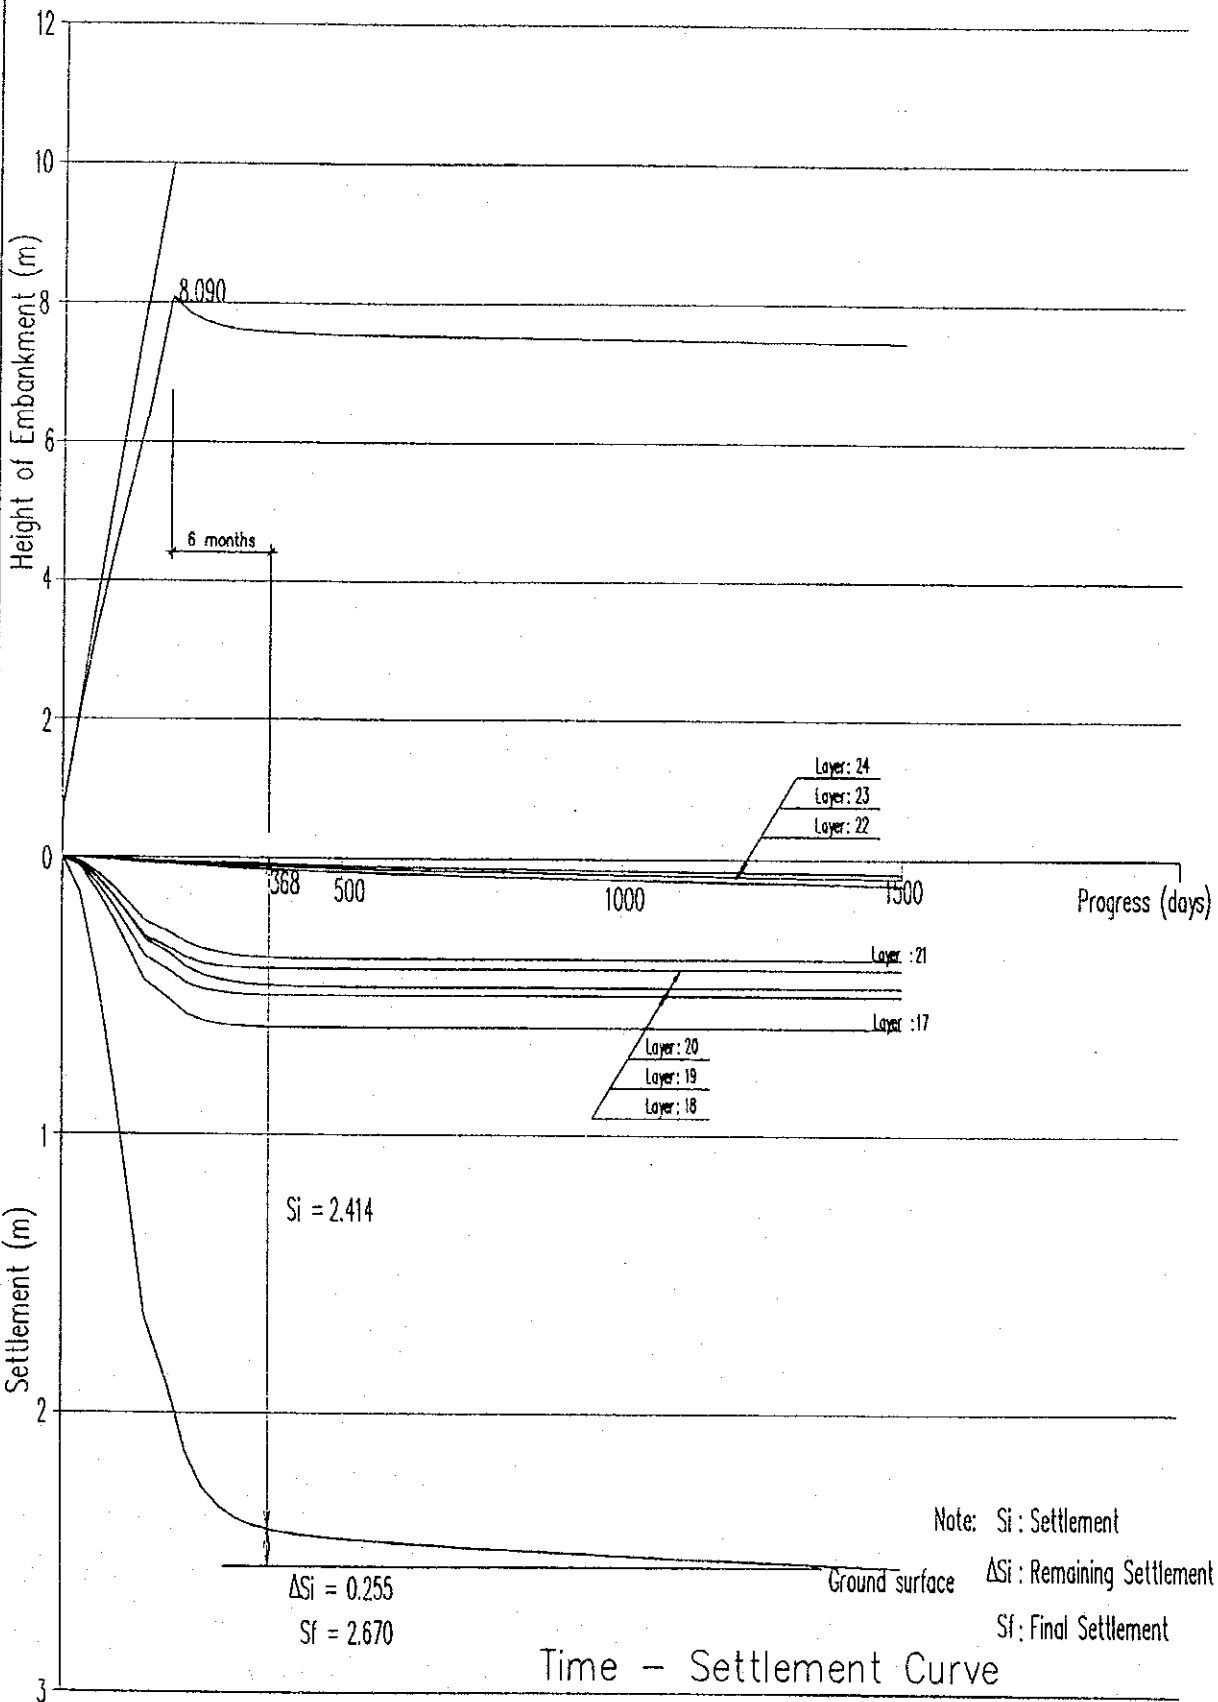







# Calculation of Settlement Segment 3 H=3m

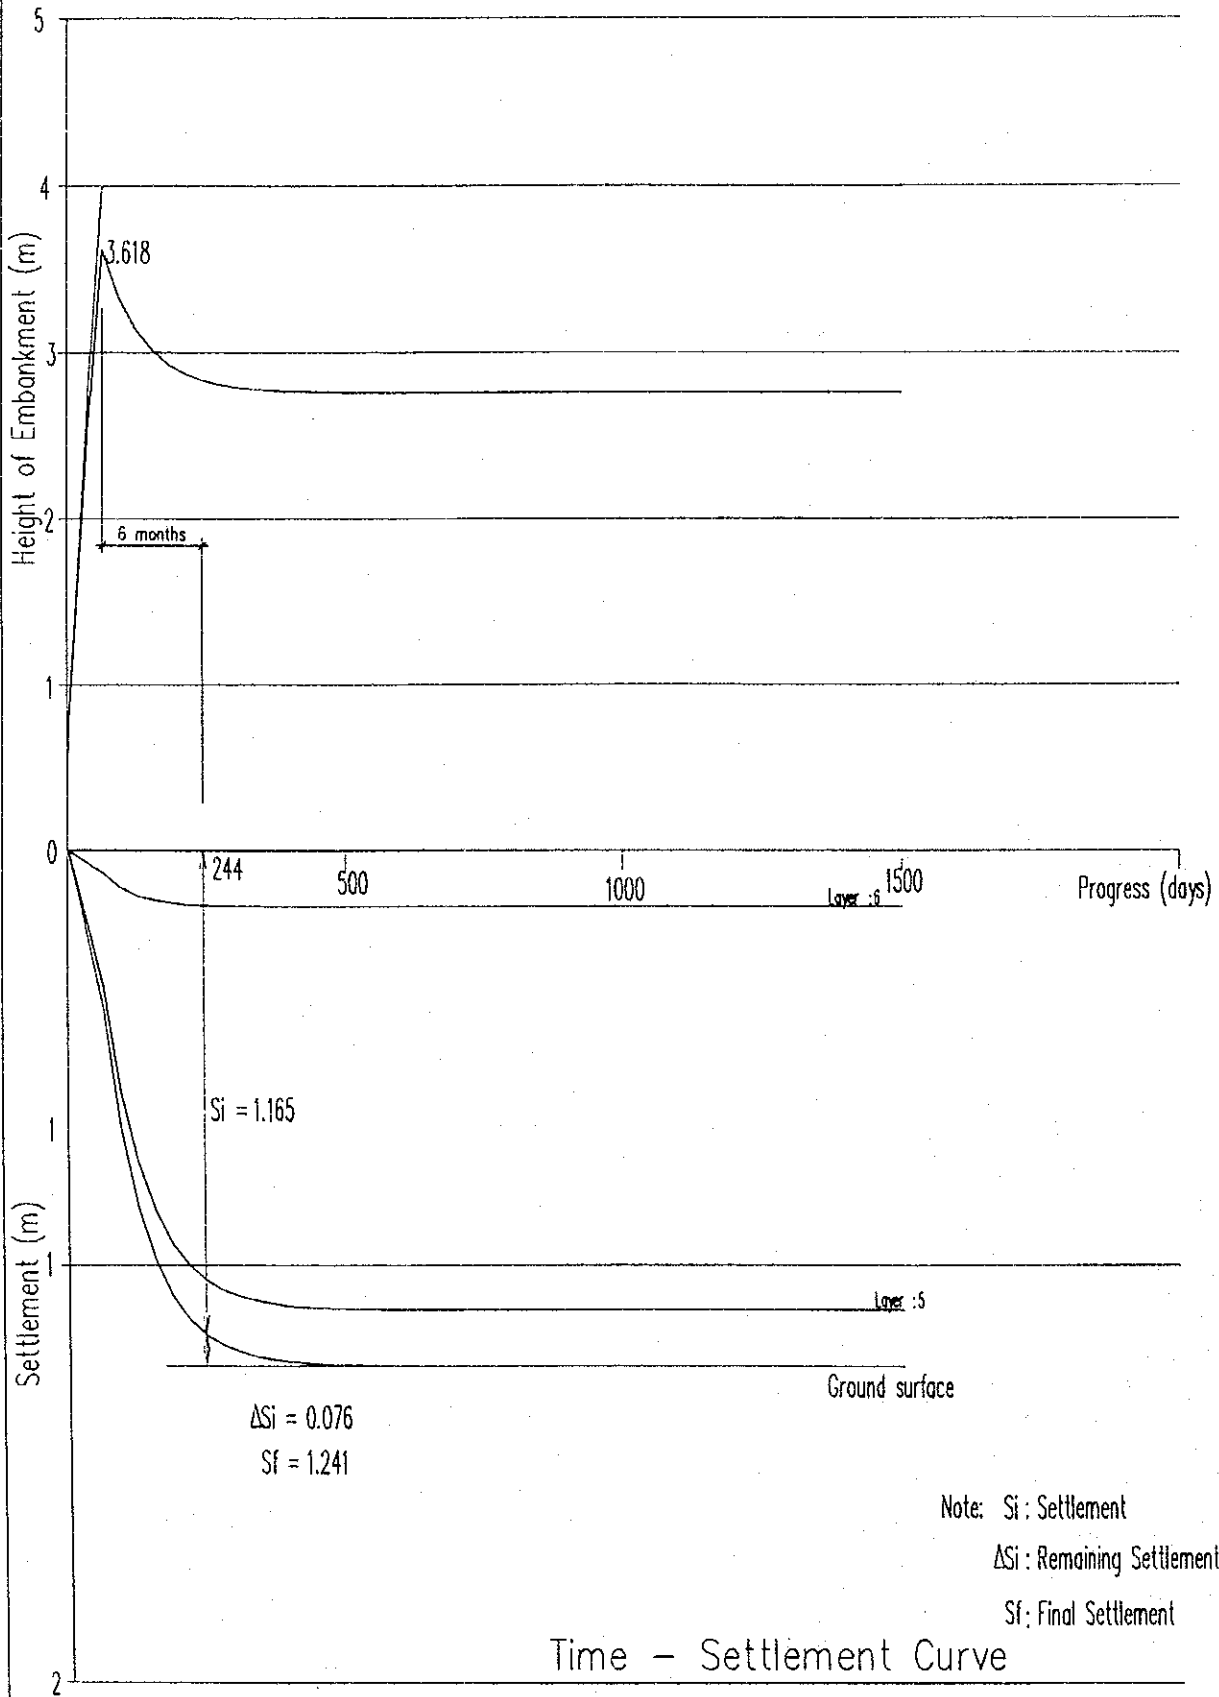



# Calculation of Settlement Segment 3 H=4m

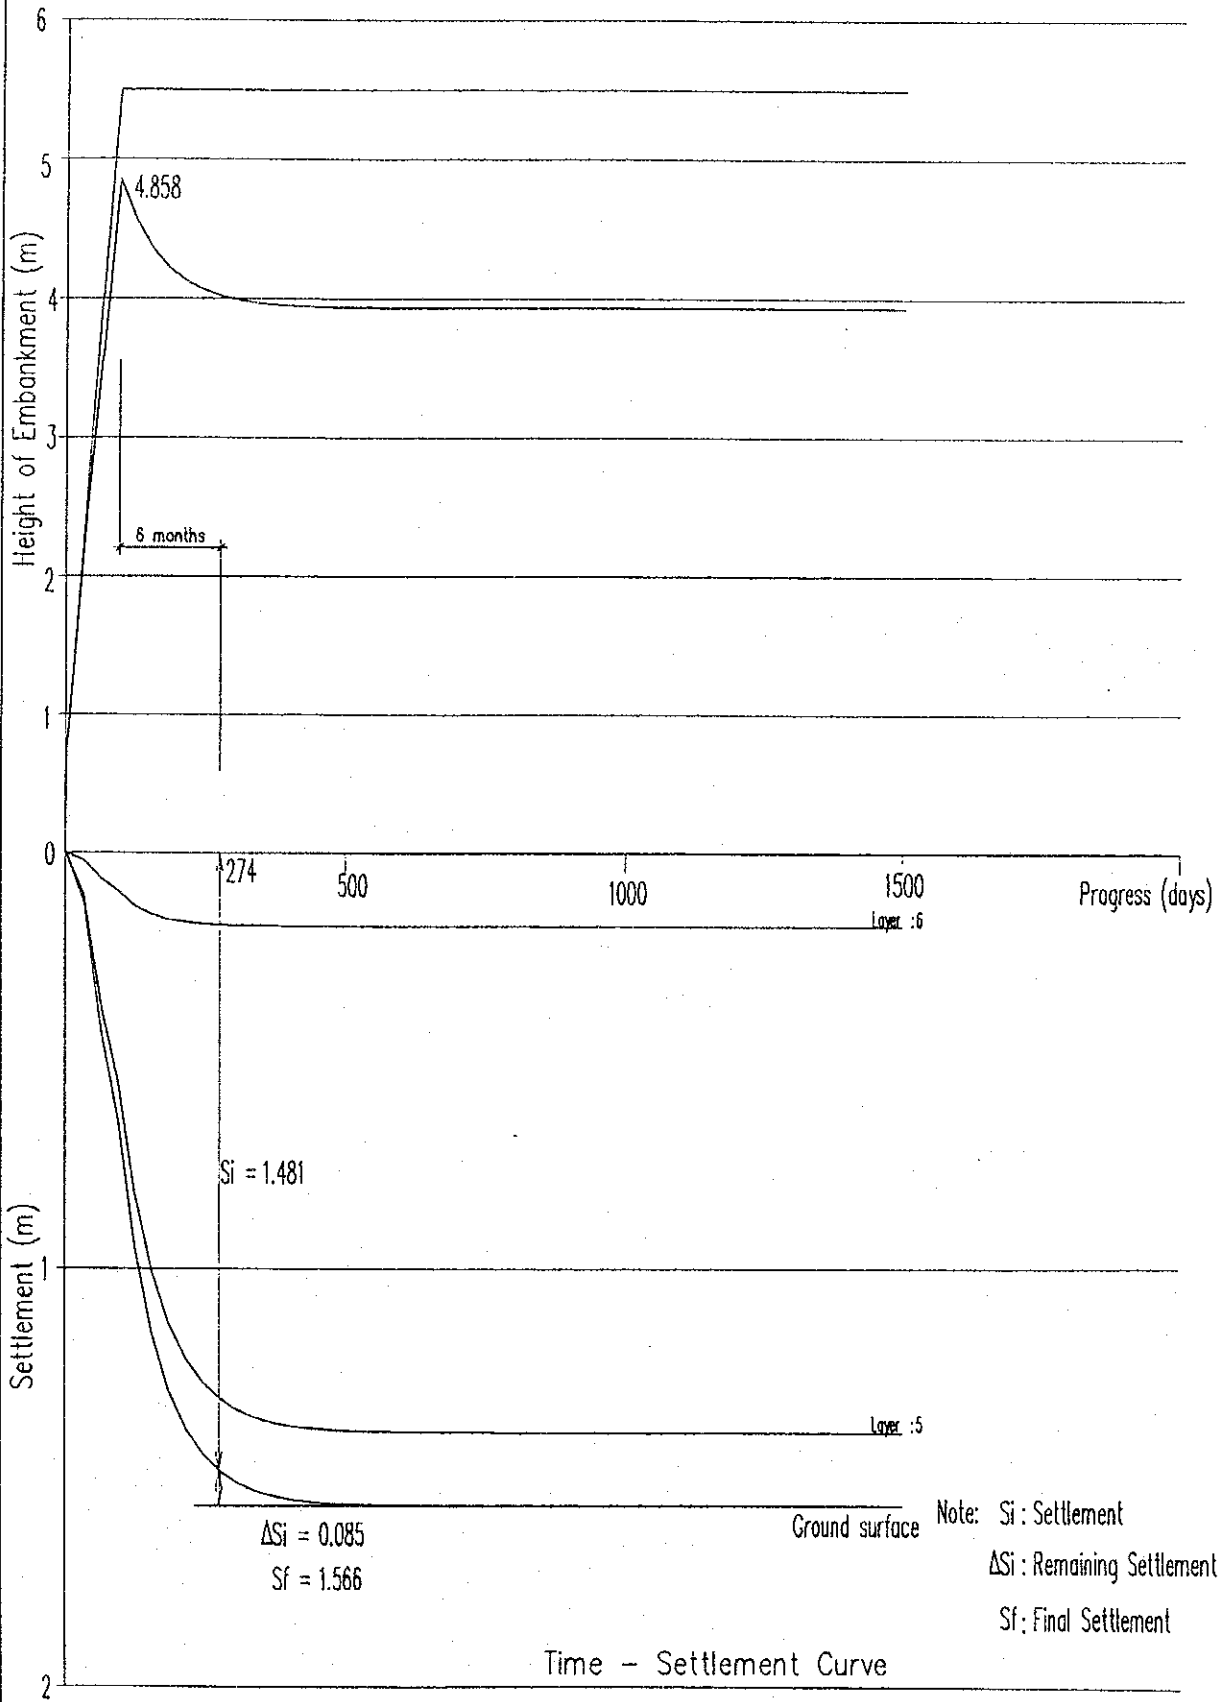

# Calculation of Settlement Segment 3 H=5m

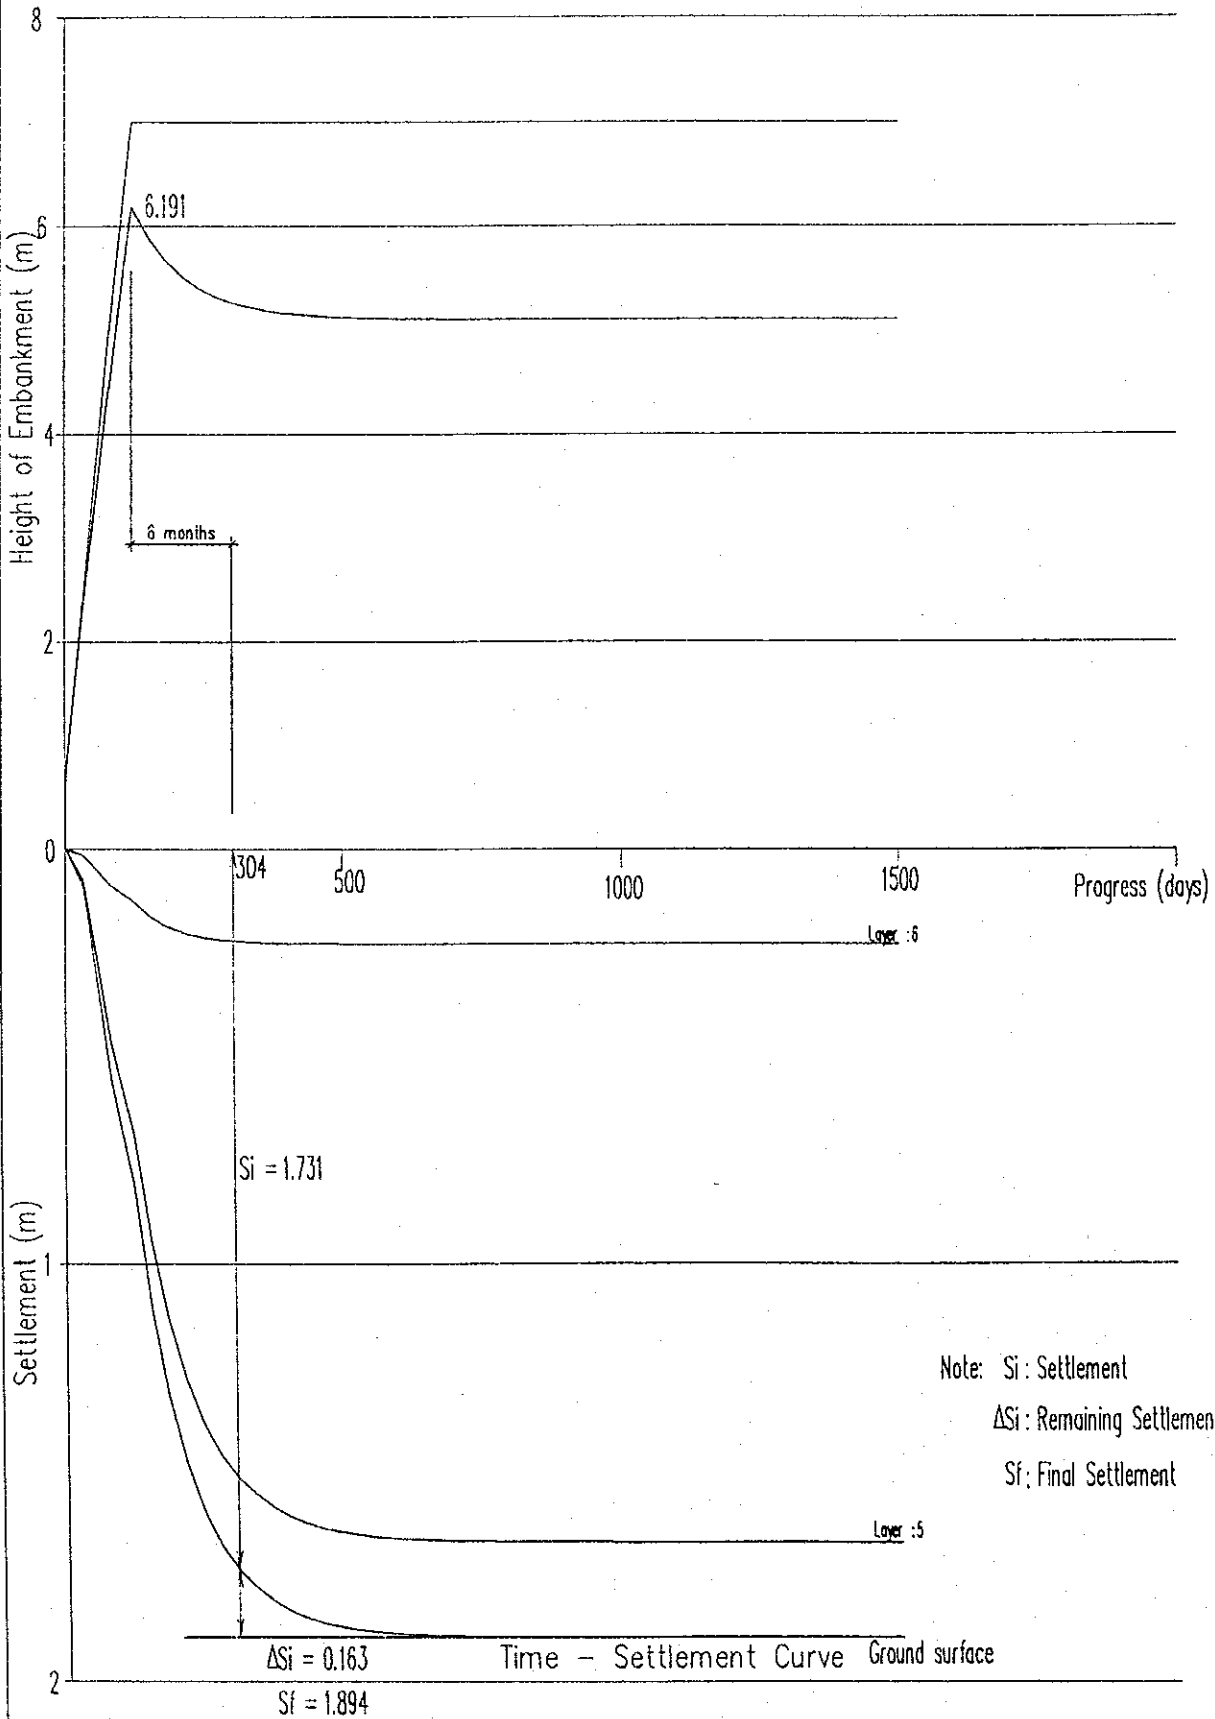



# Calculation of Settlement Segment 3 H=6m

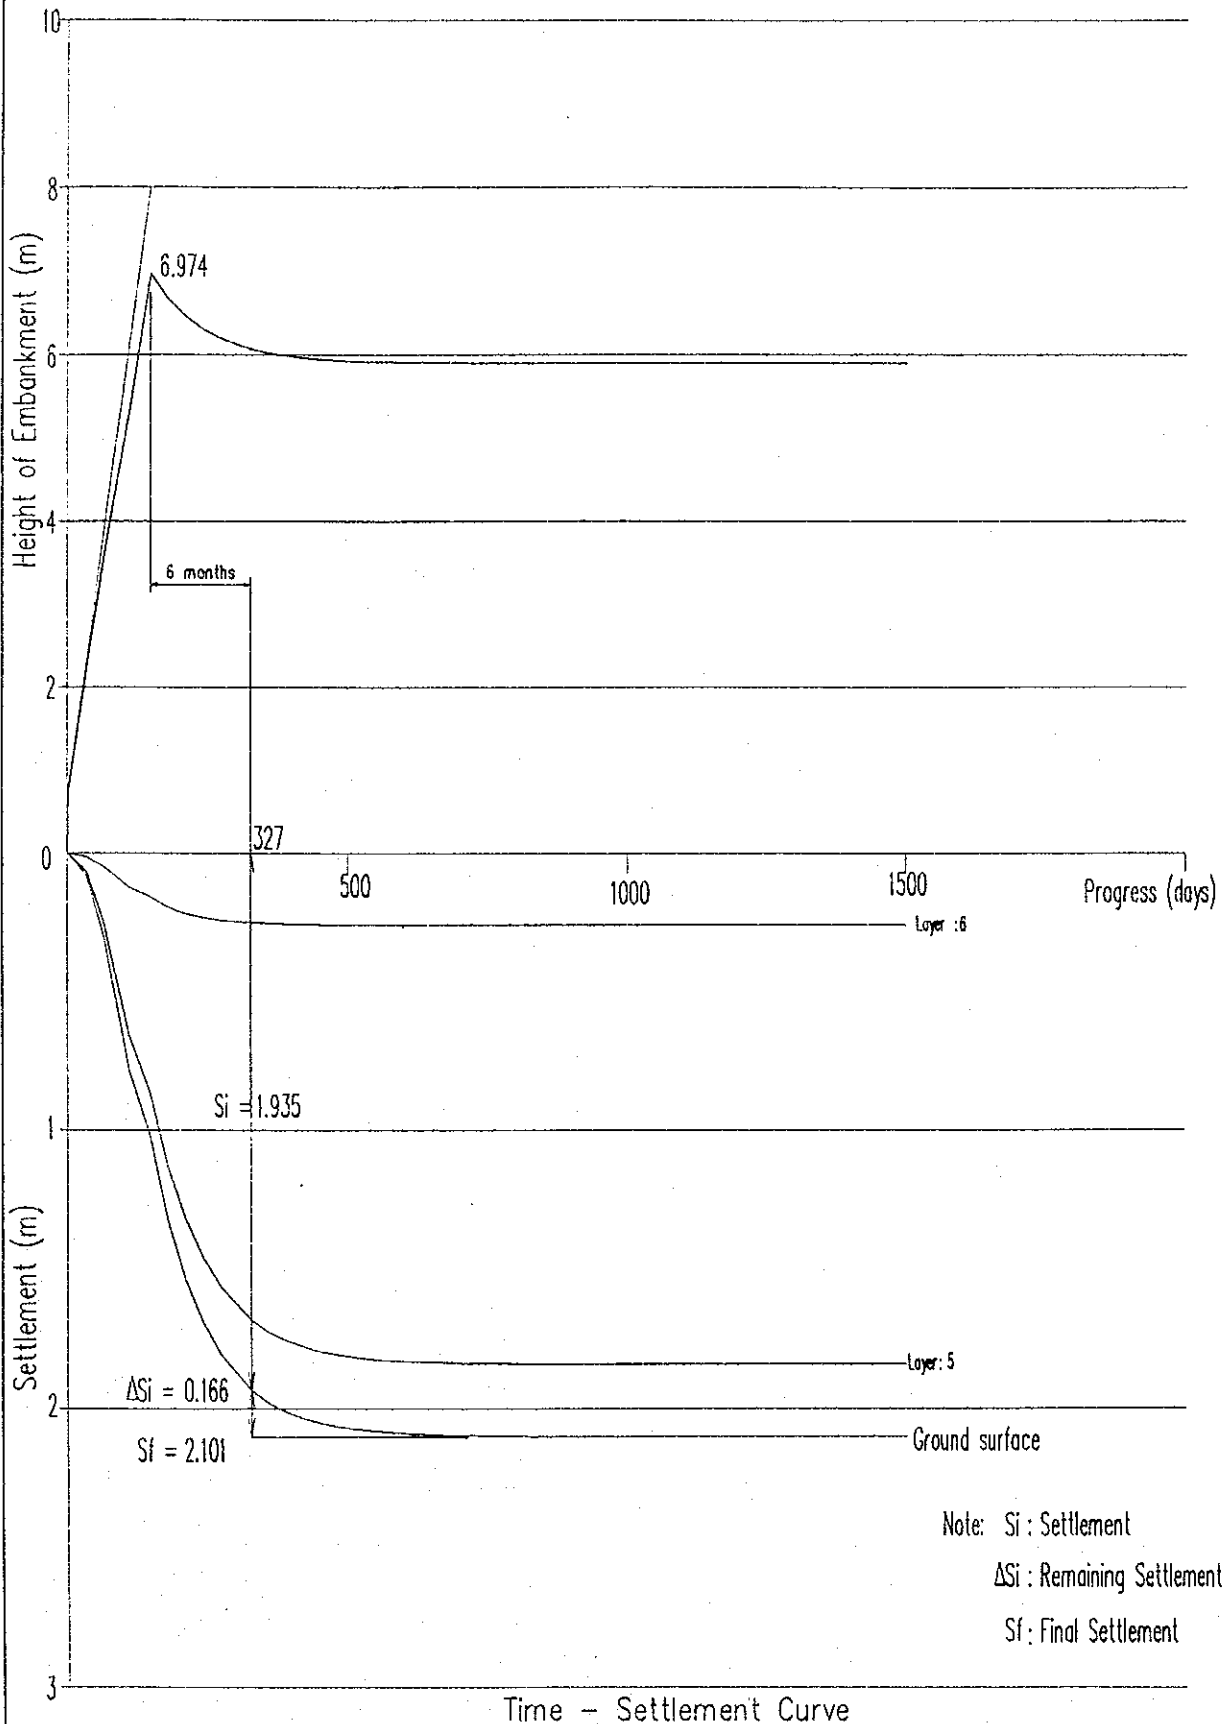

Note:  $S_i$  : Settlement  
 $\Delta S_i$  : Remaining Settlement  
 $S_f$  : Final Settlement



# Calculation of Settlement Segment 3 H=7m

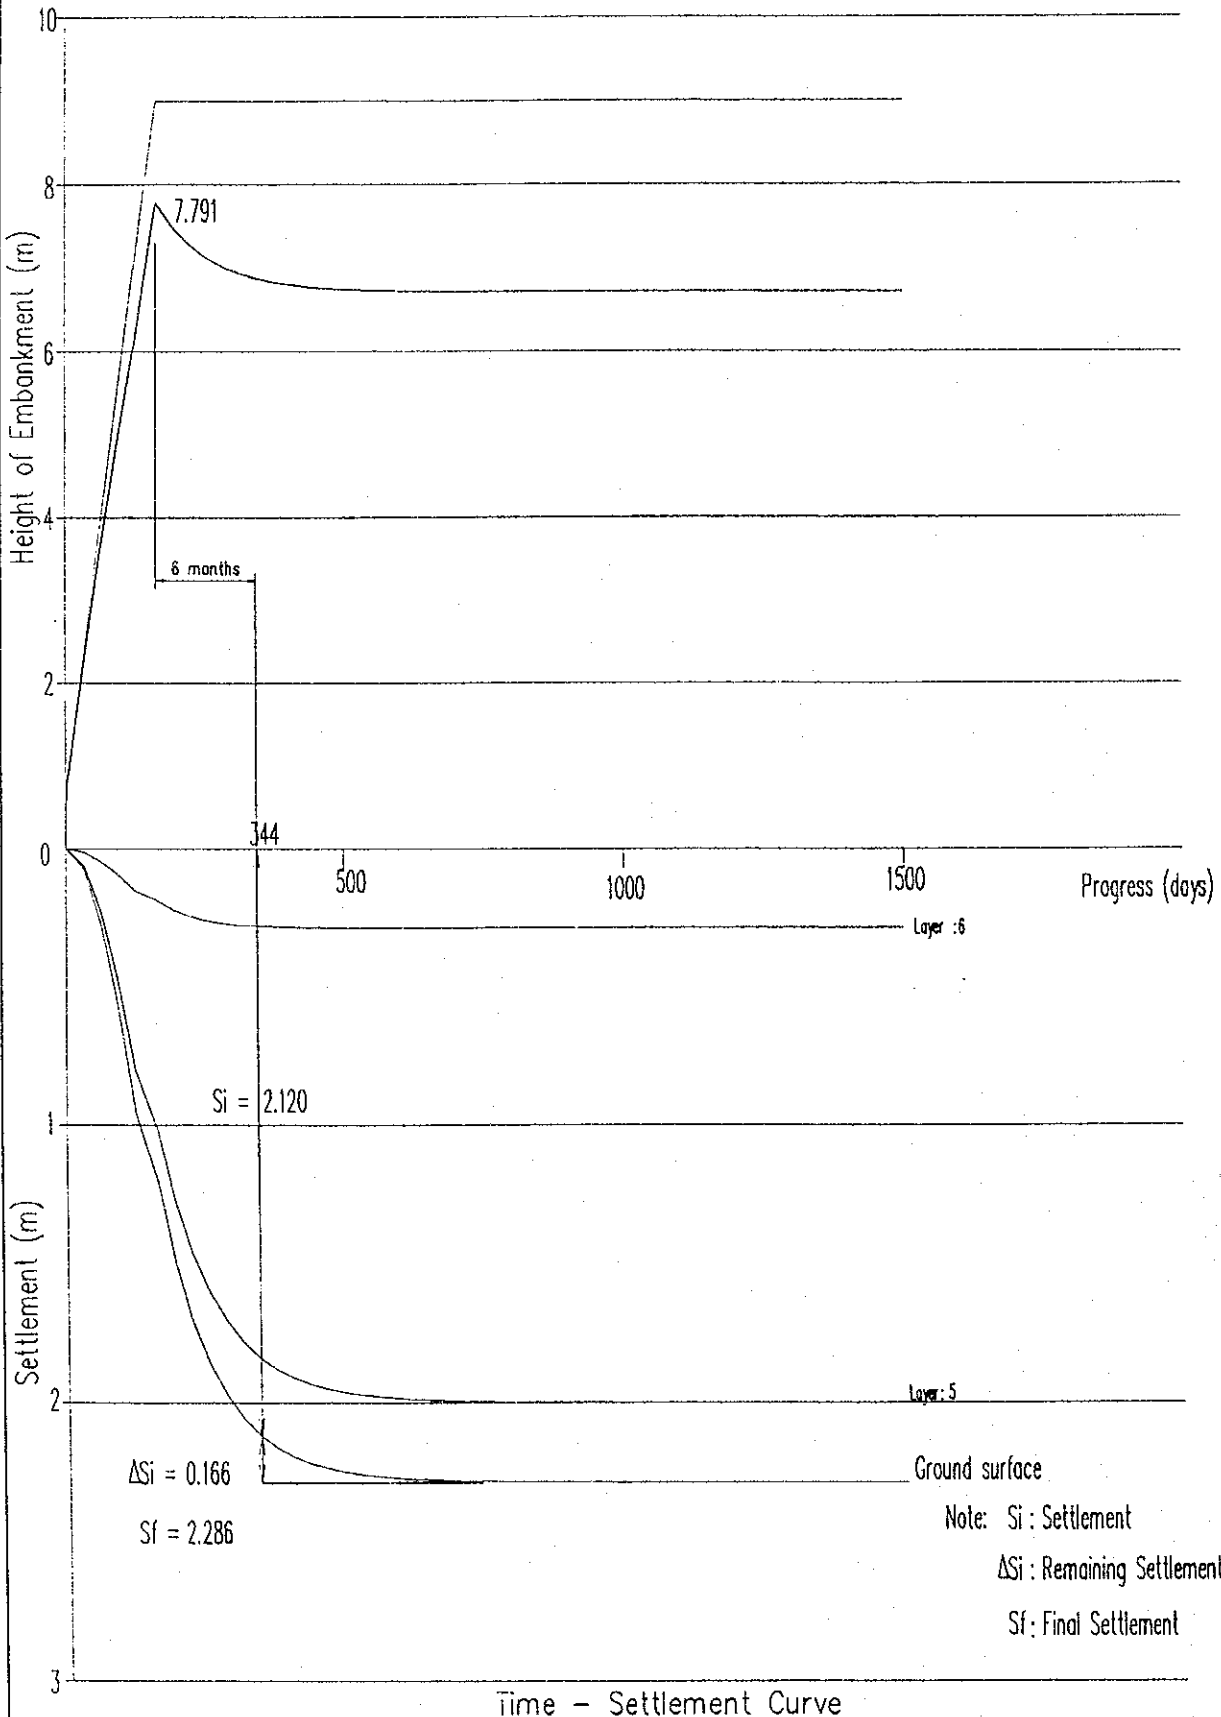

Note:  $S_i$  : Settlement  
 $\Delta S_i$  : Remaining Settlement  
 $S_f$  : Final Settlement

Time - Settlement Curve



# Calculation of Settlement Segment 3 H=8m

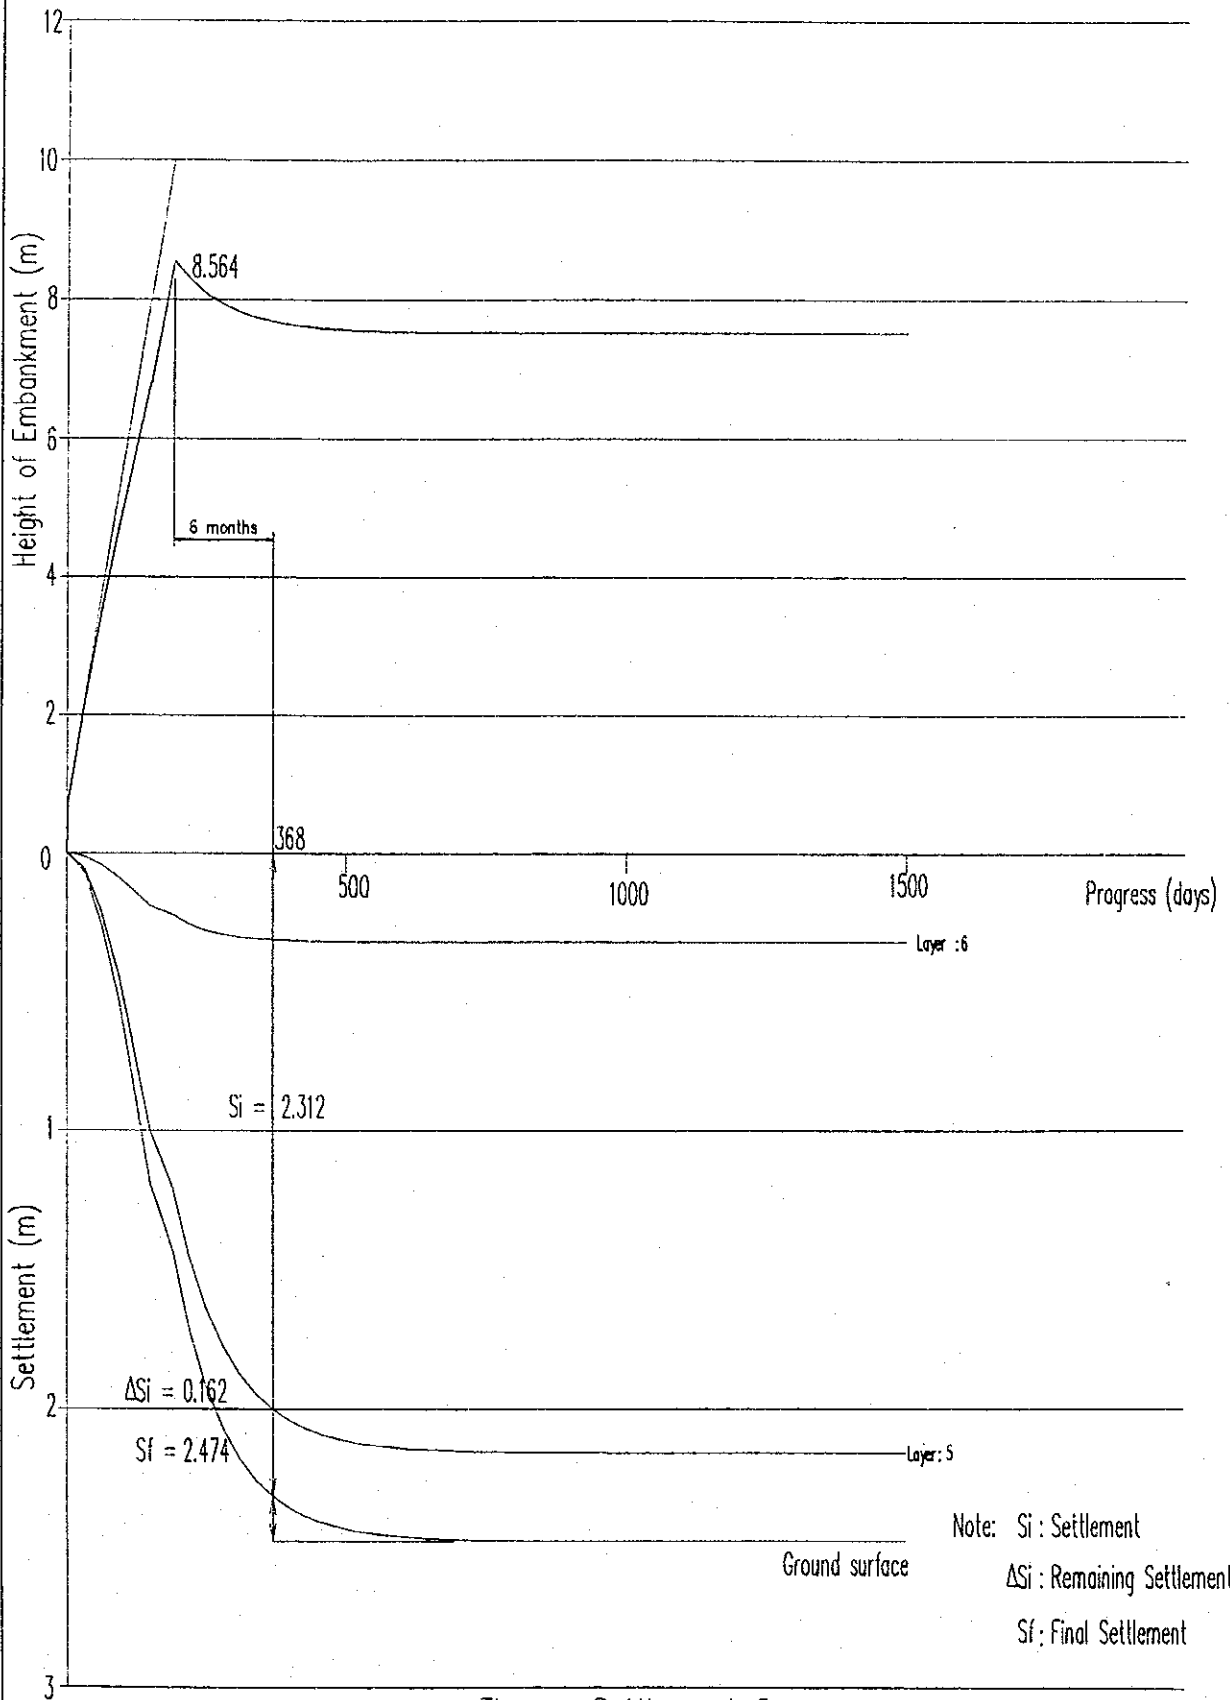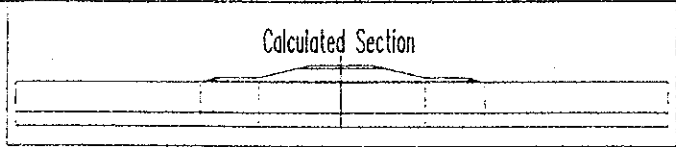



Note:  $Si$  : Settlement  
 $\Delta Si$  : Remaining Settlement  
 $Sf$  : Final Settlement

Time - Settlement Curve

# Calculation of Settlement Segment 4 H=3m

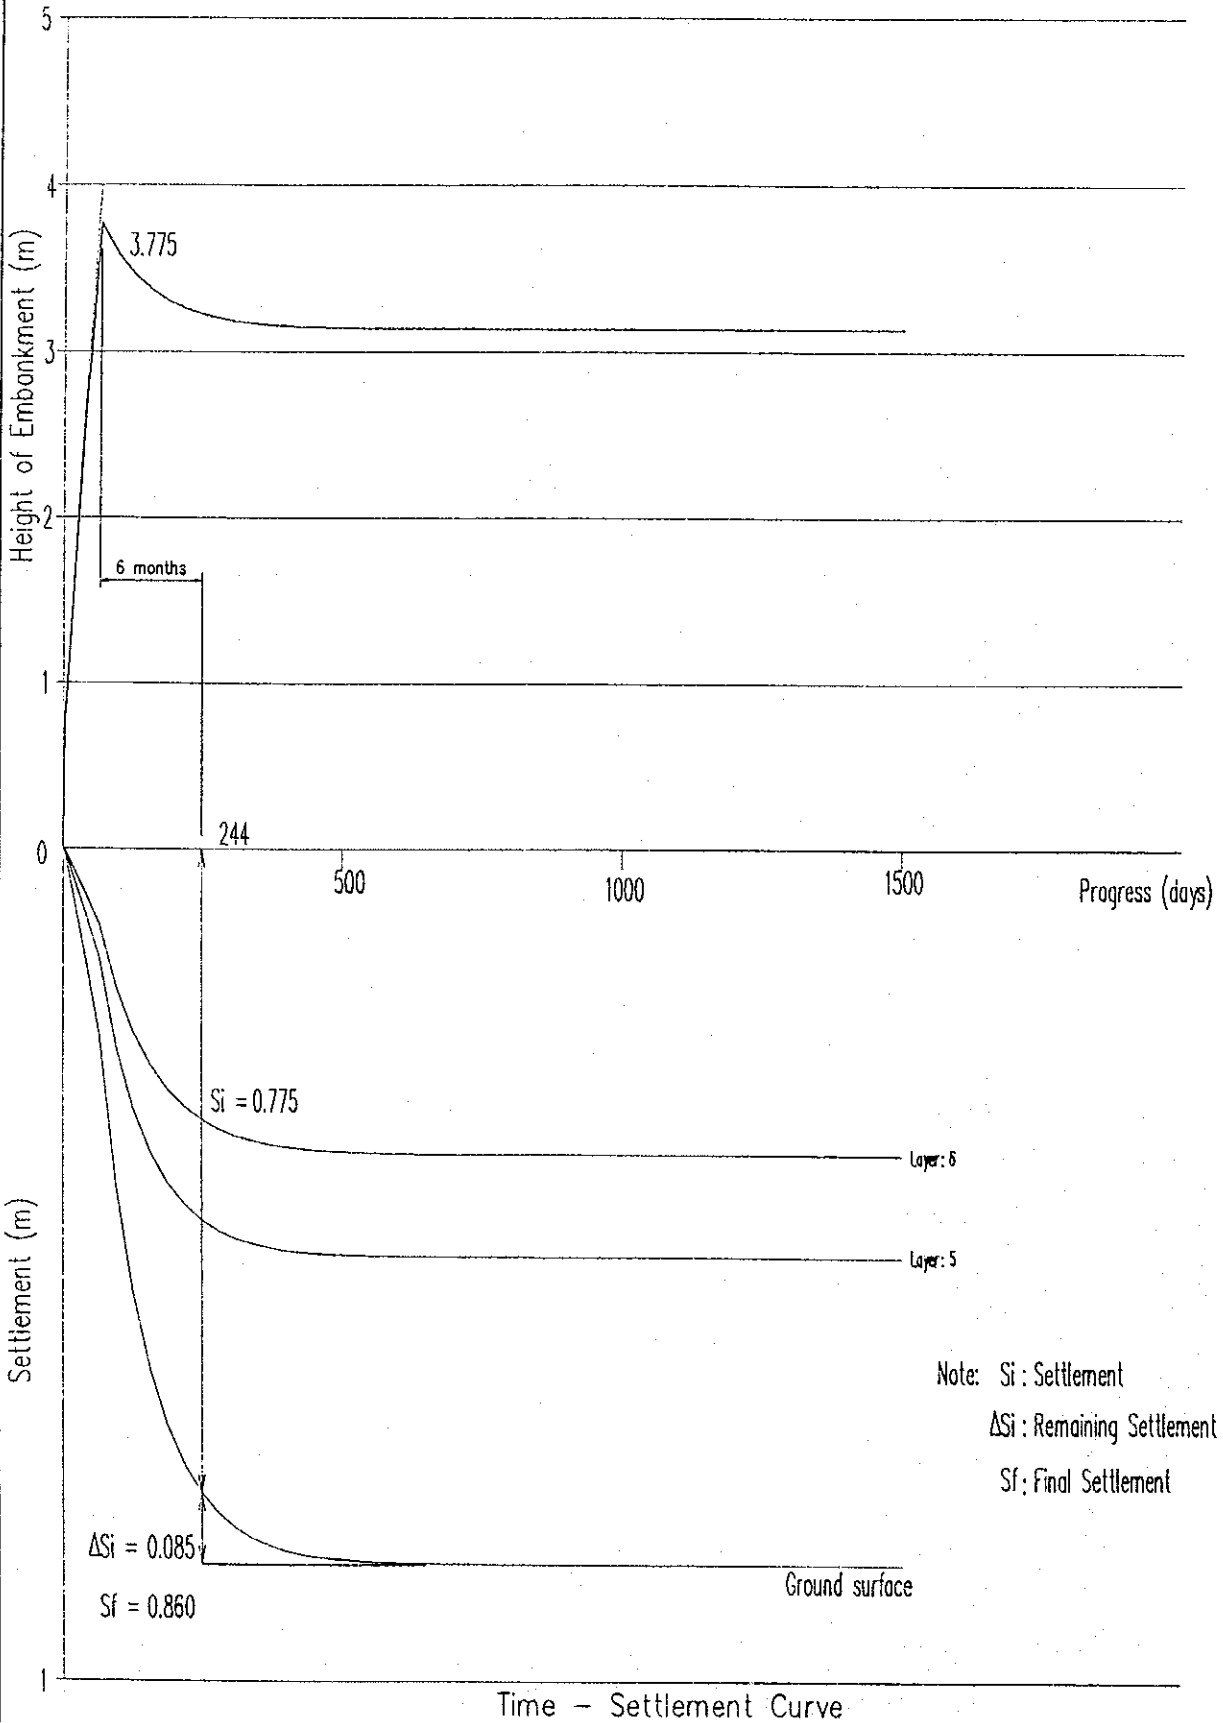



# Calculation of Settlement Segment 4 H=4m

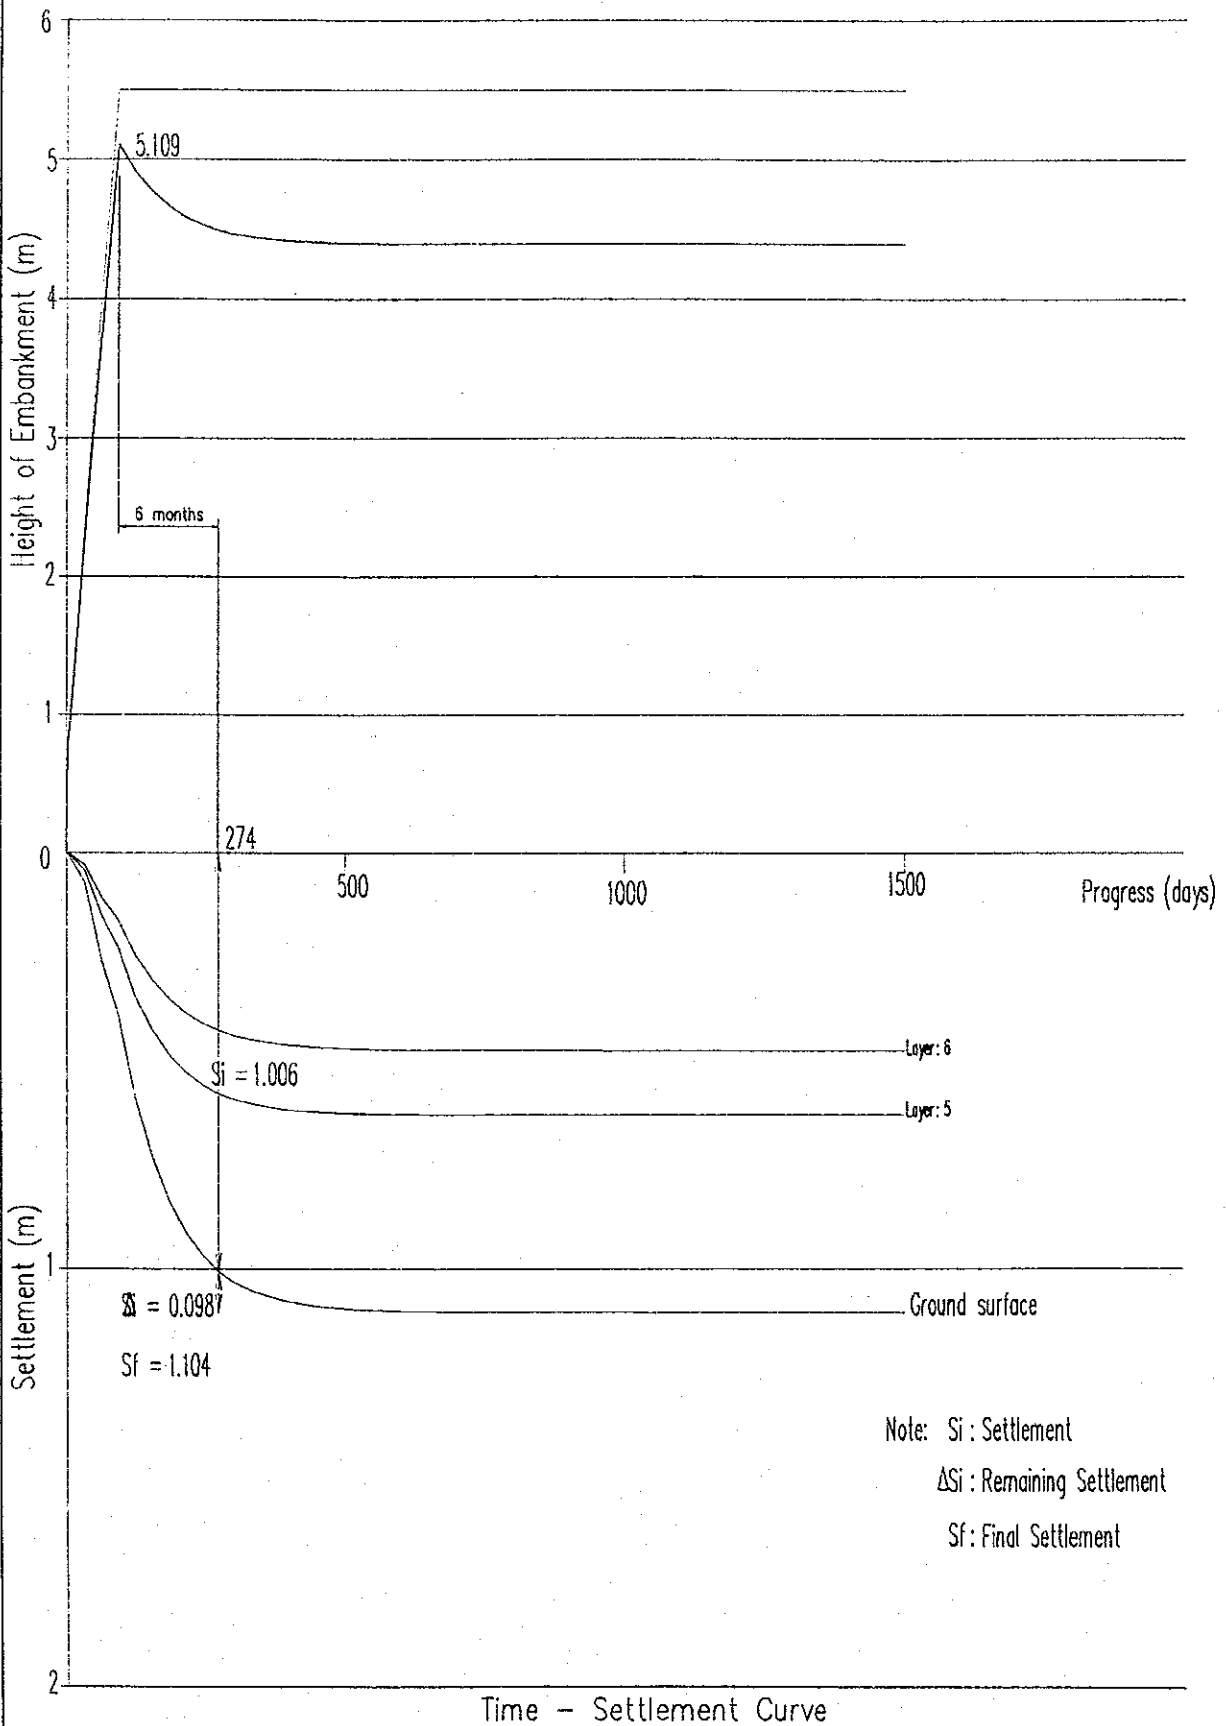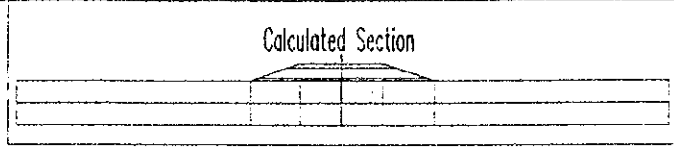





# Calculation of Settlement Segment 4 H=5m

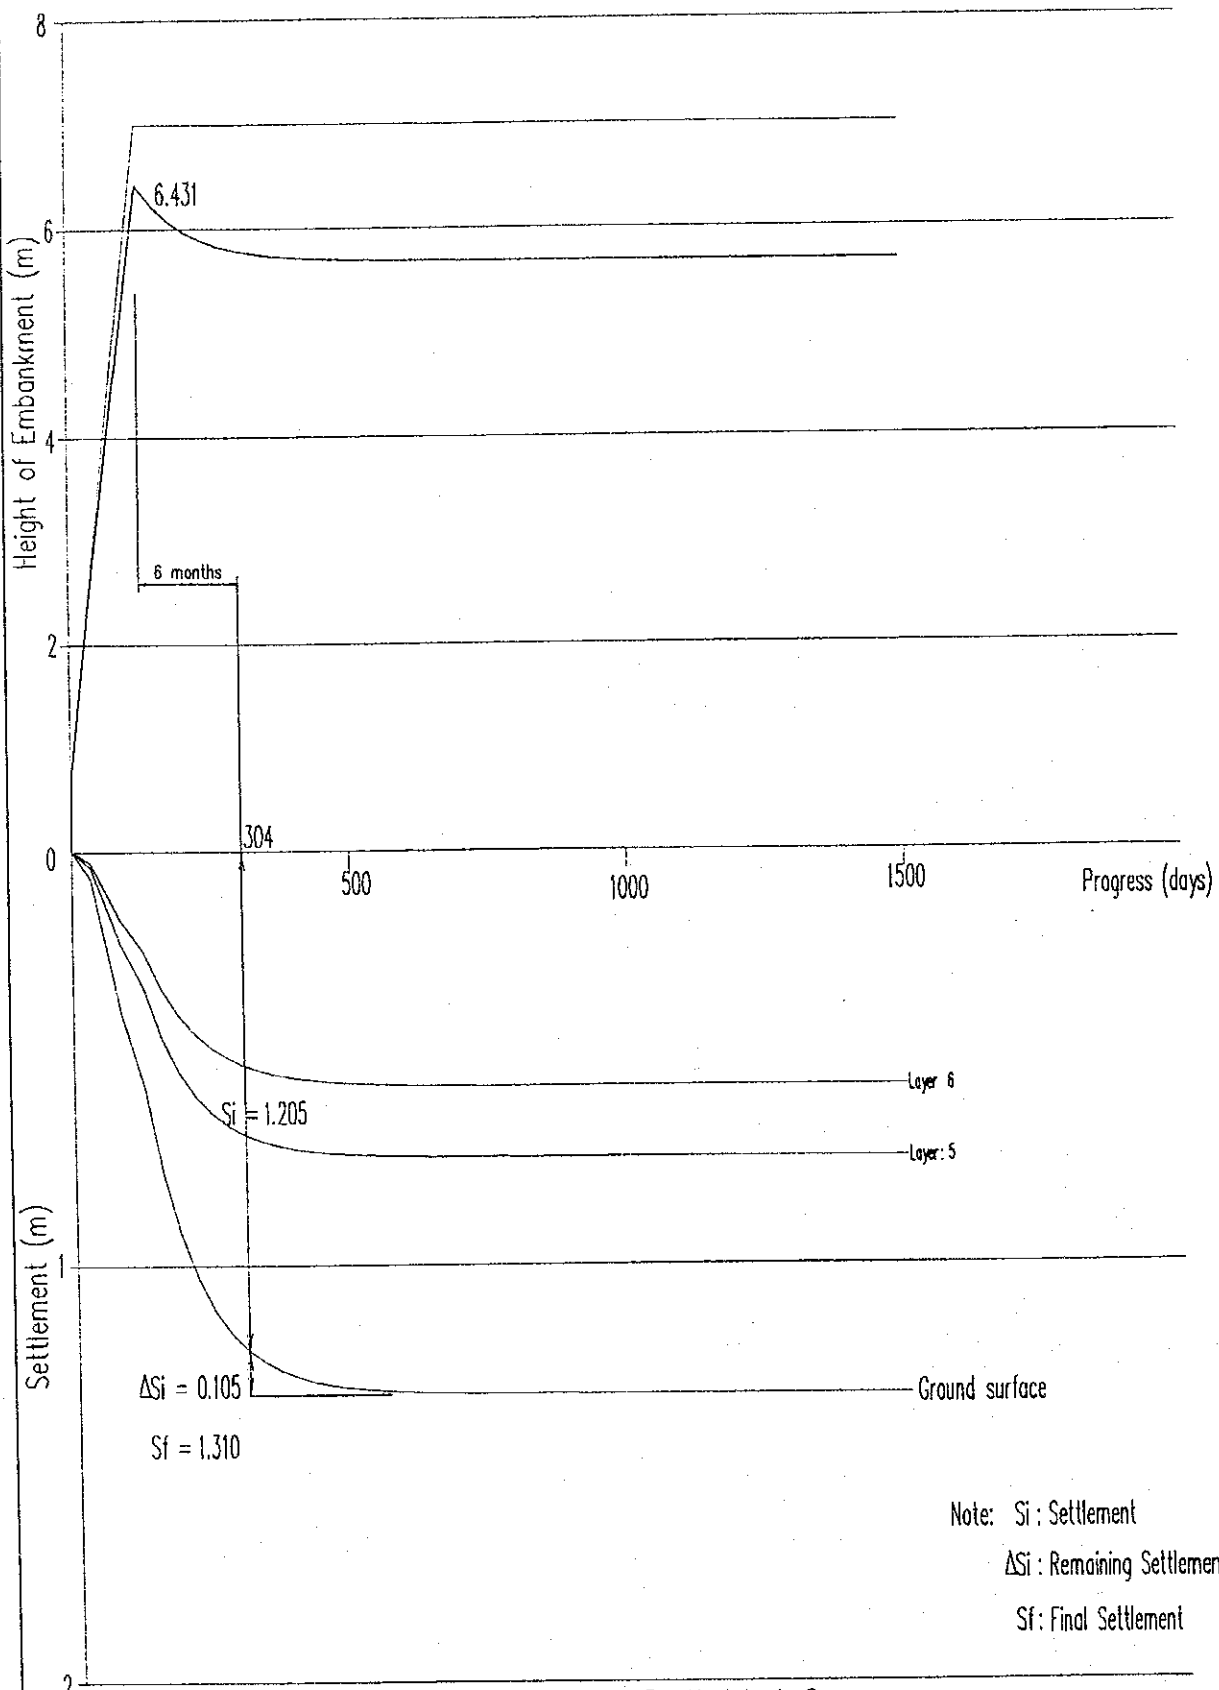

Note:  $S_i$  : Settlement  
 $\Delta S_i$  : Remaining Settlement  
 $S_f$  : Final Settlement

Time - Settlement Curve



# Calculation of Settlement Segment 4 H=6m

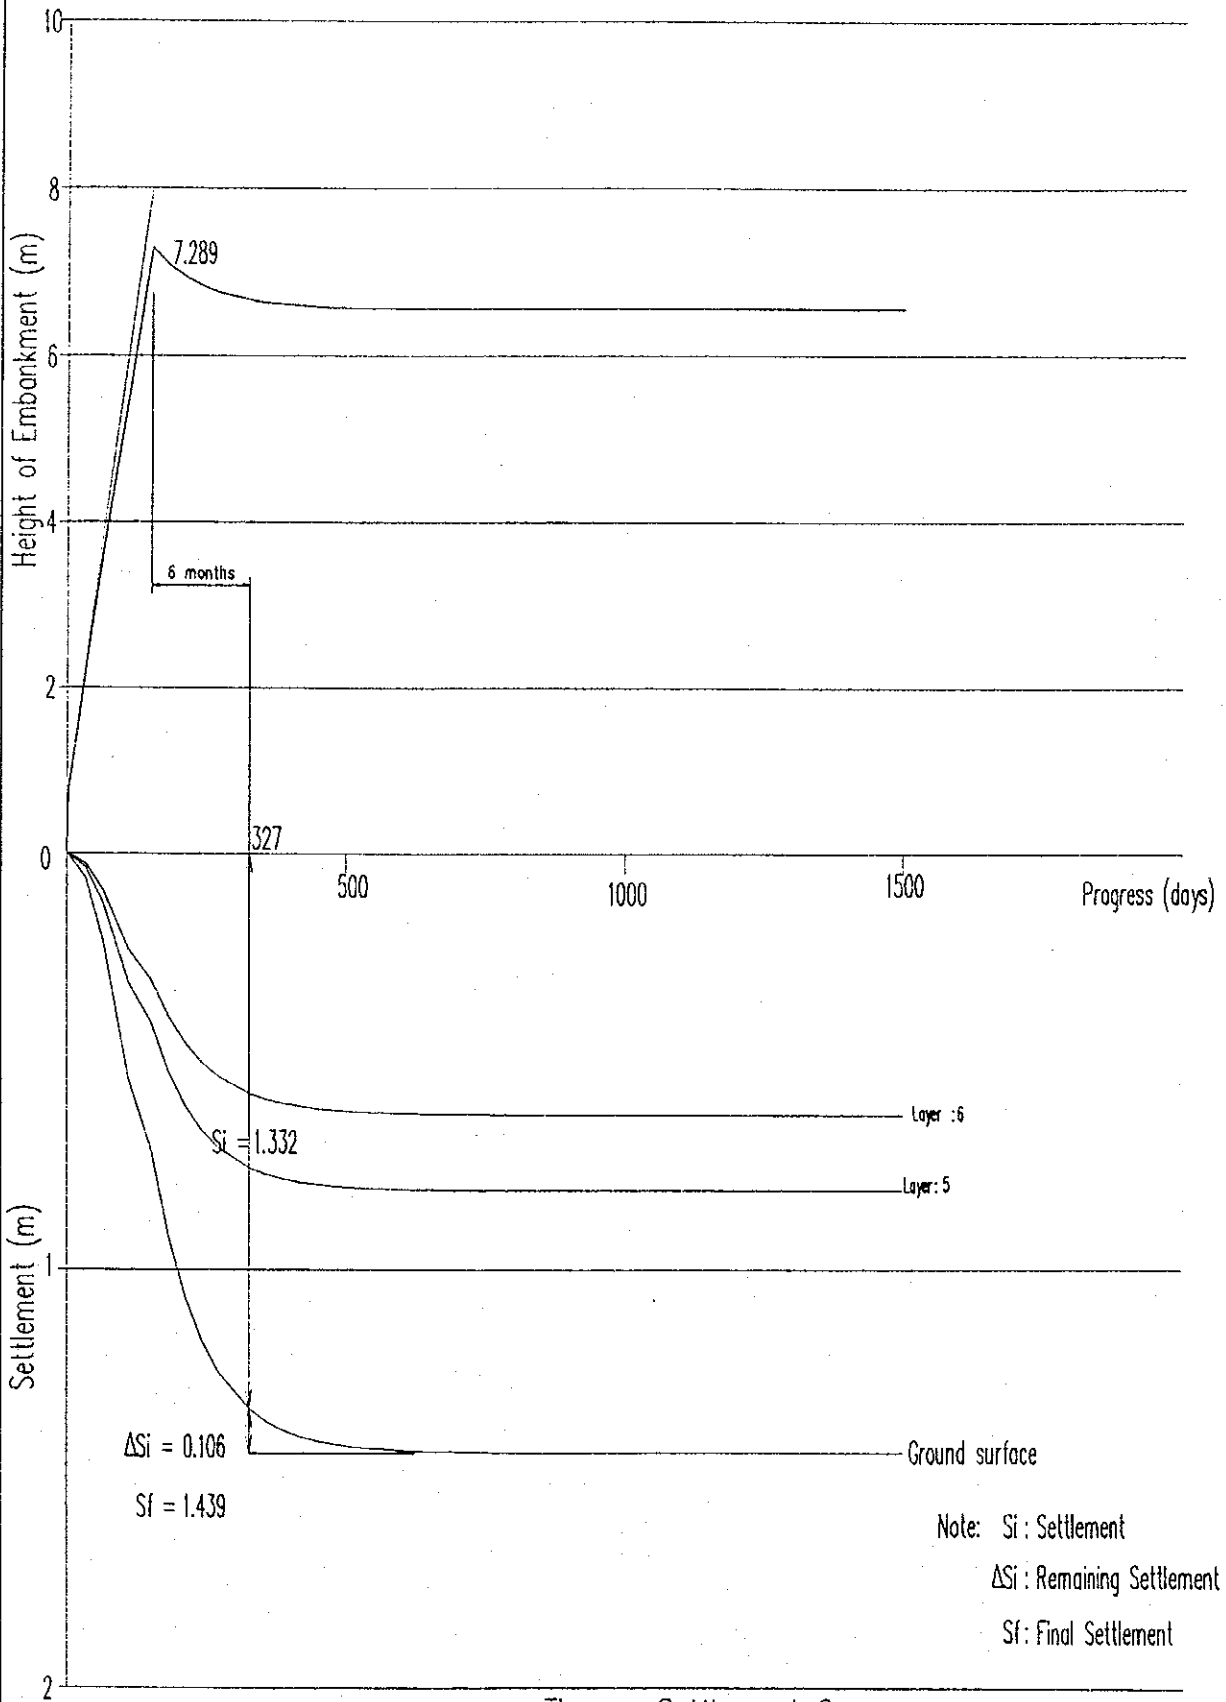



Note:  $S_i$  : Settlement  
 $\Delta S_i$  : Remaining Settlement  
 $S_f$  : Final Settlement

Time - Settlement Curve

# Calculation of Settlement Segment 4 H=7m

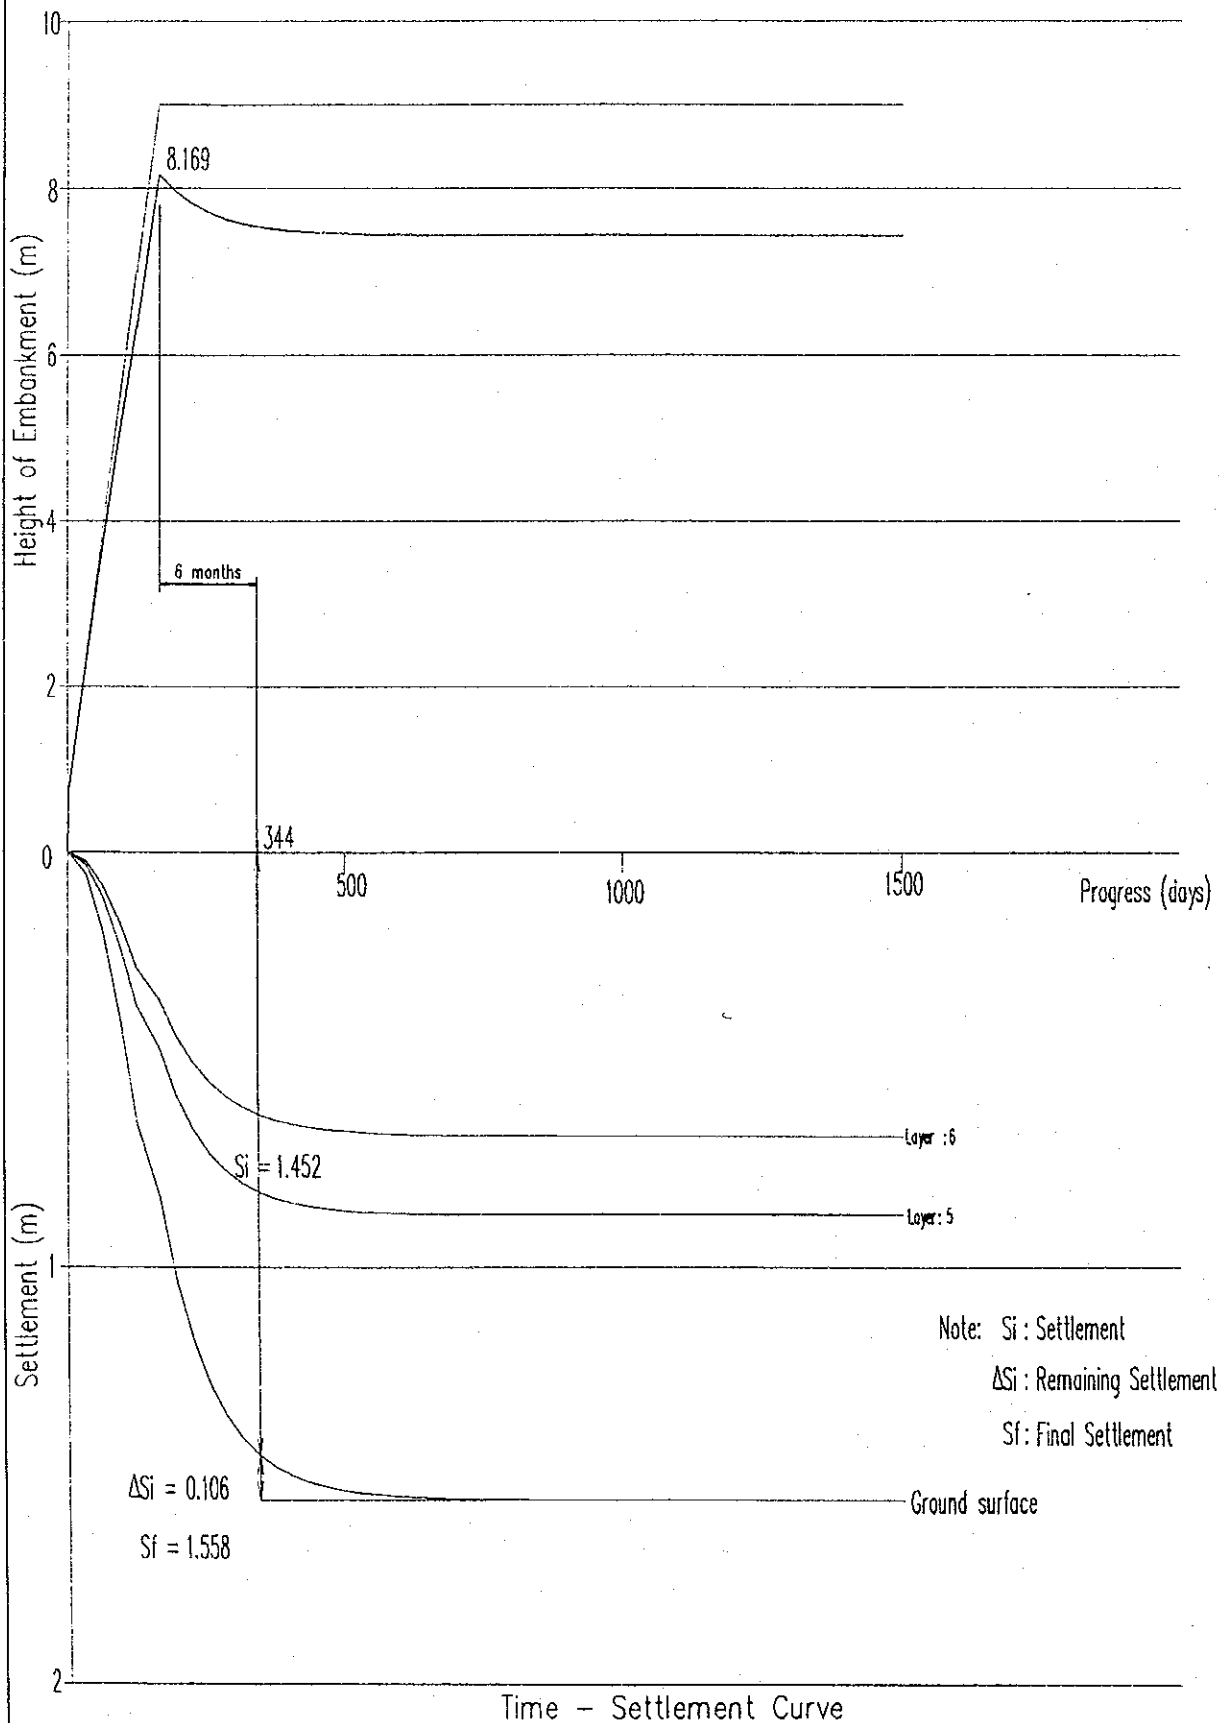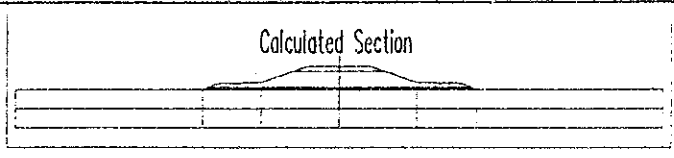

# Calculation of Settlement Segment H=8m

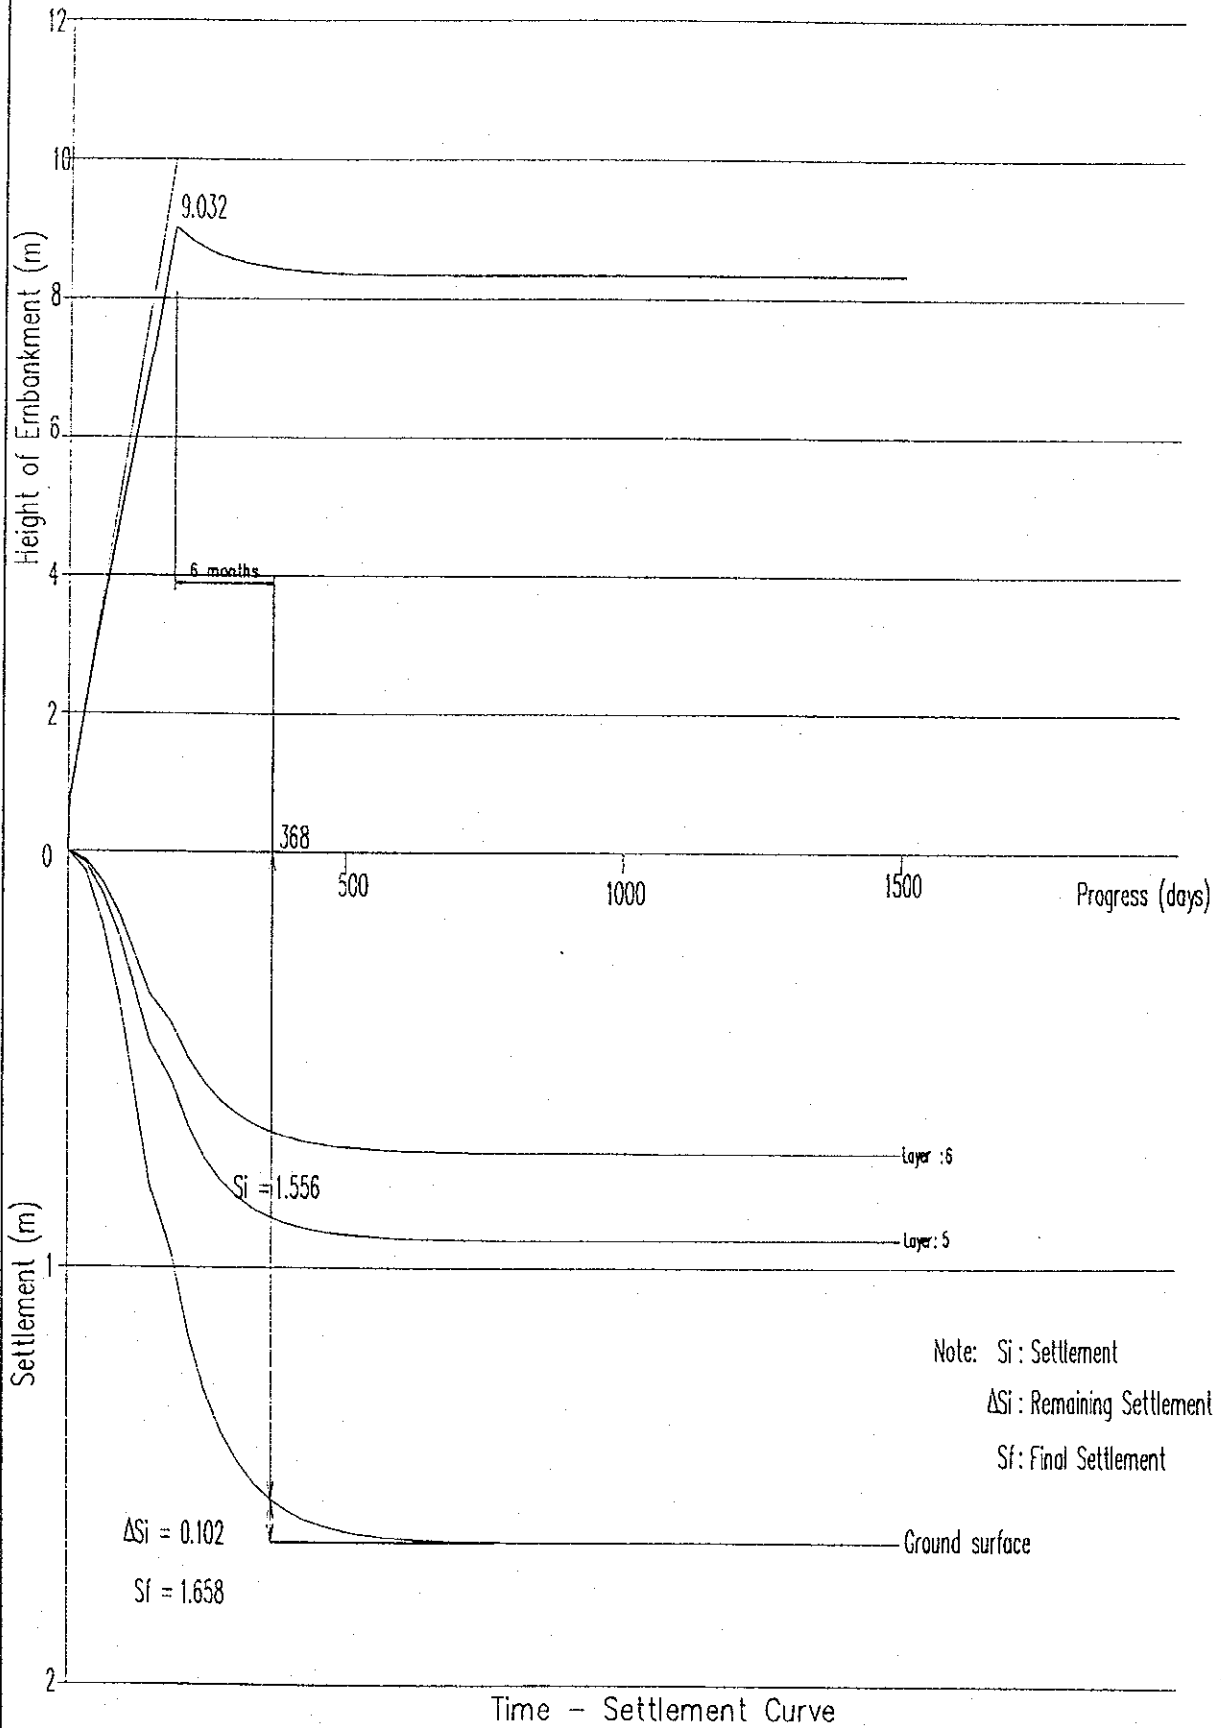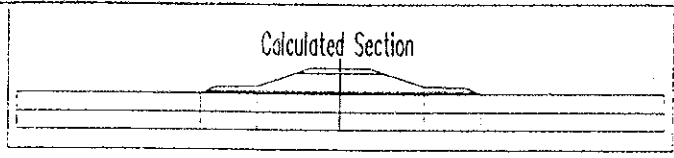

## *Chapter 5*

### **FLEXIBLE PAVEMENT**

	CONTENTS	I-5-1
5.1	TRAFFIC VOLUME AND EQUIVALENT SINGLE AXLE LOAD (ESAL)	I-5-2
5.2	FLEXIBLE PAVEMENT DESIGN	I-5-3

# CHARTER 5 FLEXIBLE PAVEMENT

## CONTENTS

5.1.	TRAFFIC VOLUME AND EQUIVALENT SINGLE AXLE LOAD (ESAL).....	2
5.2.	FLEXIBLE PAVEMENT DESIGN.....	3
5.2.1	DESIGN CRITERIA.....	3
5.2.2	DESIGN DATA .....	3
5.2.3.	AASHTO DESIGN CONCEPT.....	5
5.2.4	THICKNESS DESIGN.....	7



### 5.1. Traffic volume and Equivalent Single Axle Load (ESAL)

- Traffic volume, types of vehicles and traffic growth factor are forecasted to be used from a report of Feasibility Study.
- Equivalent single axle load is determined in accordance with types of vehicles and weighing data is referred in Rehabilitation Project NH No.1, section Sai Gon-Can Tho.
- Design cumulative ESAL is defined by the above 2 the basic data.

	Traffic 2006	Growth Factors (2006-2010)	Traffic 2010	Design Traffic	Traffic equivalency factor	E.S.A.L two way	Design E.S.A.L (2006- 2010)
Light Buses	1267	0.13	2051	2,984,777	0.012	35,084	
Heavy Buses	566	0.12	898	1,318,486	0.870	1,147,083	
Light truck	918	0.17	1721	2,350,924	0.012	27,634	
Medium Truck	2201	0.17	4175	5,674,988	1.529	8,677,057	
Heavy Truck	185	0.21	397	512,799	1.670	856,374	
						<b>10,743,232</b>	<b>4,834,454</b>
	Traffic 2010	Growth Factors (2010-2020)	Traffic 2020	Design Traffic	Traffic equivalency factor	E.S.A.L two way	Design E.S.A.L ( 2010- 2020 )
Light Buses	2051	0.09	4420	11,322,610	0.012	133,090	
Heavy Buses	898	0.08	1834	4,806,725	0.870	4,181,851	
Light truck	1721	0.12	4958	11,280,179	0.012	132,591	
Medium Truck	4175	0.12	11978	27,296,293	1.529	41,736,032	
Heavy Truck	397	0.11	1053	2,475,955	1.670	4,134,845	
						<b>50,318,410</b>	<b>22,643,284</b>
<b>Design E.S.A.L (2006- 2018)</b>							<b>27,477,739</b>



## 5.2. Flexible Pavement Design

### 5.2.1 Design criteria

According to comparative cost result of pavement structures designed by methods of Viet Nam, Japan, AASHTO (see appendix I-5-2), AASHTO method is selected for design.

Following design criteria has been applied.

**Table 5.2.1 Design Criteria for Pavement Design**

Design Input Requirements		Value	Reference	
1	Design Variables	Performance Period (years)	15	22TCN211-93
		Analysis Period (years)	15	22TCN211-93
		Traffic		
		Equivalent Single Axle Load (ton)	8.2	AASHTO
		Directional Distribution Factor, $D_D$	0.5	AASHTO
		Lane Distribution Factor, $D_L$	0.9	AASHTO
		Reliability	99	AASHTO
		Overall Standard Deviation	0.45	AASHTO
2	Performance Criteria	Initial Serviceability Index, $p_0$	4.2	AASHTO
		Terminal Serviceability Index, $p_t$	2.5	AASHTO
		Design Serviceability Loss, $\Delta PSI$	1.7	AASHTO
3	Material Properties	Effective Roadbed Soil Resilient Modulus, $M_R$ (psi)	$1500 \times CBR$	Asphalt Inst.
		Layer Coefficient for Asphalt Concrete, $a_1$	-	AASHTO
		Layer Coefficient for Base Course, $a_2$	-	AASHTO
		Layer Coefficient for Subbase Course, $a_3$	-	AASHTO
4	Pavement Characteristics	Drainage Coefficients for Base Course and Subbase Course, $m_2, m_3$	1.25	AASHTO

### 5.2.2 Design data

The design variables, performance criteria and pavement characteristics are selected as given in the Table 5.2.1. The estimated design ESAL (equivalent single axle load) is  $27 \times 10^6$  number of applications from the traffic forecast.

### 5.2.2.1 Material properties

1. The effective roadbed soil resilient modulus,  $M_R$  will be computed from the CBR value of the subgrade material.

Table 5.2.2 The CBR test result and the calculation result of design CBR.

Lab No	Material	Location	CBR(%)	Remarks
46	Dai Ngai 2 Sand	Tra Ech	13.2	
46-a			10.6	
46-b			9.4	
Average			11.1	
Standard deviation	=STDEV(13.2,10.6,9.4)		1.9	
Design CBR			8	11.1-1.9=9.2

Lab No	Material	Location	CBR(%)	Remarks
912	River Sand	1km down stream of proposed bridge	11.5	
912a			9.6	
912b			9.6	
Average			10.2	
Standard deviation	=STDEV(13.2,10.6,9.4)		1.1	
Design CBR			8	10.2-1.1=9.1

2. The CBR value of subbase material is taken as greater than 30%. This value of CBR shall be mentioned in the specification of subbase materials.
3. The CBR value of granular base material is taken as greater than 80%. This value shall be mentioned in the specification of base materials.
4. Design of flexible pavement by AASHTO method requires the selection of elastic modulus of Asphalt Concrete ( $E_{AC}$ ). The value of  $E_{AC}$  has been taken as 400,000 psi in AASHTO. AASHTO recommends using value based on the local practice. In Vietnam, similar projects like National Highway No.5 used 400,000 in some of the sections. National Highway No.18 project used a value of 300,000 for surface course as well as binder course. In accordance with pavement Exporter,  $E_{AC}$  value of 400,000 psi is very high. Based on these facts, the design value of  $E_{AC}$  will be taken as 300,000 psi.

### 5.2.2.2 Layer coefficients

For the material properties described in section 5.2.2.1, the layer coefficients are calculated from the chart (equation) given in AASHTO for the respective materials.

Table 5.2.3, Layer coefficients of pavement materials

Material Type	Coefficient
Layer coefficient for asphalt concrete a1, E <sub>AC</sub> =300,000psi	0.37
Layer coefficient for granular base course CBR≥80	0.132
Layer coefficient for subbase course CBR≥30	0.109

5.2.3. AASHTO design concept

For a set of design data of Reliability, Standard Deviation, ESAL applications, effective roadbed soil resilient modulus and Design Serviceability Loss, the Design Structural Number, SN is computed from the Nomograph or from the given relationship.

AASHTO states that, once the design structure number (SN) for an initial pavement structure is determined, it is necessary to identify a set of pavement layer thickness which, when combined, will provide the load-carrying capacity corresponding to the design SN. The following equation provides the basis for converting SN into actual thickness of surfacing, base and subbase:

NOMOGRAPH SOLVES:

$$\log_{10} \frac{W_{18}}{18} = Z_R * S_0 + 9.36 * 10^{-5} (SN+1)^{-0.20} + \frac{\log_{10} \left[ \frac{\Delta PSI}{4.2 - 1.5} \right]}{1.094} + 2.32 * 10^{-4} M_R - 8.07$$

$$0.40 + \frac{5.19}{(SN+1)}$$

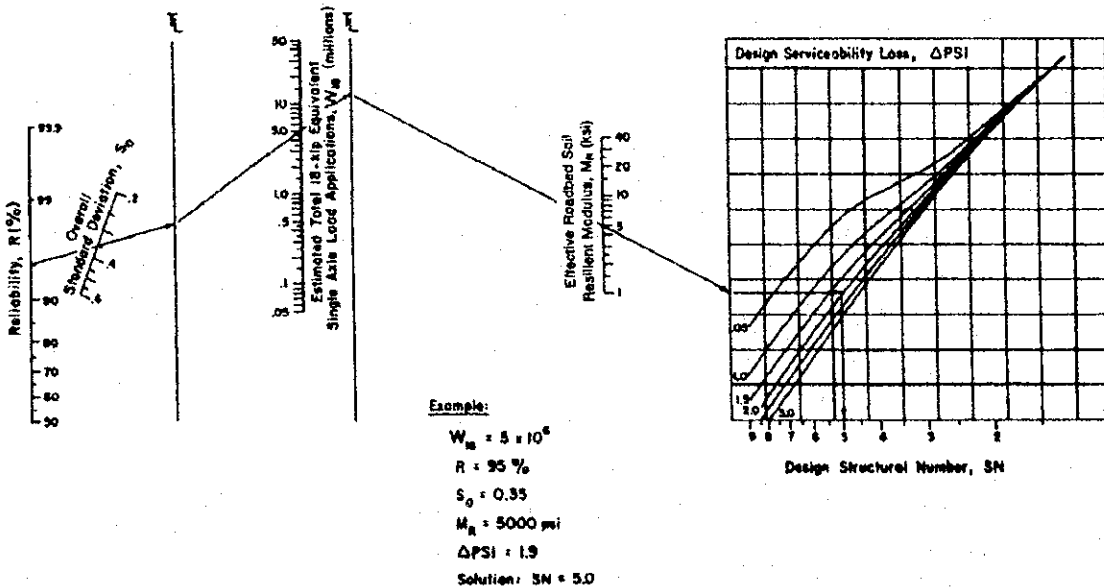


Figure 3.1. Design Chart for Flexible Pavements Based on Using Mean Values for Each Input

$$SN = a_1 D_1 + a_2 D_2 m_2 + a_3 D_3 m_3$$


Where,

$a_1, a_2, a_3$  = layer coefficients representative of surface, base, and subbase courses, respectively

$D_1, D_2, D_3$  = actual thickness (in inches) of surface, base, and subbase courses, respectively

$m_2, m_3$  = drainage coefficients for base and subbase layers, respectively

AASHTO further states, it should be recognized that, for flexible pavements,

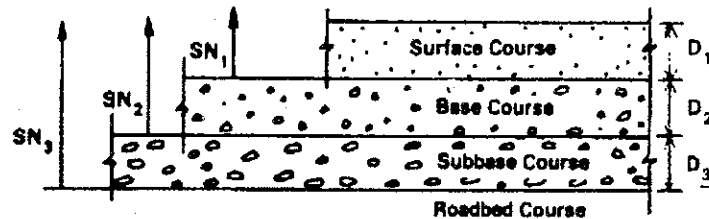

$$D^*_1 \geq \frac{SN_1}{a_1}$$

$$SN^*_1 = a_1 D^*_1 \geq SN_1$$

$$D^*_2 \geq \frac{SN_2 - SN^*_1}{a_2 m_2}$$

$$SN^*_1 + SN^*_2 \geq SN_2$$

$$D^*_3 \geq \frac{SN_3 - (SN^*_1 + SN^*_2)}{a_3 m_3}$$

- 1)  $a, D, m$  and  $SN$  are as defined in the text and are minimum required values.
- 2) An asterisk with  $D$  or  $SN$  indicates that it represents the value actually used, which must be equal to or greater than the required value.

**Figure 3.2. Procedure for Determining Thicknesses of Layers Using a Layered Analysis Approach**

the structure is a layered system and should be designed accordingly. The structure should be designed in accordance with the principles shown in Figure 3.2. First, the structural number required over the roadbed soil should be computed. In the same way, the structural number required over the subbase layer and the base layer should also be computed, using the applicable strength values for each. By working the difference between the

computed structural numbers required over each layer, the maximum allowable thickness of any given layer can be computed.

#### 5.2.4 Thickness design

Based on the design concept given in Figure 3.2, the calculated thickness for various layers have been summarized in Table 5.2.4 for various cases. SB, BS and AC stand for subbase course, base course, asphalt concrete course respectively.

Table 5.2.4, Calculated layer thickness

SN3	SN2	SN1	Calculated thickness			Rounded thickness		
			SB	BS	AC	SB	BS	AC
5.701	5.3108	4.2996	6	15	30	15	15	30


The thickness 15cm for subbase and base courses corresponds to the minimum practical thickness requirements in the rounded values.

Comparison of the results with design on other highway projects show that, asphalt concrete thickness of Class I,II roads is between 12cm and 15cm in a common practice in Vietnam due to economical reasons. AASHTO suggests a minimum of 4 in of asphalt concrete for traffic level more than 7 million equivalent single axle load. However, AASHTO does not provide any information on asphalt concrete thickness requirement for different types of base strength. Based on these it is concluded that 15cm of asphalt concrete with 5cm of surface course and 10cm of binder course shall be taken.

AASHTO also states that, the structural number equation does not have a single unique solution; i.e., there are many combinations of layer thickness that are satisfactory solutions. AASHTO further states, when selecting appropriate values for the layer thickness, it is necessary to consider their cost effectiveness along with the construction and maintenance constraints in order to avoid the possibility of producing an impractical design. The layer thickness are re-calculated to satisfy the structural number equation ( $SN = a_1D_1 + a_2D_2m_2 + a_3D_3m_3$ ) with 5cm of asphalt concrete surface course and 10cm of asphalt concrete binder course. The results for this alternate are given in Table 5.2.5.

Table 5.2.5, Calculated Layer Thicknesses

SN3	Calculated thickness			
	SB	BS	AC	TOTAL
5.701	30	30	15	75

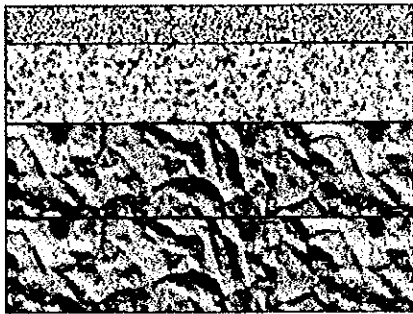

5cm asphalt concrete surface course

10cm asphalt concrete binder course





30cm aggregate base course CBR $\geq$ 80

30cm aggregate subbase course CBR $\geq$ 30

**Traffic Input Data for Pavement Design  
Hightway No.1 Rehabilitation Project**



WIM Site	Km Post	AADT		Percent Heavy Vehicles	Distribution of Heavy Vehicles				Average ESAL/Vehicle				ESALs (million)		
		1996	1996		Single-Unit		Truck-Trailer		Direction	Single-Unit		Truck-Trailer		1996	10-Yr
					2-axle 6-tire	3-axle	<=4-axle	5-axle		2-axle 6-tire	3-axle	<=4-axle	5-axle		
<b>Contract 3:</b>															
1	1916	11400	55.40%	70.60%	18.30%	4.90%	6.20%	NB	2.40	5.99	1.93	2.35	3.49	61.20	
2	1933	9200	54.50%	93.30%	4.70%	1.40%	0.60%	SN	1.24	0.88	1.16	1.58	1.37	24.10	
3	1942	8800	50.70%	91.90%	4.40%	1.60%	2.10%	NB	1.09	0.98	0.30	1.31	0.98	17.20	
4	1950	7600	53.00%	91.60%	4.40%	1.70%	2.30%	SB	1.05	0.96	0.44	1.18	0.95	16.70	
5	1969	5800	54.20%	91.10%	5.90%	1.50%	1.50%	NB	1.11	0.68	2.08	0.94	0.90	15.70	
6	1993	5400	58.00%	92.40%	4.10%	1.90%	1.60%	SB	0.96	0.58	1.14	0.57	0.76	13.40	
7	2009	4650	46.70%	91.80%	4.70%	2.40%	1.10%	NB	0.90	0.76	0.53	0.74	0.65	11.40	
8	2025	3500	46.00%	96.10%	3.00%	0.20%	0.70%	SB	0.66	0.67	0.21	1.16	0.49	8.60	
9	2030	2800	47.20%	92.20%	5.10%	1.60%	1.10%	NB	2.32	1.10	0.88	2.13	1.28	22.40	
10	2051	2100	50.30%	96.00%	2.90%	0.90%	0.20%	SB	0.88	0.51	0.78	1.31	0.50	8.70	
									1.99	1.27	0.92	1.86	1.11	19.40	
									1.60	1.38	1.07	2.05	0.91	15.90	
									1.72	0.39	0.24	0.59	0.64	11.20	
									1.77	0.44	1.18	1.56	0.67	11.70	
									1.67	0.43	0.21	0.66	0.48	8.40	
									1.58	0.47	0.84	1.31	0.45	8.00	
									1.46	0.38	0.18	0.53	0.33	5.80	
									1.97	2.30	0.59	1.26	0.47	8.30	
									1.46	0.77	1.32	5.85	0.28	4.90	
									2.75	1.16	1.06	4.39	0.52	9.10	

## Comparison of Pavement Structure

Design Standards	Pavement Structure	Costs(US\$/m <sup>2</sup> )	Remarks
<b>Case-1</b> Vietnam Design Standards 227CN211-93 (Design Specification for Flexible Pavements -1998)	 <p style="text-align: center;">Thickness ; 70cm</p>	23.9	
	<b>Case-2</b> Japan Road Association (The Policy of Asphalt Pavement Design -1992)	a)  <p style="text-align: center;">Thickness ; 70cm</p>	25.6
<b>Case-3</b> AASHTO (Guide for Design of Pavement structures )	b)  <p style="text-align: center;">Thickness ; 55cm</p>	27.9	
		 <p style="text-align: center;">Thickness ; 75cm</p>	23.5

Note; Sub-Grade  
Design CBR=8(%)

Legend;



THE DETAILED DESIGN OF  
THE CAN THO BRIDGE CONSTRUCTION  
IN SOCIALIST REPUBLIC OF VIET NAM

Comparison of Pavement Structure

JAPAN INTERNATIONAL COOPERATION AGENCY




## *Chapter 6*

# **LIGHTING SYSTEM**

## Design of Road Lighting

Street lighting luminaries is 250W High Pressure Sodium vapor type having a light distribution complying with Semi Cut-off.

And it is mounted at 11.5m from road surface, with 15deg of mounting angle, on a double armed street lighting column as below.

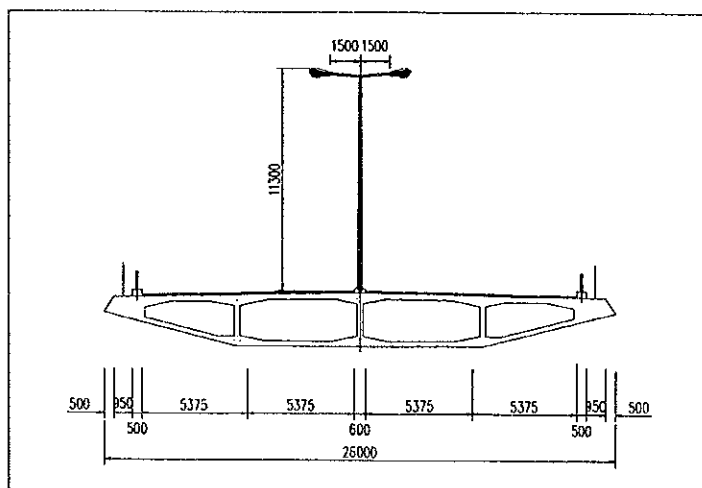

Lighting spacing(S) is decided by road width(W) and lighting height(H) with reference to Vietnam Standard 20TCN95-83. Road width is 10.25m(without shoulder) and lighting height is 11.5m, therefore lighting spacing(S) is sufficient with 40m to refer to the table below.

Determination for height of installing Light according to equal Light level

Light Source	Height of installing Light	Ratio: S/H
High Pressure Sodium	$>0.8W$	4
High Pressure Mercury	$>1.0W$	3.5
Low Pressure Sodium	$>1.2W$	3-3.5

W : Road Width(Sphere for lighting of light) ; m

S : Lighting spacing(Distance between 2 light) ; m

H : Height of installing light ; m

The result of luminance calculation from the above condition was 18.5 lux in average.

Therefore Standard luminance is  $1.23\text{cd/m}^2$  ( $= 18.5 \div 15.0$ ), because this project line is asphalt pavement.

Luminance coefficient

Required illuminance for luminance $1\text{nt}(\text{cd/m}^2)$	
Asphalt	$15\text{ lx/cd/m}^2$
Concrete	$10\text{ lx/cd/m}^2$

The traffic volume prediction of this project line is 30,000 units per day in 2010 and 70,000 units per day in 2020.

In the case of fragment line in a time, the traffic volume will be 625 units per day in 2010 and 1,500 units per day in 2020. Judging from the above, Lighting luminance is in need of 1.2 cd/m<sup>2</sup> to be shown in table as below.

Therefore, this lighting plan is satisfied with Standard Luminance.


Determination of Average Dazzling L(tb)

Light Categories	Maxium Traffic Volume	L(tb) cd/m <sup>2</sup>
A	from 3,000 cars or more	1.6
	from 1,000 to 3,000 cars	1.2
	from 500 to 1,000 cars	1.0
	less than 500 cars	0.8

A: Freeway / Street of Class I, II / Main Square of city / Transport Square etc.

For the reasons mentioned above, we decide that lighting spacing(S) is 40m in basically.


Illuminance Distribution at the Typical Portion of Throughway

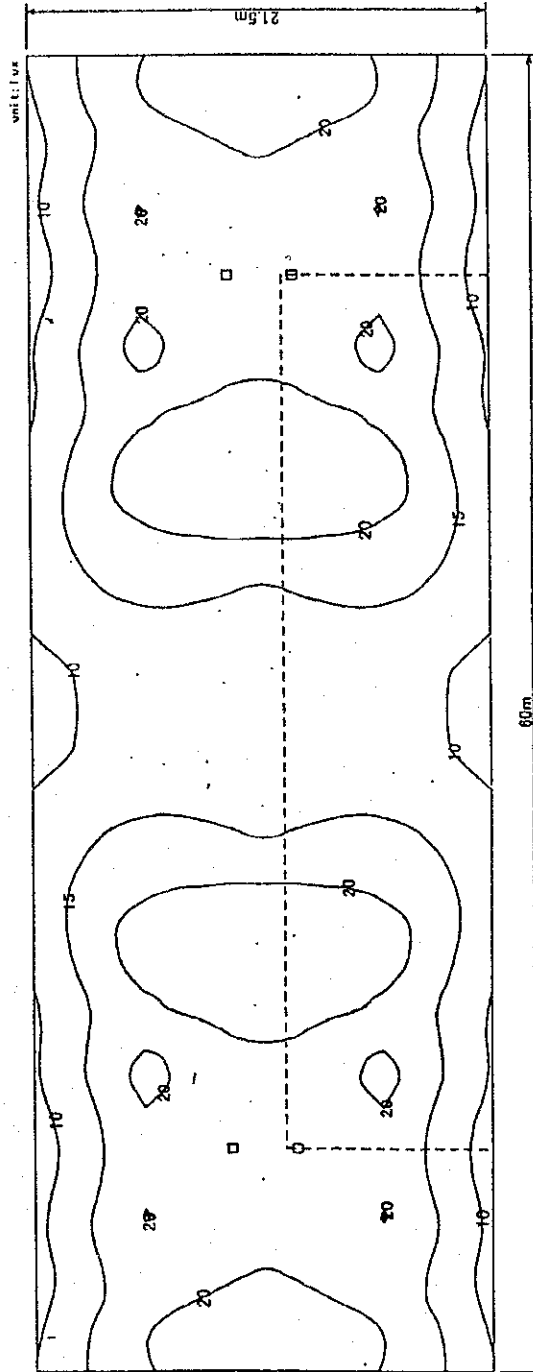

---	
Area	Road Area
Average illuminance	16.0 lux
Minimum illuminance	8.1 lux
Maximum illuminance	27.2 lux
E min./E ave.	0.509
E min./E max.	0.300

Model No.	YAT35125
Lamp	NH250
Total Luminous Flux	26500 <small>lm/w</small>
Maintenance Factor	0.6
Light Distribution Code	#K60333
Mounting Height	11.5 m
Qty of Luminaires	4 sets


Illuminance Distribution at the Underpass Portion of Interchange Viaduct

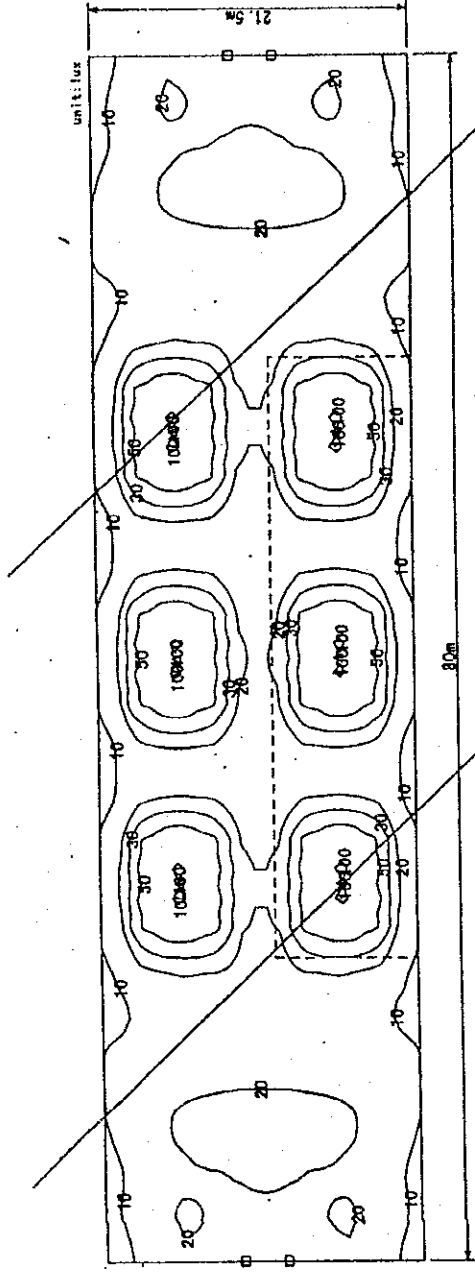

Average Illuminance	35.9 lux
Minimum Illuminance	7.6 lux
Maximum Illuminance	106.6 lux
E min./E ave.	0.213
E min./E max.	0.072

Model No.	YAT35125	□	△
Model Name	NH1250	YB58232	サービステーション用器具
Lamp	NH150	NH150	
Total Luminous Flux	26500 lumen	14500 lumen	
Maintenance Factor	0.6	0.6	
Lamp Distribution Code	AK60333	K67184	
Mounting Height	11.5 m	4.5 m	
No. of Luminaires	4 sets	8 sets	

### Vertical Illuminance Distribution around Toll Gate

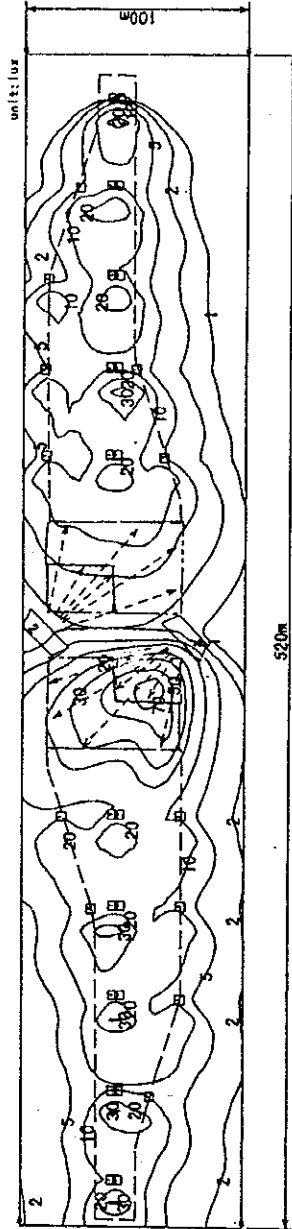

Model No.	YAT35125	YAS6350
Model Name	NHT250	H1000
Lamp	26500 lumens	55000 lumens
Total Illuminance	0.6	0.8
Maintenance Factor	0.6	0.8
Light Distribution	K51273	K51273
Mounting Height	11.5 m	20 m
No. of Luminaires	32 sets	12 sets

Area	A	B	C	D	E	F
Average Illuminance	53.7 lux	36.1 lux	3.79 lux	6.91 lux	16.1 lux	12.7 lux
Minimum Illuminance	24.6 lux	6.3 lux	2.33 lux	1.80 lux	7.5 lux	0.0 lux
Maximum Illuminance	90.4 lux	73.3 lux	5.39 lux	13.39 lux	41.1 lux	35.6 lux
E min./E ave	0.459	0.173	0.614	0.261	0.462	0.000
E min./E max	0.272	0.085	0.432	0.135	0.181	0.000







JICA