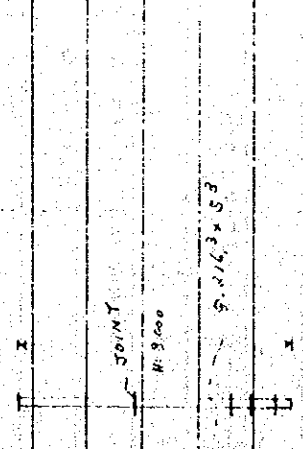
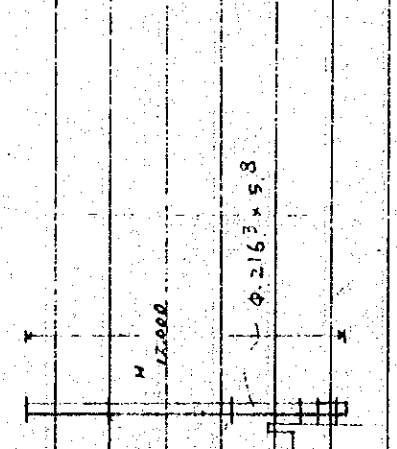


STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
3 ネット7インズ (NET FENCE DOOR)	EA	1					
<p>900 x 1100 900 x 1100</p>							
<p>1500 x 300 SOP 1500 x 300 SOP</p>	SM	50					
<p>STEEL WIRE 1500 x 300 SOP 1500 x 300 SOP</p>							
4 床 真千工目地障 (FLOOR BRASS JOINTER)	LM	25					
<p>3 x 25</p>							
5 床 真千工目地障 (EXPANSION JOINT COVER)	"	53					
<p>150 x 4 ALUMINIUM (READY MADE) 1500 x 75 CAULKING 45 x 6</p>							
6 外壁 (EXTERIOR WALL)	"	132					
<p>1500 x 75 ANCHORED STEEL BAR 1500 x 75 ANCHORED STEEL BAR CAULKING 45 x 6</p>							

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
7 鉄塔 (STEEL TOWER) H: 8.000 	EA	1					
8 鉄塔 (STEEL TOWER) H: 12.000 JOINT H: 12.000 	EA	1					

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
内 部 (INTERIOR)							
9 床 裏 ちゅう目地 棒 (FLOOR BRASS JOINTER) 3x25	LM	142					
10 床 工 事 用 伸 縮 接 合 部 (EXPANSION JOINT COVER) FLOOR TIN W=160 ALUMINIUM DWG NO. A-110	"	29					
11 壁 工 事 用 伸 縮 接 合 部 (EXPANSION JOINT COVER) WALL TIN W=160 ALUMINIUM DWG NO. A-110	"	50					
12 天 井 工 事 用 伸 縮 接 合 部 (EXPANSION JOINT COVER) CEILING TIN W=160 ALUMINIUM DWG NO. A-110	"	29					
13 マ ン ホ ー ル (MANHOLE) 600φ	EA	1					
14 9 寸 7° (LADDER) ステンレス 16φ □150	"	4					


STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
15	ポット 10 1/2" - (FLOOR PIT COVER)	LM		86			
	27-V CR-45 W-500 CHECKERED PLATE T-45						
	CR-45						
	PWS NO A-124						
	SOP	SM		2.3			
	配線ボックス 10 1/2" - (WIRING DUCT COVER)	LM		74.6			
	27-IV CR-45 W-500 GALVANIZED STEEL PLATE						
	PWS NO A-119						
	SOP	SM		22.4			
17	配線ボックス 10 1/2" - (WIRING DUCT COVER)	LM		1.0			
	27-IV CR-45 W-500 GALVANIZED STEEL PLATE						
	PWS NO A-119						
	SOP	SM		0.2			



STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
18							
ロットカバ - 17 (PIT COVER FLAME)	LM	20					
<i>L-45x15</i> STEEL PLATE							
<i>L-30x30x3</i> SOP	SM	24					
19							
ロットカバ - 17 (PIT COVER FLAME)	LM	226					
<i>L-45x15</i> STEEL PLATE							
<i>L-25x25x3</i> SOP	SM	180					

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
20 配線用 9" x 1" (WIRING DUCT)	EA	10					
21 7-V E-12 STEEL PLATE T-12 H W 60 x 300 L=300 DWG NO A-119 	LM	30.9					
22 7-F 77 (HOOD FLAME) 77-W L-50 x 50 x 4 STEEL 1000 x 1000 DWG NO A-124	EA	1					
23 7-77) 水取管φ70 (VINYL PIPE) VP 500 L=150 DWG NO A-124	EA	1					

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
24 軽鉄野縁受了170°V (STEEL ANGLE) L-50x50x4 L=1.900 DWG NO L-1.900	EA	14					
25 1.70° " 70° (SAFETY TREAD NOSING HARD ALUMINIUM) W=55	LM	2.7					
26 L-1.70° 補強 (REINFORCEMENT AROUND WALL OPENING) 	LM	244					
27 省摺金物 (SADDLE STAINLESS STEEL) DWG NO A-121 6 x 30  SYNTHETIC RUBBER	LM	56					
A-1-(6) 小計 (SUB TOTAL)							

STUDIO

(7) 木 工 事	I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
				UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
1	木造天井下地 (WOODEN OF CELLING) BELOW BOARD	SM	13.9					TOTAL
2	窓 四 方 枠 105 FRAMING 30	LM	19.8					
		SOP	2.9					
3	— " — 90 FRAMING 30	LM	19.8					
		SOP	2.2					
4	— " — 40 FR 30	LM	8.4					
		SOP	0.5					




STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
5 木入口 三 窓 枠 (WOODEN DOOR HEAD & JAMB) 75 12000 30	LM	4.9					
	SOP SM	0.6					
6 " " " (DITTO) 180 12000 45	LM	43.2					
	SOP SM	8.2					
7 " " " (DITTO) 345 12000 30	LM	14.9					
	SOP SM	5.8					
8 " " " (DITTO) 385 12000 30	LM	14.7					
	SOP SM	6.3					
9 " " " (DITTO) 515 12000 30	LM	29.4					
	SOP SM	16.5					

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
10 木 入口 三 角 材 (WOODEN DOOR HEAD & JAMB) 595 30	LM	9.8					
	SOP SM	6.3					
11 木 材 (DITTO) 675 30	LM	14.9					
	SOP SM	10.7					
12 木 材 (DITTO) 300 30	LM	4.8					
	SOP SM	1.7					
13 木 材 (WOODEN WINDOW CASING) 780 30	LM	13.2					
	SOP SM	2.9					
14 木 材 入口 四 角 材 (WOODEN DOOR CASING) 集材 180x100 LAMINATED LUMBER	LM	64.3					

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(8) 屋根工事 (ROOFING WORK)							TOTAL
1 着色鉛板瓦葺き T-04 PRECOATED GALVANIZED STEEL SHEET BATTEN SEAM ROOFING T-04	SM	1.89					
2 7.774 T-1.17 20kg (ASPHALT ROOFING FELT 20kg)	"	1.89					
3 下工用 - 水 - T-18 (HAND CEMENTED CHIP BOARD T-18)	"	1.89					
4 床押元: 着色鉛板瓦 T-04 RIDGE 鋼板瓦 T-04 鋼板瓦 T-18 (WITH WOOD)	LM	83.2					
<p>FLOOR 50 x 30</p>							

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
5 專造: 着色鉛鉄板 T-04 FASCIA: PRECOATED GALVANIZED STEEL SHEET T-04 工: 手工 系 T-18 HARD CEMENTED CHIP BOARD T-18 	LM	159					
6 專造: 着色鉛鉄板 T-04 COPING: PRECOATED GALVANIZED STEEL SHEET T-04 (木下埋込) 	"	914					
7 水切: 着色鉛鉄板 T-04 FLASHING: PRECOATED GALVANIZED STEEL SHEET T-04 工: 手工 系 T-18 HARD CEMENTED CHIP BOARD T-18 (木下埋込) ANIMOR BOLT 9φ φ500 	"	638					
8 工: 手工 系 T-18 HARD CEMENTED CHIP BOARD T-18 (木下埋込) 300x50 8 工: 手工 系 T-18 HARD CEMENTED CHIP BOARD T-18 (木下埋込) 15x15 (CAULKING)	"	159					

STUDIO

I T E M		UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
				UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	TOTAL
9	新徳 排水工 T-30 EAVES GUTTER (WATER PROOFING MORTAR TROWEL) T-30	SM	1.82					
10	新直形 " (DITTO) T-30	"	86					
11	笠水 " (DITTO) T-30	LM	166					
	50 [195] 75							
12	新和 " (DITTO) EAVES	SM	79.7					
13	" " (DITTO) " (SPRAYED LITHIN)	"	79.7					
14	新天 コンクリート打板 EAVES SOFFIT (EXPOSED CONCRETE)	"	1.30					
15	排水 ライン E.A. φ100 J-F-F 共 4100 (WITH CAULKING)	E.A.	23					

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
16 ZBY-FLY (FLOOR DRAIN) φ-100 3-4=7"共	EA	3					
17 型 (型名) φ-100 7分金切共 種 (DOWN SPOUT) (VINYL) φ-100 (WITH LEADER STRAPS)	LM	149					
18 防水 914 330 T-30 15 COPING (WATER PROOFING) MORTAR TRWEL T-30	"	9					
A-1-(8) 小計 (SUB TOTAL)							

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(9) 建具工事 (DOORS, WINDOW & GLAZING)							
1 木製建具工事 (WOODEN DOOR & WINDOW WORK)	LOT	/					
2 鋼製建具工事 (STEEL DOOR & WINDOW WORK)	LOT	/					
3 アルミ製建具工事 (ALUMINIUM DOOR & WINDOW WORK)	LOT	/					
4 ガラス工事 (GLAZING WORK)	LOT	/					
5 建具雑工事 (SPECIALITIES)	LOT	/					
A-1-(9) 小計 (SUB TOTAL)							

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(9)-1 木製建具工事 (WOODEN DOOR & WINDOW WORK)							
1 木製窓 (WOODEN WINDOW) 500 x 2535	EA	3					
2 木製窓 (WOODEN WINDOW) 500 x 2535	EA	10					
3 木製窓 (WOODEN WINDOW)	EA	4					
4 木製窓 (WOODEN WINDOW) 500 x 1915	EA	1					
5 木製扉 (WOODEN DOOR) 800 x 600	EA	6					
6 木製扉 (WOODEN DOOR) 800 x 2000	EA	1					
7 木製扉 (WOODEN DOOR) 800 x 2000	EA	3					
8 木製扉 (WOODEN DOOR) 550 x 1820	EA	4					
9 木製扉 (WOODEN DOOR) 800 x 2000	EA	1					

SI 010

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
10 GS-1 硝子入り (GLASS SCREEN) W H 5370 x 2700	EA	1					
11 GS-2 硝子入り (GLASS SCREEN) W H 5370 x 2700	EA	1					
12 MW-1 入り入り網戸 (STAINLESS STEEL WIRE) H FIXED SCREEN 500 x 1295	EA	3					
13 MW-2 入り入り網戸 (- DITTO -) H - DITTO - 500 x 1295	EA	10					
14 MW-3 入り入り網戸 (- DITTO -) H - DITTO - 500 x 1295	EA	4					
15 WD-1 木製カマリ (WOODEN LOUVER) W H 600 x 500	EA	2					
16 WD-2 木製カマリ (- DITTO -) W H 600 x 500	EA	4					
17 WD-3 木製カマリ (- DITTO -) W H 600 x 500	EA	2					
(9)-1 小計 (SUB TOTAL)							

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(9)-2 鋼製建具工事 (STEEL DOOR & WINDOW WORK)							
1 SD-1 24-14 トド 900 x 2000 H	EA	3					
2 SD-2 24-14 トド 800 x 2000 H	EA	1					
3 SD-3 24-14 トド 900 x 2000 H	EA	1					
4 SD-4 24-14 トド 2000 x 2000 H	EA	3					
5 SD-5 24-14 トド 2000 x 2000 H	EA	1					
6 SL-1 24-14 折り戸 1500 x 500 H	EA	1					
7 SL-2 24-14 折り戸 1000 x 500 H	EA	1					
8 SL-3 24-14 折り戸 1000 x 700 H	EA	1					
9 SL-4 24-14 折り戸 500 x 500 H	EA	2					

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
10 SC-1 7 1/2" x 10" (SCREEN)	EA	4					
^M 150 x 3000							
(9)-2 小計 (SUB TOTAL)							

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(9)-3							
TRILMI 製 建 具 工 事 (ALUMINIUM DOOR & WINDOW WORK)							
1 PAD-C-1 TRILMI 製 建 具 工 事 W 900 x 2000 H (ALUMINIUM DOOR)	EA	5					
2 PAD-C-2 TRILMI 製 建 具 工 事 W 1100 x 2000 H (ALUMINIUM DOOR)	EA	1					
3 PAD-D-1 TRILMI 製 建 具 工 事 W 900 x 2000 H (ALUMINIUM DOOR)	EA	6					
4 PAD-D-2 TRILMI 製 建 具 工 事 W 1100 x 2000 H (ALUMINIUM DOOR)	EA	1					
5 PAD-Dg-1 TRILMI 製 建 具 工 事 W 900 x 2000 H (ALUMINIUM DOOR)	EA	5					
6 PW-B-1 TRILMI 製 建 具 工 事 W 1500 x 900 H (ALUMINIUM WINDOW)	EA	1					
7 PW-B-2 TRILMI 製 建 具 工 事 W 1200 x 600 H (ALUMINIUM WINDOW)	EA	1					
8 PW-B-3 TRILMI 製 建 具 工 事 W 2400 x 900 H (ALUMINIUM WINDOW)	EA	3					

STUDIO

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(9)-4 ガラス工事 (GLAZING WORK)							TOTAL
1 透明硝子 (CLEAR SHEET GLASS) 3M/M	SM	0.5					
2 透明硝子 (CLEAR SHEET GLASS) 5M/M	SM	1/5					
3 透明硝子 (CLEAR SHEET GLASS) 8M/M	SM	8/6					
4 透明硝子 (CLEAR SHEET GLASS) 10M/M	SM	8/6					
5 型硝子 (PATTERNED SHEET GLASS) 4M/M	SM	12.7					
6 透明70-ト硝子 (CLEARED FLOAT SHEET GLASS) 5M/M	SM	38.3					
7 リーニング (CLEANING)	SM	80.2					
(9)-4 小計 (SUB TOTAL)							

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(9)5 建具雑工事 (SPECIALITIES)							
1 建具廻りモルタル詰 (MORTAR GROUTING AROUND DOOR AND FRAME)	LM	423					
2 建具廻りコーキング詰 (CAULKING GROUTING AROUND DOOR AND FRAME)	LM	488					
3 鋼板建具金具 (PAINTING FOR STEEL COP)	SM	741					
4 木装建具金具 (PAINTING FOR WOODEN DOOR, WINDOW AND FRAME)	SM	131					
5 木装建具金具 (HARDWARE)	LOT	1					
6 ステンレスプレート (STAINLESS STEEL PLATE)	LM	24					
(9)5 小計 (SUB TOTAL)							

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(9)-5-1 木製建具金物 (HARD WARE)							
1 丁番 (HINGE)	EA	87					
2 ラフトリ-エッジ (LABORATORY HINGE)	SET	4					
3 ドアクローザー (DOOR CLOSER)	EA	10					
4 シリンダー形凸錠 (CYLINDER MORTISE LOCK)	EA	8					
5 シリンダー形凸錠用 錠錠式本錠錠 (CYLINDER MORTISE DEADLOCKS)	EA	1					
6 面付けスライドボルト (CRIM SLIDE BOLT)	EA	4					
7 用器窓用行掛金物 (CASEMENT FASTENER)	EA	17					
8 用器窓用行掛金物 (CASEMENT OPERATOR & HOLDER)	EA	17					
9 カムラッチハンドル (CAM LATCH HANDLE)	EA	6					

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
10 取付金具 (DOORSTOP & HOOK HOLDER)	EA	11					
11 取付金具 (DOOR HOOK & BUMPER)	EA	4					
12 取付金具 (KNOB)	EA	7					
13 取付金具 (PUSH PLATE)	EA	4					
14 取付金具 (DOOR HANDLE) SUS	EA	1					
15 取付金具 (CRESCENT SASH LOCK)	EA	1					
16 取付金具 (INSULATION COST)	EA	34					
(9)5-1 小計 SUB TOTAL							

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(10) 仕上工事 (FINISH WORK)							
1 床仕上工事 (FLOOR FINISH WORK)	LOT						
2 巾着仕上工事 (SKIRTING FINISH WORK)	LOT						
3 壁仕上工事 (WALL FINISH WORK)	LOT						
4 天井仕上工事 (CEILING FINISH WORK)	LOT						
5 仕上雑工事 (SPECIALTIES)	LOT						
A-1-(10) 小計 (SUB TOTAL)							

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(10)-1 承仕上工事 (FLOOR FINISH WORK)							
外 部 (EXTERIOR)							
1 床 止 及 巾 金 工 子 (MORTAR TROWEL) FLOOR T-30	SM	32.2					
2 階 段 踏 面 下 込 (RISER TREAD STAIRS) P.L.T.O. T-30	"	15.2					
3 床 理 研 子 工 子 (POLISHED TERRAZO) FLOOR T-30	"	23.1					

STUDIO

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
内 部 (INTERIOR)							TOTAL
4 床 T-2 FLOOR T-2 FLOOR (VINYL ASBESTOS TILE) SM 毛布9寸金ゴ子下地 WITH MORTAR TROWEL	SM	208					
5 床 現場磨き手塗り T-30 FLOOR (POLISHED TERRAZZO)	"	626					
6 床 毛布179寸V FLOOR (MOSAIC TILE)	"	215					
7 床 毛布9寸金ゴ子 T-30 FLOOR (MORTAR TROWEL)	"	444					
8 床 TYPE-1 T-200 DWG NO A-103	"	181					
9 床 TYPE-1 T-230 DWG NO A-103	"	214					
10 床 TYPE-2 DWG NO A-103	"	148					

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
11 床 TYPE-3 DWG NO A-103	SM	260					
12 床 TYPE-4 DWG NO A-103	"	105					
13 床 TYPE-5 DWG NO A-103	"	114					
14 床 防湿ケレン金 2" J FLOOR WATER PROOF MORTAR TROWEL	"	2.3					
15 床 防湿ケレン金 2" J (FLOOR DUCT MORTAR TROWEL) LM 900 GIRTH 500	LM	98					
16 床 防湿ケレン金 2" J (DITTO) 660 GIRTH 180 300	"	50.3					

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
17 E-11 9 14 金 工 7 (FLOOR DUCT MORTAR TROWEL) 560 GIRTH □ 180 200	LM	15					
18 — " — (DITTO) 720 GIRTH □ 210 300	"	361					
19 床 (FLOOR) コンクリート 金 工 7 (CONCRETE TROWEL) 溶接金網 60 @ 100 (WELDED WIRE MESH) 防湿 金 工 7 T-30 (WATER PROOF MORTAR)	SM	154					
20 257F SLAB 木 毛 板 T-25 (CEMENTED EXCELSIOR BOARD)	"	905					
(10)-1 小 計 (SUB TOTAL)							

STUDIO

I T E M		UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
				UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	TOTAL
(10)-2 木仕上工事 (SKIRTING FINISH WORK)								
1	木 毛ワグ/金ワグ (SKIRTING MORIAR TROWEL) H=150	LM	120					
2	木 毛ワグ/木木 (VINYL SOFT BASE) H=25	"	201					
3	木 製 中 木 (WOODEN SKIRTING) T-25 H=150	"	146					
		SM	220					
4	" " (DITTO) T-25 H=180	LM	298					
		SM	54					
5	" " (DITTO) T-25 H=180	LM	428					
		CL	77					

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(10)-2							
小 計							
(SUB TOTAL)							

STUDIO

I T E M	U N I T	Q U A N T I T Y	L O C A L (R U P E E)		J A P A N (Y E N)		(Y E N)
			U N I T P R I C E	A M O U N T	U N I T P R I C E	A M O U N T	
(10)-3 壁仕上工事 (WALL FINISH WORK)							
外部 (EXTERIOR)							
1 外壁 モルタル塗り (MORTAR TROWEL)	SM	183					
	T-30						
2 外壁 (D I T T O)	"	1133					
	T-30						
3 " 1) 2) 吹付 (SPRAYED LITCHIN)	"	4108					
	- D I T T O -						
4 " 3) 4) 吹付 (EXPOSED CONCRETE)	"	189					
	- D I T T O -						


STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
内 部 (INTERIOR)							
5 壁 子 子 - ジ ロ ッ ク WALL (TERRAZZO BLOCK) T-25	SM	499					
6 毛 打 下 地 WALL (MORTAR TROWEL) A-EMP	"	533					
7 毛 打 下 地 WALL (MORTAL TROWEL)	"	416					
8 半 磁 器 下 地 WALL (SEMI-PORCELAIN TILE) WITH MORTAR BACK UP	"	571					
9 木 毛 打 下 地 WALL (CEMENTED EXCELSIOR BOARD)	"	294					
10 TYPE-1 DWG NO A-103	"	192					
11 TYPE-2 DWG NO A-103	"	102					

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
12 壁 TYPE - 3 DWG NO A-103	SM	595					TOTAL
13 " TYPE - 4 DWG NO A-103	"	207					
14 " TYPE - 5 DWG NO A-103	"	760					
15 " TYPE - 6 DWG NO A-103	"	444					
16 壁 TYPE - 11 既 WALL (EXPOSED CONCRETE)	"	162					
17 防水モルタル工 WALL (WATER PROOF MORTAR TROWEL)	"	64					
18 壁 TYPE - 11 既 WALL (EXPOSED CONCRETE) 溶接金網 60 @100 WELDED WIRE MESH 防水モルタル工 WATER PROOF MORTAR	"	202					

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
19 柱 毛瓦9W金ゴジ T-20 (MORTAR TROWEL) COLUMN	SM	420					
	A-EMP "	420					
20 柱 毛瓦9W金ゴジ T-20 (MORTAR TROWEL) COLUMN	"	294					
21 柱 毛瓦9W金ゴジ T-25 (TERRAZZO BLOCK) COLUMN	"	28					
22 壁 毛瓦9W金ゴジ T-7 (TERRAZZO BLOCK) WALL DMG NO. A-122 	LM	50					
(10)-3 小計 (SUB TOTAL)							

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(10)-4 天井仕上工事 (CEILING FINISH WORK)							TOTAL
外 部 (EXTERIOR)							
天井 コンクリート打込み (EXPOSED CONCRETE) SM	SM	4.0					
" 2 天井板 (ASBESTOS BOARD) T-60	"	13.9					
" 3 天井板 (A - EMP) T-60	"	13.9					
天井処理 漆 (MOULDING) VINYL	LM	16.4					

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
内 部 (INTERIOR)							
5 梁 コンクリート BEAM (EXPOSED CONCRETE)	SM	107					
6 天井 石膏ボード CEILING (PLASTER BOARD)	"	218					
	A-EMP	218					
7 天井 トラスボード CEILING (ASBESTOS BOARD)	"	215					
	A-EMP	215					
8 天井 セメント板 CEILING (CEMENTED EXCELSIOR BOARD)	"	152					
9 天井 コンクリート CEILING (EXPOSED CONCRETE)	"	336					
10 TYPE - 1	"	225					
DWG NO A-103							

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
11 軒 TYPE-2 DWG NO A-103	SM	260					
12 " TYPE-3 DWG NO A-103	"	123					
13 " TYPE-4 DWG NO A-103	"	129					
14 " 合板 T-6 (PLYWOOD) CEILING	"	626					
	CL	626					
15 内壁合板 T-6 (PLYWOOD)	"	05					
	CL	05					
16 " 天井板 T-6 (ASBESTOS BOARD)	"	04					
	CL	04					

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
17 天井輕鐵下地 (STEEL SUSPENDED FURRING OF CEILING)	SM	454					
18 側壁輕鐵軸組 WALL (LGS STUD)	"	09					
19 天井邊緣 CEILING (MOULDING)	LM	559					
20 天井英檢口 VINYL (CEILING HATCH)	EA	22					
21 天井英檢口 450 x 450 (CEILING HATCH)	EA	2					
22 天井開口部補強 (REINFORCING OF CEILING OPENING)	EA	63					
23 天井照明器具取付下地補強 (REINFORCING OF LIGHTING FIXTURE OPENING IN CEILING)	EA	59					
(10)-4 小計 (SUB TOTAL)							

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(10)-5 雑工事 (SPECIALTIES)							
外部 (EXTERIOR)							
1 橋板置場跡 主 2x7 SP [2x0 15	LM	9.3					
2 外壁 目地 (VERTICAL JOINT) J-K-7 (CAULKING)	"	26.0					
3 目地 (HORIZONTAL JOINT) J-K-7 (CAULKING)	"	237					
SP [2x0 15							

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
内部 (INTERIOR)							
4 トイレブース (TOILET BOOTH)	SM	95					
耐水合板 7/8 x 1/2 T-40 WATERPROOF PLYWOOD							
SOP	"	190					
5 ブース 頂 継ぎ (BOOTH COPING)	LM	7.5					
ステンレス E-40x20x1.0 STAINLESS STEEL							
6 ブース 足金物 (SUPPORT METAL)	EA	14					
ステンレス U							
7 ブース 壁 受金物	"	15					
ステンレス L							
8 ブース 壁 受金物	"	12					
ステンレス JL							
9 甲板 7/8 x 1/2 T-40 (TERRAZZO BLOCK)	LM	74					
230 x 25							

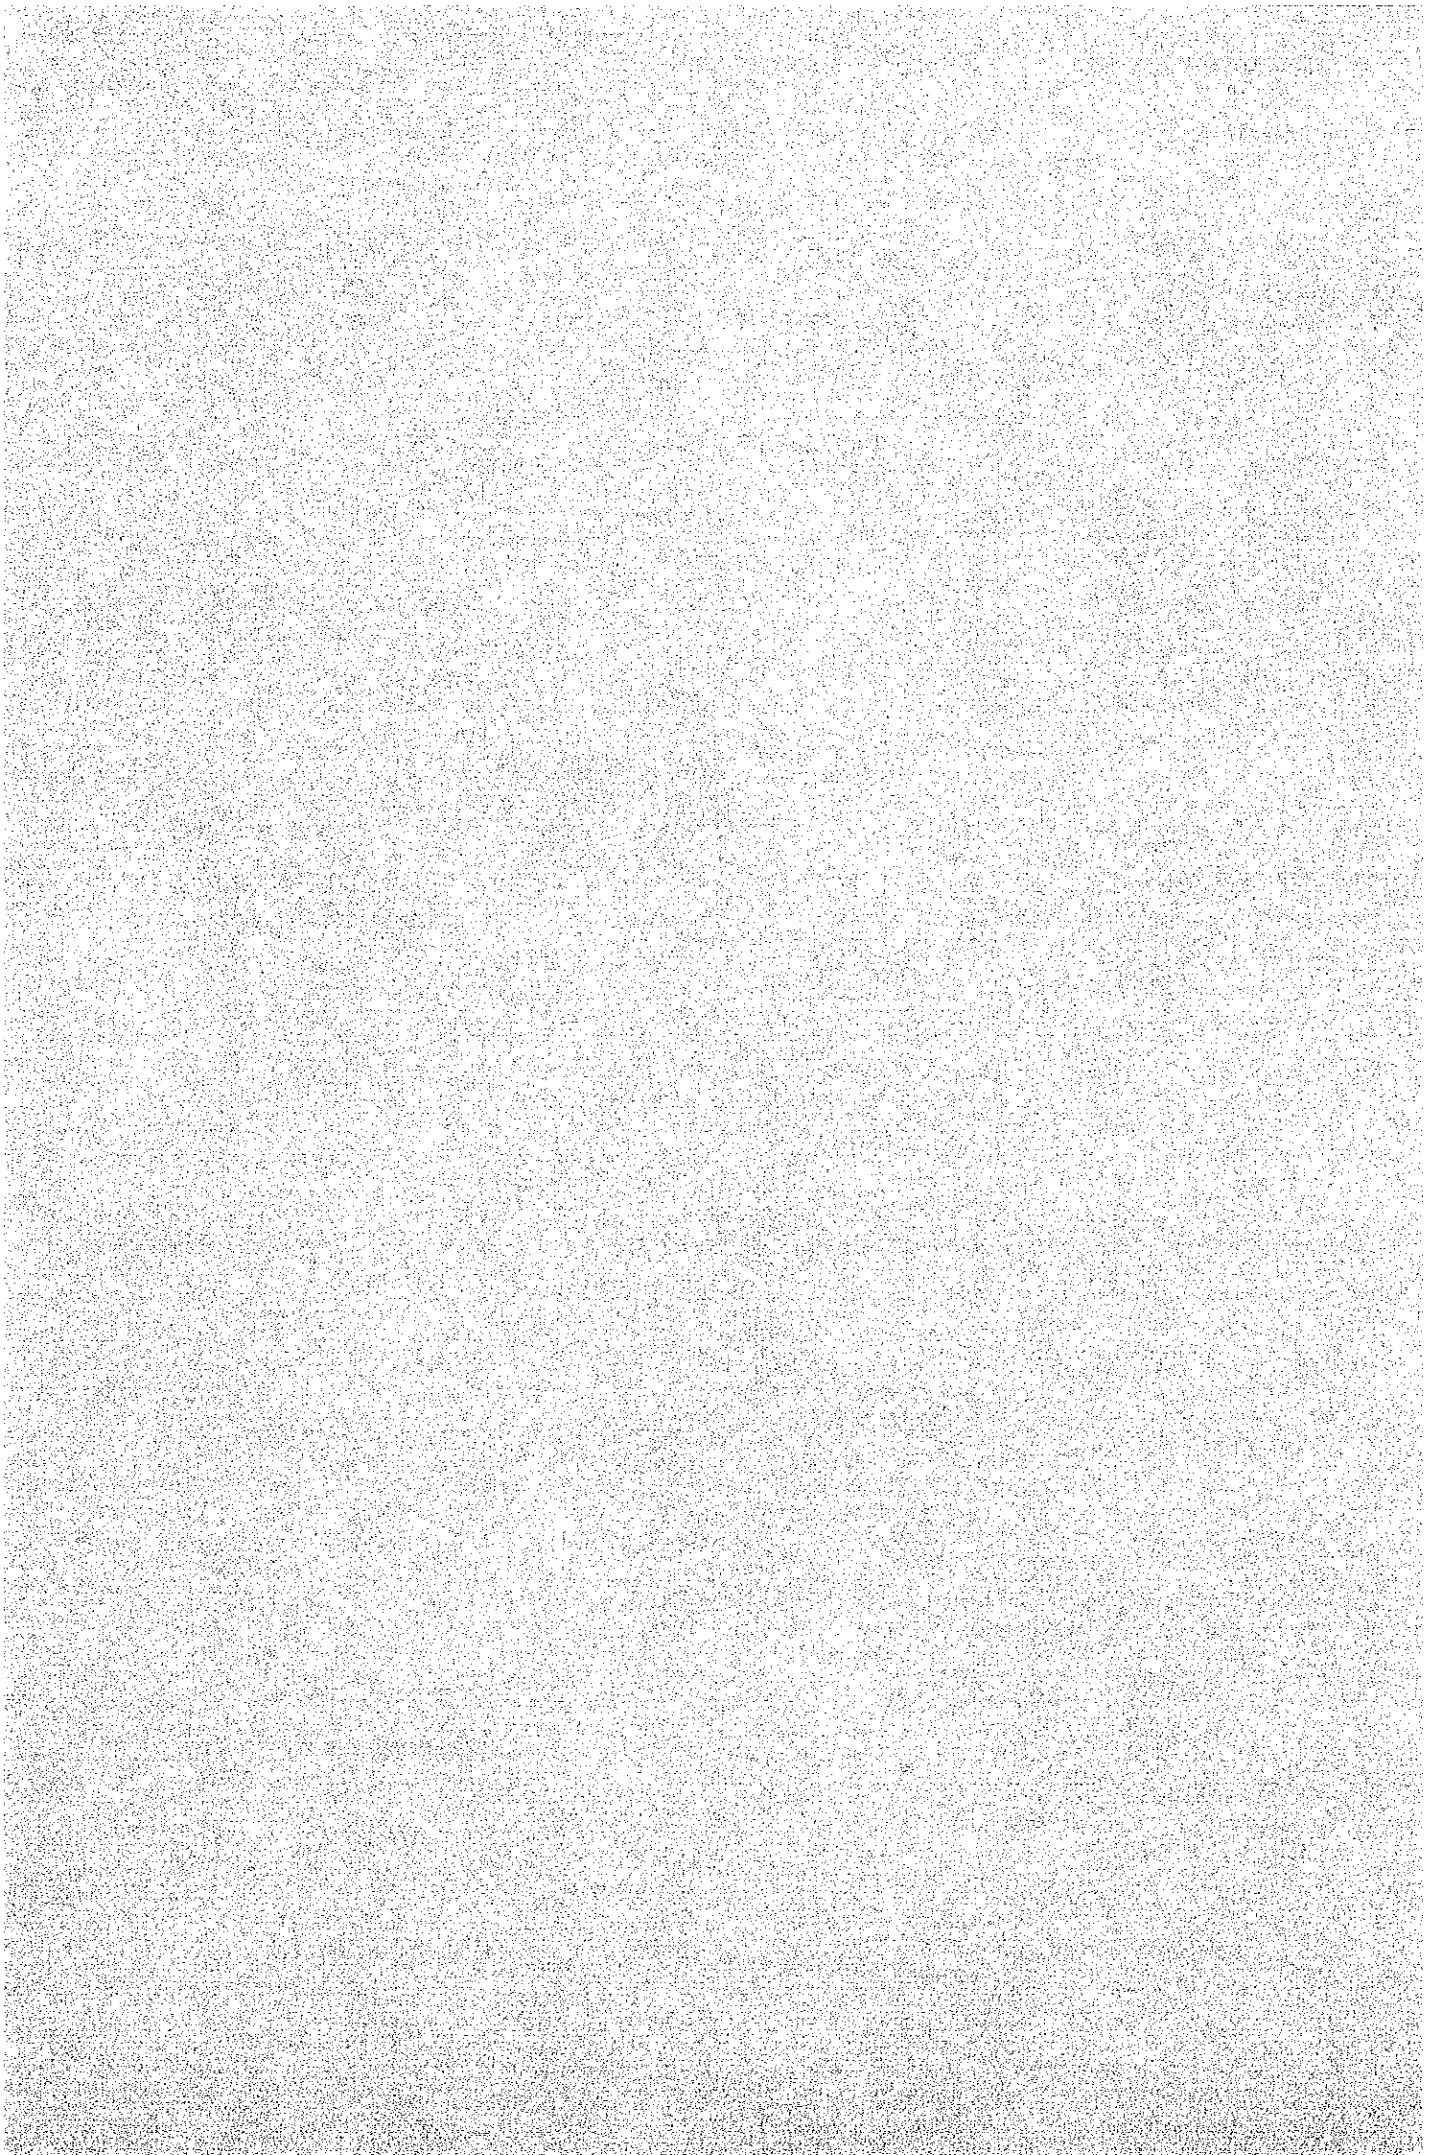
STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)	TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT		
10 防油堤 150 EINON 金ゴ 7 OIL FENCE MORTAR TROWEL 200 SSD GIRTH	LM	32						
11 1075x150x70 情報カウンタ テラゾブロック 990 40 L=800 DNG NO A-122	EA	1						
12 南口岸 325 テラゾブロック 7 (TERRAZZO BLOCK) 25 DNG NO A-122	LM	20						
13 200 テラゾブロック (DITTO) 25	LM	48						

STUDIO

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(11) 雑工事							
1 窓右丸	EA	27					
2 鉛板	"	1					
3 ガラス入り (GLASS SCREEN)	"	1					
(11) 小計 (SUB TOTAL)							

A-2 Kathmandu Transmitting Station
Building Construction Work



KATHMANDU

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
A-2カトマंडウ送信所建築工事 (KATHMANDU TRANSMITTING STATION BUILDING CONSTRUCTION WORK)							
(1) 仮設工事 (TEMPORARY WORK)	LOT						
(2) 土工事 (EARTH WORK)	"						
(3) 鉄筋コンクリート工事 (REINFORCED CONCRETE WORK)	"						
(4) 鉄骨工事 (STRUCTURAL STEEL WORK)	"						
(5) 組積工事 (MASONRY)	"						
(6) 金属工事 (METAL WORK)	"						
(7) 木工事 (CARPENTRY)	"						
(8) 屋根工事 (ROOFING WORK)	"						
(9) 建具工事 (DOORS, WINDOWS & GLAZING)	"						

KATHMANDU

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(1) 仮設工事 (TEMPORARY WORK)							
1 水盛遺 方 (LAYOUT OF BUILDING)	SM	669					
2 墨 出 (FINISH MARKING)	"	669					
3 コニクリ-ト足場架板 (SCAFFOLDING FOR CONCRETE)	"	669					
4 鉄筋足場架板 (SCAFFOLDING FOR RE-BAR WORK)	"	669					
5 外部足場架板 (SCAFFOLDING OF EXTERIOR WALL)	"	739					
6 内部足場損料 (INTERIOR SCAFFOLDING)	"	669					
7 片付者掃費 (CLEANING)	"	669					
A-2-(1) 小計 (SUB TOTAL)							

KATHMANDU

I T E M		UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)	
土 工 事	(EARTH WORK)			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT
(2)							TOTAL
1	根 切 (BUILDING EXCAVATION)	C.M	412				
2	残 土 処 分 (DISPOSAL) (場 内) (WITHIN SITE)	"	978				
3	埋 戻 し (BACKFILL)	"	311				
4	砕 石 敷 (CRUSHED STONE) 基礎・地中梁下 (BELOW FOUNDATION & BEAM)	"	170				
5	— " — (DITTO) 土 間 下 (BELOW GROUND FLOOR SLAB)	"	466				
6	盛 土 (SOIL BANKING)	"	688				
7	床 付 (GRADING & COMPACTION)	S.M	505				
	基礎・地中梁 (FOUNDATION & TIE BEAM)						

