


C-1 Kathmandu Studio Centre
Plumbing Work

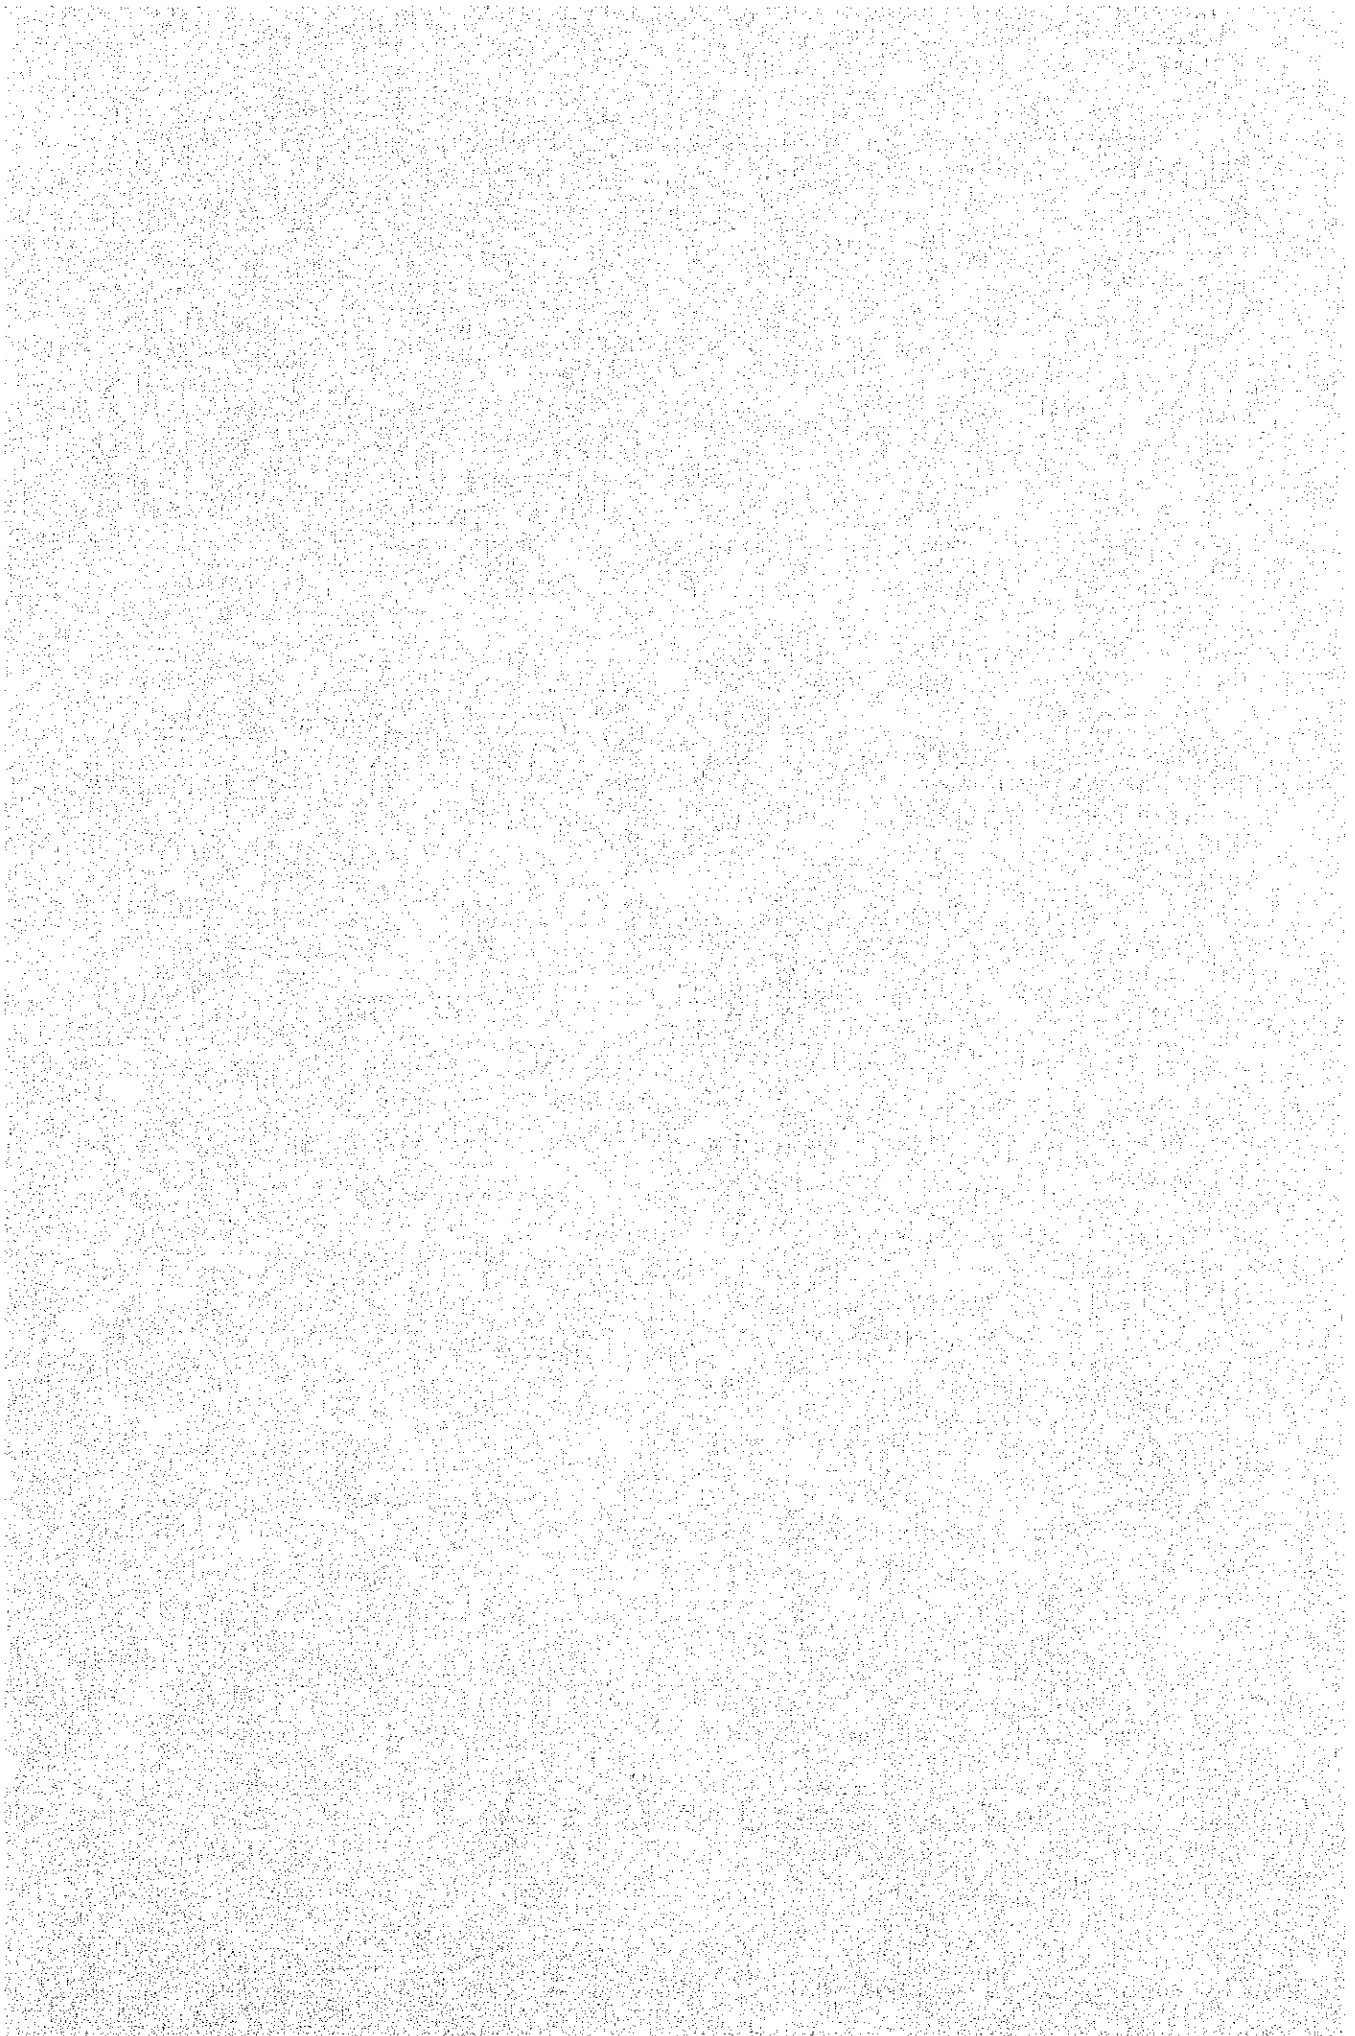

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
KATHMANDU STUDIO CENTRE							
PLUMBING WORK							
(1)	繪水設備 WATER SUPPLY SYSTEM	LOT					
(2)	排水通氣設備工事 DRAINAGE AND VENT WORK	LOT					
(3)	衛生器具設備工事 SANITARY FIXTURE WORK	LOT					
(4)	油タンク設備工事 OIL TANK INSTALLATION WORK	LOT					
	計 SUB TOTAL						
(5)	粗工費 TEMPORARY WORK	LOT					
(6)	臨時費	LOT					
	合計 TOTAL						

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
C-1 KATHMANDU STUDIO CENTRE							
(1) 給水設備							
WATER SUPPLY SYSTEM							
[材料]							
[材料]							
圧力タンク及ポンプ	PRESSURE TANK AND SET	1					
PUMP							
PUMP 40" x 150 1/2 mm x 2.2 KW							
TANK 500 L							
塩化ビニルパイプ	P.V.C. LINID STEEL PIPE						
20A	LM	49					
25A	LM	55					
32A	LM	11					
40A	LM	22					
50A	LM	44					
金工継手類	FITTINGS FOR DIITTO	1					
金工支持金物	SUPPORT AND HANGER	1					

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
4"-1号 (5K)							
GATE VALVE (5K)							
20A	PC	4					
25A	PC	1					
32A	PC	1					
50A	PC	2					
ボ-149.07°							
BALL COCK							
32A	PC	1					
フレキシブル継手							
FLEXIBLE JOINT							
40	PC	2					
50	PC	2					
消火栓ボックス (埋込型)							
FIRE HYDRANT BOX (CLOSED)	SET	1					
消火栓							
FIRE HYDRANT							
40	PC	1					
消火器							
EXTINGUISHER							
A.B.C-4型	PC	6					
ABC-4TYPE							

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
保温工事材料	LOT	/					
INSULATION MATERIALS							
塗装工事材料	LOT	/					
PAINTING MATERIALS							
消耗品雑材料	LOT	/					
MISCELLANEOUS MATERIALS							
スリーブ材材料	LOT	/					
SLEEVE AND INSERT MATERIALS							
穴明補修費材料	LOT	/					
CHIPPING MATERIALS							
基礎工事材料	LOT	/					
FOUNDATION MATERIALS							
小計							
SUB TOTAL							
[工費]							
[LABOR COST]							
搬入搬付費	LOT	/					
TRANSPORT AND INSTALLATION FOR EQUIPMENT							

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
配管工事	LOT	/					
器具取付	LOT	/					
保温工事	LOT	/					
塗装工事	LOT	/					
穴明補修	LOT	/					
スリット取付	LOT	/					
試験	LOT	/					
運搬費	LOT	/					
小計							
計							

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(2) 排水通気設備工事							
DRAINAGE AND VENT WORK							
[材料]							
(MATERIALS)							
亜鉛鍍鋼管(排水)							
GALVANIZED STEEL PIPE FOR DRAINAGE							
40A	LM	27.5					
50	LM	33					
65	LM	11					
80	LM	5.5					
100	LM	5.5					
全工 止水手類							
FITTINGS FOR DITTO	LOT	1					
全工 支持金物							
SUPPORT AND HANGER	LOT	1					
亜鉛鍍鋼管(通気)							
GALVANIZED STEEL PIPE FOR VENT							
40A	LM	5.5					
50	LM	16.5					
全工 止水手類							
FITTINGS FOR DITTO	LOT	1					

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
全工支持金物	SUPPORT AND HANGER	LOT					
排水鉛鉄管 (YA=01L)	CAST IRON PIPE						
	MECHANICAL JOINT TYPE						
	75 x 1600 L	PC					
	75 x 600 L	PC					
	100 x 1600 L	PC					
	100 x 400 L	PC					
全工異型管	FITTINGS FOR DITTO						
	LY 100x100	PC					
	LY 100x75	PC					
	LY 75x40	PC					
	ST 100x50	PC					
	ST 75x50	PC					
	90°SB 100	PC					
	90°SB 75	PC					
	GS 100	PC					
	GS 75	PC					
	GS 50	PC					
	GS 50x40	PC					

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)	
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	TOTAL	TOTAL
全工種合材料	LOT	1						
CONNECTING								
MATERIALS FOR DITTO								
全上支持金物	LOT	1						
SUPPORTERS FOR DITTO								
鉛管								
LEAD PIPE								
30A	LM	7						
40	LM	7						
65	LM	1						
75	LM	4						
100	LM	4						
全上構造材料	LOT	1						
CONNECTING								
MATERIALS FOR DITTO								
排気管 (ビニル管)								
VINYL PIPE FOR VENT								
200φ	LM	12						
全上金物類	LOT	1						
FITTINGS FOR DITTO								
全上支持金物	LOT	1						
SUPPORT AND HANGER								

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
コンクリート管	PC	5					
CONCRETE PIPE 100φ	PC	5					
金上接合材料	LOT	1					
CONNECTING MATERIALS FOR DITTO	LOT	1					
掃除口	PC	2					
CLEAN OUT 100 COA	PC	2					
80 COA	PC	1					
65 COA	PC	1					
50 COA	PC	2					
床排水金物	PC	2					
FLOOR DRAIN SOT5A	PC	2					
ベンチキャップ	PC	1					
VENT CAP 50	PC	1					

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
防虫網	PC	1					
ANTI INSECTS NET 50							
水中排水ポンプ							
UNDER WATER DRAINAGE PUMP							
40 ^φ x 100 ^H x 15 ^M x 1.5 ^{KW}	SET	2					
千円弁	PC	2					
CHECK VALVE 40							
導入管	PC	1					
INTRODUCTION PIPE 100							
汚水枒	EA	4					
SOIL PIT 450 x 450							
排水枒	EA	3					
WASTE PIT 450 x 450							

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)	
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	AMOUNT	TOTAL
マンホール MANHOLE COVER	PC	7						
450φ								
浄化槽 SEPTIC TANK	LOT	1						
保温工事材料 INSULATION MATERIALS	LOT	1						
塗装工事材料 PAINTING MATERIALS	LOT	1						
消耗品材料 MISCELLANEOUS MATERIALS	LOT	1						
スリーブ材料 SLEEVE AND INSERT MATERIALS	LOT	1						
充てり材料 CHIPPING MATERIALS	LOT	1						
小計 SUB TOTAL								

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
[工費]							
LABOR COST							
配管工費	PIPING LABOR COST	LOT					
器具取付費	FIXTURE INSTALLATION	LOT					
保温工事	INSULATION WORK	LOT					
塗装工事	PAINTING WORK	LOT					
穴明補修費	CHIPPING AND MAKING	LOT					
	GOOD						
掘削及埋戻	EXCAVATING AND	LOT					
	BACK FILLING						
スリーブ取付工費	SLEEVE INSTALLATION	LOT					


I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)	
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	AMOUNT	TOTAL
試驗費	LOT	1						
運輸費	LOT	1						
小計								
計								

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(3) 衛生器具設備工事							
	SANITARY FIXTURE WORK						
	大便器						
	C-14 CLOSET	2					
	C-97 (T50NMV4)	2					
	小便器						
	U-57 (T60P) LAVATORY	3					
	L-230D SLOP SINK	4					
	掃除機						
	SK-22A MIRROR	1					
	鏡						
	TS119A55 FAUCET	4					
	水栓						
	B-T-27 (* / BOX)	1					


I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
消耗品材料	LOT	/					
MISCELLANEOUS MATERIALS							
插入山卷生材料	LOT	/					
SLEEVE MATERIALS							
小計							
SUB TOTAL							
{工費}							
器具取付費	LOT	/					
FIXTURE INSTALLATION							
箱入山卷生費	LOT	/					
SLEEVE WORK							
沉册補修費	LOT	/					
CHIPPING AND MAKING							
GOOD							
器具調整費	LOT	/					
ADJUSTING WORK							
運搬費	LOT	/					
TRANSPORTATION							
小計							
SUB TOTAL							
計							
TOTAL							

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(4) 111727 設備工事							
	OIL TANK INSTALLTION						
	WORK						
[材料]							
111727	OIL TANK 20000	1					
地下埋設形	UNDER GROUND TYPE						
200-14	WITH MANHOLE COVER						
222222-9-	TANK LEVEL METER						
全工用躯体工事	CONSTRUCTION FOR	1					
	DITTO						
黒ガス管	STEEL PIPE						
	65A	55					
	50	55					
	40	22					
	32	22					
合上継手類	FITTING FOR DITTO	1					
合上支持金物	SUPPORTERS FOR DITTO	1					

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
塗裝工事材料	LOT	/					
消耗品雜材料	LOT	/					
定明補修費材料	LOT	/					
小計	SUB TOTAL						
[工費]	[LABOR COST]						
搬入振付費	LOT	/					
配管工事	PIPING LABOR COST	/					
塗裝工事	PAINTING WORK	/					
定明補修費	CHIPPING AND MAKING	/					
試驗費	GOOD TEST						
運搬費	TRANSPORTATION	/					
小計	SUB TOTAL						
合計	TOTAL						

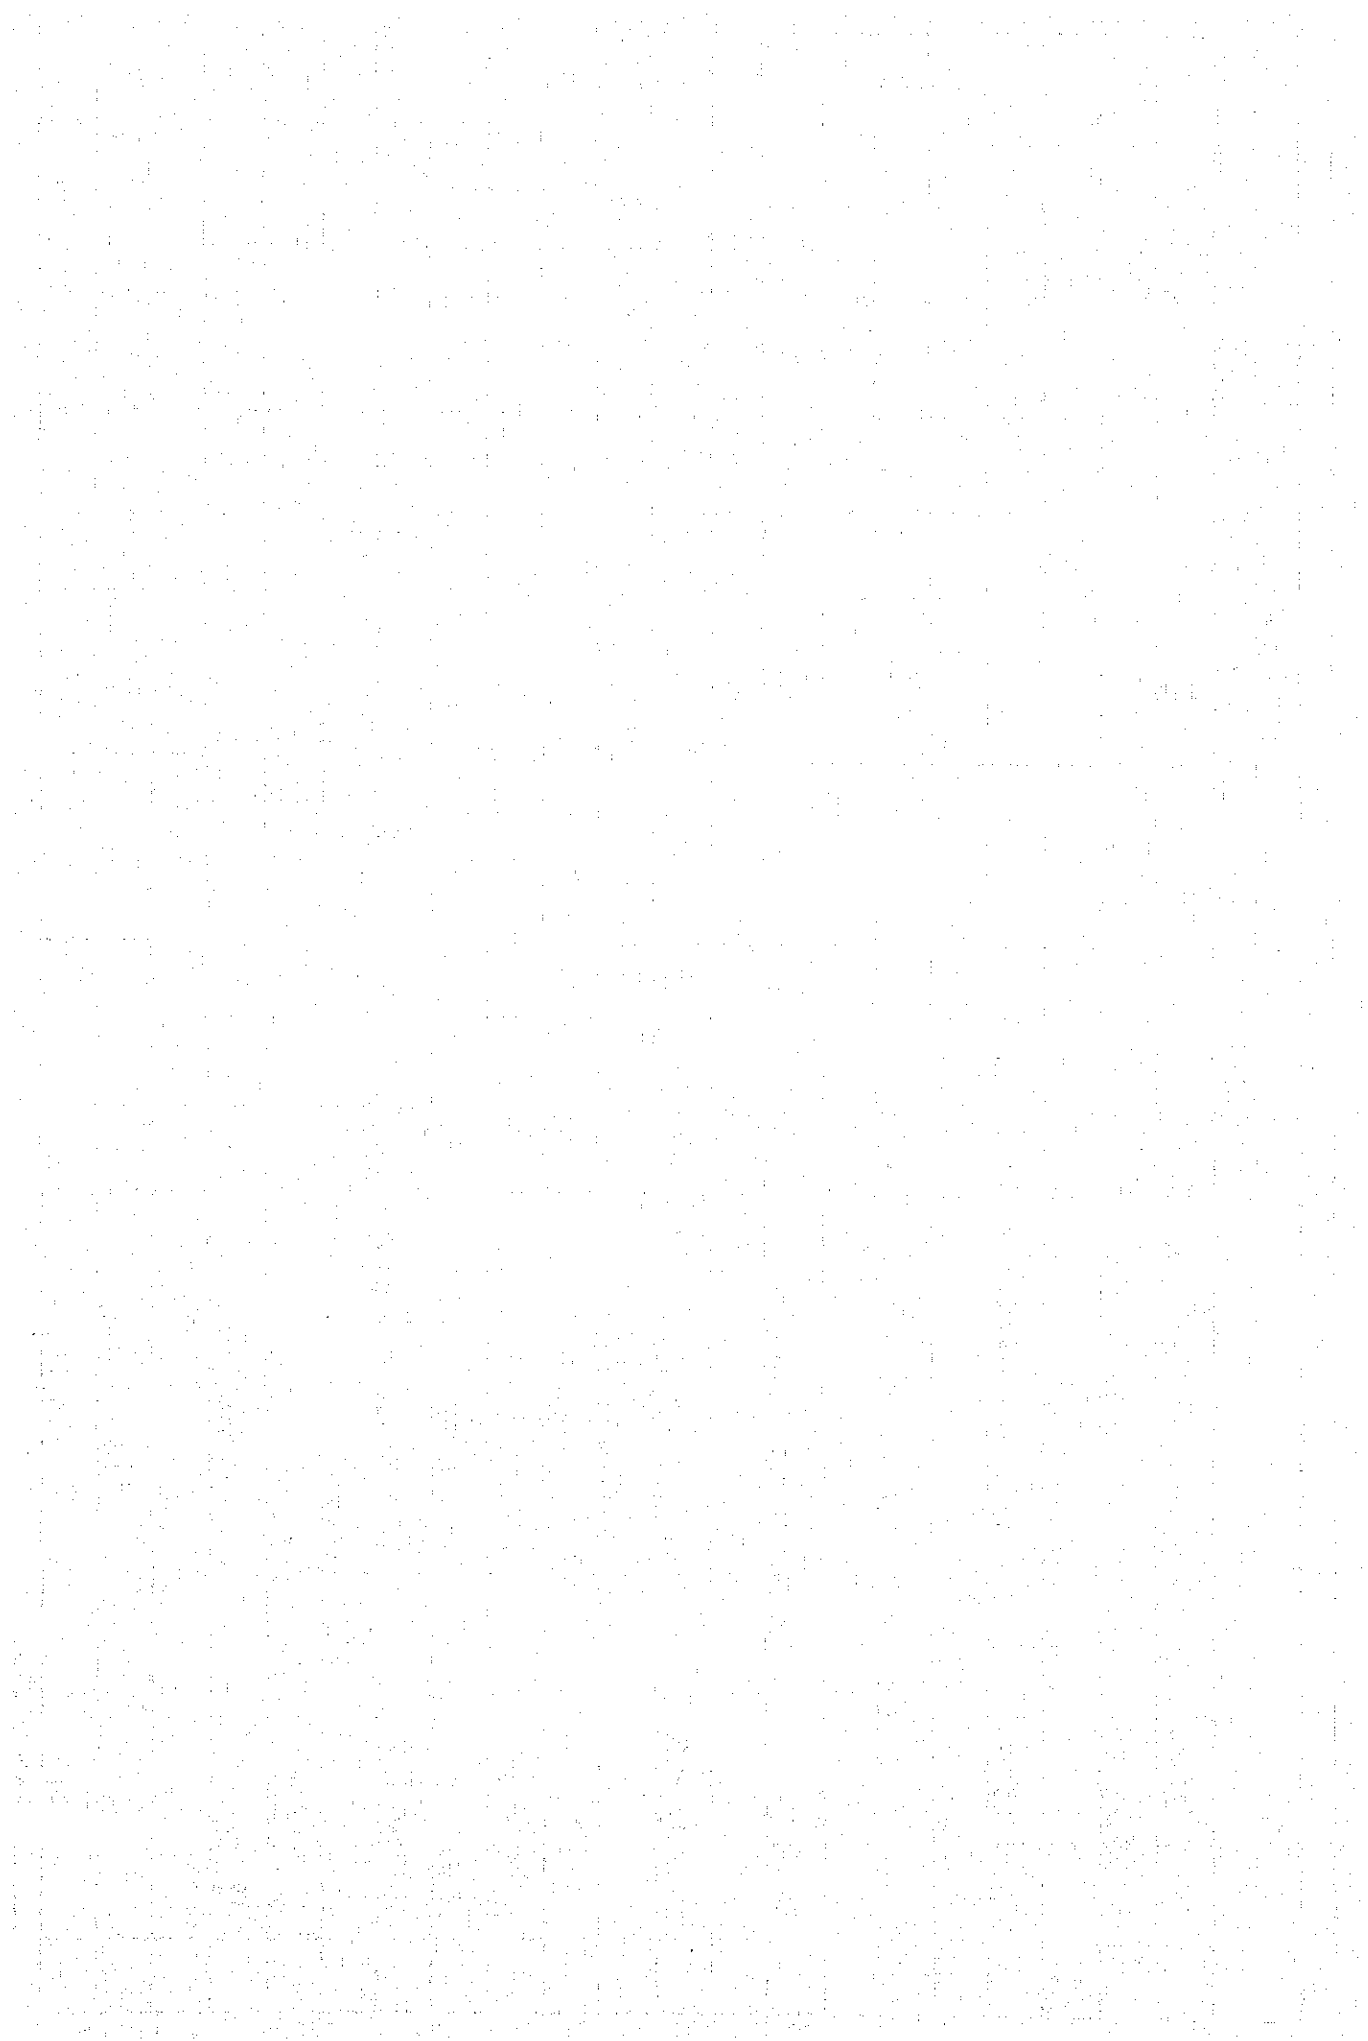

C-2 Kathmandu Transmitting Station
Plumbing Work

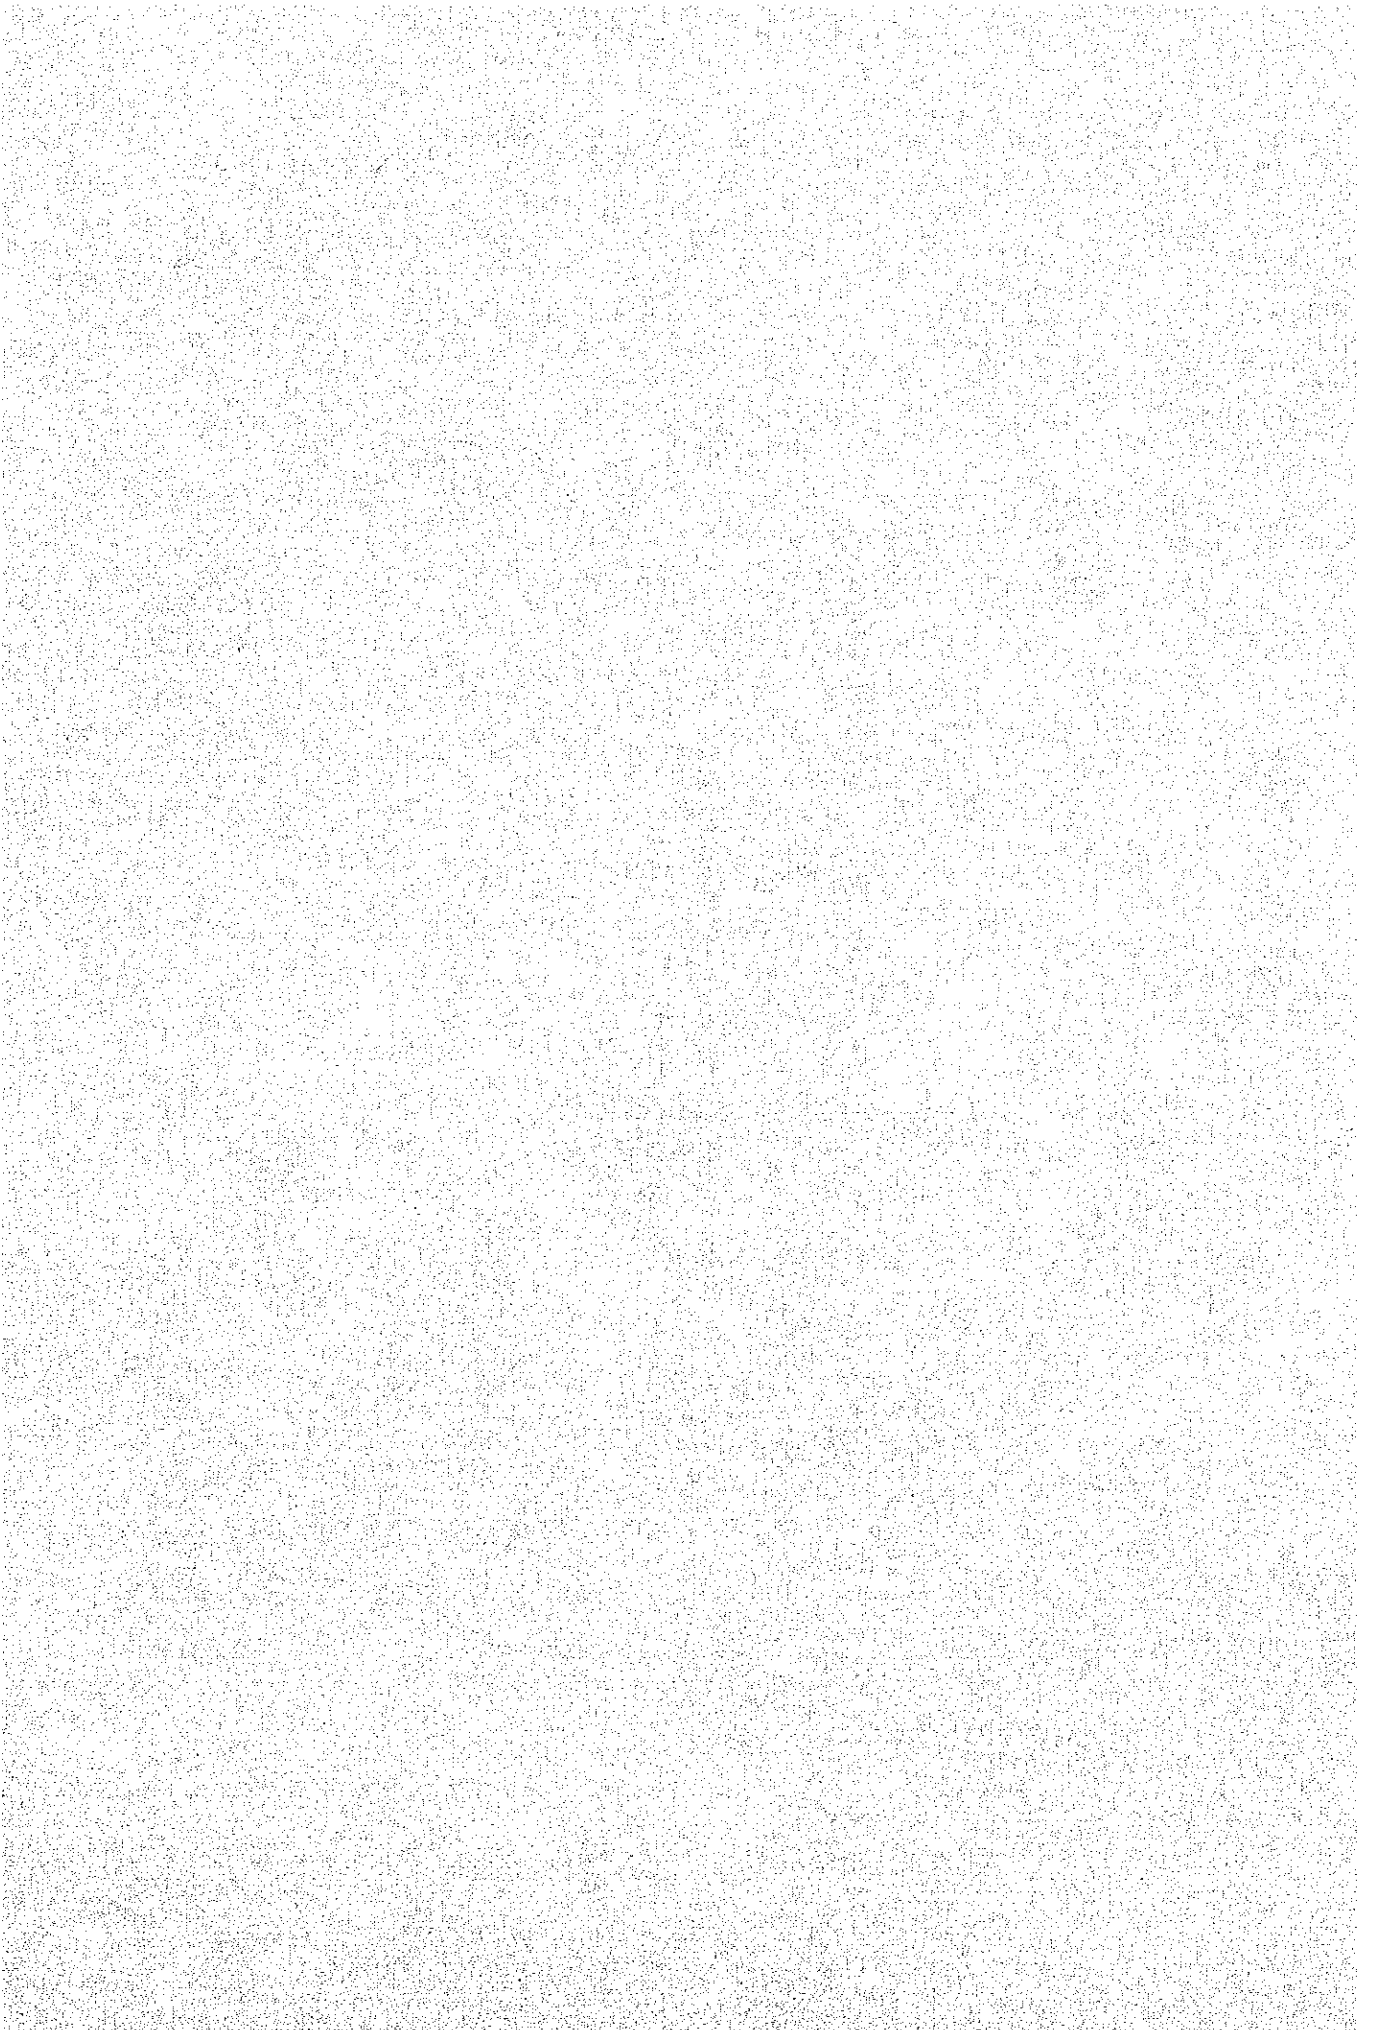

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN.)		(YEN.) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
2 C-19 KATHMANDU TRANSMITTING STATION							
PLUMBING WORK							
(1)	給水設備工事 WATER SUPPLY SYSTEM	LOT	/				
(2)	給湯設備工事 HOT WATER SUPPLY SYSTEM	LOT	/				
(3)	排水通気設備工事 DRAINAGE AND VENT WORK	LOT	/				
(4)	衛生器具設備工事 SANITARY FIXTURE WORK	LOT	/				
(5)	貯水タンク設備工事 OIL TANK INSTALLATION WORK	LOT	/				
	計						
	SUB TOTAL						
(6)	包工費 TEMPORARY WORK	LOT	/				
(7)	経費 EXPENSE	LOT	/				
	合計						
	TOTAL						

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
2 C-2 KATHMANDU TRANSMITTING STATION							
(1) 給水設備							
WATER SUPPLY SYSTEM							
[材料]							
圧力タンク及ポンプ	SET	1					
PUMP							
PUMP 40" x 150 1/2 mm x 2.2 KW							
TANK 500 L							
塩化ビニルパイプ 鋼管 P.V.C LINID STEEL PIPE							
20A	LM	44					
25A	LM	49					
32A	LM	33					
40A	LM	11					
50A	LM	16					
金工 継手類	LOT	1					
金工 支持金物	LOT	1					

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
5寸 (5K)							
GATE VALVE (5K)							
20A	PC	2					
25A	PC	3					
32A	PC	1					
50A	PC	2					
本口90°							
BALL COCK							
32A	PC	1					
フレキシブル継手							
FLXIBLE JOINT							
40	PC	2					
50	PC	1					
消火栓ボックス (埋込型)							
FIRE HYDRANT BOX (CLOSED)	SET	1					
消火器							
EXTINGUISHER							
ABC-4型	PC	4					
ABC-4TYPE							

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
保温工事材料	LOT	/					
INSULATION MATERIALS							
塗装工事材料	LOT	/					
PAINTING MATERIALS							
消耗品雑材料	LOT	/					
MISCELLANEOUS MATERIALS							
スリーブ挿入材料	LOT	/					
SLEEVE AND INSERT MATERIALS							
穴明補修費材料	LOT	/					
CHIPPING MATERIALS							
基礎工事材料	LOT	/					
FOUNDATION MATERIALS							
小計							
SUB TOTAL							
[工費]							
[LABOR COST]							
搬入据付費	LOT	/					
TRANSPORT AND INSTALLATION FOR EQUIPMENT							

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
配管工事	PIPING LABOR COST	LOT	/				
器具取付	FIXTURE INSTALLATION	LOT	/				
保温工事	INSULATION WORK	LOT	/				
塗装工事	PAINTING WORK	LOT	/				
欠明補修費	CHIPPING AND MAKING	LOT	/				
	GOOD						
スリ-7.5-D-1-費	SLEEVE INSTALLATION	LOT	/				
試験費	TEST	LOT	/				
運搬費	TRANSPORTATION	LOT	/				
小計	SUB TOTAL						
計	TOTAL						

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(2) 給湯設備							
	HOT WATER SUPPLY						
	SYSTEM						
	[MATERIALS]						
	ELECTRIC WATER	1					
電気湯沸器	HEATER (30KW)						
	CAPACITY 25°C U.P						
	17.2ℓ/min						
	COPPER PIPE						
銅管	20A	5					
	LM						
	25	10					
	LM						
	FITTINGS FOR P.I.T.T.O	1					
金上継手類							
	SUPPORT AND HANGER	1					
金上支持金物							
	INSULATION MATERIALS	1					
保溫工事材料							
	PAINTING MATERIALS	1					
塗装工事材料							

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
道標品雜材料	MISCELLANEOUS MATERIALS	LOT					
又川-7 材料	SLEEVE AND INSERT MATERIALS	LOT					
定明通修材料	CHIPPING MATERIALS	LOT					
小計	SUB TOTAL						
[工費]	[LABOR COST]						
配管工費	PIPING LABOR COST	LOT					
器具取付費	FIXTURE INSTALLATION	LOT					
保温工事	INSULATION WORK	LOT					
塗装工事	PAINTING WORK	LOT					
定明補修	CHIPPING AND MAKING GOOD	LOT					

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
試驗費	LOT	1					
運輸費	LOT	1					
計	SUB TOTAL						
計	TOTAL						

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)	TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT		
(3) 排水通気設備工事								
[材料]								
重鋅鋼管(排水)								
PIPE FOR DRAINAGE								
40A	LM	22						
50	LM	27						
65	LM	16						
80	LM	5						
100	LM	5						
全上総手類								
FITTINGS FOR DITTO	LOT	1						
全上支持金物								
SUPPORT AND HANGER	LOT	1						
重鋅鋼管(通気)								
GALVANIZED STEEL								
PIPE FOR VENT								
40A	LM	5						
50	LM	16						
全上総手類								
FITTINGS FOR DITTO	LOT	1						

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
全工支持金物	SUPPORT AND HANGER	LOT					
排水斜釘管 (1A=01L)	CAST IRON PIPE						
	MECHANICAL JOINT TYPE						
	75 x 1000L	PC					
	75 x 400L	PC					
	100 x 1000L	PC					
	100 x 400L	PC					
全工異型管	FITTINGS FOR DITTO						
	LY 100x100	PC					
	LY 100x75	PC					
	LY 75x40	PC					
	ST 100x50	PC					
	ST 75x50	PC					
	90°SB 100	PC					
	90°SB 75	PC					
	GS 100	PC					
	GS 75	PC					
	GS 50	PC					
	GS 50x40	PC					

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)	TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT		
全工接合材料	LOT	1						
CONNECTING								
MATERIALS FOR DITTO								
全工支持金物	LOT	1						
SUPPORTERS FOR DITTO								
鉛管								
LEAD PIPE								
30A	LM	4						
40	LM	4						
65	LM	1						
75	LM	2						
100	LM	2						
全工接合材料	LOT	1						
CONNECTING								
MATERIALS FOR DITTO								
排气管 (E=114管)								
VINYL PIPE FOR VENT								
150 ^φ	LM	12						
全工磁手類	LOT	1						
FITTINGS FOR DITTO								
全工支持金物	LOT	1						
SUPPORT AND HANGER								

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
コンクリート管	PC	19					
CONCRETE PIPE							
100							
合上接合材料	LOI	1					
CONNECTING							
MATERIALS FOR DITTO							
掃除口	PC	1					
CLEAN OUT							
100 COA							
80 COA	PC	1					
65 COA	PC	2					
50 COA	PC	1					
床排水金物	PC	2					
FLOOR DRAIN							
50T-5A							
去 塵	PC	1					
WASTE FITTING							
50T-3C							
流し排水金物	PC	1					
SINK DRAIN							
40-BLM-A							
ベントキャップ	PC	1					
VENT CAP							
50							

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)	TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT		
防虫網	PC	1						
ANTI INSECTS NET	PC	1						
水中排水ポンプ								
UNDER WATER DRAINAGE PUMP								
40° x 100 ^{mm} x 15 ^m x 1.5KW	SET	2						
弁	PC	2						
CHECK VALVE	PC	2						
40								
導入管								
INTRODUCTION PIPE								
100	PC	1						
汚水坑	EA	3						
SOIL PIT	EA	3						
450 x 450								
排水坑	EA	3						
WASTE PIT	EA	3						
450 x 450								
600 x 600	EA	2						

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
マンホールカバー							
MANHOLE COVER							
450φ	PC	6					
500φ	PC	2					
浄化槽							
SEPTIC TANK	LOT	1					
保温工事材料							
INSULATION MATERIALS	LOT	1					
塗装工事材料							
PAINTING MATERIALS	LOT	1					
消耗品材料							
MISCELLANEOUS MATERIALS	LOT	1					
217.1材料							
SLEEVE AND INSERT MATERIALS	LOT	1					
穴明補修材料							
CHIPPING MATERIALS	LOT	1					
小計							
SUB TOTAL							

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(4) 衛生器具設備工事							
洗面器	SET	1					
小便器	SET	1					
洗面器	SET	2					
洗面器	SET	3					
掃除機	SET	1					
鏡	PC	3					
水栓	PC	1					
シャワーセット	PC	1					


I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
消耗品 材料	LOT	/					
MISCELLANEOUS MATERIALS							
挿入小卷生材料	LOT	/					
SLEEVE MATERIALS							
小計							
SUB TOTAL							
[工費]							
器具取付費	LOT	/					
FIXTURE INSTALLATION							
挿入小卷生費	LOT	/					
SLEEVE WORK							
穴明補修費	LOT	/					
CHIPPING AND MAKING							
GOOD							
器具調整費	LOT	/					
ADJUSTING WORK							
運搬費	LOT	/					
TRANSPORTATION							
小計							
SUB TOTAL							
計							
TOTAL							

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(5) 才他27設備工事							
[材料]							
才111977	UNIT	/					
才111977							
地下埋設形							
マホ-14							
7771111-9-							
全工用躯体工事	LOT	/					
黒ガス管							
	LM	55					
	LM	55					
	LM	22					
	LM	22					
全工用平形	LOT	/					
全工用金物	LOT	/					

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
塗裝工事材料	LOT	/					
消耗品雜材料	LOT	/					
定明預備費材料	LOT	/					
小計	SUB TOTAL						
[工資]	[LABOR COST]						
搬入掘付費	LOT	/					
安裝設備	INSTILLATION FOR EQUIPMENT						
配管工資	PIPING LABOR COST	LOT					
塗裝工事	PAINTING WORK	LOT					
定明補修費	CHIPPING AND MAKING	LOT					
試驗費	GOOD TEST						
運輸費	TRANSPORTATION	LOT					
小計	SUB TOTAL						
合計	TOTAL						

148

C-3 Pokhara Transmitting Station
Plumbing Work

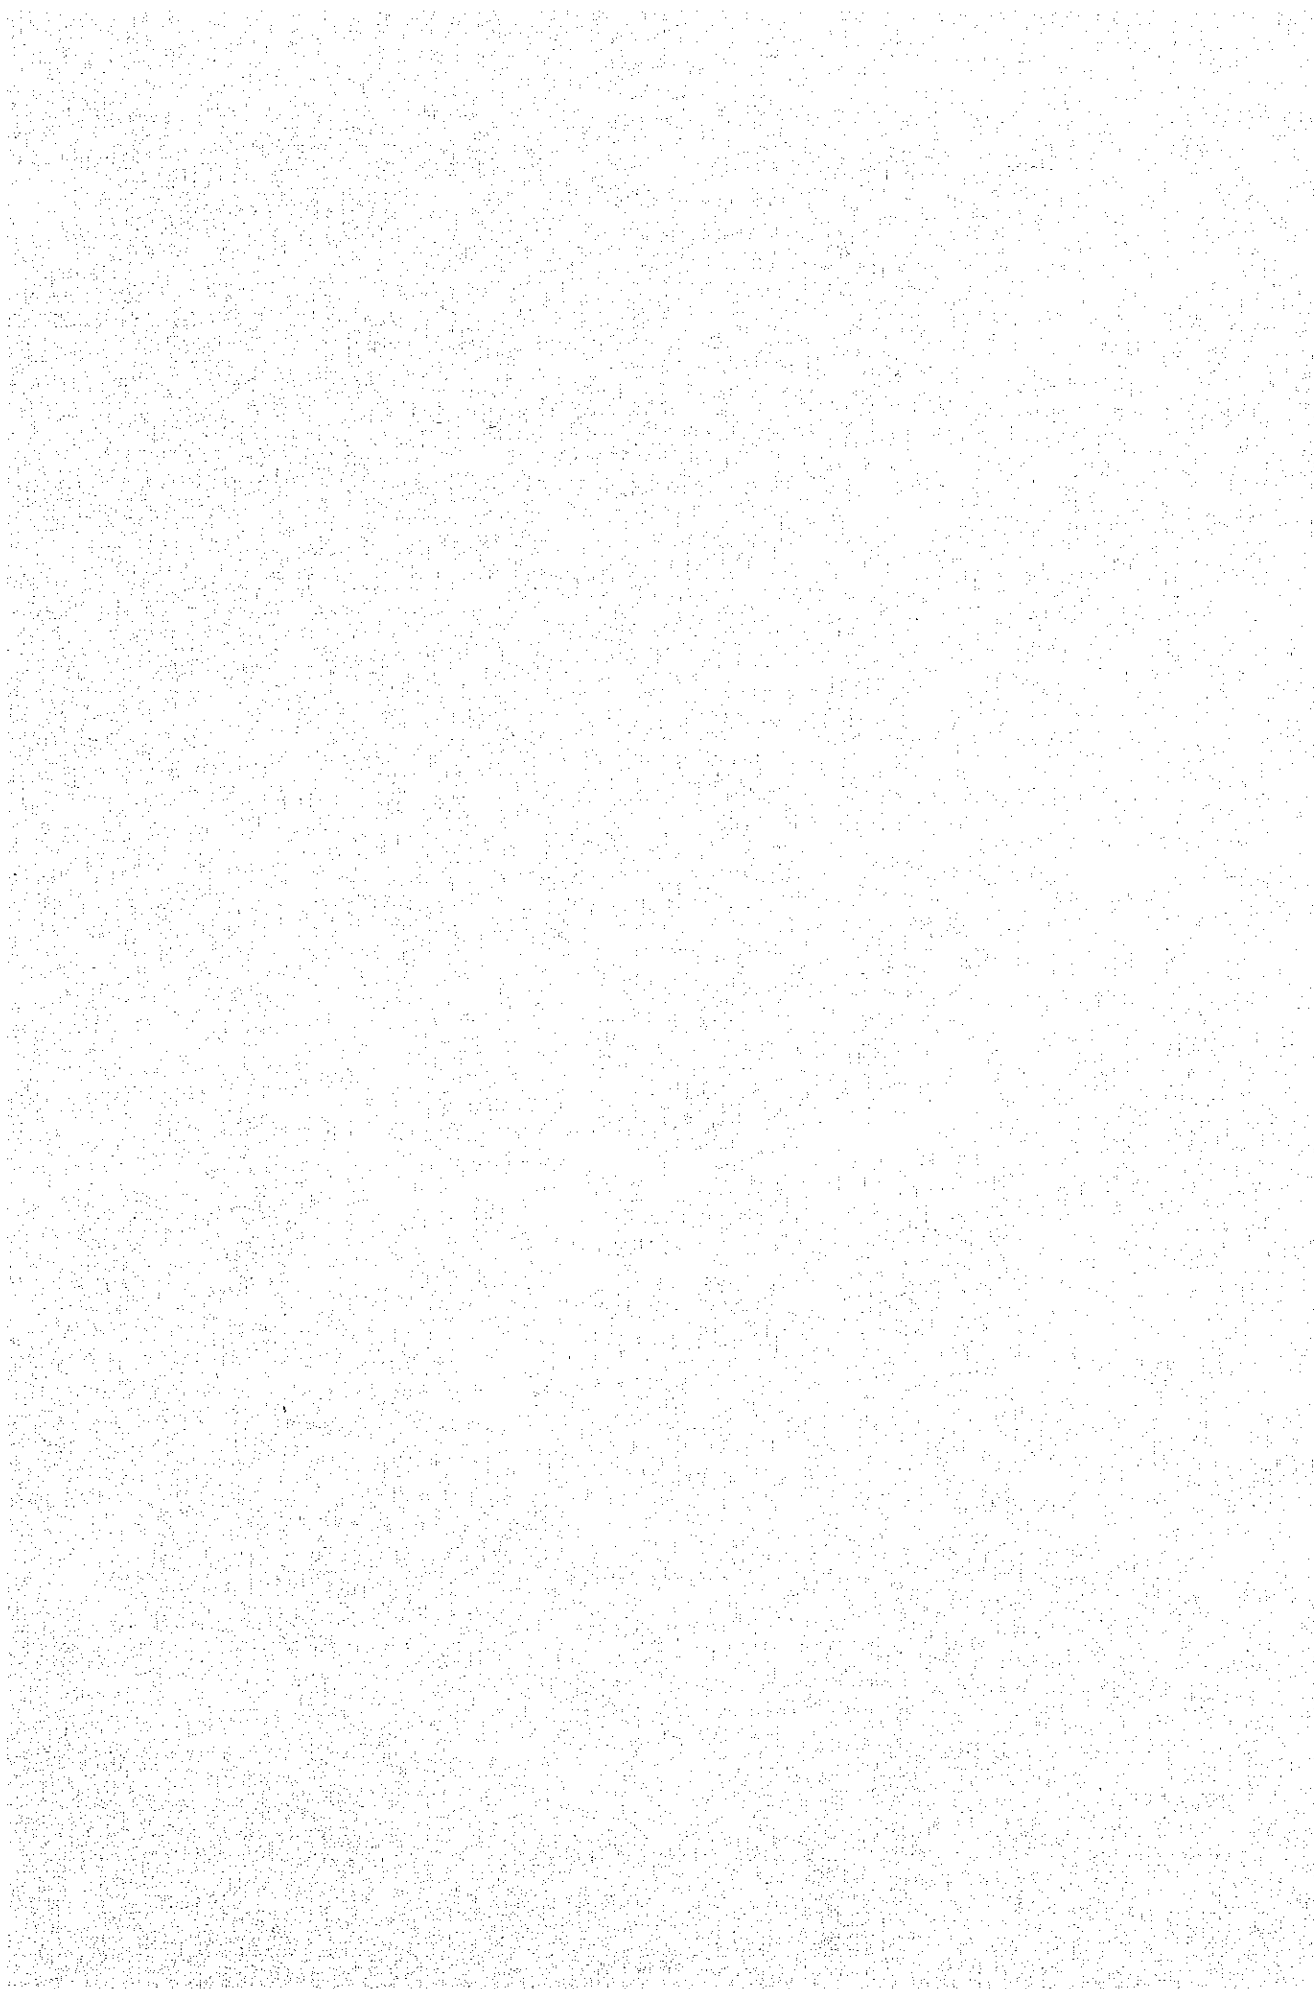

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
C-3 POKHARA TRANSMITTING STATION							
PLUMBING WORK							
(1) 給水設備	LOT	1					
WATER SUPPLY SYSTEM							
(2) 給湯設備工事	LOT	1					
HOT WATER SUPPLY SYSTEM							
(3) 排水通気設備工事	LOT	1					
DRAINAGE AND VENT WORK							
(4) 衛生器具設備工事	LOT	1					
SANITARY FIXTURE WORK							
(5) 石油タンク設備工事	LOT	1					
OIL TANK INSTALLATION WORK							
計							
SUB TOTAL							
梱包費							
(6) 仮設工事	LOT	1					
TEMPORARY WORK							
雑費							
EXPENSE							
合計							
TOTAL							

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
C-40							
POKHARA TRANSMITTING STATION.							
(1) 給水設備							
WATER SUPPLY SYSTEM							
[材料]							
[材料]							
圧力タンク及ポンプ	SET	1					
PRESSURE TANK AND PUMP							
PUMP 40" x 150 ^{mm} x 2.2 ^{HP}							
TANK 500 ^L							
塩化ビニルパイプ 鋼管							
PVC LINID. STEEL PIPE							
20A	LM	495					
25A	LM	495					
32A	LM	33					
40A	LM	11					
50A	LM	16					
金工 配手類	LOT	1					
FITTINGS FOR DITTO							
金工 支持金物	LOT	1					
SUPPORT AND HANGER							

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
ゲート弁 (5K)							
GATE VALVE (5K)							
20A	PC	3					
25A	PC	3					
32A	PC	1					
50A	PC	2					
ボールコック							
BALL COCK							
32A	PC	1					
フレキシブル継手							
FLIXIBLE JOINT							
40	PC	2					
50	PC	1					
消火栓ボックス (埋込型)							
FIRE HYDRANT BOX (CLOSED)	SET	1					
消火器							
EXTINGUISHER							
A.B.C-4型	PC	4					
A.B.C-4TYPE							

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
保温工事材料	LOT	/					
INSULATION MATERIALS							
塗装工事材料	LOT	/					
PAINTING MATERIALS							
消耗品材料	LOT	/					
MISCELLANEOUS MATERIALS							
スリット材	LOT	/					
SLEEVE AND INSERT MATERIALS							
穴明補修費材料	LOT	/					
CHIPPING MATERIALS							
基礎工事材料	LOT	/					
FOUNDATION MATERIALS							
小計							
SUB TOTAL							
[工費]							
[LABOR COST]							
搬入搬出費	LOT	/					
TRANSPORT AND INSTALLATION FOR EQUIPMENT							

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
配管工事	LOT	/					
器具取付等	LOT	/					
保温工事	LOT	/					
塗装工事	LOT	/					
穴明補修等	LOT	/					
スリット 1=11-1	LOT	/					
試験等	LOT	/					
運搬等	LOT	/					
小計							
計							

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)	TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT		
(2) 給湯設備								
	HOT WATER SUPPLY							
	SYSTEM							
	[MATERIALS]							
	ELECTRIC WATER	/						
	HEATER (30KW)							
	CAPACITY 25% U.P.							
	17.2% / min							
	COPPER PIPE							
	20A	LM						
	25	LM						
	FITTINGS FOR DITTO	LOT						
	SUPPORT AND HANGER	LOT						
	INSULATION MATERIALS	LOT						
	PAINTING MATERIALS	LOT						

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
全工支持金物	SUPPORT AND HANGER	LOT					
排水金網管 (1/2=10L)	CAST IRON PIPE						
	MECHANICAL JOINT TYPE						
	75 x 1000L	PC					
	75 x 400L	PC					
	100 x 1000L	PC					
	100 x 400L	PC					
全工異径管	FITTINGS FOR DITTO						
	LY 100x100	PC					
	LY 100x75	PC					
	LY 75x40	PC					
	ST 100x50	PC					
	ST 75x50	PC					
	90°SB 100	PC					
	90°SB 75	PC					
	GS 100	PC					
	GS 75	PC					
	GS 50	PC					
	GS 50x40	PC					

C-49

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)	TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT		
全工機金物	LOT	1						
CONNECTING								
MATERIALS FOR DITTO								
全工支持金物	LOT	1						
SUPPORTERS FOR DITTO								
鉛管								
LEAD PIPE								
30A	LM	4						
40	LM	4						
65	LM	1						
75	LM	2						
100	LM	2						
全工機材料	LOT	1						
CONNECTING								
MATERIALS FOR DITTO								
排氣管 (ビニル管)	LM	12						
VINYL PIPE FOR VENT								
150								
全工機金物類	LOT	1						
FITTINGS FOR DITTO								
全工支持金物	LOT	1						
SUPPORT AND HANGER								

858

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)	
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	TOTAL	TOTAL
CONCRETE PIPE	PC	19						
100								
全上接合材料	LOL	1						
CONNECTING MATERIALS FOR DITTO								
掃除口	PC	1						
CLEAN OUT								
100 COA	PC	1						
80 COA								
65 COA	PC	2						
50 COA	PC	1						
床排水金物	PC	2						
FLOOR DRAIN								
50T-5A								
土佐	PC	1						
WASTE FITTING								
50T-3C								
流し排水金物	PC	1						
SINK DRAIN								
40-BLM-A								
天井排水金物	PC	1						
VENT CAP								
50	PC	1						

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
防虫網							
ANTI INSECTS NET							
50	PC	1					
水中排水ポンプ							
UNDER WATER							
DRAINAGE PUMP							
40 x 100 mm x 15 m x 1.5 KW	SET	2					
弁							
CHECK VALVE							
40	PC	2					
導入管							
INTRODUCTION PIPE							
100	PC	1					
汚水坑							
SOIL PIT							
450 x 450	EA	3					
排水坑							
WASTE PIT							
450 x 450	EA	3					
600 x 600	EA	2					

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)	
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	UNIT PRICE	TOTAL
マンホール蓋	MANHOLE COVER							
	450 ^φ	6						
	500 ^φ	2						
浄化槽	SEPTIC TANK	1						
保温工事材料	INSULATION MATERIALS	1						
塗装工事材料	PAINTING MATERIALS	1						
消耗品材料	MISCELLANEOUS MATERIALS	1						
マンホール材料	SLEEVE AND INSERT MATERIALS	1						
穴開補修材料	CHIPPING MATERIALS	1						
小計	SUB TOTAL							

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(4) 衛生器具設備工事							
	SANITARY FIXTURE						
	WORK						
	CLOSET						
	C-14	1					
	C-97 (T150NMV4)	1					
	URINAL						
	U-57 (T60P)	2					
	LAVATORY						
	L-230D	3					
	SLOP SINK						
	SK-22A	1					
	MIRROR						
	TSU19AS5	3					
	FAUCET						
	B-T-27 (W/BOX)	1					
	T-130AR13	1					
	SHOWER SET						
	TGM-140CF	1					

I T E M	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
消耗品材料	LOT	/					
MISCELLANEOUS MATERIALS							
箱入小卷生材料	LOT	/					
SLEEVE MATERIALS							
小計							
[LABOR COST]							
器具取付費	LOT	/					
FIXTURE INSTALLATION							
箱入小卷生費	LOT	/					
SLEEVE WORK							
定明補修費	LOT	/					
CHIPPING AND MAKING							
GOOD							
器具調整費	LOT	/					
ADJUSTING WORK							
運搬費	LOT	/					
TRANSPORTATION							
小計							
SUB TOTAL							
計							
TOTAL							

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN) TOTAL
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	
(5) 油罐設備工事							
	OIL TANK INSTALLTION						
	WORK						
	[材料]						
	油罐 3000ℓ	UNIT					
	地下埋設形						
	マンホ-1ℓ						
	WITH MANHOLE COVER						
	タンクレベルメ-タ-						
	TANK LEVEL METER						
	全上用船体工事	LOT					
	CONSTRUCTION FOR						
	DITTO						
	黒パイプ						
	STEEL PIPE						
	65A	LM					
	50	LM					
	40	LM					
	32	LM					
	全上陸平堀	LOT					
	FITTING FOR DITTO						
	全上陸平堀金物	LOT					
	SUPPORTERS FOR DITTO						

ITEM	UNIT	QUANTITY	LOCAL (RUPEE)		JAPAN (YEN)		(YEN)	
			UNIT PRICE	AMOUNT	UNIT PRICE	AMOUNT	TOTAL	TOTAL
塗料工事材料	LOT	/						
消光豆粉打料	LOT	/						
定明補修打料	LOT	/						
合計	SUB TOTAL							
[工賃]	[LABOR COST]							
搬入掘付費	LOT	/						
搬入掘付費	INSTALLATION FOR EQUIPMENT							
配管工賃	PIPING LABOR COST	/						
塗装工賃	PAINTING WORK	/						
定明補修費	CHIPPING AND MAKING GOOD	/						
試験費	TEST							
運搬費	TRANSPORTATION	/						
合計	SUB TOTAL							
合計	TOTAL							