

# 付 録


## 付録 1


既設新ケラニ橋図面（橋梁一般図、断面図）

# THE NEW KELANI BRIDGE

FIG 1

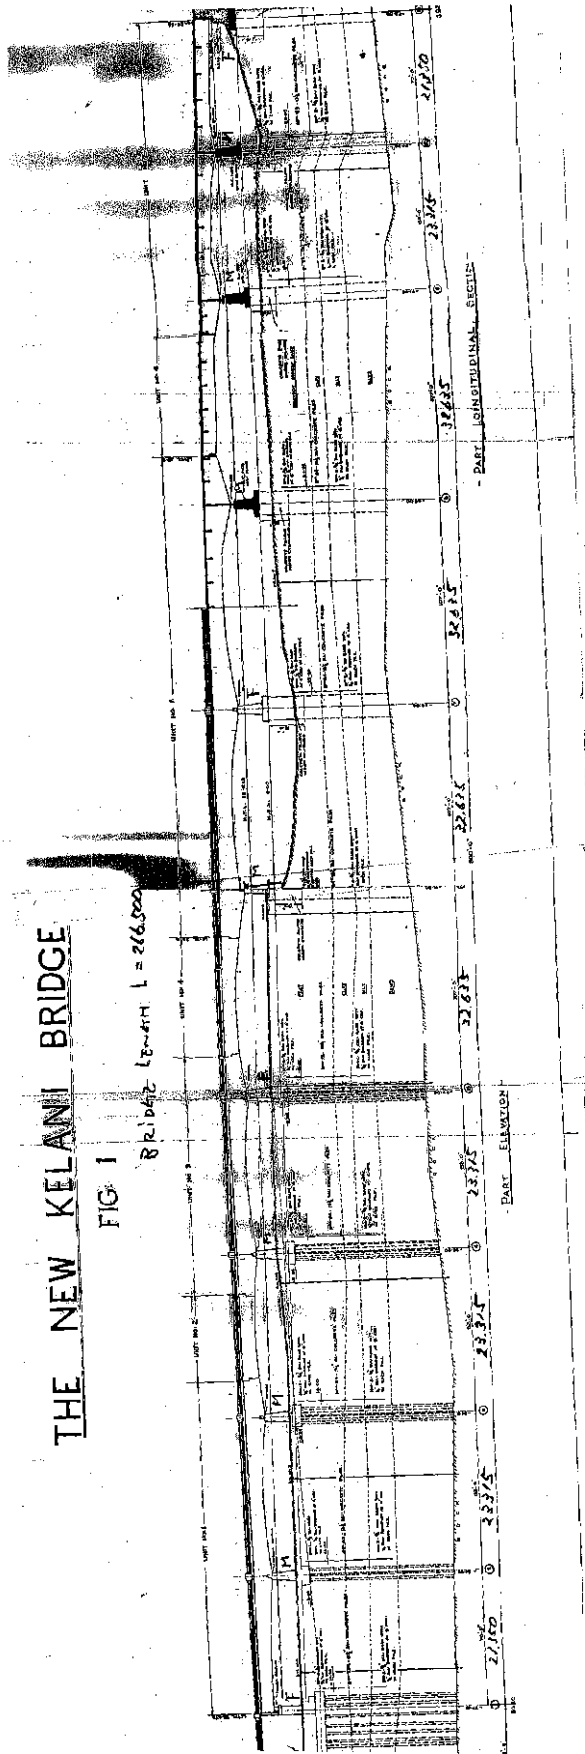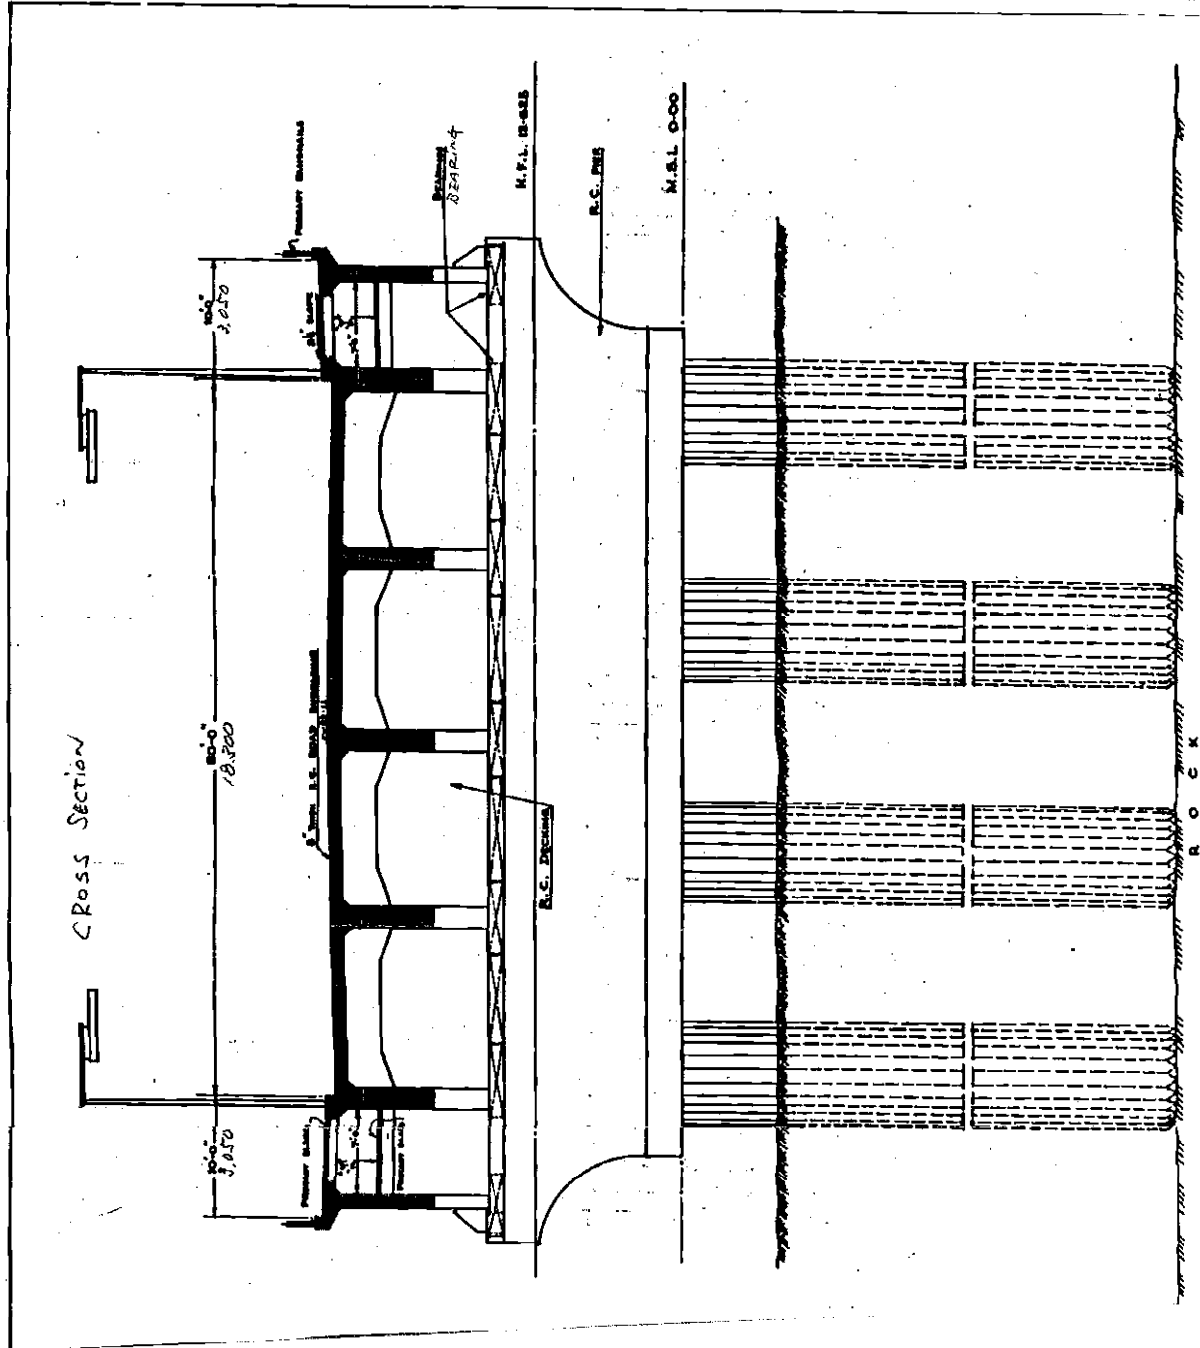RIDGE LENGTH = 266.000





- CROSS SECTION -  
 BETWEEN PILES N° 7 & 8  
 SCALE: 1/8" FEET TO AN INCH

SCALE: 1/8" FEET TO AN INCH

SCALE: 1/8" FEET TO AN INCH



## 付録 2

### シュミットハンマー試験結果



**SCHMIDT HAMMER TEST ON CONCRETE  
STRUCTURES  
TEST METHOD ASTM C - 805 - 94**

Test Format No: ELS-ML-33  
Revision No. 00

**Project details:**

Project: New Kelani Bridge Healthness Check  
Client: Oriental Consultants

**Schmidt Hammer Details:**

Model: 58-C0181/N  
Serial No: 10008440  
Capacity: 100  
Resolution: 2  
Readability: 1

**Test Data:**

Location: Piers Job Ref: ML/FT/653  
Element of Structure: - Date of testing: 06.03.2013  
Concrete Grade: - Date of Report: 07.03.2013  
Direction of Impact:  $\alpha = 0^\circ$  PIER  $\downarrow$  GIRDER PIER  $\downarrow$  GIRDER

| Location No:                                | P-01 | P-01(3) | P-02(1) | P-02(2) | P-03 | P-03(2) |
|---|------|---------|---------|---------|------|---------|
| Readings                                    | 36   | 38      | 40      | -       | 44   | 34      |
|   | 36   | 44      | 36      | 34      | 44   | 36      |
|   | 40   | 37      | 44      | 42      | 44   | 36      |
|   | 37   | 37      | 46      | 40      | 43   | 38      |
|   | -    | 32      | 44      | 34      | 44   | 32      |
|   | 36   | 32      | 44      | 34      | 44   | 34      |
|   | 36   | 34      | 38      | 40      | 41   | 32      |
|   | 36   | 36      | 44      | 38      | 40   | -       |
|   | 32   | 38      | 38      | 39      | 46   | 36      |
|   | 34   | 37      | 38      | 42      | 42   | 33      |
| Average Reading                             | 36   | 37      | 41      | 38      | 43   | 35      |
| Correction Factor (by calibration)          | 1    | 1       | 1       | 1       | 1    | 1       |
| Corrected Rebound No.                       | 36   | 37      | 41      | 38      | 43   | 35      |
| Compressive Strength (N / mm <sup>2</sup> ) | 35   | 37      | 44      | 39      | 48   | 33      |

Remarks: \*Readings differing from average more than 6 units have been discarded

- \* Average Reading = Average of the readings except discarded values
- \* Correction factor = Factor from calibration of the Schimith Hammer
- \* Corrected Reading = Average Reading \* Correction Factor
- \* Compressive Strength = A reading obtained from the chart appeared on the Schimith Hammer

\*The decision on acceptability of concrete is taken by the consultant engineer

\* All the test locations were selected by the client.

Tested By:

Checked By:

Certified By:



**SCHMIDT HAMMER TEST ON CONCRETE  
STRUCTURES  
TEST METHOD ASTM C - 805 - 94**

Test Format No: ELS-ML-33  
Revision No. 00

**Project details:**

Project: New Kelani Bridge Healthness Check  
Client: Oriental Consultants

**Schmidt Hammer Details:**

Model: 58-C0181/N  
Serial No: 10008440  
Capacity: 100  
Resolution: 2  
Readability: 1

**Test Data:**

Location: Pier Job Ref: ML/FT/653  
Element of Structure: - Date of testing: 06.03.2013  
Concrete Grade: - Date of Report: 07.03.2013

Direction of Impact:  $\alpha = 0^\circ$

GIRDER ↓

GIRDER ↓

| Location No:                                | P-04 | P-04(2) | P-05 | P-05 (5) |
|---|------|---------|------|----------|
| Readings                                    | 48   | 46      | 38   | 44       |
|   | 46   | 48      | 38   | 46       |
|   | 48   | 48      | 38   | 44       |
|   | 46   | 42      | 35   | 42       |
|   | 40   | 44      | 34   | 41       |
|   | 42   | 40      | 34   | 40       |
|   | 43   | 46      | 36   | 41       |
|   | 42   | 42      | 36   | 40       |
|   | 50   | 42      | 39   | 40       |
|   | 44   | 44      | 41   | 40       |
| Average Reading                             | 45   | 44      | 37   | 42       |
| Correction Factor( by calibration)          | 1    | 1       | 1    | 1        |
| Corrected Rebound No.                       | 45   | 44      | 37   | 42       |
| Compressive Strength (N / mm <sup>2</sup> ) | 52   | 50      | 37   | 46       |

Remarks: \*Readings differing from average more than 6 units have been discarded

- \* Average Reading = Average of the readings except discarded values
- \* Correction factor = Factor from calibration of the Schimith Hammer
- \* Corrected Reading = Average Reading\*Correction Factor
- \* Compressive Strength = A reading obtained from the chart appeared on the Schimith Hammer

\*The decision on acceptability of concrete is taken by the consultant engineer

\* All the test locations were selected by the client.

Tested By:

Checked By:

Certified By:



**SCHMIDT HAMMER TEST ON CONCRETE  
STRUCTURES  
TEST METHOD ASTM C - 805 - 94**

Test Format No: ELS-ML-33  
Revision No. 00

**Project details:**

Project: New Kelani Bridge Healthness Check  
Client: Oriental Consultants

**Schmidt Hammer Details:**

Model: 58-C0181/N  
Serial No: 10008440  
Capacity: 100  
Resolution: 2  
Readability: 1

**Test Data:**

Location: Abutment Job Ref: ML/FT/653  
Element of Structure: - Date of testing: 06.03.2013  
Concrete Grade: - Date of Report: 07.03.2013  
Direction of Impact:  $\alpha = 0^\circ$

| Location No:                                | Abutment        |    |
|---|-----------------|----|
| Readings                                    | 36              |    |
|   | 34              |    |
|   | 33              |    |
|   | 40              |    |
|   | 32              |    |
|   | 36              |    |
|   | 40              |    |
|   | 36              |    |
|   | 34              |    |
|   | 37              |    |
|   | Average Reading | 36 |
| Correction Factor( by calibration)          | 1               |    |
| Corrected Rebound No.                       | 36              |    |
| Compressive Strength (N / mm <sup>2</sup> ) | 35              |    |

Remarks: \*Readings differing from average more than 6 units have been discarded

- \* Average Reading = Average of the readings except discarded values
- \* Correction factor = Factor from calibration of the Schimith Hammer
- \* Corrected Reading = Average Reading\*Correction Factor
- \* Compressive Strength = A reading obtained from the chart appeared on the Schimith Hammer

\*The decision on acceptability of concrete is taken by the consultant engineer

\* All the test locations were selected by the client.

Tested By:

Checked By:

Certified By:





**SCHMIDT HAMMER TEST ON CONCRETE  
STRUCTURES  
TEST METHOD ASTM C - 805 - 94**

**Test Format No:** ELS-ML-33  
**Revision No.** 00

**Project details:**

**Project:** New Kelani Bridge Healthness Check  
**Client:** Oriental Consultants

**Schmidt Hammer Details:**

**Model:** 58-C0181/N  
**Serial No:** 10008440  
**Capacity:** 100  
**Resolution:** 2  
**Readability:** 1

**Test Data:**

|  |                    |          |          |          |                         |                |
|--|--------------------|----------|----------|----------|-------------------------|----------------|
| <b>Location:</b>                                 | Piers              |          |          |          | <b>Job Ref:</b>         | ML/FT/653      |
| <b>Element of Structure:</b>                     | -                  |          |          |          | <b>Date of testing:</b> | 06.03.2013     |
| <b>Concrete Grade:</b>                           | -                  |          |          |          | <b>Date of Report:</b>  | 07.03.2013     |
| <b>Direction of Impact:</b>                      | $\alpha = 0^\circ$ | Pier     | Pier     | Pier     | Pier                    | ABUT 2. GIRDER |
| <b>Location No:</b>                              | P-06 (N)           | P-07 (N) | P-08 (N) | P-09 (N) | P-10 (N)                | P-10 (06) (N)  |
| <b>Readings</b>                                  | 38                 | 42       | 34       | 36       | 34                      | 40             |
|  | 36                 | 40       | 36       | 40       | 32                      | 41             |
|  | 36                 | 40       | 32       | 40       | 30                      | 38             |
|  | 33                 | 46       | 36       | 38       | 33                      | 38             |
|  | 36                 | 40       | 35       | 44       | 35                      | 39             |
|  | 35                 | 42       | 38       | 36       | 32                      | 42             |
|  | 33                 | 42       | 41       | 34       | 30                      | 40             |
|  | 37                 | 39       | 32       | 40       | 40                      | 36             |
|  | 32                 | 40       | 39       | 34       | 32                      | 38             |
|  | 34                 | 40       | 40       | 36       | 40                      | 40             |
| <b>Average Reading</b>                           | 35                 | 41       | 36       | 38       | 34                      | 39             |
| <b>Correction Factor( by calibration)</b>        | 1                  | 1        | 1        | 1        | 1                       | 1              |
| <b>Corrected Rebound No.</b>                     | 35                 | 41       | 36       | 38       | 34                      | 39             |
| <b>Compressive Strength (N / mm<sup>2</sup>)</b> | 34                 | 44       | 35       | 39       | 32                      | 40             |

**Remarks:** \*Readings differing from average more than 6 units have been discarded

- \* Average Reading = Average of the readings except discarded values
- \* Correction factor = Factor from calibration of the Schmith Hammer
- \* Corrected Reading = Average Reading\*Correction Factor
- \* Compressive Strength = A reading obtained from the chart appeared on the Schmith Hammer

\*The decision on acceptability of concrete is taken by the consultant engineer  
\* All the test locations were selected by the client.

**Tested By:**

**Checked By:**

**Certified By:**

## 付録 3

交通重要予測データ（参考）

## REFERENCE DATA FOR TRAFFIC DEMAND FORECAST

This appendix shows the reference data for traffic demand forecast such as the results of transport survey consists with traffic turning volume survey, travel speed survey and traffic signal phasing survey, as well as the data in the each stage of demand forecast.

### 1 TRANSPORT SURVEY RESULTS

#### 1.1 Traffic Turning Volume Survey

The main objective of this survey is to obtain the present turning movement of vehicles at intersections and junctions within the survey area. The obtained data was used as the basis of traffic simulation and vehicular Origin-Destination (OD) matrix estimation.

The survey was conducted at fourteen (14) locations which include two (2) Roundabouts, 4 Signalized Intersections, and 8 other locations as indicated in Figure 1.

Table 1 Survey locations

| No | Location Code | Survey Method  |
|----|---------------|--|
| 1  | R-1           | Traffic Turning Volume Survey  |
| 2  | R-2           |  |
| 3  | J-1           |  |
| 4  | J-2           |  |
| 5  | J-3           |  |
| 6  | J-4           |  |
| 7  | C-1           | Classified Vehicle Count Survey (one direction*)<br>*Inflow to the Survey Area |
| 8  | C-2           |  |
| 9  | C-3           |  |
| 10 | C-4           |  |
| 11 | C-5           |  |
| 12 | C-6           |  |
| 13 | C-7           |  |
| 14 | C-8           |  |

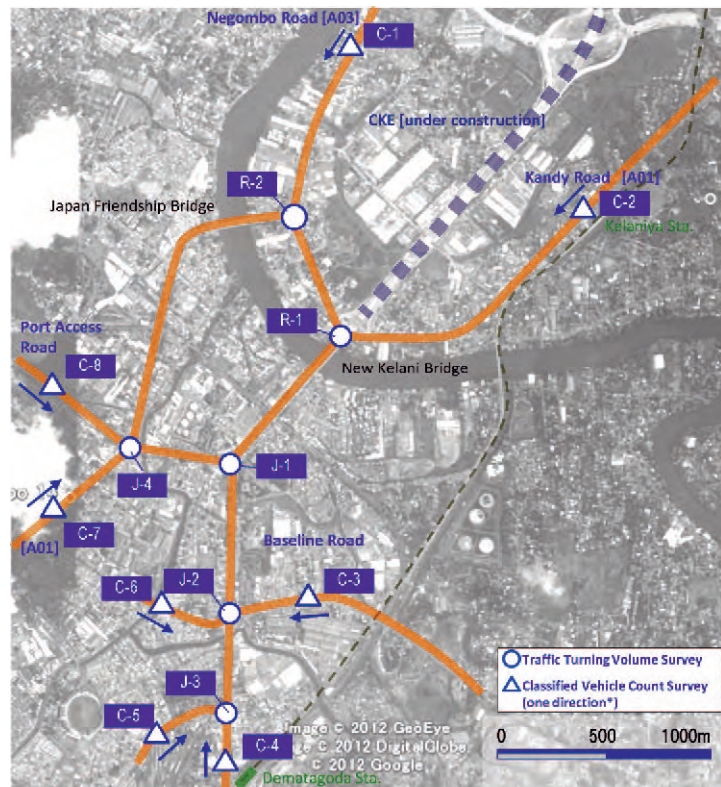


Figure 1 Survey Locations

The survey was conducted on 2 weekdays (either Tuesday, Wednesday or Thursday) for the duration of 24 hours (6:00 AM to 6:00 AM of the following day).

The types of vehicles for this survey are classified into the following 11 categories:

|        |                              |         |                                |
|--------|------------------------------|---------|--------------------------------|
| Type 1 | Motor Bike                   | Type 7  | Large Truck (3 axels and more) |
| Type 2 | Three Wheeler                | Type 8  | Container Trailer              |
| Type 3 | Car, Jeep                    | Type 9  | Minibus (29 seats and below)   |
| Type 4 | Passenger Van                | Type 10 | Bus                            |
| Type 5 | Pick-up (Single/ Double Cab) | Type 11 | Others ( )                     |
| Type 6 | Medium Truck (2 axels)       |         |                                |

Summary of the results is described below and each data imputed into the table is available in the MS excel file.

### LOCATION

- [R1] PERIYAGODA ROUNDABOUT
- [R2] NAWALOKA ROUNDABOUT
- [J1] KELANI POWER STATION
- [J2] ORUGODAWATHTHA
- [J3] SAMANTHA CINEMA
- [J4] PORT ACCESS ROAD JUNCTION

### DATE

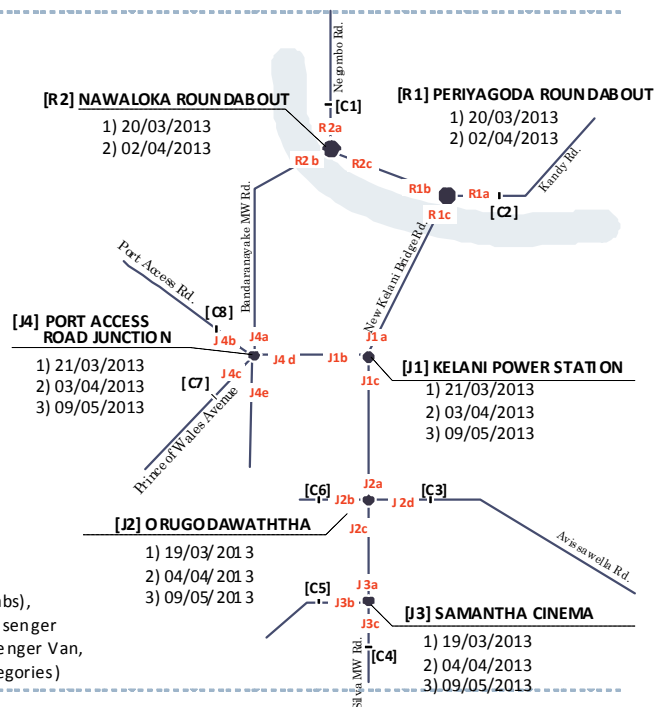
- 1<sup>st</sup> Survey :  
19<sup>th</sup> March to 21<sup>th</sup> March 2013
- 2<sup>nd</sup> Survey  
2<sup>nd</sup> April to 4<sup>th</sup> April 2013
- \*Additional Survey on 9<sup>th</sup> May 2013

### SURVEY PERIOD

24 hours (6:00am – 6:00am)

### TYPE OF VEHICLE

- [1]Motorcycle s & Scooters, [2]Pickups (Single/ Double Cabs),
- [3]Large Trucks 3 Axel or more, [4]Three-wheelers, [5]Pas senger car/je ep, [6]Containe r Trailer, [7]M edium Trucks, [8]P asse nger Van,
- [9]MiniBus, [10]Standard bus, [11]Farm & Other (11 categories)



## [ R1 ] PERIYAGODA ROUNDABOUT

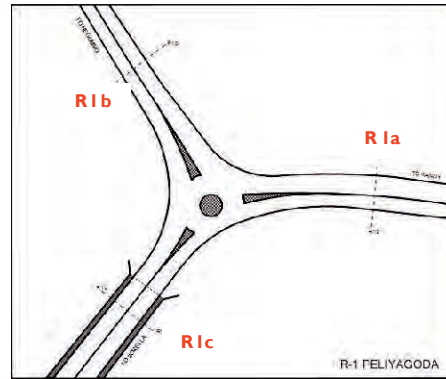
### RESULT OF SURVEY

#### 1<sup>st</sup> SURVEY 20th March 2013

|       | inflow  | outflow | total   |
|-------|---------|---------|---------|
| R1a   | 32,863  | 38,218  | 71,081  |
| R1b   | 20,122  | 19,516  | 39,638  |
| R1c   | 51,543  | 47,531  | 99,074  |
| total | 104,528 | 105,265 | 209,793 |

#### 2<sup>nd</sup> SURVEY 2nd April 2013

|       | inflow  | outflow | total   |
|-------|---------|---------|---------|
| R1a   | 35,154  | 33,032  | 71,081  |
| R1b   | 22,890  | 21,826  | 44,716  |
| R1c   | 44,260  | 47,923  | 92,183  |
| total | 102,304 | 102,781 | 205,085 |



#### cf. PREVIOUS SURVEY

19th September 2012

|            |       | inflow | outflow | total   |
|------------|-------|--------|---------|---------|
| To KANDY   | R1a   | 34,680 | 25,295  | 59,975  |
| To WATTALA | R1b   | 18,304 | 25,417  | 43,721  |
| To COLOMBO | R1c   | 40,739 | 43,011  | 83,750  |
|            | total | 59,043 | 68,428  | 187,446 |

## [ R2 ] NAWALOKA ROUNDABOUT

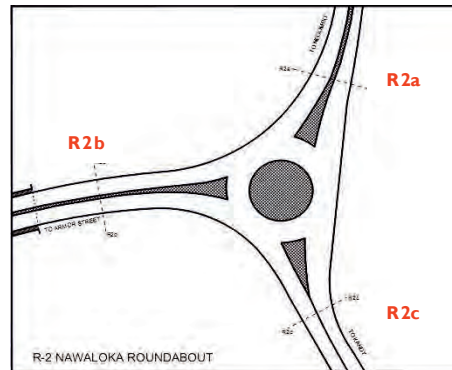
### RESULT OF SURVEY

#### 1<sup>st</sup> SURVEY 20th March 2013

|       | inflow | outflow | total   |
|-------|--------|---------|---------|
| R2a   | 39,303 | 36,830  | 71,081  |
| R2b   | 28,898 | 21,741  | 50,639  |
| R2c   | 19,516 | 20,122  | 39,638  |
| total | 87,717 | 78,693  | 166,410 |

#### 2<sup>nd</sup> SURVEY 2nd April 2013

|       | inflow | outflow | total   |
|-------|--------|---------|---------|
| R2a   | 38,468 | 37,500  | 71,081  |
| R2b   | 28,397 | 28,196  | 56,593  |
| R2c   | 21,826 | 22,890  | 44,716  |
| total | 88,691 | 88,586  | 177,277 |



#### cf. PREVIOUS SURVEY

20th September 2012

|               |       | inflow | outflow | total   |
|---------------|-------|--------|---------|---------|
| To NEGOMBO    | R2a   | 40,775 | 44,634  | 85,409  |
| To TOTALOANGA | R2b   | 28,933 | 24,209  | 53,142  |
| To KANDY      | R2c   | 21,998 | 22,863  | 44,861  |
|               | total | 91,706 | 91,706  | 183,412 |

## [ J1 ] KELANI POWER STATION JUNCTION

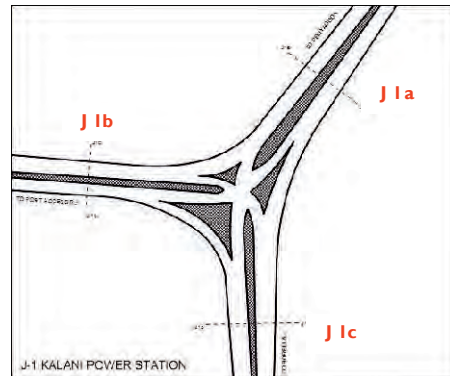
### RESULT OF SURVEY

#### 1<sup>st</sup> SURVEY 21th March 2013

|       | inflow  | outflow | total   |
|-------|---------|---------|---------|
| J1a   | 58,588  | 48,455  | 107,043 |
| J1b   | 21,580  | 20,851  | 42,431  |
| J1c   | 43,489  | 54,351  | 97,840  |
| total | 123,657 | 123,657 | 247,314 |

#### 2<sup>nd</sup> SURVEY 4th April 2013

|       | inflow  | outflow | total   |
|-------|---------|---------|---------|
| J1a   | 56,555  | 46,071  | 102,626 |
| J1b   | 21,776  | 20,883  | 42,659  |
| J1c   | 40,995  | 52,372  | 93,367  |
| total | 119,326 | 119,326 | 238,652 |



#### cf. PREVIOUS SURVEY

20th September 2012

|                      | inflow  | outflow | total   |
|----------------------|---------|---------|---------|
| To PELINGAYAGODA J1a | 58,121  | 49,657  | 107,778 |
| To INGURUKADE J1b    | 18,444  | 18,424  | 36,868  |
| To COLOMBO J1c       | 43,820  | 52,304  | 96,124  |
| total                | 120,385 | 120,385 | 240,770 |

## [ J2 ] ORUGODAWATHA JUNCTION

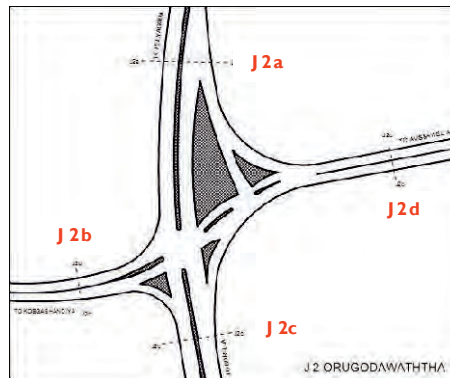
### RESULT OF SURVEY

#### 1<sup>st</sup> SURVEY 19th March 2013

|       | inflow  | outflow | total   |
|-------|---------|---------|---------|
| J2a   | 38,041  | 39,671  | 77,712  |
| J2b   | 9,569   | 12,315  | 21,884  |
| J2c   | 44,265  | 43,148  | 87,413  |
| J2d   | 20,481  | 17,222  | 37,703  |
| total | 112,356 | 112,356 | 224,712 |

#### 2<sup>nd</sup> SURVEY 4th April 2013

|       | inflow  | outflow | total   |
|-------|---------|---------|---------|
| J2a   | 43,359  | 40,963  | 84,322  |
| J2b   | 8,769   | 11,607  | 20,376  |
| J2c   | 44,918  | 47,913  | 92,831  |
| J2d   | 19,764  | 16,327  | 36,091  |
| total | 116,810 | 116,810 | 233,620 |



#### cf. PREVIOUS SURVEY

No data available

## [ J3 ] SAMANTHA CINEMA JUNCTION

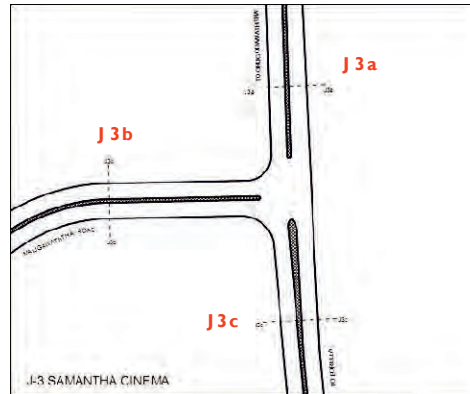
### RESULT OF SURVEY

#### 1<sup>st</sup> SURVEY 19th March 2013

|       | inflow  | outflow | total   |
|-------|---------|---------|---------|
| J 3a  | 47,703  | 46,211  | 93,914  |
| J 3b  | 30,491  | 29,040  | 59,531  |
| J 3c  | 41,812  | 44,755  | 86,567  |
| total | 120,006 | 120,006 | 240,012 |

#### 2<sup>nd</sup> SURVEY 4th April 2013

|       | inflow  | outflow | total   |
|-------|---------|---------|---------|
| J 3a  | 50,587  | 42,969  | 93,556  |
| J 3b  | 25,724  | 28,384  | 54,108  |
| J 3c  | 38,372  | 43,330  | 81,702  |
| total | 114,683 | 114,683 | 229,366 |




cf. PREVIOUS SURVEY

No data available

The peak hour turning volume diagrams were developed based on the results. Following show the sample of the results for each location. The original results were developed for three periods (7:00am-8:00am, 1:00pm-2:00pm, 5:00pm-6:00pm) with two survey dates for six survey locations (in total 36 diagrams).

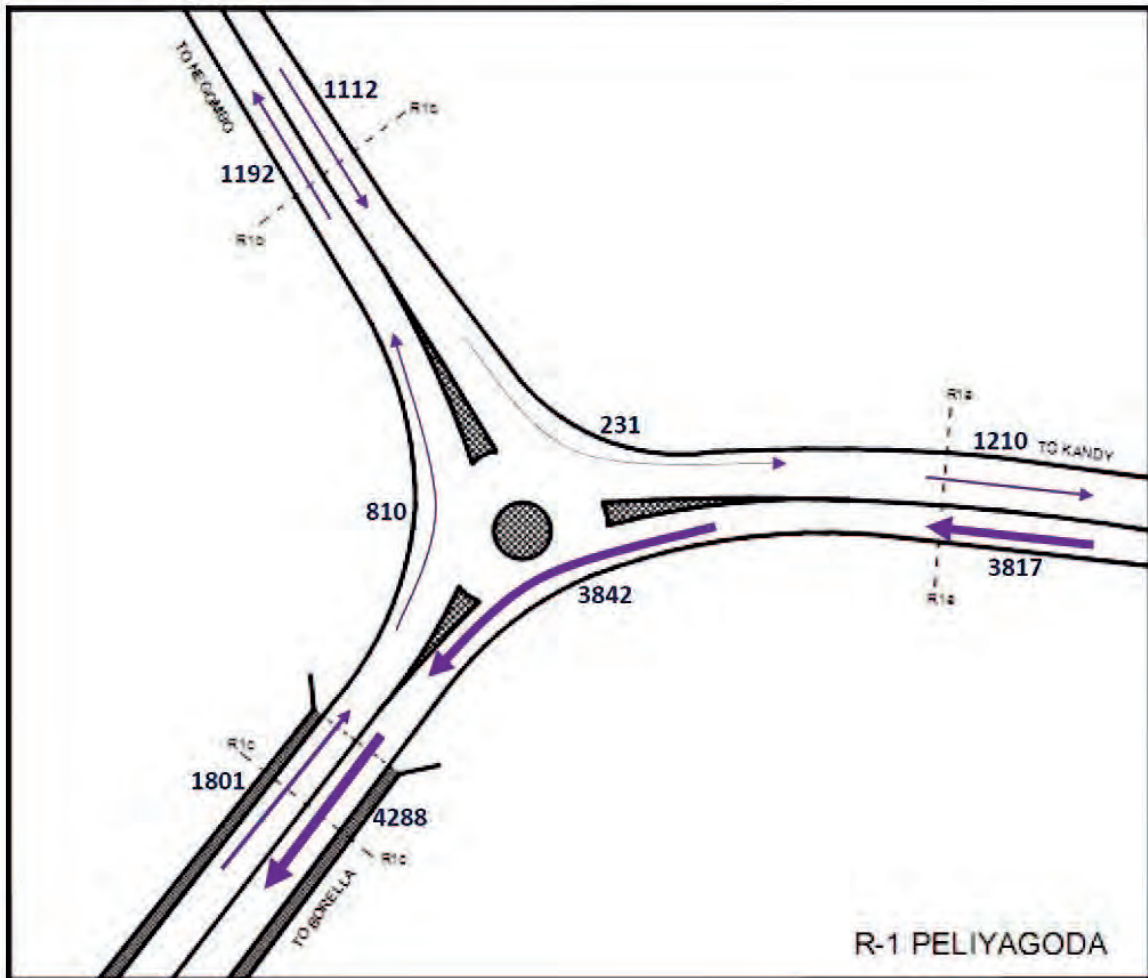Vehicle count data @ R1 between from 7:00 am to 8:00 am




xxxxx - Vehicle count data @ R1 On 20-03-2013

| Movement | No. of vehicles during 7:00 am to 8:00 am | Movement | No. of vehicles during 7:00 am to 8:00 am |
|----------|---|----------|---|
| C2-R1    | 3817                                      | R1a-R1c  | 3842                                      |
| R1-C2    | 1210                                      | R1b-R1a  | 0231                                      |
| R1-J1    | 4288                                      | R1c-R1b  | 0810                                      |
| J1-R1    | 1801                                      |          |   |
| R1-R2    | 1192                                      |          |   |
| R2-R1    | 1112                                      |          |   |



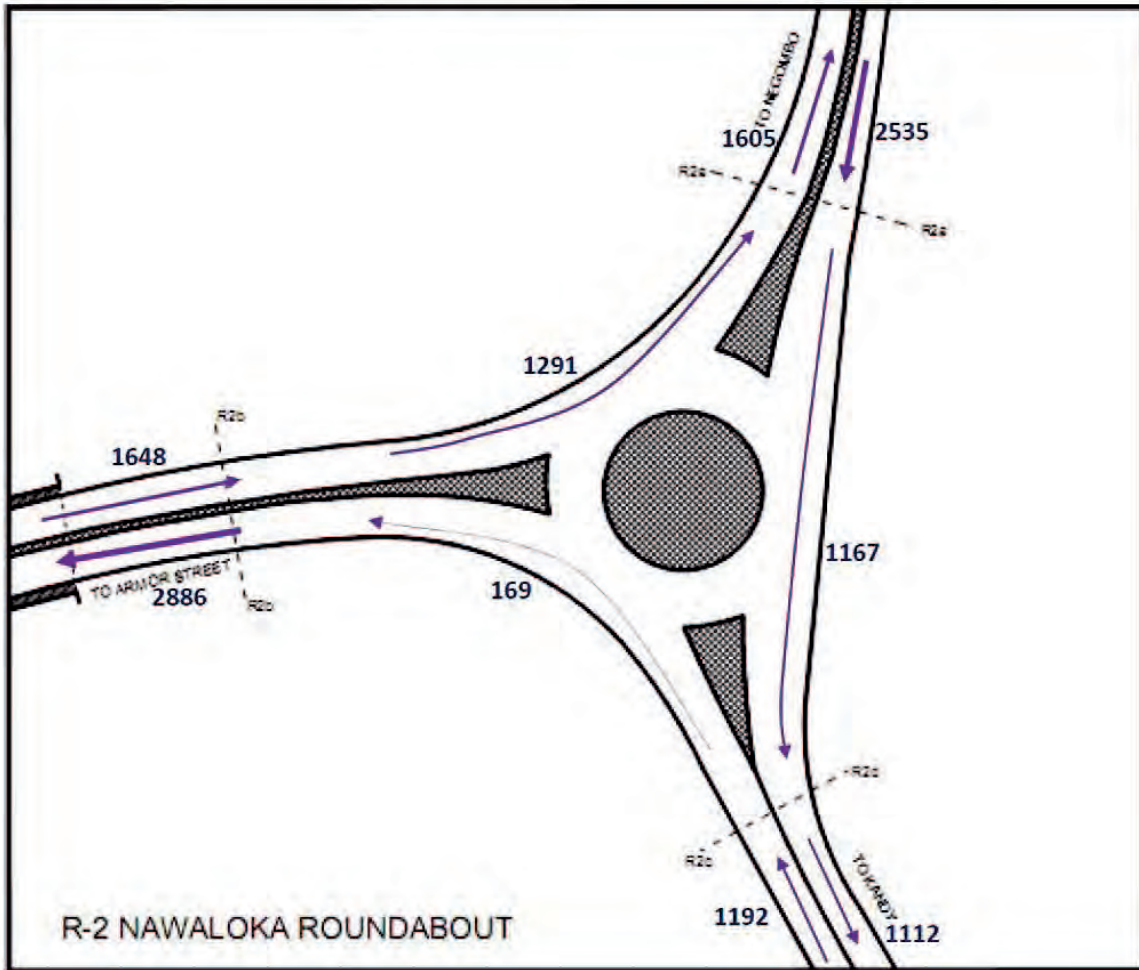
Vehicle count data @ R2 between from 7:00 am to 8:00 am



xxxxx → - Vehicle count data @ R2 On 20-03-2013

| Movement | No. of vehicles during 7:00 am to 8:00 am | Movement | No. of vehicles during 7:00 am to 8:00 am |
|----------|---|----------|---|
| C1-R2    | 2535                                      | R2a-R2c  | 1167                                      |
| R2-C1    | 1605                                      | R2a-R2a  | 1291                                      |
| R2-J4    | 2886                                      | R2c-R2b  | 0169                                      |
| J4-R2    | 1648                                      |          |   |
| R1-R2    | 1192                                      |          |   |
| R2-R1    | 1112                                      |          |   |

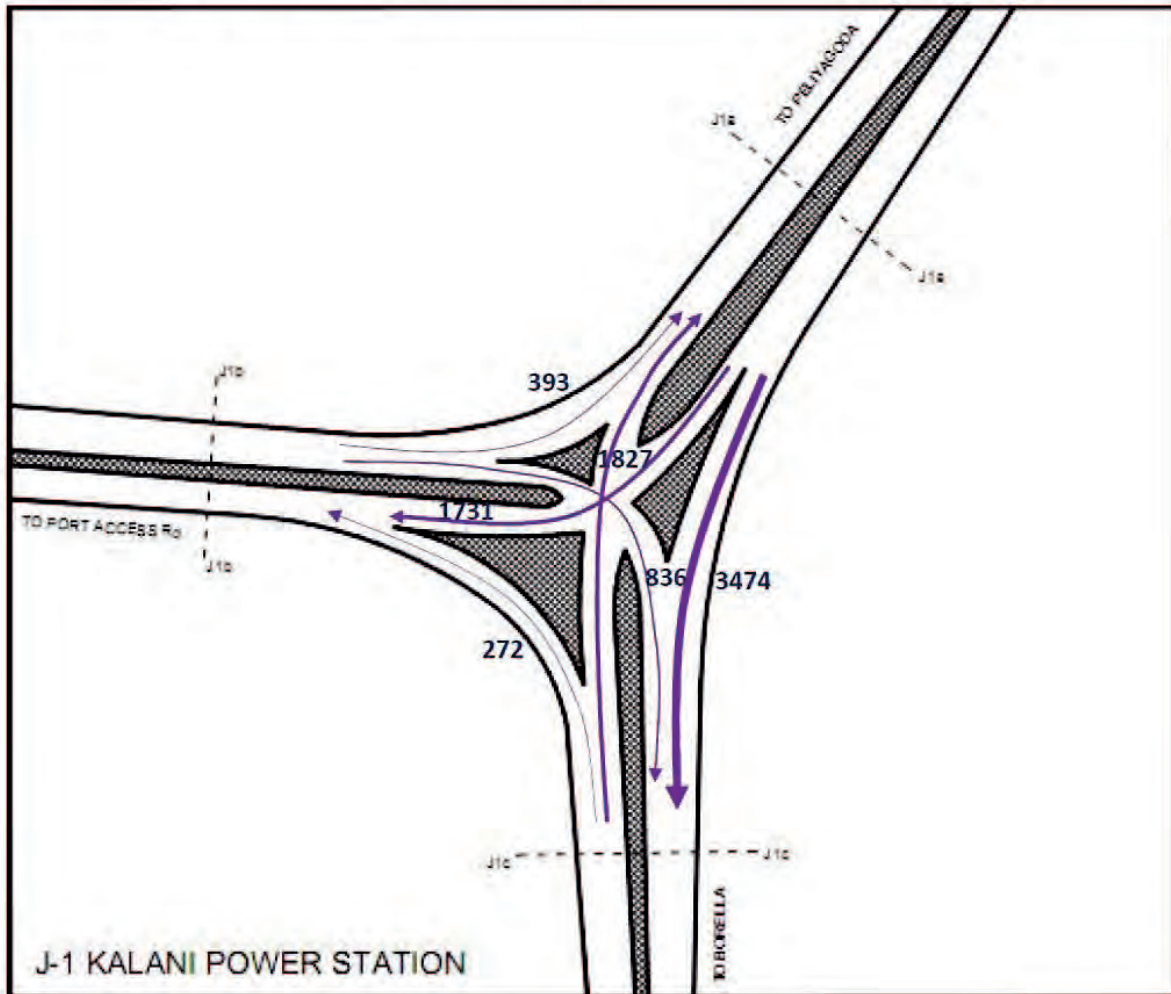
Vehicle count data @ J1 between from 7:00 am to 8:00 am



xxxxx - Vehicle count data @ J1 On 21-03-2013

| Movement | No. of vehicles during 7:00 am to 8:00 am |
|----------|---|
| J1a-J1b  | 1731                                      |
| J1a-J1c  | 3474                                      |
| J1b-J1a  | 0393                                      |
| J1b-J1c  | 0836                                      |
| J1c-J1a  | 1827                                      |
| J1c-J1b  | 0272                                      |

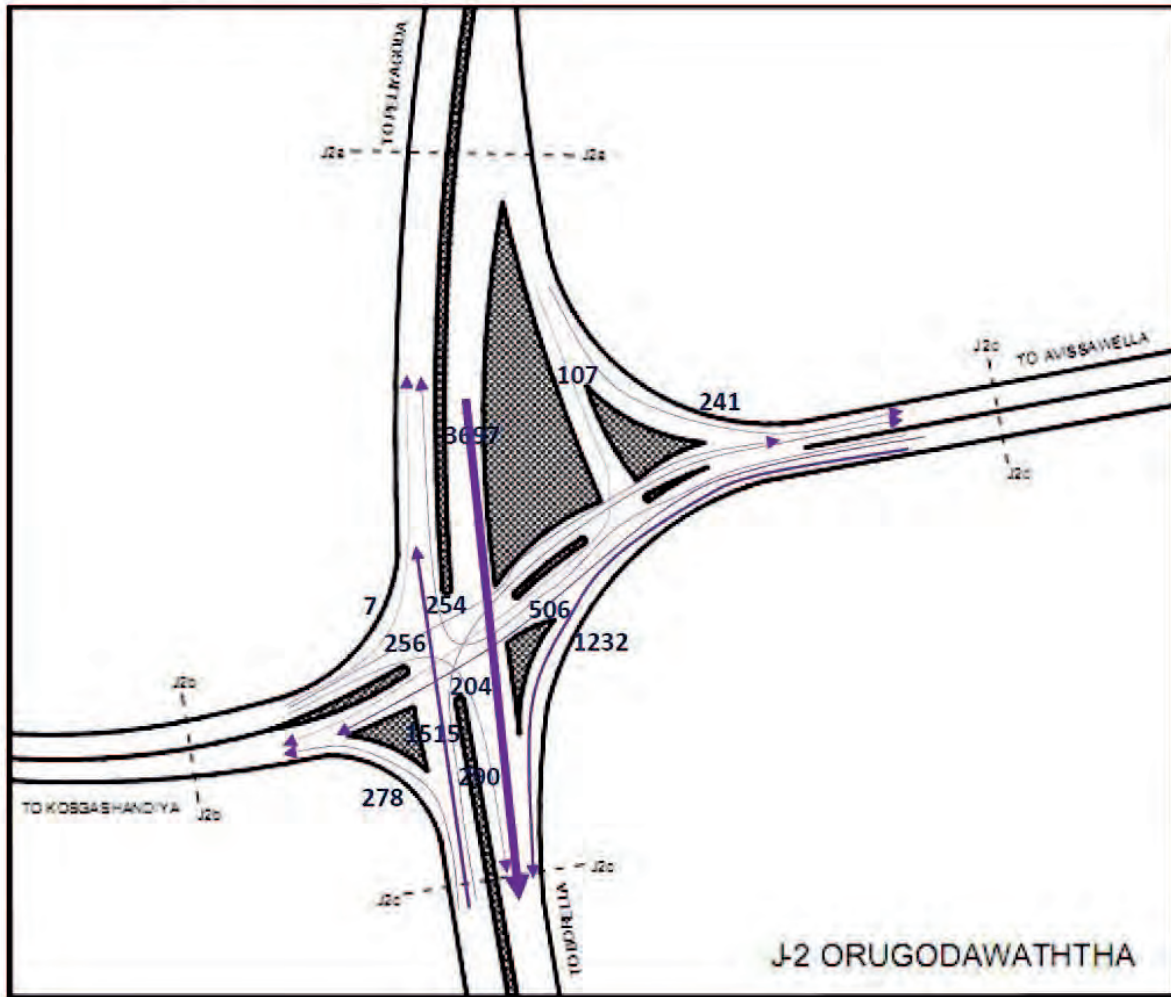
Vehicle count data @ J2 between from 7:00 am to 8:00 am



xxxxx - Vehicle count data @ J2 On 19-03-2013

| Movement | No. of vehicles during 7:00 am to 8:00 am | Movement | No. of vehicles during 7:00 am to 8:00 am |
|----------|---|----------|---|
| J2a-J2b  | 0107                                      | J2c-J2a  | 1515                                      |
| J2a-J2c  | 3697                                      | J2c-J2b  | 0278                                      |
| J2a-J2d  | 0241                                      | J2c-J2d  | 0290                                      |
| J2b-J2a  | 0007                                      | J2d-J2a  | 0254                                      |
| J2b-J2c  | 0204                                      | J2d-J2b  | 0506                                      |
| J2b-J2d  | 0256                                      | J2d-J2c  | 1232                                      |

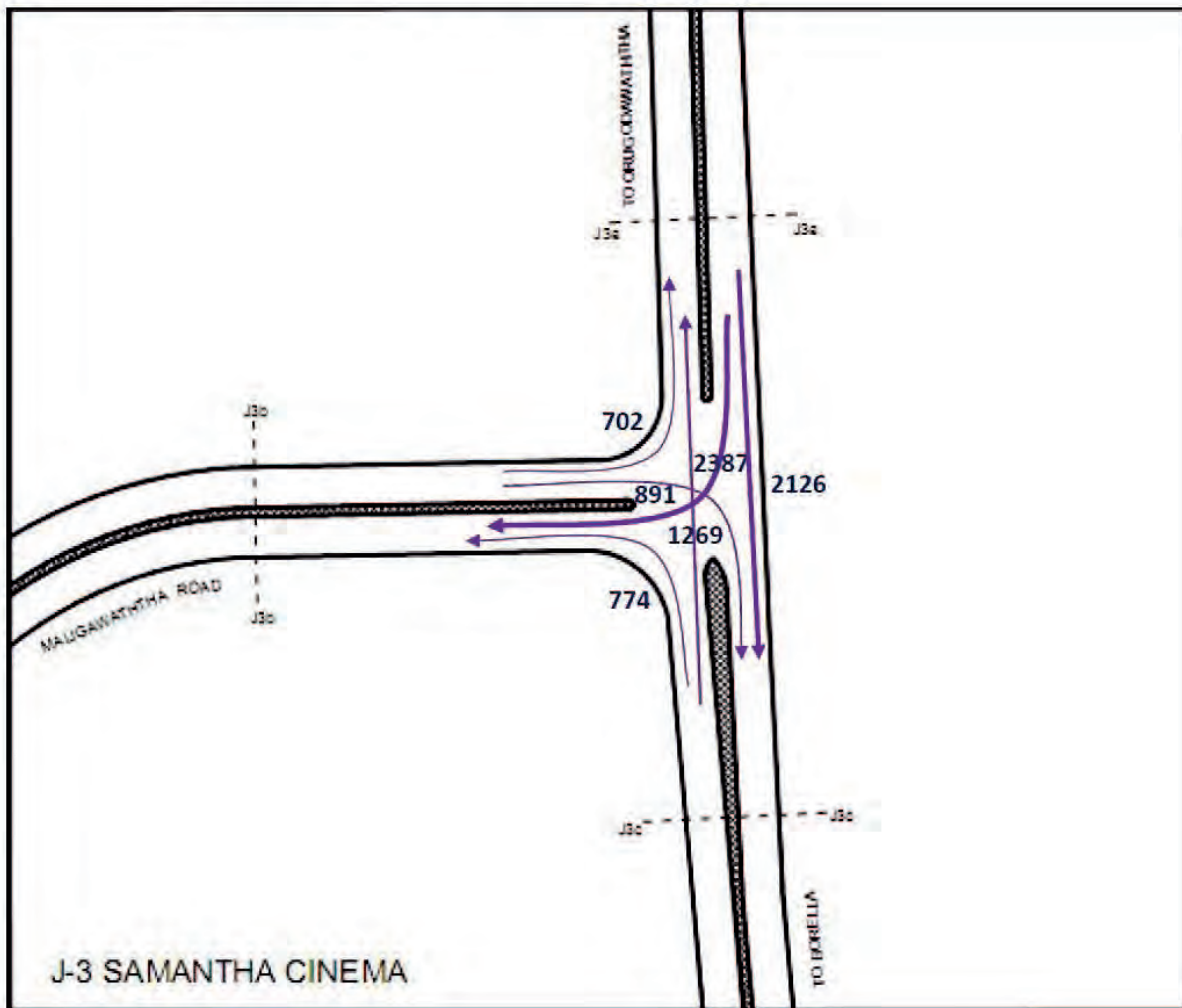
Vehicle count data @ J3 between from 7:00 am to 8:00 am



xxxxx → - Vehicle count data @ J3 On 19-03-2013

| Movement | No. of vehicles during 7:00 am to 8:00 am |
|----------|---|
| J3a-J3b  | 2387                                      |
| J3a-J3c  | 2126                                      |
| J3b-J3a  | 0702                                      |
| J3b-J3c  | 0891                                      |
| J3c-J3a  | 1269                                      |
| J3c-J3b  | 0774                                      |

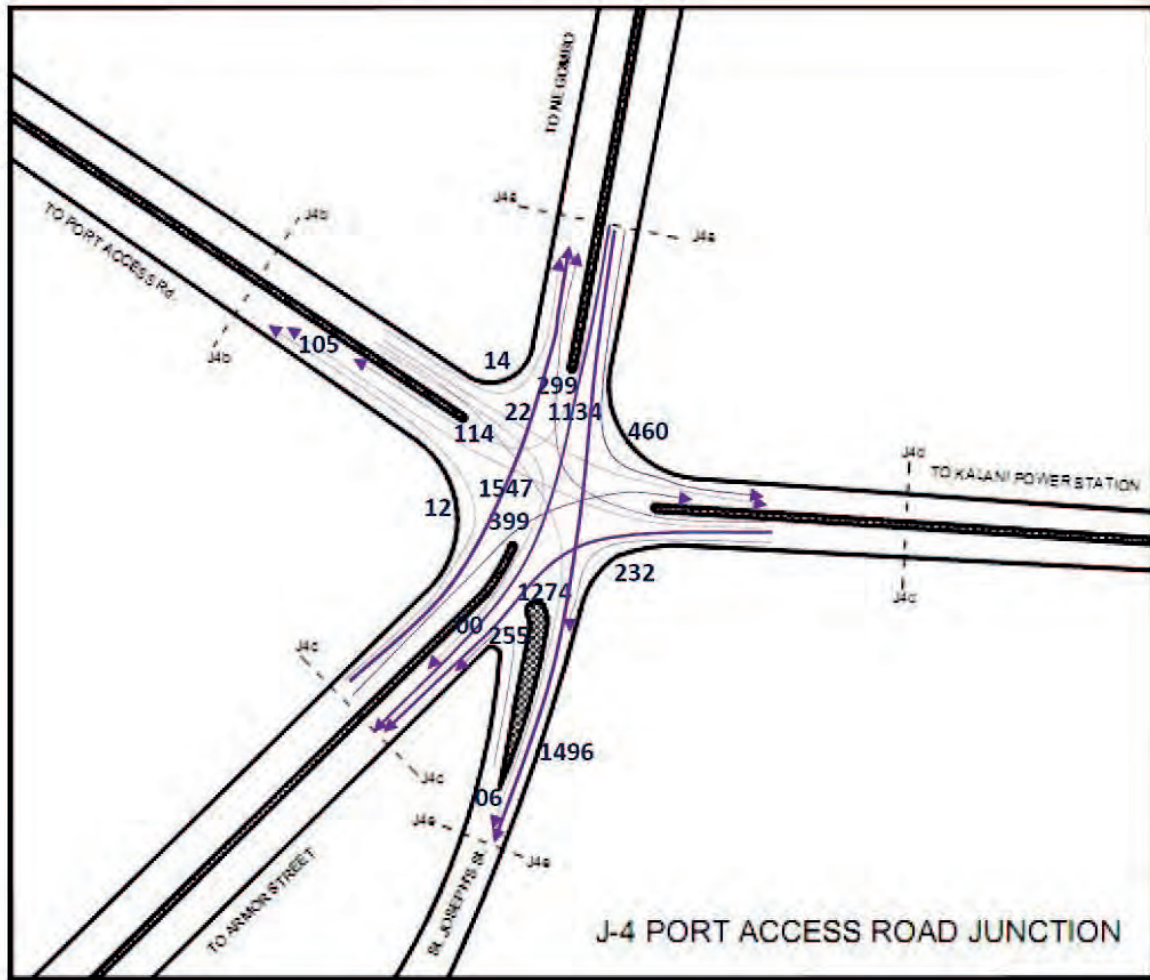Vehicle count data @ J4 between from 7:00 am to 8:00 am



xxxxx → - Vehicle count data @ J4 On 21-03-2013

| Movement | No. of vehicles during 7:00 am to 8:00 am | Movement | No. of vehicles during 7:00 am to 8:00 am | Movement | No. of vehicles during 7:00 am to 8:00 am |
|----------|---|----------|---|----------|---|
| J4a-J4b  | 0114                                      | J4b-J4d  | 0022                                      | J4d-J4b  | 0105                                      |
| J4a-J4c  | 1134                                      | J4b-J4e  | 0006                                      | J4d-J4c  | 1274                                      |
| J4a-J4d  | 0460                                      | J4c-J4a  | 1547                                      | J4d-J4e  | 0232                                      |
| J4a-J4e  | 1496                                      | J4c-J4b  | 0012                                      | J4e-J4c  | 0255                                      |
| J4b-J4a  | 0014                                      | J4c-J4d  | 0399                                      |          |   |
| J4b-J4c  | 0000                                      | J4d-J4a  | 0299                                      |          |   |

## 1.2 Travel Speed Survey

In order to identify congested bottlenecks and its causes, Travel Speed Survey was conducted by utilizing vehicles equipped with the Global Positioning System (GPS).

Figure 1 shows the survey routes which consist of 4 routes described as follows;

- Route 1 (approx. 29.6 km): Yakkala junction (Gampaha) to CTO junction (Colombo Centre),
- Route 2 (approx. 29.0 km): Yakkala junction (Gampaha) to Kanatta Junction (Base Line),
- Route 3 (approx. 20.8 km): Ja-Ela junction (Gampaha) to CTO junction (Colombo Centre), and
- Route 4 (approx. 20.5 km): Ja-Ela junction (Gampaha) to Kanatta Junction (Base Line).

Each route was divided into intermediate sections where average speed was required to be identified. Figure 1 also shows the intermediate points.



Figure 1: Survey Routes and Section Points

The survey was carried out on two or more working days from Monday to Friday, excluding Monday and Friday. For the Route 1 to 3, the survey was conducted into four periods such as i) 6:30 AM to 9:00 AM, ii) 9:30 AM to 12:00 PM, iii) 1:00 PM to 3:30 PM and iv) 4:00 PM to 6:30 PM. For the Route 4, the survey was conducted into three periods such as i) 9:30 AM to 12:00 PM, ii) 1:00 PM to 3:30 PM and iii) 4:00 PM to 6:30 PM. The enumerator drove each entire route from the start point to end point and the way to back to start point.

Table 1 Details of Dates and Survey Period for Each Route

| Ref. No. | Travel Speed Survey Date  | Route  |                  |                    | Survey Starting Time | Survey End Time |
|----------|---------------------------|--|------------------|--------------------|----------------------|-----------------|
|          |                           | No.  | Starting Point   | Ending Point       |                      |                 |
| 1        | 13 <sup>th</sup> Mar 2013 | Route 2  | Yakkala Junction | Kanaththa Junction | 6:30 am              | 6:30 pm         |
| 2        | 14 <sup>th</sup> Mar 2013 | Route 4  | Ja-Ela           | Kanaththa Junction | 6:30 am              | 6:30 pm         |
| 3        | 1 <sup>st</sup> Apr 2013  | Route 3  | Ja-Ela           | CTO Junction       | 6:45 am              | 6:45 pm         |
| 4        | 2 <sup>nd</sup> Apr 2013  | Route 1  | Yakkala Junction | CTO Junction       | 6:30 am              | 6:30 pm         |
| 5        | 3 <sup>rd</sup> Apr 2013  | Route 3  | Ja-Ela           | CTO Junction       | 6:30 am              | 6:30 pm         |
| 6        | 4 <sup>th</sup> Apr 2013  | Route 1  | Yakkala Junction | CTO Junction       | 6:45 am              | 6:45 pm         |
| 7        | 5 <sup>th</sup> Apr 2013  | Route 4  | Ja-Ela           | Kanaththa Junction | 6:45 am              | 6:45 pm         |
| 8        | 9 <sup>th</sup> Apr 2013  | Route 2  | Yakkala Junction | Kanaththa Junction | 6:45 am              | 6:45 pm         |
| 9        | 10 <sup>th</sup> Apr 2013 | Route 3<br>(Missing Trip on 3 <sup>rd</sup> Apr 2013)    | Ja-Ela           | CTO Junction       | 6:15 pm              | -               |
|          |                           | Route 4<br>(Missing 2 Trips on 5 <sup>th</sup> Apr 2013) | Ja-Ela           | Kanaththa Junction | 3:15 pm & 6:15 pm    | -               |

In order to obtain an average speed on the selected road sections a “Floating Vehicle Method”, with six GPS tracking devices (GPS logger) were used.

All the drivers were instructed always to follow road rules and follow the specified route unless instructed by the traffic police and maintain its own travel speed such a way that balancing passing vehicle and passed vehicle.

Each vehicle equipped with a GPS logger dispatched from starting point of each route at 30min intervals. All GPS loggers were set to record the location co-ordinate at 10 second intervals. Each surveyor recorded the time at each section check points and any special reasons for delays for his trip, while on the move. The time recording based on wrist watches synchronized with the GPS logger timer. After reaching to the terminus point of each route, vehicles were returned back immediately while recording was carried out as before.



The GPS track log data was retrieved by the software accompanied with the GPS Loggers. All the log files saved as raw file (.itm file) and each track log was converted to .kml file which compatible with Google Earth for the average speed calculation.

The methodology of calculation is described below;

1. Length of each segment was obtained, using Google Earth data and the lengths measured to the approximate middle of the junctions,
2. Each segment was given section ID for avoid confusion and errors in data processing,
3. Export data logger track file to Google Earth, and at each section point data logger time was extracted,
4. Data was sorted based on section ID and identified the trips at each section within each hourly time bands,
5. Average Speed was calculated based on the hourly data for each section. Common section such as, Ja-ela to Peliayagoda and Yakkala to Peliyagoda, have more trips within each hour at each section, and
6. The calculated average speed data for each hour, classified in to speed class range of 5km/h, marked on a map with graduated color bands.

Following figures are as sample results. Each diagrams for the route and time periods were available into the soft data set.



Figure 2 Diagram for Average Travel Speed toward to Colombo (8:00am to 9:00am)



Figure 3 Diagram for Average Travel Speed leaving from Colombo (7:00pm to 8:00pm)

### 1.3 Traffic Signal Phasing Survey

The objective of this survey is to obtain the present signal phase pattern of each intersection for use of micro-scopic traffic simulation.

The survey conducted at following four signalized junctions and shown in Figure 1, such as i) J1 – New Kelani Powerhouse Junction, ii) J2 – Orugodawatta Junction, iii) J3 – Samantha Cinema Junction, and iv) J4 – Port Access Road Junction.

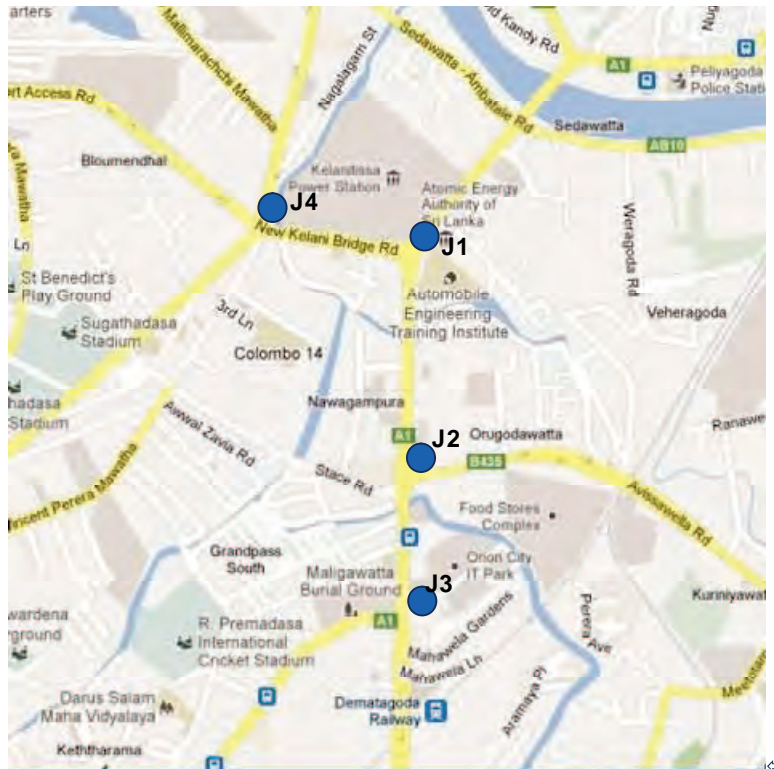


Figure 1 Survey Locations for Traffic Signal Survey

The survey to be conducted on 2 weekdays (either Tuesday, Wednesday or Thursday) and to be conducted for Four periods (6:30 AM to 9:00 AM, 9:30 AM to 12:00 PM, 1:00 PM to 3:30 PM and 4:00 PM to 6:30 PM). The table-1 below shows details of survey date for each location.

Table-1 Survey Date for each Survey Location

| Ref. No. | junction                               | survey date 1 | survey date 2 |
|----------|--|---------------|---------------|
| 1        | J1- Kelani Tissa Powerstation Junction | 21 Mar 2013   | 03 Apr 2013   |
| 2        | J2- Orugodawatta Junction              | 02 Apr 2013   | 04 Apr 2013   |
| 3        | J3- Samantha Cinema Junction           | 02 Apr 2013   | 04 Apr 2013   |
| 4        | J4- Port Access Road Junction          | 21 Mar 2013   | 03 Apr 2013   |

Prior to carry out the survey, Signal phasing pattern was obtained from corresponding authority (RDA and CMC) and survey forms were prepared accordingly. The signal phasing pattern obtained from each intersection is given on Figure 2a to 2d.

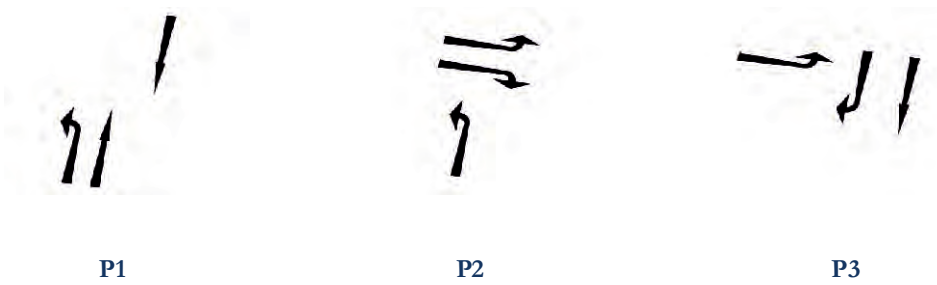
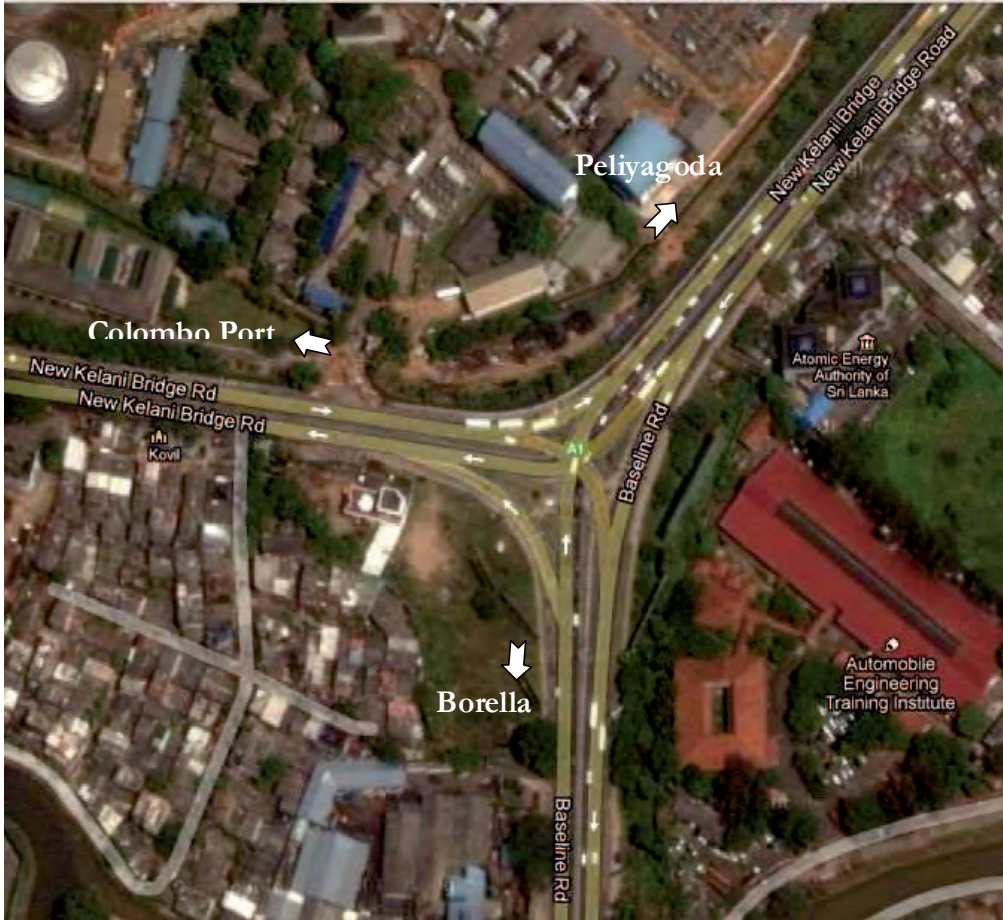


Figure 2a: Signal Phasing at J1- Kelani Thissa Powerstation Junction

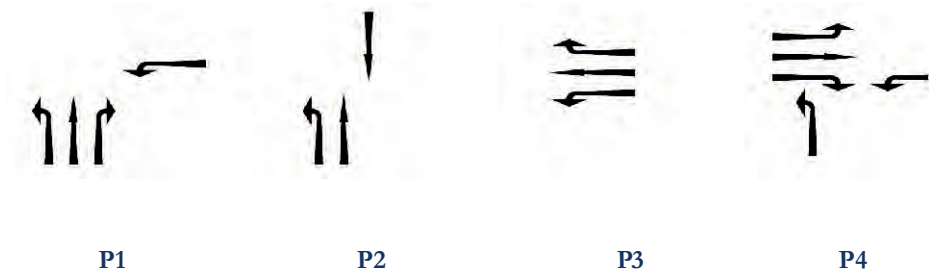
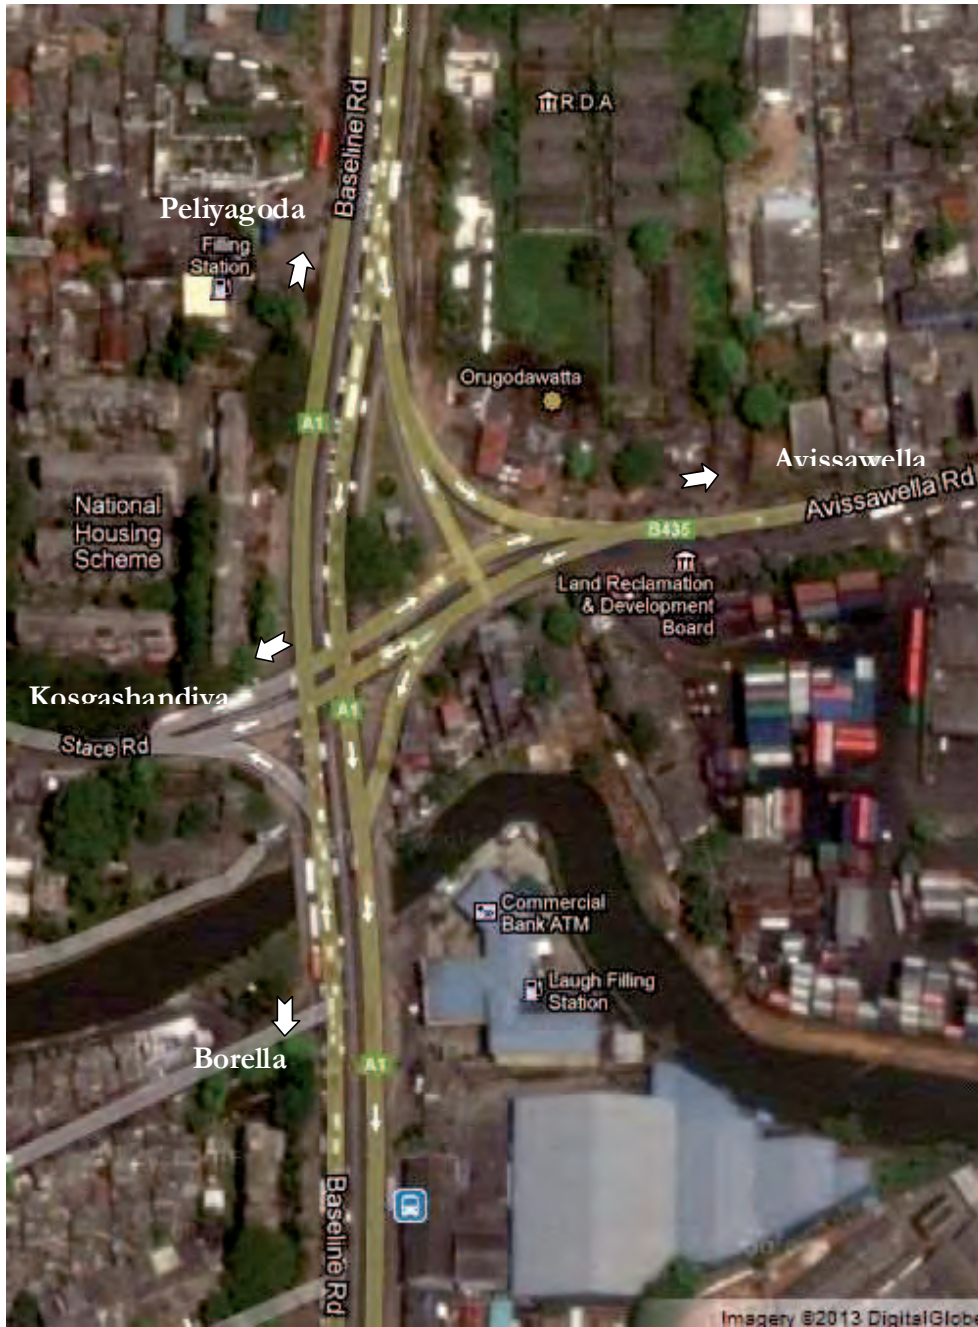


Figure 2b: Signal Phasing at J2- Orugodawatta Junction

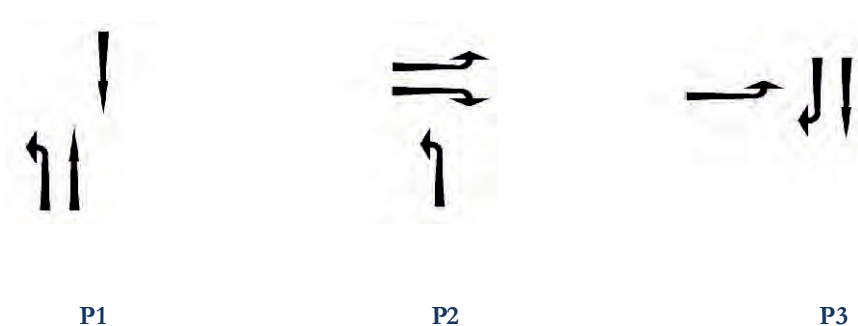
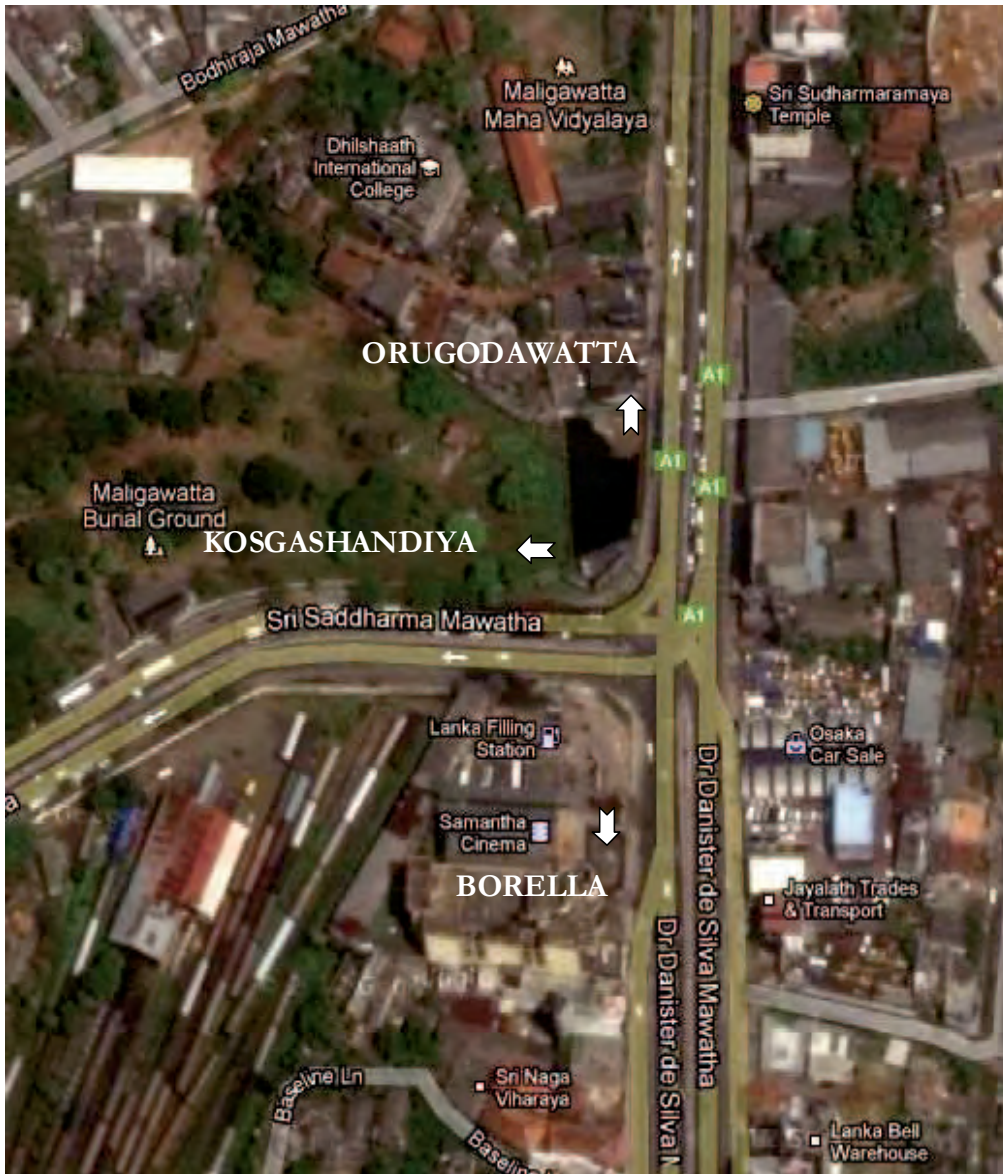


Figure 2c: Signal Phasing at J3 – Samantha Cinema Junction



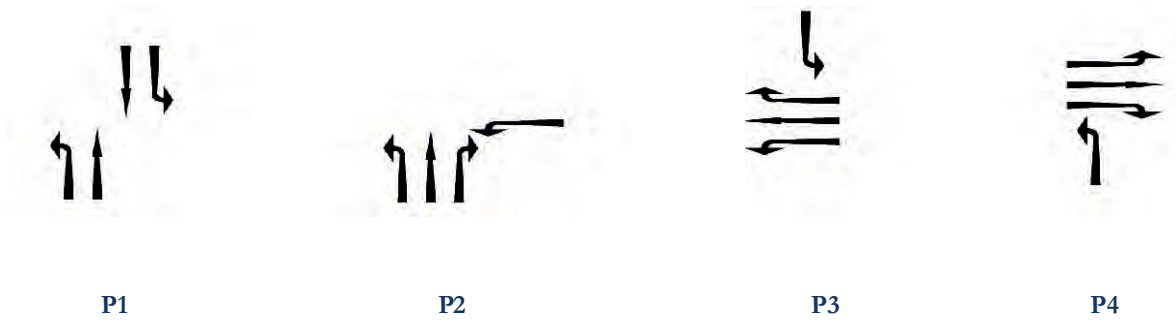



Figure 2d: Signal Phasing at J4 – Port Access Road Junction


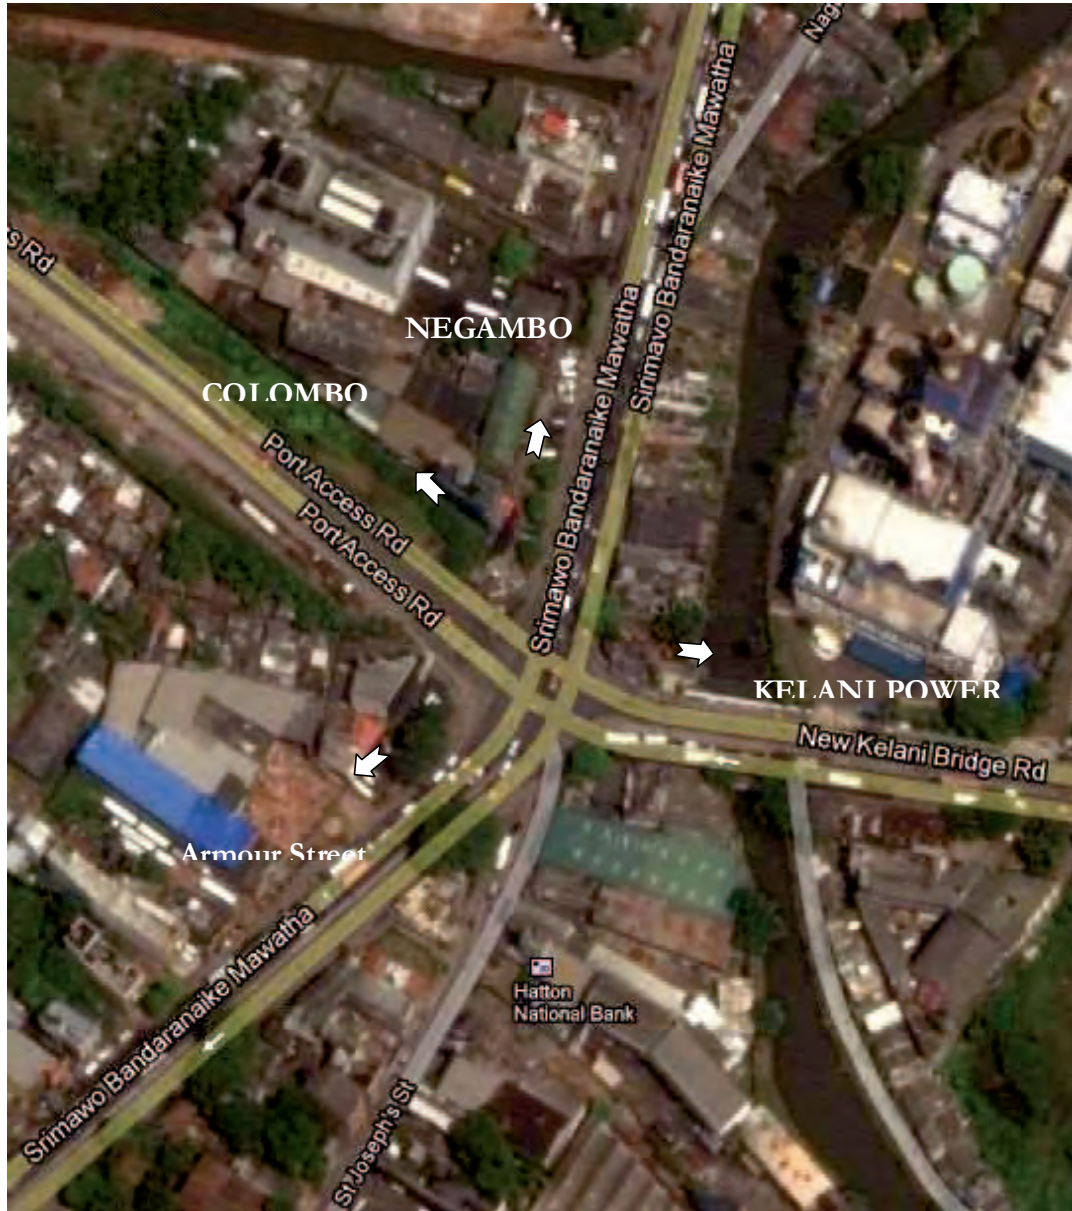


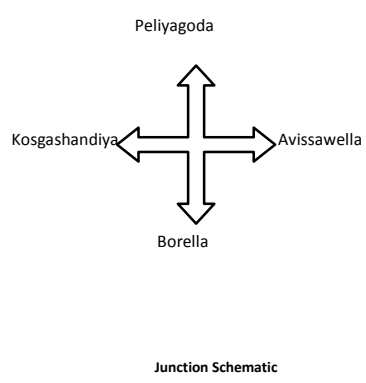

**Preparatory Survey on Traffic Improvement Project around New Kelani Bridge  
Draft Final Report**

| PREPARATORY SURVEY ON TRAFFIC IMPROVEMENT PROJECT AROUND NEW KELENI BRIDGE<br>TRAFFIC SIGNAL PHASING AND QUE LENGTH SURVEY - SIGNAL CONTROL |               |                  |               |   |   |
|---|---------------|------------------|---------------|---|---|
| Enumerators Name: ..... Kasun Thennakoon  |               | Date: 02.04.2013 |               | Survey Location: J2-Orugodawaththa Junction | Sheet No.: .....  |
| Vehicle Que Direction: NA   |               |                  |               |   |   |
| Weather: DRY/HEAVY RAIN/LIGHT RAIN  |               |                  |               |   |   |
| Signal Phasing<br>Time<br>Observe<br>Time   | P 1 (Seconds) | P 2 (Seconds)    | P 3 (Seconds) | P 4 (Seconds)                               |  <p align="center">Junction Schematic</p> |
| 7.30 am   | 20            | 86               | 28            | 18  |   |
| 8.00 am   | 26            | 124              | 68            | 42  |   |
| 9.00 am   | 38            | 276              | 69            | 25  |   |
| 10.00 am  | 32            | 240              | 64            | 56  |   |
| 11.00 am  | 44            | 238              | 58            | 42  |   |
| 12.00 pm  | 96            | 184              | 76            | 47  |   |
| 1.00 pm   | 55            | 220              | 67            | 38  |   |
| 2.00 pm   | 110           | 170              | 97            | 85  |   |
| 3.00 pm   | 66            | 168              | 108           | 69  |   |
| 4.00 pm   | 170           | 185              | 92            | 52  |   |
| 5.00 pm   | 115           | 222              | 87            | 72  |   |
| 6.00 pm   | 168           | 165              | 80            | 82  |   |
| 6.30 pm   | 118           | 82               | 106           | 35  |   |

| PREPARATORY SURVEY ON TRAFFIC IMPROVEMENT PROJECT AROUND NEW KELENI BRIDGE<br>TRAFFIC SIGNAL PHASING AND QUE LENGTH SURVEY - POLICE CONTROL |                    |                    |                    |   |                  |  |
|---|--------------------|--------------------|--------------------|---|------------------|--|
| Enumerators Name: ..... Kasun Thennakoon  |                    | Date: 02.04.2013   |                    | Survey Location: J2-Orugodawaththa Junction | Sheet No.: ..... |  |
| Vehicle Que Direction: NA   |                    |                    |                    |   |                  |  |
| Weather: DRY/HEAVY RAIN/LIGHT RAIN  |                    |                    |                    |   |                  |  |
| Signal Phase<br>Time<br>Observe<br>Time   | P 1                | P 2                | P 3                | P 4   | P 5              |  <p align="center">Junction Schematic</p> |
| 11.05 am  |                    |                    |                    |   |                  |  |
|   | Duration (s) :     | Duration (s) : 503 | Duration (s) : 148 | Duration (s) :                              | Duration (s) :   |  |
| 11.55 am  |                    |                    |                    |   |                  |  |
|   | Duration (s) : 42  | Duration (s) : 163 | Duration (s) :     | Duration (s) : 68                           | Duration (s) :   |  |
| 1.30 pm   |                    |                    |                    |   |                  |  |
|   | Duration (s) : 38  | Duration (s) : 272 | Duration (s) : 94  | Duration (s) :                              | Duration (s) :   |  |
| 2.30 pm   |                    |                    |                    |   |                  |  |
|   | Duration (s) :     | Duration (s) : 92  | Duration (s) : 36  | Duration (s) :                              | Duration (s) :   |  |
| 4.45 pm   |                    |                    |                    |   |                  |  |
|   | Duration (s) : 74  | Duration (s) : 160 | Duration (s) : 130 | Duration (s) : 82                           | Duration (s) :   |  |
| 5.15 pm   |                    |                    |                    |   |                  |  |
|   | Duration (s) : 52  | Duration (s) : 90  | Duration (s) : 82  | Duration (s) :                              | Duration (s) :   |  |
| 5.30 pm   |                    |                    |                    |   |                  |  |
|   | Duration (s) : 67  | Duration (s) : 58  | Duration (s) : 75  | Duration (s) :                              | Duration (s) :   |  |
| 5.45 pm   |                    |                    |                    |   |                  |  |
|   | Duration (s) : 62  | Duration (s) : 50  | Duration (s) : 148 | Duration (s) : 54                           | Duration (s) :   |  |
| 6.15 pm   |                    |                    |                    |   |                  |  |
|   | Duration (s) : 145 | Duration (s) : 115 | Duration (s) : 65  | Duration (s) : 92                           | Duration (s) :   |  |
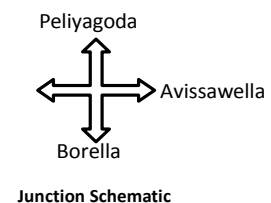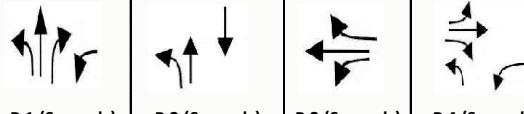
| PREPARATORY SURVEY ON TRAFFIC IMPROVEMENT PROJECT AROUND NEW KELENI BRIDGE<br>TRAFFIC SIGNAL PHASING AND QUE LENGTH SURVEY - SIGNAL CONTROL |   |                            |               |  |   |
|---|---|----------------------------|---------------|--|---|
| Enumerators Name: .....Kusum  |   | Date: 04.04.2013           |               | Survey Location: J2-Orugodawa Sheet No.: ..... |   |
| Vehicle Que Direction; NA   |   | Road Name: .....Stace Road |               |  |   |
| Weather: DRY/HEAVY RAIN/LIGHT RAIN  |   |                            |               |  |   |
| Signal Phasing<br>Time  | P 1 (Seconds)   | P 2 (Seconds)              | P 3 (Seconds) | P 4 (Seconds)                                  |  <p style="text-align: center;">Junction Schematic</p> |
| Observe Time  |  |                            |               |  |   |
| 6.30 am   | 56  | 178                        | 47            | 22   |   |
| 7.00 am   | 115   | 217                        | 92            | 25   |   |
| 8.00 am   | 80  | 238                        | 75            | 28   |   |
| 9.00 am   | 95  | 420                        | 88            | 64   |   |
| 10.00 am  | 178   | 165                        | 52            | 48   |   |
| 11.00 am  | 183   | 225                        | 184           | 57   |   |
| 12.00 pm  | 117   | 204                        | 105           | 38   |   |
| 1.00 pm   | 110   | 130                        | 55            | 27   |   |
| 2.00 pm   | 181   | 138                        | 43            | 52   |   |
| 3.00 pm   | 118   | 128                        | 102           | 65   |   |
| 4.00 pm   | 129   | 182                        | 125           | 68   |   |
| 5.00 pm   | 138   | 166                        | 84            | 75   |   |
| 6.00 pm   | 83  | 124                        | 132           | 34   |   |
| 6.30 pm   | 124   | 223                        | 112           | 98   |   |


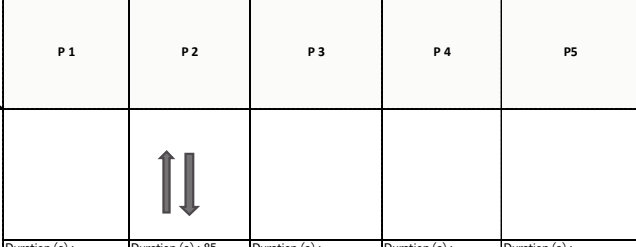



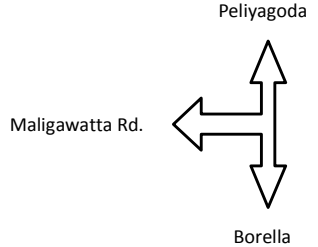
| PREPARATORY SURVEY ON TRAFFIC IMPROVEMENT PROJECT AROUND NEW KELENI BRIDGE<br>TRAFFIC SIGNAL PHASING AND QUE LENGTH SURVEY - POLICE CONTROL |  |                   |                    |   |                |   |
|---|--|-------------------|--------------------|---|----------------|---|
| Enumerators Name: .....Kasun Thennakoon   |  | Date: 04.04.2013  |                    | Survey Location: J2-Orugodawaththa Junction |                |   |
| Road Name : Stace Road  |  | Sheet No.: .....  |                    |   |                |   |
| Weather: DRY/HEAVY RAIN/LIGHT RAIN  |  |                   |                    |   |                |   |
| Signal Phase  | P 1  | P 2               | P 3                | P 4   | P 5            |  <p style="text-align: center;">Junction Schematic</p> |
| Observe Time  |  |                   |                    |   |                |   |
| 9.15 am   |  | ↑↓                |                    |   |                |   |
|   | Duration (s) :   | Duration (s) : 85 | Duration (s) :     | Duration (s) :                              | Duration (s) : |   |
| 5.15 pm   | ↑↘   |                   | ↘↘↘                |   |                |   |
|   | Duration (s) : 62  | Duration (s) :    | Duration (s) : 46  | Duration (s) :                              | Duration (s) : |   |
| 5.30 pm   |  | ↑↓                | ↘↘↘                |   |                |   |
|   | Duration (s) :   | Duration (s) : 42 | Duration (s) : 108 | Duration (s) :                              | Duration (s) : |   |
| 6.15 pm   |  | ↓                 | ↘↘↘                |   |                |   |
|   | Duration (s) :   | Duration (s) : 90 | Duration (s) : 34  | Duration (s) :                              | Duration (s) : |   |















Figure 3b: Signal Phasing at J2- Orugodawatta Junction


Preparatory Survey on Traffic Improvement Project around New Kelani Bridge  
Draft Final Report

| PREPARATORY SURVEY ON TRAFFIC IMPROVEMENT PROJECT AROUND NEW KELENI BRIDGE<br>TRAFFIC SIGNAL PHASING AND QUE LENGTH SURVEY - SIGNAL CONTROL |  |  |  |
|---|--|--|--|
| Enumerators Name: ..... Kasun Thennakoon  |  | Date: 02.04.2013   | Survey Location: J3-Samantha Cinema Junction Sheet No.: .....                                      |
| Vehicle Que Direction: NA   |  | Road Name: .....   |  |
| Weather: DRY/HEAVY RAIN/LIGHT RAIN  |  |  |  |
| Signal Phasing<br>Time<br>Observe<br>Time   | <br>P 1 (Seconds) | <br>P 2 (Seconds) | <br>P 3 (Seconds) |
| 6.30 am   |  |  |  |
| 7.00 am   | 120  | 121  | 67   |
| 8.00 am   | 60   | 50   | 156  |
| 9.00 am   | 55   | 30   | 60   |
| 10.00 am  | 80   | 40   | 30   |
| 11.00 am  | 20   | 55   | 40   |
| 12.00 pm  | 15   | 60   | 35   |
| 1.00 pm   | 80   | 160  | 90   |
| 2.00 pm   | 25   | 40   | 66   |
| 3.00 pm   | 130  | 30   | 53   |
| 4.00 pm   | 63   | 37   | 52   |
| 5.00 pm   | 40   | 23   | 46   |
| 6.00 pm   | 137  | 25   | 40   |



**Junction Schematic**
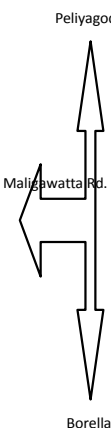
| PREPARATORY SURVEY ON TRAFFIC IMPROVEMENT PROJECT AROUND NEW KELENI BRIDGE<br>TRAFFIC SIGNAL PHASING AND QUE LENGTH SURVEY - POLICE CONTROL |   |   |   |   |   |
|---|---|---|---|---|---|
| Enumerators Name: ..... Chathura Manoj  |   | Date: 02.04.2013  | Survey Location: J3-Samantha Cinema Junction  | Sheet No.: .....  |   |
| Vehicle Que Direction: NA   |   | Road Name: <b>Baseline Road</b>   |   |   |   |
| Weather: DRY/HEAVY RAIN/LIGHT RAIN  |   |   |   |   |   |
| Signal Phase<br>Observe<br>Time   | P 1   | P 2   | P 3   | P 4   | P 5   |
| 10.15 am  |  |  |  |   |   |
|   | Duration (s) : 50   | Duration (s) : 40   | Duration (s) : 60   | Duration (s) :  | Duration (s) :  |
| 10.30 am  |  |  |  |  |  |
|   | Duration (s) : 50   | Duration (s) : 30   | Duration (s) : 40   | Duration (s) : 42   | Duration (s) : 40   |
| 1.15 pm   |  |  |  |   |   |
|   | Duration (s) : 135  | Duration (s) : 60   | Duration (s) : 80   | Duration (s) :  | Duration (s) :  |
| 4.10 pm   |  |   |   |   |   |
|   | Duration (s) : 40   | Duration (s) :  | Duration (s) :  | Duration (s) :  | Duration (s) :  |
| 4.15 pm   |  |  |   |   |   |
|   | Duration (s) : 20   | Duration (s) : 15   | Duration (s) :  | Duration (s) :  | Duration (s) :  |



**Junction Schematic**

Preparatory Survey on Traffic Improvement Project around New Kelani Bridge  
Draft Final Report

| PREPARATORY SURVEY ON TRAFFIC IMPROVEMENT PROJECT AROUND NEW KELENI BRIDGE<br>TRAFFIC SIGNAL PHASING AND QUE LENGTH SURVEY - SIGNAL CONTROL |               |                  |               |   |
|---|---------------|------------------|---------------|---|
| Enumerators Name: ..... Nipun   |               | Date: 04.04.2013 |               | Survey Location: J3-Samantha Cinema Junction Sheet No.: ..... |
| Vehicle Que Direction; NA   |               | Road Name: ..... |               |   |
| Weather: DRY/HEAVY RAIN/LIGHT RAIN  |               |                  |               |   |
| Signal Phasing<br>Time  | P 1 (Seconds) | P 2 (Seconds)    | P 3 (Seconds) | Remarks   |
| 7.02 am   | 64.43         | 31.55            | 62.42         |   |
| 7.17 am   | 67.89         | 39               | 176.77        | Traffic   |
| 7.36 am   | 54.11         | 34.06            | 249.39        | signals   |
| 7.55 am   | 62.41         | 19.88            | 161.96        | controlled  |
| 8.28 am   | 63.44         | 24.8             | 156.78        | by  |
| 8.43 am   | 66.29         | 35.16            | 96.39         | traffic   |
| 8.55 am   | 91.6          | 59.16            | 116.81        | police  |
| 9.10 am   | 86.77         | 57.49            | 23.84         |   |
| 9.35 am   | 45.42         | 43               | 46.43         |   |
| 9.51 am   | 43.7          | 41.46            | 65.89         | Signal control  |
| 11.51 am  | 56.7          | 35.99            | 41.15         |   |
| 12.53 pm  | 68.65         | 38.71            | 51.49         |   |
| 1.51 pm   | 42.79         | 49.51            | 78.35         |   |
| 2.51 pm   | 108.1         | 77.16            | 15.41         | Traffic signals are controlled by traffic police              |
| 3.06 pm   | 58.01         | 50.26            | 78            | Traffic signals are controlled by traffic police              |
| 3.21 pm   | 66.39         | 65.02            | 25.82         | Signal control  |
| 4.21 pm   | 55.36         |                  |               |   |
| 5.21 pm   | 42.6          | 89.26            | 57.16         | Traffic signals are controlled by traffic police              |
| 5.37 pm   | 78.23         | 38.28            | 50.48         | Traffic signals are controlled by traffic police              |
| 5.53 pm   |               |                  | 29.19         | Signal control  |
| 6.25 pm   | 108.87        | 83.98            | 83            | Traffic signals are controlled by traffic police              |


Junction Schematic

| PREPARATORY SURVEY ON TRAFFIC IMPROVEMENT PROJECT AROUND NEW KELENI BRIDGE<br>TRAFFIC SIGNAL PHASING AND QUE LENGTH SURVEY - POLICE CONTROL |                      |  |                      |                  |
|---|----------------------|--|----------------------|------------------|
| Enumerators Name: ..... Nipun   |                      | Date: 04.04.2013                             |                      | Sheet No.: ..... |
| Road Name: .....  |                      | Survey Location: J3-Samantha Cinema Junction |                      |                  |
| Weather: DRY/HEAVY RAIN/LIGHT RAIN  |                      |  |                      |                  |
| Signal Phase<br>Observe Time  | P 1                  | P 2  | P 3                  |                  |
| 10.51 am  |                      |  |                      |                  |
|   | Duration (s) : 34.66 | Duration (s) : 41.97                         | Duration (s) : 22.09 |                  |
| 4.21 pm   |                      |  |                      |                  |
|   | Duration (s) :       | Duration (s) : 27.23                         | Duration (s) : 38.25 |                  |
| 5.53 pm   |                      |  |                      |                  |
|   | Duration (s) : 79.54 | Duration (s) : 54.37                         | Duration (s) :       |                  |

Junction Schematic

Figure 3c: Signal Phasing at J3 –Samantha Cinema Junction

**Preparatory Survey on Traffic Improvement Project around New Kelani Bridge  
Draft Final Report**

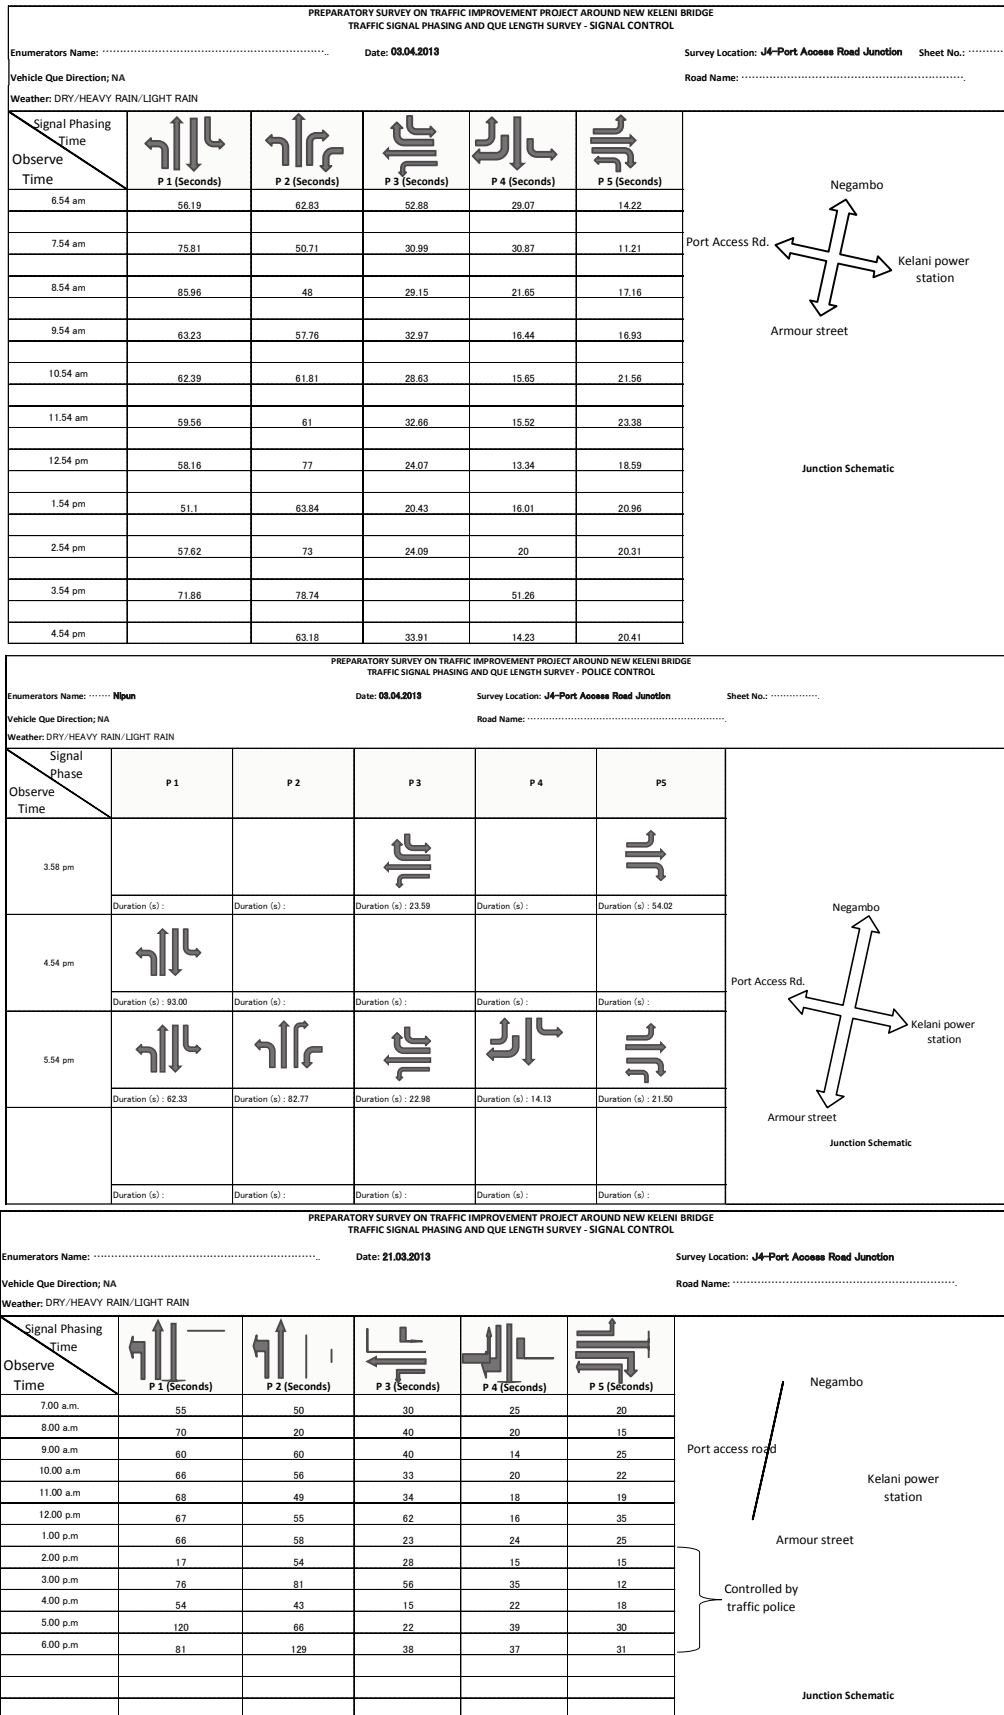

**Figure 4d: Signal Phasing at J4 – Port Access Road Junction**

## 2 REFERENCE DATA FOR EACH STEPS IN THE METHODOLOGY OF TRAFFIC DEMAND FORECAST

Following sections show the reference data used for the each step in the methodology taken in traffic demand forecast, which are described in the chapter 3.


### 2.1 Origin-Destination Matrix Development

The current origin-destination matrix described in table 3.3.2 in the main report was developed by the result of traffic volume count survey, especially the tuning ratio at each intersection. The estimated traffic volume of inflow and outflow to each zone is based on the observed traffic volume at the cross section. Following table shows the cross section code for each inflow and outflow traffic in accordance with the traffic volume survey described in annex 1.1.1.

Table 1: Related Cross-section Code in the Traffic Volume Survey

Upper: Nos. of Vehicle  
Middle: Nos. of Large Vehicle (Truck, Bus, Trailer)  
Bottom: PCU
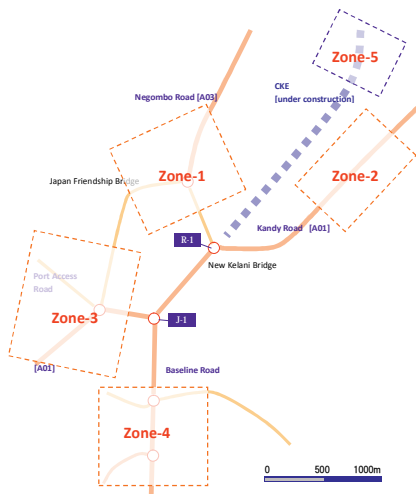
| Origin \ Destination                                       | Zone-1                             | Zone-2                             | Zone-3                             | Zone-4                             | Total                                 | Referenced cross section code in the traffic volume survey |
|--|------------------------------------|------------------------------------|------------------------------------|------------------------------------|---------------------------------------|--|
| Zone-1   | 0<br>(0)<br><b>0</b>               | 4,544<br>(691)<br><b>4,471</b>     | 2,986<br>(1,089)<br><b>4,043</b>   | 15,307<br>(2,684)<br><b>15,397</b> | 22,837<br>(4,464)<br><b>23,911</b>    | R2c-out<br>R1b-in  |
| Zone-2   | 6,535<br>(1,565)<br><b>7,875</b>   | 0<br>(0)<br><b>0</b>               | 5,191<br>(2,051)<br><b>6,898</b>   | 23,416<br>(3,645)<br><b>22,757</b> | 35,142<br>(7,261)<br><b>37,530</b>    | R1a-in   |
| Zone-3   | 2,716<br>(919)<br><b>3,508</b>     | 6,692<br>(1,926)<br><b>7,373</b>   | 0<br>(0)<br><b>0</b>               | 4,765<br>(2,280)<br><b>8,151</b>   | 14,173<br>(5,125)<br><b>19,031</b>    | J1b-in<br>J4d-out  |
| Zone-4   | 10,691<br>(2,090)<br><b>11,551</b> | 25,722<br>(3,531)<br><b>24,128</b> | 4,321<br>(988)<br><b>5,118</b>     | 0<br>(0)<br><b>0</b>               | 40,734<br>(6,609)<br><b>40,796</b>    | J2a-out<br>J1c-in  |
| Total  | 19,942<br>(4,574)<br><b>22,933</b> | 36,958<br>(6,148)<br><b>35,972</b> | 12,948<br>(4,128)<br><b>16,059</b> | 43,488<br>(8,609)<br><b>46,305</b> | 112,886<br>(23,459)<br><b>121,269</b> |  |
| Referenced cross section code in the traffic volume survey | R2c-in<br>R1b-out                  | R1a-out                            | J1b-out<br>J4d-in                  | J2a-in<br>J1c-out                  |                                       |  |




In the process of this estimation, each of six vehicle types was used, such as i) motor cycle, ii) 3-wheeler, iii) car, iv) bus, v) truck and vi) trailer. Above table is the result of total value of each categorised origin-destination traffic volume. Note that, due to the limitation of technical and enumerators' resources, different survey dates at the location, and two weekdays conducted at each location, the estimated results are not exactly the same of the survey results.

## 2.2 Liner Regression Model Development and Increments of Future Demand

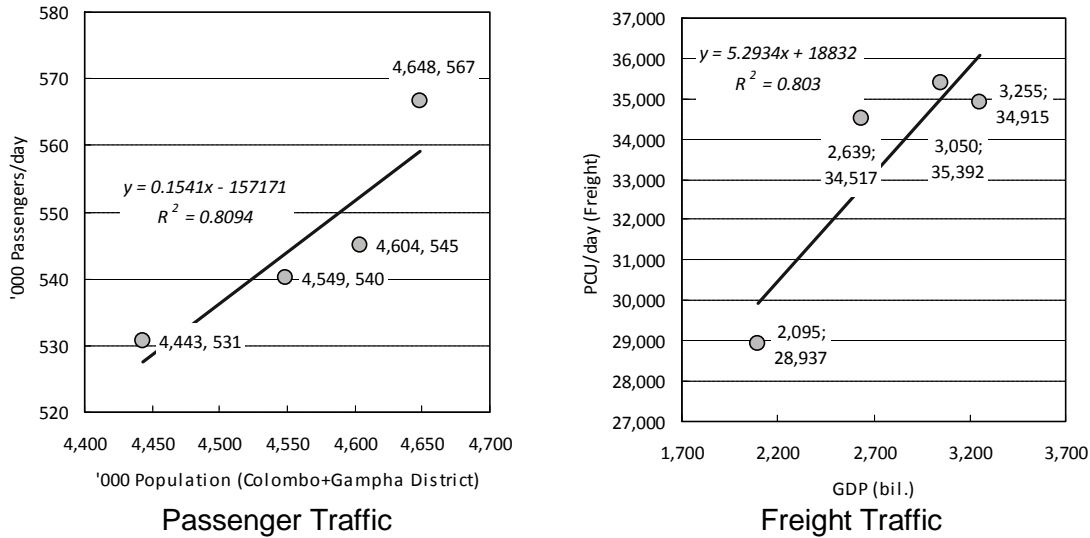In the section of 3.2.3, the liner regression models for passenger and freight transport at the target area were developed using the collected traffic volume in 2006, 2010, 2012 and 2013, which was described in table 3.2.1 in the main report.

Following figure shows the each value of independent and dependent variables and estimated parameters.



In the case of future increment of traffic demands are calculated based on these formula and socio-economic frameworks.

Number of passenger is expected to increase from 567,000 in 2013 to 792,000 in 2035, which means 40 % increased in the future. Freight traffic volume in PCU basis is expected to increase from 35,000 in 2013 to 64,900 in 2035, which means 85% increased in the future.

These increased ratios were applied to the future OD matrix for each vehicle category, such as i) motor cycle, ii) 3-wheeler, iii) car, iv) bus, v) truck and vi) trailer.

As described in 3.2.6, the increased volume of passenger demand for car and bus is assumed to be increased, and the volume of motor cycle and 3-wheeler maintains status quo.

The freight traffic is assumed to be increased with same proportional of vehicle type structure.



付録 4  
地質調査

**ORIENTAL CONSULTANTS CO., LTD. AND  
KATAHIRA & ENGINEERS INTERNATIONAL**

**GEOLOGICAL SURVEY WORKS FOR THE PROPOSED  
TRAFFIC IMPROVEMENT PROJECT AROUND NEW KELANI  
BRIDGE**



**FINAL REPORT**






**JULY 2013**

**DOCUMENT CONTROL SHEET**

**Client :** Oriental Consultants Co., Ltd. and Katahira & Engineers International.

**Project :** GEOLOGICAL SURVEY WORKS FOR THE PROPOSED TRAFFIC IMPROVEMENT PROJECT AROUND NEW KELANI BRIDGE

**Project No:** 30/24318

|            |   | Prepared by   |   | Reviewed by   |   | Approved by |           |
|------------|---|---|---|---|---|-------------|-----------|
| REPORT     | NAME  | NAME  | NAME  | NAME  | NAME  | NAME        | NAME      |
| FINAL      | M.D.S.L.Karunsadass<br>(Site Engineer)  | N.M.L.B. Nawarathne<br>(Site Engineer)  | Nanthini.V<br>(Project Engineer)  | Prof. H.S.Thilakasiri,<br>(Consultant)<br>Ph.D,C.Eng,P.Eng (SL),<br>Senior Lecturer,<br>Dept. of Civil Eng.,<br>University of Moratuwa. | P.H.K. De Silva<br>(Head)<br>Geotechnical Engineering<br>Division                   |             |           |
| DATE       | SIGNATURE   | SIGNATURE   | SIGNATURE   | SIGNATURE   | SIGNATURE   | SIGNATURE   | SIGNATURE |
| 11-07-2013 |  |  |  |   |  |             |           |

| REPORT     | NAME      | NAME      | NAME      | NAME      | NAME      |
|------------|-----------|-----------|-----------|-----------|-----------|
| RIVISION I |           |           |           |           |           |
| DATE       | SIGNATURE | SIGNATURE | SIGNATURE | SIGNATURE | SIGNATURE |
|            |           |           |           |           |           |

| REPORT      | NAME      | NAME      | NAME      | NAME      | NAME      |
|-------------|-----------|-----------|-----------|-----------|-----------|
| RIVISION II |           |           |           |           |           |
| DATE        | SIGNATURE | SIGNATURE | SIGNATURE | SIGNATURE | SIGNATURE |
|             |           |           |           |           |           |

This report, and information or advice which it contains, is provided by NBRO solely for internal use and reliance by its Client in performance of NBRO's duties and liabilities under its contract with the Client. Any advice, opinions, or recommendations within this report should be read and relied upon only in the context of the report as a whole. The advice and opinions in this report are based upon the information made available to NBRO at the date of this report and on the standards, codes, and technology and construction practices as at the date of this report. Following final delivery of this report to the Client, NBRO will have no further obligations or duty to advise the Client on any matters, including development affecting the information or advice provided in this report. This report has been prepared by NBRO in their professional capacity as Consulting Engineers. The contents of the report do not, in any way, purport to include any manner of legal advice or opinion. This report is prepared in accordance with the terms and conditions of NBRO's contract with the Client. Regard should be had to those terms and conditions when considering and/or placing any reliance on this report. Should the Client wish to release this report to a Third Party for that party's reliance, NBRO may, at its discretion, agree to such release provided that:

- (a) NBRO's written agreement is obtained prior to such release, and
- (b) By release of the report to the Third Party, that Third Party does not acquire any rights, contractual or otherwise, whatsoever against NBRO and NBRO accordingly, assume no duties, liabilities or obligations to that Third Party, and
- (c) NBRO accepts no responsibility for any loss or damage incurred by the Client or for any conflict of NBRO's interests arising out of the Client's release of this report to the Third Party.

## ABBREVIATIONS

### (1) General

|      |   |   |
|------|---|---|
| NBRO | - | National Building Research Organisation |
| BS   | - | British Standards                       |
| HC   | - | Highland Complex                        |
| WC   | - | Wanni Complex                           |
| VC   | - | Vijayan Complex                         |
| KC   | - | Kadugannawa Complex                     |
| Ph   | - | Photograph                              |

#### Field Investigation

|     |   |                           |
|-----|---|---------------------------|
| CD  | - | Core Drilling             |
| WB  | - | Wash Boring               |
| MSL | - | Mean Sea Level            |
| BH  | - | Borehole                  |
| SPT | - | Standard Penetration Test |

### (2) Explanation of Boring Logs

#### Sample Condition

|    |   |                       |
|----|---|-----------------------|
| SM | - | Silty Sand            |
| MS | - | Sandy Silt            |
| GM | - | Silty Gravel          |
| MG | - | Gravelly Silt         |
| SC | - | Clayey Sand           |
| CS | - | Sandy Clay            |
| GC | - | Clayey Gravel         |
| CG | - | Gravelly Clay         |
| SG | - | Gravelly Sand         |
| GS | - | Sandy Gravel          |
| GP | - | Gravel, poorly graded |
| GW | - | Gravel, well graded   |
| SP | - | Sand, poorly graded   |
| SW | - | Sand, Well graded     |

|     |   |   |
|-----|---|---|
| CV  | - | Clay, very high plastic                         |
| CH  | - | Clay, high plastic                              |
| CI  | - | Clay, intermediate plastic                      |
| CL  | - | Clay, low plastic                               |
| MV  | - | Silt, very high plastic                         |
| MH  | - | Silt, high plastic                              |
| MI  | - | Silt, intermediate plastic                      |
| ML  | - | Silt, low plastic                               |
| CHO | - | Clay, high plastic with organic matters         |
| CIO | - | Clay, intermediate plastic with organic matters |
| CLO | - | Clay, low plastic with organic matters          |
| MHO | - | Silt, high plastic with organic matters         |
| MIO | - | Silt, intermediate plastic with organic matters |
| MLO | - | Silt, low plastic with organic matters          |
| Pt  | - | Peat  |
| UDS | - | Undisturbed Sample                              |
| DS  | - | Disturbed Sample                                |
| RQD | - | Rock Quality Designation                        |
| TCR | - | Total Core Recovery                             |

**(3) Laboratory tests**

|         |   |                                      |
|---------|---|--------------------------------------|
| CU      | - | Consolidated Undrained (Shear tests) |
| UCS     | - | Uniaxial Compressive Strength        |
| c       | - | Cohesion                             |
| c'      | - | Effective Cohesion                   |
| $\phi$  | - | Angle of internal friction           |
| $\phi'$ | - | Effective Angle of Friction          |
| LL      | - | Liquid Limit                         |
| PL      | - | Plastic Limit                        |
| PI      | - | Plasticity Index                     |

## TABLE OF CONTENT

|       |   |    |
|-------|---|----|
| 1     | INTRODUCTION.....                                       | 1  |
| 2     | OBJECTIVE OF SOIL INVESTIGATION .....                   | 1  |
| 3     | SCOPE OF SOIL INVESTIGATION.....                        | 2  |
| 4     | PROPOSED STRUCTURE.....                                 | 2  |
| 5     | FIELD INVESTIGATION.....                                | 2  |
| 5.1   | CODES & STANDARDS.....                                  | 2  |
| 5.2   | QUALIFICATION & LEVEL OF SUPERVISION.....               | 3  |
| 5.3   | DRILLING.....   | 3  |
| 5.3.1 | <i>Rock Quality Designation (RQD) %</i> .....           | 3  |
| 5.3.2 | <i>Total Core Recovery (TCR) %</i> .....                | 3  |
| 5.4   | STANDARD PENETRATION TEST .....                         | 3  |
| 5.5   | SOIL SAMPLING & CLASSIFICATION .....                    | 4  |
| 5.5.1 | <i>Disturbed</i> .....                                  | 4  |
| 5.5.2 | <i>Undisturbed</i> .....                                | 4  |
| 5.6   | SURVEYING OF BOREHOLE LOCATIONS.....                    | 5  |
| 5.7   | GROUND WATER TABLE .....                                | 5  |
| 5.8   | SOIL PROFILE .....                                      | 5  |
| 6     | SITE RECONNAISSANCE & GEOLOGY OF THE PROJECT AREA.....  | 5  |
| 6.1   | GENERAL.....  | 5  |
| 6.2   | GENERAL GEOLOGY OF PROJECT AREA .....                   | 6  |
| 6.3   | GEOLOGY OF THE SITE.....                                | 7  |
| 6.3.1 | <i>Rock &amp; Mineralogy</i> .....                      | 7  |
| 6.3.2 | <i>Structural Geology</i> .....                         | 8  |
| 6.3.3 | <i>Origin of Rock</i> .....                             | 8  |
| 6.3.4 | <i>Geological Conclusion</i> .....                      | 9  |
| 7     | LABORATORY TESTING .....                                | 10 |
| 7.1   | INDEX PROPERTY TESTS.....                               | 10 |
| 7.2   | GEO-MECHANICAL TESTS.....                               | 10 |
| 7.3   | UNIAXIAL COMPRESSIVE STRENGTH (UCS) TESTS ON ROCK ..... | 10 |
| 8     | ENGINEERING APPRECIATION OF SUBSOIL CONDITION.....      | 11 |

|           |   |    |
|-----------|---|----|
| 8.1       | GENERAL OBSERVATIONS.....                                       | 11 |
| 8.2       | ENGINEERING APPRECIATION OF SUBSOIL CONDITION.....              | 11 |
| 9         | SOIL PROPERTIES & FOUNDATION RECOMMENDATIONS.....               | 12 |
| 9.1       | INTRODUCTION.....   | 12 |
| 9.2       | SPECIMEN CALCULATIONS.....                                      | 12 |
| 9.2.1     | <i>Strength parameters of the soil layers.....</i>              | 12 |
| 9.2.2     | <i>Properties of the bedrock.....</i>                           | 13 |
| 9.2.3     | <i>Carrying capacities of bored and cast in-situ piles.....</i> | 14 |
| 9.2.3.1   | <i>Skin friction.....</i>                                       | 14 |
| 9.2.3.1.1 | <i>Soil layers.....</i>   | 14 |
| 9.2.3.1.2 | <i>Bedrock.....</i>   | 15 |
| 9.2.3.2   | <i>End bearing.....</i>   | 16 |
| 9.2.3.2.1 | <i>Bedrock.....</i>   | 16 |
| 9.3       | RECOMMENDATIONS.....  | 16 |
| 9.3.1     | <i>BH 1.....</i>  | 17 |
| 9.3.2     | <i>BH 2.....</i>  | 17 |
| 9.3.2.1   | <i>Subsurface layers.....</i>                                   | 17 |
| 9.3.2.2   | <i>Bedrock layer.....</i>                                       | 18 |
| 9.3.3     | <i>BH 3.....</i>  | 18 |
| 9.3.3.1   | <i>Subsurface layers.....</i>                                   | 18 |
| 9.3.3.2   | <i>Bedrock layer.....</i>                                       | 19 |
| 9.3.4     | <i>BH 4.....</i>  | 20 |
| 9.3.4.1   | <i>Subsurface layers.....</i>                                   | 20 |
| 9.3.4.2   | <i>Bedrock layer.....</i>                                       | 21 |
| 9.3.5     | <i>BH 5.....</i>  | 21 |
| 9.3.5.1   | <i>Subsurface layers.....</i>                                   | 21 |
| 9.3.5.2   | <i>Bedrock layer.....</i>                                       | 22 |
| 9.3.6     | <i>BH 6.....</i>  | 23 |
| 9.3.6.1   | <i>Subsurface layers.....</i>                                   | 23 |
| 9.3.6.2   | <i>Bedrock layer.....</i>                                       | 24 |
| 9.3.7     | <i>BH 7.....</i>  | 24 |
| 9.3.7.1   | <i>Subsurface layers.....</i>                                   | 24 |
| 9.3.7.2   | <i>Bedrock layer.....</i>                                       | 25 |
| 9.3.8     | <i>BH 8.....</i>  | 25 |
| 9.3.8.1   | <i>Subsurface layers.....</i>                                   | 25 |
| 9.3.8.2   | <i>Bedrock layer.....</i>                                       | 26 |
| 9.3.9     | <i>BH 9.....</i>  | 27 |

|          |                                |    |
|----------|--------------------------------|----|
| 9.3.9.1  | <i>Subsurface layers</i> ..... | 27 |
| 9.3.9.2  | <i>Bedrock layer</i> .....     | 28 |
| 9.3.10   | <i>BH 10</i> .....             | 29 |
| 9.3.10.1 | <i>Subsurface layers</i> ..... | 29 |
| 9.3.10.2 | <i>Bedrock layer</i> .....     | 29 |
| 9.3.11   | <i>BH 11</i> .....             | 30 |
| 9.3.11.1 | <i>Subsurface layers</i> ..... | 30 |
| 9.3.11.2 | <i>Bedrock layer</i> .....     | 31 |
| 9.3.12   | <i>BH 12</i> .....             | 32 |
| 9.3.12.1 | <i>Subsurface layers</i> ..... | 32 |
| 9.3.12.2 | <i>Bedrock layer</i> .....     | 33 |
| 9.3.13   | <i>BH 13</i> .....             | 33 |
| 9.3.13.1 | <i>Subsurface layers</i> ..... | 33 |
| 9.3.13.2 | <i>Bedrock layer</i> .....     | 34 |
| 9.3.14   | <i>BH 14</i> .....             | 35 |
| 9.3.14.1 | <i>Subsurface layers</i> ..... | 35 |
| 9.3.14.2 | <i>Bedrock layer</i> .....     | 35 |
| 9.3.15   | <i>BH 15</i> .....             | 36 |
| 9.3.15.1 | <i>Subsurface layers</i> ..... | 36 |
| 9.3.15.2 | <i>Bedrock layer</i> .....     | 37 |
| 9.3.16   | <i>BH 16</i> .....             | 38 |
| 9.3.16.1 | <i>Subsurface layers</i> ..... | 38 |
| 9.3.16.2 | <i>Bedrock layer</i> .....     | 39 |
| 9.3.17   | <i>BH 17</i> .....             | 39 |
| 9.3.17.1 | <i>Subsurface layers</i> ..... | 39 |
| 9.3.17.2 | <i>Bedrock layer</i> .....     | 41 |
| 9.3.18   | <i>BH 18</i> .....             | 41 |
| 9.3.18.1 | <i>Subsurface layers</i> ..... | 41 |
| 9.3.18.2 | <i>Bedrock layer</i> .....     | 42 |
| 9.3.19   | <i>BH 19</i> .....             | 43 |
| 9.3.19.1 | <i>Subsurface layers</i> ..... | 43 |
| 9.3.19.2 | <i>Bedrock layer</i> .....     | 44 |
| 9.3.20   | <i>BH 20</i> .....             | 44 |
| 9.3.20.1 | <i>Subsurface layers</i> ..... | 44 |
| 9.3.20.2 | <i>Bedrock layer</i> .....     | 45 |
| 9.4      | REFERENCE.....                 | 46 |



**ORIENTAL CONSULTANTS CO., LTD. AND  
KATAHIRA & ENGINEERS INTERNATIONAL**

**FINAL REPORT ON  
GEOLOGICAL SURVEY WORKS FOR THE PROPOSED TRAFFIC IMPROVEMENT PROJECT  
AROUND NEW KELANI BRIDGE**

**1 INTRODUCTION**

The JICA Survey Team, which is a consortium of Oriental Consultants Co., Ltd. and Katahira & Engineers International, has been executing the preparatory survey on road improvement project, namely Traffic Improvement Project around New Kelani Bridge under the Road Development Authority (RDA), Government of Sri Lanka from 2013. One of the components of the project is pavement/ road design. Geological Survey, accordingly, to be conducted to grasp the existing ground level and the land use along Baseline road including Port access and Flyover, for pavement/ road design.

In order to carryout this task, Dr. Masaaki TATSUMI, Team Leader, Oriental Consultants Co., Ltd. requested National Building Research organisation (NBRO) to submit a quotation for the soil investigation of the proposed Traffic Improvement Project around New Kelani Bridge by his letter dated 4<sup>th</sup> March 2013.

In response to the request, NBRO submitted initial cost estimate on 7<sup>th</sup> March 2013 for the same.

Upon acceptance of the financial proposal by the Team Leader, contract agreement was signed on 19<sup>th</sup> March 2013 by both parties. Fieldwork for the above investigations was commenced on 23<sup>rd</sup> March 2013 and completed by 23<sup>rd</sup> May 2013. Laboratory tests were completed on 19<sup>th</sup> June 2013.

This factual report is based on the site reconnaissance, field investigation and laboratory tests conducted.

**2 OBJECTIVE OF SOIL INVESTIGATION**

The objective of this investigation is to provide information on,

- ❖ Geological and geotechnical reconnaissance throughout the proposed road trace.
- ❖ Subsurface profile along the proposed road trace with necessary soil parameters for the design purposes.

- ❖ Rock coring results such as Rock Quality Designation (RQD), Total Core Recovery (TCR) and Uniaxial Compressive Strength (UCS).

### 3 SCOPE OF SOIL INVESTIGATION

The initial scope of the work given by client as follows;

- Drilling twenty two (22 Nos.) boreholes through overburden and thereafter 5.0m depth into the rock layer (not weathered) or 40m depth.
- Conduct Standard Penetration Tests (SPT) at every 1.0m intervals within boreholes.
- Collect disturbed & undisturbed soil samples for the laboratory tests to determine the soil properties for the design purposes.
- Recommendation for suitable type of foundation for the piers.

While conducting field work depth of drilling in rock was changed as per the client instruction given as follows.

“ If RQD > 85% and 6m depth into bearing layer (rock) then ok, otherwise, 10m depth into bearing layer is also acceptable.”

Further, number of boreholes for drilling were reduced to 20 Nos. by the client as the availability of the geotechnical parameters for the CKE area.

### 4 PROPOSED STRUCTURE

It is intended to construct 2<sup>nd</sup> New Kelani Bridge and some approach roads to improve the traffic around New Kelani Bridge at the site. The proposed road trace has 3 links such as along Baseline road, New Kelani Bridge road and Flyover. The proposed road trace passes through high land, low land areas.

The proposed road contains 20 Nos. of boreholes for carryout the soil investigation and above road trace is proposed to support through piers at via duct area and cables for suspension bridge area as per the client.

Structural details of the proposed structures are not available at the time of preparation of this report.

### 5 FIELD INVESTIGATION

#### 5.1 Codes & Standards

All field and laboratory testing were carried out as per the client requirement.

## 5.2 Qualification & Level of Supervision

The fieldwork for the soil investigation was carried out under the overview of a project engineer and a technical officer of NBRO whose were responsible for nominating and directing sampling and in-situ testing, and providing field logs of the soil profiles encountered.

Project Engineer (Geotechnical) co-ordinated from the NBRO head Office at Colombo and at the site when necessary.

## 5.3 Drilling

The objective of the drilling is to obtain geo-technical information and to grasp the sub-soil conditions. Twenty (20 Nos.) boreholes were advanced at the locations shown in **Figure I** in **Appendix I** by implementing three drilling crews.

Boreholes were carried out using core drilling techniques through overburden and thereafter into the rock. The termination depth of boreholes was decided as per the client.

Bore holes were carried out using rotary core drilling using *TRD 80 S, NL 26 & YWD 45* heavy drilling machines and NX size diamond core bits.

Coring in boulders, highly weathered and fractured rock was carried out by using the Triple Tube core barrel and in moderately weathered to fresh rock was done by using the double tube core barrels and impregnated diamond core bits in NX size. Boreholes were supported with NX size casings. Details of borehole investigation are given in **Table2** in **Appendix V**.

### 5.3.1 Rock Quality Designation (RQD) %

Rock Quality Designation (RQD) is the ratio of the sum of the lengths of the intact rock cores more than 10cm in each length to the length of the actual core run.

### 5.3.2 Total Core Recovery (TCR) %

Total Core Recovery (TCR) is the ratio of the core recovered (solid and non intact) to the length of the actual core run.

The core samples were kept and maintained on core boxes. These samples are placed in order, properly labeled and marked according the related depth. Photographs (**Ph 01 – Ph 20**) in **Appendix VI** show some core boxes.

## 5.4 Standard Penetration Test

Standard Penetration Tests (SPT) was conducted within the boreholes at every 1.0m depth intervals. Engineering logs of the boreholes along with the explanation sheets describing the terms and symbols used and the graphical representation of SPT values are presented in **Appendix II**.

For the purpose of preparing the logs of boreholes, compactness/consistency was classified according to the following **Tables 5.4.1 & 5.4.2**.

**Table 5.4.1 - Cohesionless soil**

| Compactness  | SPT No. |
|--------------|---------|
| Very loose   | 0 - 4   |
| Loose        | 4 - 10  |
| Medium dense | 10 - 30 |
| Dense        | 30 - 50 |
| Very dense   | >50     |

**Tables 5.4.2 - Cohesive soil**

| Consistency | SPT No. |
|-------------|---------|
| Very soft   | 0 - 2   |
| Soft        | 2 - 4   |
| Firm        | 4 - 8   |
| Stiff       | 8 - 15  |
| Very Stiff  | 15 - 30 |
| Hard        | >30     |

## 5.5 Soil Sampling & Classification

All samples were collected under the supervision of the Site Engineer.

### 5.5.1 Disturbed

Disturbed soil samples from the bore holes were collected at every 1.0m depth intervals or at every change of soil layer in each borehole by using the split spoon sampler having a sharp cutting edge at its lowered end is forced into the ground by dynamic impact.

### 5.5.2 Undisturbed

UD Samples were collected by using 70mm diameter thin wall samplers for the soils that are particularly sensitive to sampling disturbance and a thin walled steel / Copper tubes whose lower end is shaped to form a cutting edge to form a small inside clearance.

The depths of the samplings are shown in the logs of the boreholes in **Appendix II**. Visual classification of the soils was done in the field by NBRO personnel for field logging of the boreholes.

### 5.6 Surveying of Borehole Locations

Elevations (Mean Sea Level) of the boreholes and co-ordinates to the national grid were estimated for actual borehole location using topographical drawing provided by the client and summarised in the **Table 1** in **Appendix V**.

### 5.7 Ground Water Table

Ground water table of the boreholes were observed during the period of field investigation. Then, depth of water table was measured from the ground surface and recorded in all borehole logs. The level of water table was measured daily and recorded before boring to be continued next morning.

### 5.8 Soil Profile

The interpreted vertical subsurface profiles through boreholes at the site are given as,

**Fig. II(a), Appendix I** – Assumed vertical subsoil profile along the Baseline Road and the Flyover section

**Fig. II(b), Appendix I** - Assumed vertical subsoil profile along the Port access road and New Kelani Bridge road section

## 6 SITE RECONNAISSANCE & GEOLOGY OF THE PROJECT AREA

### 6.1 General

Sri Lanka lies in the monsoon region of South Asia. The project area is situated on the Western coast of the island and experiences a humid tropical climate.

The proposed road trace is situated in the Colombo district and located around New Kelani Bridge at Peliyagoda. Details of respective borehole locations are given in the **Photographs** in **Appendix VI**.

The proposed site can be accessible through Baseline Road, New Kelani Bridge Road, port access road and Colombo – Kandy main road. (**Ref. Fig. I** in **Appendix I**).

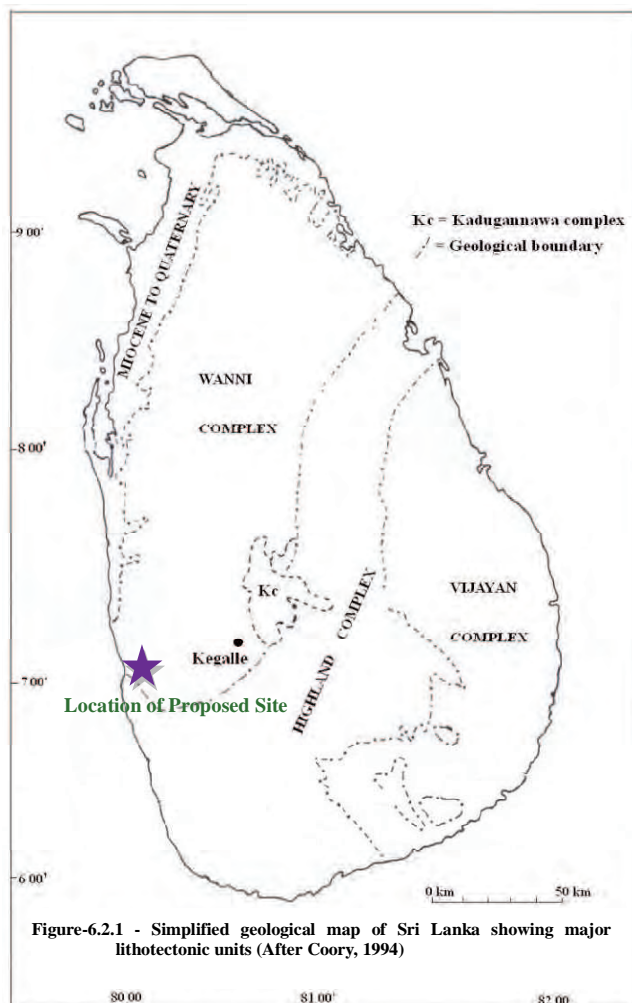


**Figure 6.1.1 – Some incidents of borehole investigation**

## 6.2 General Geology of Project Area

About 90% of Sri Lanka basement is underlain by late proterozoic high grade metamorphic rock and the rest is made up of Mesozoic (Jurassic), Tertiary (Miocene) and quarternary sedimentary formation. The late proterozoic high grade basement of Sri Lanka is divided into three main and one subordinate lithotectonic units namely Highland Complex (HC), Wannii Complex (WC), Vijayan Complex (VC) and Kadugannawa Complex (KC).

The proposed project area is located in Wannii Complex with close to the western coast of Sri Lanka (See **Figure-6.2.1**). This complex occupies the complex folded granitoid gneisses, granitic migmatites, cordierite gneiss, garnet cordierite gneisses, meta-quartzites, hornblende biotite gneiss, charnokitic gneiss, biotite hornblende gneiss, garnet hornblende biotite gneiss, garnet silimanite biotite gneiss, garnet silimanite graphite gneiss (khondalitic gneiss), granitic gneiss, biotite granitic gneiss, pegmatitic gneiss, charnockitic garnet biotite gneiss, charnockitic biotite gneiss and late microcline granitic intrusion (Tonigala granite). However, overburden of the western coastal of Wannii Complex is mainly formed by very thick alluvium (in the form of sand, silt or clay) deposit. (Ref. **Figure III** in **Appendix I**)



As a result of chemical weathering of bedrock, laterite is formed above the bedrock specially into the country side within the south-west part of Wannu Complex. Laterite is a surface formation in hot and wet tropical areas which is enriched in iron and aluminium developed by long lasting weathering of the underlying parent rock. The percolating rain water causes dissolution of primary rock minerals and decrease of easily soluble elements such as sodium, potassium, calcium, magnesium and silicon. This gives rise to a residual concentration of insoluble elements predominantly iron and aluminium. Laterites consist mainly of the minerals kaolinite, goethite, hematite and gibbsite. The iron oxides, goethite and hematite cause the red-brown colour of laterite.

The rocks of Wannu Complex indicating younger Nd modal ages (1-2Ga) have undergone upper amphibolite to granulite facies metamorphism. Pressure and Temperature conditions for the rock formation of metamorphic rocks in Wannu Complex are ranging (3.5 kb - 7.5 kb) and (600°C - 900°C) respectively.

### 6.3 Geology of the Site

#### 6.3.1 Rock & Mineralogy

The site is lying within a highly populated and build up region especially in the either side of Kelani River, and the area is comprises of dense road network. Lithologically there are no bedrock exposures in and around the proposed site. According to the lithological observations using borehole investigation at the site, the major rock types underlain at this location are biotite granitic gneiss, hornblende biotite gneiss, garnet hornblende biotite gneiss and charnockitic biotite gneiss which show the medium to coarse grained xenomorphic inequigranular texture. Based on the visual observation of rock core samples collected at the site, the major rock forming minerals of each rock type can be observed as follows.

| <u><b>Biotite granitic gneiss</b></u><br><u><b>(Meta-igneous)</b></u> | <u><b>Hornblende biotite gneiss</b></u><br><u><b>(Meta-sedimentary)</b></u> | <u><b>Garnet hornblende biotite gneiss</b></u><br><u><b>(Meta-sedimentary)</b></u> |
|---|---|--|
| - Quartz  | - Quartz  | - Quartz   |
| - K-feldspar  | - Plagioclase feldspar  | - Plagioclase feldspar   |
| - Plagioclase feldspar  | - Orthoclase feldspar   | - Orthoclase feldspar  |
| - Orthoclase feldspar   | - Hornblende  | - Hornblende   |
| - Microcline feldspar   | - Biotite   | - Biotite  |
| - Biotite   |   | - Garnet   |

### **Charnockitic biotite gneiss**

#### **(Meta-sedimentary)**

- Quartz
- Plagioclase feldspar
- Orthoclase feldspar
- Biotite
- Hornblende
- Pyroxene (Hypersthene)

The river alluvium is present in substantial amounts in the flood plain of the Kelani river. However, bedrock at the proposed site was overlain by primary formation of residual soil and secondary formation of alluvium soil at the top of the overburden. It is identified that a thick bed of river alluvium around the BH-18, BH-19 and BH-20 area in the form of poorly graded sand and clayey silt. Rest of the site area is predominantly covered by residual soil (lateritic soil) and the surface layer is comprises of filling materials (aggregates, building refuse, debris) with organic clay and peat.

#### ***6.3.2 Structural Geology***


Structural geologically, proposed site area is located on a large scale shear zone (approximately sensing to N 22° W) and nearly two numbers of normal fault zones (approximately sensing to N 85° W/81° and N 79° E). The general dip of the foliation plane of bedrock was observed about 40°. However, dip of the foliation plane of bedrock is highly varied due to presence of highly folded bedding planes of bedrock formed as a result of layer parallel compression during the shearing of bedrock. According to the observation of structures of the rock core samples, the fracture index / fault intensity of bedrock was increased upto about 20 m<sup>-1</sup>. Most of fractures in bedrock are present as tight condition and trending into different directions including parallel to the foliation plane of bedrock. With reference to the scale of shear zone, difference fracture index / joint intensity can be extent into the deep underground level of bedrock within the proposed site.

#### ***6.3.3 Origin of Rock***

According to characteristics (grain type, grain size and grain shape) of rock forming minerals of each rock types of the bedrock, the initial rock type formed within the proposed site is hornblende biotite gneiss under amphibolites facies (medium pressure and temperature) metamorphism condition as a metasedimentary rock.



After development of the major geological structures of bedrock, biotite granitic gneiss was formed by a secondary granitic intrusion come through the major discontinuities of bedrock. After that, garnet hornblende biotite gneiss and charnockitic biotite gneiss were formed under pro-grade metamorphism process (amphibolite facies into granulite facies) by the following metamorphic reaction of hornblende biotite gneiss.



However, invisible tight fractured condition of bedrock was caused for suddenly decreasing of the actual rock strength according to the test results of uncompressive strength of rock core samples. Further, very small thickness of mafic-rich layers (hornblende and biotite) which shows low to intermediate rock strength was present through the bedding plane of bedrock. Therefore, most of mechanical breakdown of rock cores are developed along the mafic rich layers bedrock.

#### 6.3.4 Geological Conclusion

According to the geological (lithological, structural geology and geomorphological) observations at the proposed site area, following geological conclusions can be made for the proposed site.

- 1) The proposed site is located on a large scale shear zone and nearly to the two numbers of normal fault zones. Therefore, different fracture condition (highly to slightly) of bedrock can be extent into the deep underground level of bedrock including low RQD (Rock Quality Designation) values within the proposed site area.
- 2) Most of fracture planes (formed due to shearing and faulting of bedrock) of bedrock have very steep dip angles of the foliation plane. Ground water table of the many locations within the proposed site area was encountered at shallow depth of the ground. Therefore, weathered bedrock may be encountered into deep underground level as a result of moving of ground water into the deeper level along the fracture planes of bedrock. The weathering condition (highly to slightly) of bedrock into the depth is depend on the fracture index (FI) of bedrock (When the FI of bedrock is increased, the weathering of bedrock is increased).
- 3) The most of rock core samples with good RQD values are present as tight fractured (visible or invisible) rock. Therefore, some rock core samples having good RQD value show low UCS (Unconfined Compressive Strength) value at the different depths of boreholes.

## 7 LABORATORY TESTING

All laboratory testing of soils was carried out under the supervision of Laboratory Engineer for the representative disturbed & undisturbed soil samples as requested by the client.

### 7.1 Index Property Tests

Following tests were carried out on disturbed soil samples to determine the index properties of the soil encountered at the site.

- Natural Moisture Content
- Atterberg Limits
- Sieve Analysis
- Hydrometer Analysis

The summary of test results is given in **Table 7.1** in **Appendix III** and the details are given in **Appendix IV**.

### 7.2 Geo-Mechanical Tests

As per the contract requirement, three undisturbed soil samples to be collected in marshy area. However, only one sample could be collected as sampling from other depths were not feasible due to the very soft nature of the sub soil.(with the consent of the client)

Undisturbed soil sample collected from borehole were used for Consolidated Undrained Triaxial test (CU test) and consolidation test (1 D test) to obtain geotechnical parameters for pavement/ road design.

The summary of test results is given in **Table 7.1** in **Appendix III** and the details are given in **Appendix IV**.

### 7.3 Uniaxial Compressive Strength (UCS) Tests on Rock

Rock samples collected from boreholes were used to carry out the Uniaxial Compressive Strength test to obtain the compressive strength of the rock.

Details of core box for the respective borehole locations are given in the **Photographs** in **Appendix VI**.

The summary of test results is given in **Table 7.2** in **Appendix III** and the details are given in **Appendix IV**.

## 8 ENGINEERING APPRECIATION OF SUBSOIL CONDITION

### 8.1 General Observations

The general observations of borehole investigation are summarized in the **Table 8.1** below.

**Table 8.1-** General observations of subsurface condition at different borehole locations

| Borehole No. | Depth to Ground Water Table from the existing ground level/(m) | Depth to overburden soil from the existing ground level /(m) | Thickness of rock drilled/(m) | Depth to Termination from the existing ground level/(m) |
|--------------|--|--|-------------------------------|---|
| BH-1         | 1.45   | 19.40  | 5.35                          | 24.75   |
| BH-2         | 3.35   | 19.00  | 6.00                          | 25.00   |
| BH-3         | 3.00   | 21.80  | 6.00                          | 27.80   |
| BH-4         | 2.30   | 15.20  | 5.80                          | 21.00   |
| BH-5         | 2.30   | 22.40  | 6.75                          | 29.15   |
| BH-6         | 2.20   | 22.10  | 6.00                          | 28.10   |
| BH-7         | 2.25   | 11.80  | 6.10                          | 17.90   |
| BH-8         | 2.10   | 23.65  | 9.95                          | 33.60   |
| BH-9         | 2.30   | 21.00  | 19.00                         | 40.00   |
| BH-10        | 0.80   | 18.70  | 10.00                         | 28.70   |
| BH-11        | 1.40   | 21.75  | 10.00                         | 31.75   |
| BH-12        | 0.80   | 21.00  | 9.00                          | 30.00   |
| BH-13        | 0.60   | 21.50  | 6.00                          | 27.50   |
| BH-14        | 0.85   | 22.75  | 10.00                         | 32.75   |
| BH-15        | 0.60   | 24.10  | 10.00                         | 34.10   |
| BH-16        | 6.20   | 31.50  | 7.40                          | 38.90   |
| BH-17        | 4.60   | 32.85  | 6.05                          | 38.90   |
| BH-18        | 0.50   | 28.20  | 11.80                         | 40.00   |
| BH-19        | 0.50   | 26.00  | 12.00                         | 38.00   |
| BH-20        | 1.45   | 23.00  | 14.80                         | 37.80   |

Detailed observations of subsurface condition at different borehole locations from borehole investigation are given in **Table 2** in **Appendix V**.

### 8.2 Engineering Appreciation of Subsoil Condition

According to the borehole investigation results given in **Appendix II** ( checked by the client), Assumed vertical subsoil profile through borehole were drawn and shown in **Figure II(a) & II(b)** in **Appendix I**.

Results of the field tests carried out as above indicate that the subsoil condition at the site of the proposed construction is highly heterogeneous both in respect of composition as well as penetration resistance.

## 9 SOIL PROPERTIES & FOUNDATION RECOMMENDATIONS

### 9.1 INTRODUCTION

The methods that are used to estimate the skin friction and end bearing from soil and rock layers on rock socketed bored and cast in-situ piles are outlined here using specimen calculations for the data obtained for BH 1. In addition to the procedures outlined in the respective references, the experience of the Geotechnical Engineer is also used in giving the skin friction and end bearing recommendations.

### 9.2 SPECIMEN CALCULATIONS

#### *9.2.1 Strength parameters of the soil layers*

The energy method of SPT correction (Bowles, 1996) was used to estimate the soil strength parameters of the soil layers. The energy method of SPT correction uses the following relationship to determine the  $N'_{70}$  from the field SPT blow counts ( $N_{\text{Field}}$ ):

$$N'_{70} = N_{\text{Field}} C_N \eta_1 \eta_2 \eta_3 \eta_4$$

Where

$$C_N = \sqrt{\frac{95.76}{p'_o}}$$

$$\eta_1 = \frac{E_r}{70}$$

$p'_o$  = Effective overburden pressure at the test level

$E_r$  = Efficiency of the hammer used (taken as 55%)

$\eta_i$  = Modification factors (Bowles, 1996)

The estimated  $N'_{70}$  together with the particle size could be used to estimate the soil strength parameters at respective depths, as outlined in Bowles (1996). Table 1 gives the estimated soil strength parameters at the location of BH 1 based on the above method.

Table 1 - Estimation of the soil strength based on Bowles (1996) for the location of BH 1

| Depth (m) | SPT N | $C_N$ | $\eta_1$ | $\eta_2$ | $\eta_3$ | $\eta_4$ | $N'_{70}$ | Soil strength  |             |
|-----------|-------|-------|----------|----------|----------|----------|-----------|----------------|-------------|
|           |       |       |          |          |          |          |           | $\phi_u^\circ$ | $c_u$ (kPa) |
| 1.3       | 10    | 2.09  | 0.79     | 0.75     | 1.00     | 1.00     | 12        | 33             |             |
| 2.3       | 10    | 1.57  | 0.79     | 0.75     | 1.00     | 1.00     | 9         | 31             |             |
| 3.3       | 21    | 1.31  | 0.79     | 0.85     | 1.00     | 1.00     | 18        | 34             |             |
| 4.3       | 7     | 1.15  | 0.79     | 0.85     | 1.00     | 1.00     | 5         |                | 20          |
| 5.3       | 6     | 1.06  | 0.79     | 0.95     | 1.00     | 1.00     | 5         |                | 20          |
| 6.3       | 7     | 1.02  | 0.79     | 0.95     | 1.00     | 1.00     | 5         |                | 20          |
| 7.3       | 5     | 1.00  | 0.79     | 0.95     | 1.00     | 1.00     | 4         |                | 15          |
| 8.3       | 5     | 0.97  | 0.79     | 0.95     | 1.00     | 1.00     | 4         |                | 15          |
| 9.3       | 13    | 0.94  | 0.79     | 1        | 1.00     | 1.00     | 10        |                | 50          |
| 10.3      | 23    | 0.91  | 0.79     | 1        | 1.00     | 1.00     | 16        |                | 100         |
| 11.3      | 21    | 0.88  | 0.79     | 1        | 1.00     | 1.00     | 15        |                | 90          |
| 12.3      | 21    | 0.85  | 0.79     | 1        | 1.00     | 1.00     | 14        |                | 90          |
| 13.3      | 10    | 0.83  | 0.79     | 1        | 1.00     | 1.00     | 7         | 30             |             |
| 14.3      | 10    | 0.81  | 0.79     | 1        | 1.00     | 1.00     | 6         | 30             |             |
| 15.3      | 10    | 0.79  | 0.79     | 1        | 1.00     | 1.00     | 6         | 30             |             |
| 16.3      | 13    | 0.78  | 0.79     | 1        | 1.00     | 1.00     | 8         | 31             |             |
| 17.3      | 24    | 0.76  | 0.79     | 1        | 1.00     | 1.00     | 14        | 34             |             |
| 18.3      | 50    | 0.74  | 0.79     | 1        | 1.00     | 1.00     | 29        | 38             |             |
| 19.3      | 50    | 0.73  | 0.79     | 1        | 1.00     | 1.00     | 29        | 38             |             |

### 9.2.2 Properties of the bedrock

The bedrock is classified into five groups depending on the reported core recovery (CR), rock quality designate (RQD) and unconfined compression strength (UCS). The rock mass rating (RMR), estimated based on the system proposed by Bieniawski (1989), is also used as a guidance in the determination of the grade of the bedrock. The guidelines used to determine the grade of rock is given in Table 2.

Table 2 – Rock classification system used

| Grade     | Description               | Lithology   | Approximate range of RMR  |
|-----------|---------------------------|---|---------------------------|
| Grade I   | Fresh rock                | Clean rock  | $60 \leq \text{RMR}$      |
| Grade II  | Slightly weathered rock   | Increased fractures                                       | $50 \leq \text{RMR} < 60$ |
| Grade III | Moderately weathered rock | Partly changed to soil; rock > soil                       | $35 \leq \text{RMR} < 50$ |
| Grade IV  | Highly weathered rock     | Partly changed to soil; rock < soil                       | $\text{RMR} < 35$         |
| Grade V   | Completely weathered rock | Some remnant rock structure; completely weathered to soil | -                         |

### 9.2.3 *Carrying capacities of bored and cast in-situ piles*

#### 9.2.3.1 *Skin friction*

##### 9.2.3.1.1 *Soil layers*

Skin friction of the soil layers are determined using two different approaches for sand and clayey soils.

#### **Sand**

Estimation of the ultimate skin friction in sandy (cohesionless) soil layers is done using the average SPT  $N$  values in the sand layers. Based on ICTAD DEV 15, the ultimate skin frictional capacity of bored piles in sand,  $f_{u,s}$  is given by:

$$f_{u,s} = 1.3 N \text{ kN/m}^2; f_{u,s} \leq 100 \text{ kN/m}^2$$

#### **Clay**

Estimation of the ultimate skin friction in clayey (cohesive),  $f_{u,c}$ , soil layers is done using the estimated undrained cohesion. Based on Bowles (1996), the ultimate skin frictional capacity of bored piles in clay,  $f_{u,c}$ , is given by:

$$f_{u,c} = \alpha c_u \quad (\text{kPa})$$

Where

$\alpha$  – Factor depending on undrained strength,  $S_u$  (Bowles, 1996)

$c_u$  - Undrained cohesion (kPa)

Based on the above procedures, the ultimate skin friction of soil layers at the location of BH 1 are estimated and given in Table 3.

Table 3 – Ultimate skin friction of soil layers

| Layer                                | Depth (m) |       | Ultimate skin friction (kPa) |
|--------------------------------------|-----------|-------|------------------------------|
|                                      | From      | To    |                              |
| Medium dense silty sand/ sand        | 0.00      | 4.00  | 15                           |
| Firm peat/clay with organic material | 4.00      | 9.00  | 15                           |
| Stiff clay                           | 9.00      | 13.00 | 60                           |
| Medium dense silt                    | 13.00     | 17.00 | 15                           |
| Very dense silty sand                | 17.00     | 19.40 | 65                           |

#### 9.2.3.1.2 Bedrock

The ultimate skin friction of the socketed region of the piles are estimated based on Tomlinson (1994) and ICTAD/DEV/15. It is generally assumed that bentonite slurry is used during drilling the pile bore. The estimated ultimate skin friction values of the bedrock at the location of BH 1 are given in Table 4.

Table 4 – Estimated ultimate skin friction of the bedrock at the location of BH 1

| Depth (m) | Grade of rock | Ultimate skin friction |
|-----------|---------------|------------------------|
|           |               |                        |

| From   | To     |           | (kPa) |
|--------|--------|-----------|-------|
| -19.40 | -20.20 | Grade III | 200   |
| -20.20 | -21.50 | Grade IV  | 200   |
| -21.50 | -22.20 | Grade III | 200   |
| -22.20 | -23.40 | Grade III | 200   |
| -23.40 | -24.75 | Grade II  | 300   |

### 9.2.3.2 End bearing

#### 9.2.3.2.1 Bedrock

The **allowable** end bearing capacity of bed rock is estimated based on ICTAD/DEV/15, and Hong Kong Guidelines (2006). The estimated **allowable** end bearing capacity values of the bedrock at the location of BH 1 are given in Table 5.

Table 5 – Estimated **allowable** end bearing capacity values of the bedrock at the location of BH 1

| Depth (m) |        | Grade of rock | Allowable end bearing capacity (kPa) |
|-----------|--------|---------------|--------------------------------------|
| From      | To     |               |                                      |
| -19.40    | -20.20 | Grade III     | 3000                                 |
| -20.20    | -21.50 | Grade IV      | 3000                                 |
| -21.50    | -22.20 | Grade III     | 3500                                 |
| -22.20    | -23.40 | Grade III     | 4000                                 |
| -23.40    | -24.75 | Grade II      | 6500                                 |

## 9.3 RECOMMENDATIONS

The strength parameters of the subsurface soil layers are given at each borehole location together with the ultimate skin friction from each layer. If the clay layers in the subsurface are loaded by placing a fill layer at the ground surface level or any other means, there is a possibility of generation of negative skin friction from the layers above such clay layers and such layers are also indicated. However, if there is no possibility of generation of negative



skin friction, the skin friction from such layers should be neglected in estimating the carrying capacity of piles.

At all the borehole locations, the grade of rock within the drilled depth of the bedrock is given. Based on the properties of the bedrock at different levels, the ultimate skin friction and the allowable end bearing capacity of bored piles are given.

### 9.3.1 BH 1

Strength parameters of different soil layers and Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock of borehole BH 1 is given above as specimen calculation.

### 9.3.2 BH 2

#### 9.3.2.1 Subsurface layers

Following succession of layers, given in Table 6, are encountered during drilling for the boreholes. The estimated soil strength parameters together with the ultimate skin friction are also given in Table 6.

Table 6 – Strength parameters of different soil layers at the borehole locations together with the ultimate skin friction

| BH 2   |           |       |                     |            |                       |                              |                                       |  |
|--|-----------|-------|---------------------|------------|-----------------------|------------------------------|---------------------------------------|--|
| Layer  | Depth (m) |       | Strength parameters |            |                       | Ultimate skin friction (kPa) | Possibility of negative skin friction |  |
|  | From      | To    | Drained             |            | Undrained $c_u$ (kPa) |                              |                                       |  |
|  |           |       | $\phi^{o/}$         | $c'$ (kPa) |                       |                              |                                       |  |
| Medium dense silty SAND                        | 0.00      | 3.00  | 31                  | 0          | -                     | 15                           | Yes                                   |  |
| Soft SILT/CLAY                                 | 3.00      | 6.20  |                     |            | 15                    | 15                           | Yes                                   |  |
| Firm to stiff PEAT                             | 6.20      | 8.90  |                     |            | 35                    | 30                           | Yes                                   |  |
| Loose to medium dense SAND with organic matter | 8.90      | 11.60 | 30                  | 0          |                       | 10                           | Yes                                   |  |
| Stiff PEAT                                     | 11.60     | 12.10 |                     |            | 35                    | 30                           | Yes                                   |  |

|                                |       |       |       |    |   |    |    |     |
|--------------------------------|-------|-------|-------|----|---|----|----|-----|
| Firm CLAY                      | sandy | 12.10 | 13.00 |    |   | 30 | 25 | Yes |
| Medium SILT                    | dense | 13.00 | 15.75 | 30 | 0 |    | 10 | No  |
| Dense to very dense silty SAND |       | 15.75 | 19.00 | 36 | 0 |    | 40 | No  |

### 9.3.2.2 *Bedrock layer*

The grade of the rock with the ultimate skin friction and the allowable end bearing capacities from different rock layers encountered within the drilled depth of the bedrock are given in Table 7.

Table 7 – Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock at the borehole locations

| Depth (m) |        | Grade of rock | Ultimate skin friction (kPa) | Allowable end bearing capacity (kPa) |
|-----------|--------|---------------|------------------------------|--------------------------------------|
| From      | To     |               |                              |                                      |
| BH 2      |        |               |                              |                                      |
| -19.00    | -20.70 | Grade III/II  | 250                          | 5000                                 |
| -20.70    | -22.20 | Grade III/II  | 250                          | 5000                                 |
| -22.20    | -23.50 | Grade III/II  | 250                          | 5000                                 |
| -23.50    | -25.00 | Grade I       | 300                          | 7000                                 |

### 9.3.3 *BH 3*

#### 9.3.3.1 *Subsurface layers*

Following succession of layers, given in Table 8, are encountered during drilling for the boreholes. The estimated soil strength parameters together with the ultimate skin friction are also given in Table 8.

Table 8 – Strength parameters of different soil layers at the borehole locations together with the ultimate skin friction

| <b>BH 3</b>   |           |       |                     |            |                       |                              |                                       |
|---|-----------|-------|---------------------|------------|-----------------------|------------------------------|---------------------------------------|
| Layer   | Depth (m) |       | Strength parameters |            |                       | Ultimate skin friction (kPa) | Possibility of negative skin friction |
|   | From      | To    | Drained             |            | Undrained $c_u$ (kPa) |                              |                                       |
|   |           |       | $\phi^{o/}$         | $c'$ (kPa) |                       |                              |                                       |
| Very loose to medium dense sandy SILT/gravelly SILT | 0.00      | 3.50  | 25                  | 5          |                       | 8                            | Yes                                   |
| Soft SILT/CLAY                                      | 3.50      | 5.00  |                     |            | 15                    | 15                           | Yes                                   |
| Very loose to medium dense SILT                     | 5.00      | 11.00 | 27                  | 0          |                       | 10                           | No                                    |
| Medium dense to very dense Gravelly SAND/silty SAND | 11.00     | 21.80 | 35                  | 0          |                       | 40                           | No                                    |

### 9.3.3.2 *Bedrock layer*

The grade of the rock with the ultimate skin friction and the allowable end bearing capacities from different rock layers encountered within the drilled depth of the bedrock are given in Table 9.

Table 9 – Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock at the borehole locations

| Depth (m)   |        | Grade of rock | Ultimate skin friction (kPa) | Allowable end bearing capacity (kPa) |
|-------------|--------|---------------|------------------------------|--------------------------------------|
| From        | To     |               |                              |                                      |
| <b>BH 3</b> |        |               |                              |                                      |
| -21.80      | -23.50 | Grade II      | 250                          | 5000                                 |
| -23.50      | -25.00 | Grade II      | 250                          | 5000                                 |

|        |        |         |     |      |
|--------|--------|---------|-----|------|
| -25.00 | -26.80 | Grade I | 250 | 6000 |
| -26.80 | -27.80 | Grade I | 300 | 7000 |

### 9.3.4 BH 4

#### 9.3.4.1 Subsurface layers

Following succession of layers, given in Table 10, are encountered during drilling for the boreholes. The estimated soil strength parameters together with the ultimate skin friction are also given in Table 10.

Table 10 – Strength parameters of different soil layers at the borehole locations together with the ultimate skin friction

| <b>BH 4</b>                                  |           |       |                     |            |                       |                              |                                       |
|--|-----------|-------|---------------------|------------|-----------------------|------------------------------|---------------------------------------|
| Layer  | Depth (m) |       | Strength parameters |            |                       | Ultimate skin friction (kPa) | Possibility of negative skin friction |
|  | From      | To    | Drained             |            | Undrained $c_u$ (kPa) |                              |                                       |
|  |           |       | $\phi^{o/}$         | $c'$ (kPa) |                       |                              |                                       |
| Loose to medium dense silty SAND             | 0.00      | 4.80  | 30                  | 0          |                       | 10                           | Yes                                   |
| Soft to firm peat                            | 4.80      | 7.00  |                     |            | 25                    | 25                           | Yes                                   |
| Medium dense to dense silty SAND/clayey SAND | 7.00      | 10.00 | 32                  | 0          |                       | 15                           | No                                    |
| Very stiff SILT CLAY                         | 10.00     | 10.80 |                     |            | 100                   | 60                           | No                                    |
| SILT with pockets of clay                    | 10.80     | 13.00 | 26                  | 5          |                       | 10                           | No                                    |
| SILT with SAND                               | 13.00     | 14.5  | 30                  | 0          |                       | 12                           | No                                    |
| Very dense                                   | 14.50     | 15.20 | 38                  | 0          |                       | 65                           | No                                    |

|            |  |  |  |  |  |  |  |
|------------|--|--|--|--|--|--|--|
| silty SAND |  |  |  |  |  |  |  |
|------------|--|--|--|--|--|--|--|

### 9.3.4.2 Bedrock layer

The grade of the rock with the ultimate skin friction and the allowable end bearing capacities from different rock layers encountered within the drilled depth of the bedrock are given in Table 11.

Table 11 – Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock at the borehole locations

| Depth (m)   |        | Grade of rock | Ultimate skin friction (kPa) | Allowable end bearing capacity (kPa) |
|-------------|--------|---------------|------------------------------|--------------------------------------|
| From        | To     |               |                              |                                      |
| <b>BH 4</b> |        |               |                              |                                      |
| -15.20      | -16.50 | Grade III/II  | 200                          | 5000                                 |
| -16.50      | -18.00 | Grade II      | 250                          | 5000                                 |
| -18.00      | -19.50 | Grade II/I    | 250                          | 6000                                 |
| -19.50      | -21.00 | Grade I       | 300                          | 6500                                 |

### 9.3.5 BH 5

#### 9.3.5.1 Subsurface layers

Following succession of layers, given in Table 12, are encountered during drilling for the boreholes. The estimated soil strength parameters together with the ultimate skin friction are also given in Table 12.

Table 12 – Strength parameters of different soil layers at the borehole locations together with the ultimate skin friction

| <b>BH 5</b> |           |    |                     |           |                        |                         |
|-------------|-----------|----|---------------------|-----------|------------------------|-------------------------|
| Layer       | Depth (m) |    | Strength parameters |           | Ultimate skin friction | Possibility of negative |
|             | From      | To | Drained             | Undrained |                        |                         |
|             |           |    |                     |           |                        |                         |

|                                       |       |       | $\phi^{o/}$ | $c'$ (kPa) | $c_u$ (kPa) | (kPa) | skin friction |
|---------------------------------------|-------|-------|-------------|------------|-------------|-------|---------------|
| Medium dense to very dense silty SAND | 0.00  | 3.30  | 34          | 0          |             | 25    | Yes           |
| Medium dense to loose silty SAND      | 3.30  | 4.50  | 31          | 0          |             | 13    | Yes           |
| Very soft to firm PEAT                | 4.50  | 10.00 |             |            | 20          | 20    | Yes           |
| Very dense silty SAND                 | 10.00 | 11.00 | 38          | 0          |             | 65    | No            |
| Firm to stiff CLAY/SILT               | 11.00 | 13.00 |             |            | 60          | 45    | No            |
| Medium dense silty SAND/sandy SILT    | 13.00 | 19.50 | 32          | 0          |             | 25    | No            |
| Very dense silty SAND                 | 19.50 | 22.40 | 38          | 0          |             | 65    | No            |

### 9.3.5.2 Bedrock layer

The grade of the rock with the ultimate skin friction and the allowable end bearing capacities from different rock layers encountered within the drilled depth of the bedrock are given in Table 13.

Table 13 – Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock at the borehole locations

| Depth (m) |        | Grade of rock | Ultimate skin friction (kPa) | Allowable end bearing capacity (kPa) |
|-----------|--------|---------------|------------------------------|--------------------------------------|
| From      | To     |               |                              |                                      |
| BH 5      |        |               |                              |                                      |
| -22.40    | -23.15 | Grade V       | 150                          | 2000                                 |
| -23.15    | -24.65 | Grade III/II  | 200                          | 4500                                 |
| -24.65    | -26.15 | Grade II      | 250                          | 5000                                 |

|        |        |         |     |      |
|--------|--------|---------|-----|------|
| -26.15 | -27.65 | Grade I | 300 | 7500 |
| -27.65 | -29.15 | Grade I | 300 | 7500 |

### 9.3.6 BH 6

#### 9.3.6.1 Subsurface layers

Following succession of layers, given in Table 14, are encountered during drilling for the boreholes. The estimated soil strength parameters together with the ultimate skin friction are also given in Table 14.

Table 14 – Strength parameters of different soil layers at the borehole locations together with the ultimate skin friction

| <b>BH 6</b>                                 |           |       |                     |            |                       |                              |                                       |
|---|-----------|-------|---------------------|------------|-----------------------|------------------------------|---------------------------------------|
| Layer                                       | Depth (m) |       | Strength parameters |            |                       | Ultimate skin friction (kPa) | Possibility of negative skin friction |
|   | From      | To    | Drained             |            | Undrained $c_u$ (kPa) |                              |                                       |
|   |           |       | $\phi^o/$           | $c'$ (kPa) |                       |                              |                                       |
| Dense silty SAND                            | 0.00      | 1.80  | 35                  | 0          |                       | 25                           | Yes                                   |
| Concrete debris                             | 1.80      | 3.40  |                     |            |                       |                              | Yes                                   |
| Loose to medium dense SAND                  | 3.40      | 5.80  | 29                  | 0          |                       | 10                           | Yes                                   |
| Dense silty GRAVEL                          | 5.80      | 6.70  | 35                  | 0          |                       | 40                           | Yes                                   |
| Very stiff CLAY/SILT                        | 6.70      | 8.50  |                     |            | 100                   | 70                           | Yes                                   |
| Firm to soft SILT/CLAY                      | 8.50      | 13.00 |                     |            | 30                    | 25                           | Yes                                   |
| Loose to medium dense silty SAND/sandy SILT | 13.00     | 18.00 | 30                  | 0          |                       | 25                           | No                                    |

|   |       |       |    |   |  |    |    |
|---|-------|-------|----|---|--|----|----|
| Dense to very dense silty SAND/sandy SILT | 18.00 | 22.10 | 36 | 0 |  | 50 | No |
|---|-------|-------|----|---|--|----|----|

### 9.3.6.2 Bedrock layer

The grade of the rock with the ultimate skin friction and the allowable end bearing capacities from different rock layers encountered within the drilled depth of the bedrock are given in Table 15.

Table 15 – Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock at the borehole locations

| Depth (m)   |        | Grade of rock | Ultimate skin friction (kPa) | Allowable end bearing capacity (kPa) |
|-------------|--------|---------------|------------------------------|--------------------------------------|
| From        | To     |               |                              |                                      |
| <b>BH 6</b> |        |               |                              |                                      |
| -22.10      | -23.60 | Grade III     | 200                          | 3000                                 |
| -23.60      | -25.10 | Grade IV      | 200                          | 3500                                 |
| -25.10      | -26.60 | Grade II/I    | 250                          | 5500                                 |
| -26.60      | -28.10 | Grade I       | 300                          | 7000                                 |

### 9.3.7 BH 7

#### 9.3.7.1 Subsurface layers

Following succession of layers, given in Table 16, are encountered during drilling for the boreholes. The estimated soil strength parameters together with the ultimate skin friction are also given in Table 16.

Table 16 – Strength parameters of different soil layers at the borehole locations together with the ultimate skin friction

| <b>BH 7</b> |           |    |                     |           |                        |                         |
|-------------|-----------|----|---------------------|-----------|------------------------|-------------------------|
| Layer       | Depth (m) |    | Strength parameters |           | Ultimate skin friction | Possibility of negative |
|             | From      | To | Drained             | Undrained |                        |                         |



|                                       |       |       | $\phi^{o/}$ | $c'$ (kPa) | $c_u$ (kPa) | (kPa) | skin friction |
|---------------------------------------|-------|-------|-------------|------------|-------------|-------|---------------|
| Medium dense to very dense silty SAND | 0.00  | 3.75  | 35          | 0          |             | 25    | No            |
| Very stiff PEAT                       | 3.75  | 4.50  |             |            | 100         | 65    | No            |
| Very stiff to hard SILT/CLAY          | 4.50  | 10.85 |             |            | 150         | 100   | No            |
| Very dense silty SAND                 | 10.85 | 11.80 | 38          | 0          |             | 65    | No            |

### 9.3.7.2 *Bedrock layer*

The grade of the rock with the ultimate skin friction and the allowable end bearing capacities from different rock layers encountered within the drilled depth of the bedrock are given in Table 17.

Table 17 – Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock at the borehole locations

| Depth (m) |        | Grade of rock | Ultimate skin friction (kPa) | Allowable end bearing capacity (kPa) |
|-----------|--------|---------------|------------------------------|--------------------------------------|
| From      | To     |               |                              |                                      |
| BH 7      |        |               |                              |                                      |
| -11.80    | -13.40 | Grade II      | 250                          | 6000                                 |
| -13.40    | -14.90 | Grade II      | 250                          | 6000                                 |
| -14.90    | -16.40 | Grade I       | 300                          | 7500                                 |
| -16.40    | -17.90 | Grade I       | 300                          | 7500                                 |

### 9.3.8 *BH 8*

#### 9.3.8.1 *Subsurface layers*

Following succession of layers, given in Table 18, are encountered during drilling for the boreholes. The estimated soil strength parameters together with the ultimate skin friction are also given in Table 18.

Table 18 – Strength parameters of different soil layers at the borehole locations together with the ultimate skin friction

| <b>BH 8</b>                        |           |       |                     |            |                       |                              |                                       |
|------------------------------------|-----------|-------|---------------------|------------|-----------------------|------------------------------|---------------------------------------|
| Layer                              | Depth (m) |       | Strength parameters |            |                       | Ultimate skin friction (kPa) | Possibility of negative skin friction |
|                                    | From      | To    | Drained             |            | Undrained $c_u$ (kPa) |                              |                                       |
|                                    |           |       | $\phi^{o/}$         | $c'$ (kPa) |                       |                              |                                       |
| Sand (Top soil)                    | 0.00      | 1.00  |                     |            |                       |                              | Yes                                   |
| Stiff to firm SILT/CLAY            | 1.00      | 3.75  |                     |            | 30                    | 25                           | Yes                                   |
| Stiff to firm PEAT                 | 3.75      | 6.35  |                     |            | 30                    | 25                           | Yes                                   |
| Firm to stiff SILT/CLAY            | 6.35      | 9.00  |                     |            | 40                    | 30                           | -                                     |
| Stiff to very stiff CLAY with sand | 9.00      | 14.00 |                     |            | 125                   | 80                           | No                                    |
| Firm CLAY/SILT                     | 14.00     | 16.00 |                     |            | 50                    | 35                           | No                                    |
| Stiff to very stiff sandy CLAY     | 16.00     | 18.60 |                     |            | 120                   | 90                           | No                                    |
| Very dense Silt with sand          | 18.60     | 23.65 | 38                  | 0          |                       | 65                           | No                                    |

### 9.3.8.2 *Bedrock layer*

The grade of the rock with the ultimate skin friction and the allowable end bearing capacities from different rock layers encountered within the drilled depth of the bedrock are given in Table 19.

Table 19 – Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock at the borehole locations

| Depth (m)   |        | Grade of rock | Ultimate skin friction (kPa) | Allowable end bearing capacity (kPa) |
|-------------|--------|---------------|------------------------------|--------------------------------------|
| From        | To     |               |                              |                                      |
| <b>BH 8</b> |        |               |                              |                                      |
| -23.65      | -24.50 | Grade V/VI    | 150                          | 2500                                 |
| -24.50      | -25.80 | Grade III     | 200                          | 3000                                 |
| -25.80      | -27.20 | Grade III/II  | 200                          | 5000                                 |
| -27.20      | -28.80 | Grade III     | 200                          | 3000                                 |
| -28.80      | -30.40 | Grade IV      | 200                          | 3000                                 |
| -30.40      | -32.00 | Grade IV      | 200                          | 3000                                 |
| -32.00      | -33.60 | Grade IV      | 200                          | 3000                                 |

### 9.3.9 BH 9

#### 9.3.9.1 Subsurface layers

Following succession of layers, given in Table 20, are encountered during drilling for the boreholes. The estimated soil strength parameters together with the ultimate skin friction are also given in Table 20.

Table 20 – Strength parameters of different soil layers at the borehole locations together with the ultimate skin friction

| <b>BH 9</b>                                       |           |      |                     |            |                       |                              |                                       |
|---|-----------|------|---------------------|------------|-----------------------|------------------------------|---------------------------------------|
| Layer   | Depth (m) |      | Strength parameters |            |                       | Ultimate skin friction (kPa) | Possibility of negative skin friction |
|   | From      | To   | Drained             |            | Undrained $c_u$ (kPa) |                              |                                       |
|   |           |      | $\phi^\circ$        | $c'$ (kPa) |                       |                              |                                       |
| Medium dense silty/clayey GRAVEL (Lateritic fill) | 0.00      | 4.00 | 30                  | 5          |                       | 15                           | Yes                                   |

|                                |       |       |    |   |     |    |     |
|--------------------------------|-------|-------|----|---|-----|----|-----|
| Medium dense silty SAND        | 4.00  | 4.25  | 30 | 0 |     | 10 | Yes |
| Firm to stiff Sandy CLAY       | 4.25  | 7.00  |    |   | 40  | 30 | Yes |
| Stiff to very stiff CLAY       | 7.00  | 11.00 |    |   | 100 | 70 | -   |
| Firm sandy CLAY/CLAY           | 11.00 | 17.00 |    |   | 30  | 25 | -   |
| Dense to very dense silty SAND | 17.00 | 21.00 | 35 | 0 |     | 50 | No  |

### 9.3.9.2 Bedrock layer

The grade of the rock with the ultimate skin friction and the allowable end bearing capacities from different rock layers encountered within the drilled depth of the bedrock are given in Table 21.

Table 21 – Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock at the borehole locations

| Depth (m) |        | Grade of rock | Ultimate skin friction (kPa) | Allowable end bearing capacity (kPa) |
|-----------|--------|---------------|------------------------------|--------------------------------------|
| From      | To     |               |                              |                                      |
| BH 9      |        |               |                              |                                      |
| -21.00    | -23.30 | Grade V       | 150                          | 2000                                 |
| -23.30    | -24.80 | Grade V       | 150                          | 2000                                 |
| -24.80    | -26.30 | Grade V       | 150                          | 2000                                 |
| -26.30    | -27.80 | Grade V       | 150                          | 2000                                 |
| -27.80    | -29.30 | Grade V       | 150                          | 2000                                 |
| -29.30    | -30.80 | Grade V/IV    | 200                          | 2500                                 |
| -30.80    | -32.30 | Grade V       | 150                          | 2500                                 |
| -32.30    | -33.80 | Grade V       | 150                          | 2500                                 |

|        |        |          |     |      |
|--------|--------|----------|-----|------|
| -33.80 | -35.30 | Grade IV | 200 | 2500 |
| -35.30 | -36.80 | Grade IV | 200 | 2500 |
| -36.80 | -38.30 | Grade IV | 200 | 2500 |
| -38.30 | -39.80 | Grade IV | 200 | 2500 |

### 9.3.10BH 10

#### 9.3.10.1 Subsurface layers

Following succession of layers, given in Table 22, are encountered during drilling for the boreholes. The estimated soil strength parameters together with the ultimate skin friction are also given in Table 22.

Table 22 – Strength parameters of different soil layers at the borehole locations together with the ultimate skin friction

| <b>BH 10</b>   |           |       |                     |            |                       |                              |                                       |  |
|--|-----------|-------|---------------------|------------|-----------------------|------------------------------|---------------------------------------|--|
| Layer  | Depth (m) |       | Strength parameters |            |                       | Ultimate skin friction (kPa) | Possibility of negative skin friction |  |
|  | From      | To    | Drained             |            | Undrained $c_u$ (kPa) |                              |                                       |  |
|  |           |       | $\phi^{o/}$         | $c' (kPa)$ |                       |                              |                                       |  |
| Medium dense silty SAND                                      | 0.00      | 2.75  | 30                  |            |                       | 10                           | No                                    |  |
| Medium dense to dense silty SAND/SILT/sandy SILT/clayey SILT | 2.75      | 10.0  | 33                  |            |                       | 20                           | No                                    |  |
| Firm to very stiff CLAY/SILT                                 | 10.0      | 15.0  |                     |            | 75                    | 50                           | No                                    |  |
| Very dense SILT  | 15.0      | 18.70 | 38                  | 0          |                       | 65                           | No                                    |  |

#### 9.3.10.2 Bedrock layer

The grade of the rock with the ultimate skin friction and the allowable end bearing capacities from different rock layers encountered within the drilled depth of the bedrock are given in Table 23.

Table 23 – Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock at the borehole locations

| Depth (m)    |        | Grade of rock | Ultimate skin friction (kPa) | Allowable end bearing capacity (kPa) |
|--------------|--------|---------------|------------------------------|--------------------------------------|
| From         | To     |               |                              |                                      |
| <b>BH 10</b> |        |               |                              |                                      |
| -20.20       | -21.70 | Grade V       | 150                          | 2000                                 |
| -21.70       | -23.20 | Grade V/VI    | 200                          | 2500                                 |
| -23.20       | -24.70 | Grade V/VI    | 200                          | 2500                                 |
| -24.70       | -26.20 | Grade VI      | 200                          | 2500                                 |
| -26.20       | -27.20 | Grade VI      | 200                          | 2500                                 |
| -27.20       | -28.70 | Grade V       | 200                          | 2500                                 |

### 9.3.11 BH 11

#### 9.3.11.1 Subsurface layers

Following succession of layers, given in Table 24, are encountered during drilling for the boreholes. The estimated soil strength parameters together with the ultimate skin friction are also given in Table 24.

Table 24 – Strength parameters of different soil layers at the borehole locations together with the ultimate skin friction

| <b>BH 11</b>            |           |      |                     |            |                       |                              |                                       |
|-------------------------|-----------|------|---------------------|------------|-----------------------|------------------------------|---------------------------------------|
| Layer                   | Depth (m) |      | Strength parameters |            |                       | Ultimate skin friction (kPa) | Possibility of negative skin friction |
|                         | From      | To   | Drained             |            | Undrained $c_u$ (kPa) |                              |                                       |
|                         |           |      | $\phi^{o/}$         | $c'$ (kPa) |                       |                              |                                       |
| Medium dense silty SAND | 0.00      | 1.70 | 31                  | 0          |                       | 12                           | Yes                                   |

|   |       |       |    |   |    |    |     |
|---|-------|-------|----|---|----|----|-----|
| (Lateritic fill)  |       |       |    |   |    |    |     |
| Loose to medium dense SAND with pockets of organic matter | 1.70  | 6.00  | 29 | 0 |    | 10 | Yes |
| Firm PEAT   | 6.00  | 8.00  |    |   | 25 | 25 | Yes |
| Firm to stiff sandy CLAY                                  | 8.00  | 11.00 |    |   | 75 | 50 | No  |
| Firm CLAY/ sandy CLAY                                     | 11.00 | 14.00 |    |   | 50 | 40 | No  |
| Medium dense to dense sandy SILT                          | 14.00 | 16.50 | 33 | 0 |    | 25 | No  |
| Very dense sandy SILT                                     | 16.50 | 21.75 | 38 | 0 |    | 65 | No  |

### 9.3.11.2 Bedrock layer

The grade of the rock with the ultimate skin friction and the allowable end bearing capacities from different rock layers encountered within the drilled depth of the bedrock are given in Table 25.

Table 25 – Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock at the borehole locations

| Depth (m) |        | Grade of rock | Ultimate skin friction (kPa) | Allowable end bearing capacity (kPa) |
|-----------|--------|---------------|------------------------------|--------------------------------------|
| From      | To     |               |                              |                                      |
| BH 11     |        |               |                              |                                      |
| -21.75    | -23.25 | Grade IV      | 200                          | 2500                                 |
| -23.25    | -24.75 | Grade IV      | 200                          | 2500                                 |
| -24.75    | -26.25 | Grade IV      | 200                          | 2500                                 |
| -26.25    | -27.75 | Grade IV/ III | 200                          | 2500                                 |
| -27.75    | -29.25 | Grade III     | 200                          | 3000                                 |

|        |        |              |     |      |
|--------|--------|--------------|-----|------|
| -29.25 | -30.75 | Grade III    | 200 | 3000 |
| -30.75 | -31.75 | Grade III/II | 200 | 5000 |

### 9.3.12BH 12

#### 9.3.12.1 Subsurface layers

Following succession of layers, given in Table 26, are encountered during drilling for the boreholes. The estimated soil strength parameters together with the ultimate skin friction are also given in Table 26.

Table 26 – Strength parameters of different soil layers at the borehole locations together with the ultimate skin friction

| <b>BH 12</b>                            |           |       |                     |            |                       |                              |                                       |
|---|-----------|-------|---------------------|------------|-----------------------|------------------------------|---------------------------------------|
| Layer                                   | Depth (m) |       | Strength parameters |            |                       | Ultimate skin friction (kPa) | Possibility of negative skin friction |
|   | From      | To    | Drained             |            | Undrained $c_u$ (kPa) |                              |                                       |
|   |           |       | $\phi^{o'}$         | $c'$ (kPa) |                       |                              |                                       |
| Medium dense to dense                   | 0.00      | 2.20  | 34                  | 0          |                       | 20                           | Yes                                   |
| Soft to firm PEAT                       | 2.20      | 6.80  |                     |            | 20                    | 20                           | Yes                                   |
| Medium dense SILT with organic matter   | 6.80      | 7.60  | 28                  | 0          |                       | 10                           | Yes                                   |
| Firm PEAT                               | 7.60      | 8.60  |                     |            | 50                    | 40                           | Yes                                   |
| Very stiff to hard SILT/CLAY/sandy CLAY | 8.60      | 12.50 |                     |            | 150                   | 90                           | -                                     |
| Firm CLAY with organic matter           | 12.50     | 18.50 |                     |            | 25                    | 25                           | -                                     |
| Dense to very dense silty SAND          | 18.50     | 21.00 | 35                  | 0          |                       | 60                           | No                                    |



### 9.3.12.2 Bedrock layer

The grade of the rock with the ultimate skin friction and the allowable end bearing capacities from different rock layers encountered within the drilled depth of the bedrock are given in Table 27.

Table 27 – Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock at the borehole locations

| Depth (m)    |        | Grade of rock | Ultimate skin friction (kPa) | Allowable end bearing capacity (kPa) |
|--------------|--------|---------------|------------------------------|--------------------------------------|
| From         | To     |               |                              |                                      |
| <b>BH 12</b> |        |               |                              |                                      |
| -21.00       | -22.50 | Grade V/IV    | 150                          | 2000                                 |
| -22.50       | -24.00 | Grade IV      | 200                          | 2500                                 |
| -24.00       | -25.50 | Grade IV      | 200                          | 2500                                 |
| -25.50       | -27.00 | Grade V/VI    | 150                          | 2500                                 |
| -27.00       | -28.50 | Grade III     | 200                          | 3000                                 |
| -28.50       | -30.00 | Grade II/I    | 250                          | 6000                                 |

### 9.3.13 BH 13

#### 9.3.13.1 Subsurface layers

Following succession of layers, given in Table 28, are encountered during drilling for the boreholes. The estimated soil strength parameters together with the ultimate skin friction are also given in Table 28.

Table 28 – Strength parameters of different soil layers at the borehole locations together with the ultimate skin friction

| <b>BH 13</b> |           |      |             |                     |                       |   |                              |                                       |
|--------------|-----------|------|-------------|---------------------|-----------------------|---|------------------------------|---------------------------------------|
| Layer        | Depth (m) |      |             | Strength parameters |                       |   | Ultimate skin friction (kPa) | Possibility of negative skin friction |
|              | From      | To   | Drained     |                     | Undrained $c_u$ (kPa) |   |                              |                                       |
|              |           |      | $\phi^{o/}$ | $c'$ (kPa)          |                       |   |                              |                                       |
| Loose silty  | 0.00      | 3.00 | 28          | 0                   |                       | 5 | Yes                          |                                       |

|   |       |       |    |   |     |    |     |
|---|-------|-------|----|---|-----|----|-----|
| SAND  |       |       |    |   |     |    |     |
| Soft to firm<br>PEAT                            | 3.00  | 9.60  |    |   | 20  | 20 | Yes |
| Very stiff<br>SILT/CLAY                         | 9.60  | 12.00 |    |   | 125 | 75 | Yes |
| Stiff<br>CLAY/CLAY<br>with<br>organic<br>matter | 12.00 | 19.75 |    |   | 30  | 25 | Yes |
| Very dense<br>silty SAND                        | 19.75 | 21.50 | 37 | 0 |     | 60 | No  |

### 9.3.13.2 Bedrock layer

The grade of the rock with the ultimate skin friction and the allowable end bearing capacities from different rock layers encountered within the drilled depth of the bedrock are given in Table 29.

Table 29 – Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock at the borehole locations

| Depth (m) |        | Grade of rock | Ultimate skin friction (kPa) | Allowable end bearing capacity (kPa) |
|-----------|--------|---------------|------------------------------|--------------------------------------|
| From      | To     |               |                              |                                      |
| BH 13     |        |               |                              |                                      |
| -21.50    | -23.00 | Grade IV      | 200                          | 2500                                 |
| -23.00    | -24.00 | Grade III     | 200                          | 3000                                 |
| -24.00    | -25.00 | Grade III     | 200                          | 3000                                 |
| -25.00    | -26.00 | Grade III     | 200                          | 3000                                 |
| -26.00    | -27.50 | Grade II/I    | 300                          | 6500                                 |

### 9.3.14BH 14

#### 9.3.14.1 Subsurface layers

Following succession of layers, given in Table 30, are encountered during drilling for the boreholes. The estimated soil strength parameters together with the ultimate skin friction are also given in Table 30.

Table 30 – Strength parameters of different soil layers at the borehole locations together with the ultimate skin friction

| BH 14                                      |           |       |                     |            |                       |     |                              |                                       |
|--|-----------|-------|---------------------|------------|-----------------------|-----|------------------------------|---------------------------------------|
| Layer                                      | Depth (m) |       | Strength parameters |            |                       |     | Ultimate skin friction (kPa) | Possibility of negative skin friction |
|  | From      | To    | Drained             |            | Undrained $c_u$ (kPa) |     |                              |                                       |
|  |           |       | $\phi^{o/}$         | $c'$ (kPa) |                       |     |                              |                                       |
| Dense silty SAND                           | 0.00      | 1.70  | 35                  | 0          | 35                    | 30  | Yes                          |                                       |
| Soft to firm CLAY with organic matter/PEAT | 1.70      | 3.35  |                     |            | 30                    | 25  | Yes                          |                                       |
| Very dense silty Gravel                    | 3.35      | 5.00  | 38                  | 0          |                       | 65  | No                           |                                       |
| Stiff to hard SILT/CLAY                    | 5.00      | 11.00 |                     |            | 150                   | 100 | No                           |                                       |
| Medium dense to dense SILT                 | 11.00     | 15.60 | 35                  | 0          |                       | 30  | No                           |                                       |
| Very dense SILT                            | 15.60     | 22.75 | 38                  | 0          |                       | 65  | No                           |                                       |

#### 9.3.14.2 Bedrock layer

The grade of the rock with the ultimate skin friction and the allowable end bearing capacities from different rock layers encountered within the drilled depth of the bedrock are given in Table 31.

Table 31 – Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock at the borehole locations

| Depth (m)    |        | Grade of rock | Ultimate skin friction (kPa) | Allowable end bearing capacity (kPa) |
|--------------|--------|---------------|------------------------------|--------------------------------------|
| From         | To     |               |                              |                                      |
| <b>BH 14</b> |        |               |                              |                                      |
| -22.75       | -24.25 | Grade IV/III  | 200                          | 3000                                 |
| -24.25       | -25.75 | Grade III     | 200                          | 3000                                 |
| -25.75       | -27.25 | Grade III/II  | 200                          | 5000                                 |
| -27.25       | -28.75 | Grade III     | 200                          | 4000                                 |
| -28.75       | -30.25 | Grade III     | 200                          | 3000                                 |
| -30.25       | -31.75 | Grade III     | 200                          | 3500                                 |
| -31.75       | -32.75 | Grade III     | 200                          | 3000                                 |

### 9.3.15BH 15

#### 9.3.15.1 Subsurface layers

Following succession of layers, given in Table 32, are encountered during drilling for the boreholes. The estimated soil strength parameters together with the ultimate skin friction are also given in Table 32.

Table 32 – Strength parameters of different soil layers at the borehole locations together with the ultimate skin friction

| <b>BH 15</b>                      |           |      |                     |            |                       |                              |                                       |  |
|-----------------------------------|-----------|------|---------------------|------------|-----------------------|------------------------------|---------------------------------------|--|
| Layer                             | Depth (m) |      | Strength parameters |            |                       | Ultimate skin friction (kPa) | Possibility of negative skin friction |  |
|                                   | From      | To   | Drained             |            | Undrained $c_u$ (kPa) |                              |                                       |  |
|                                   |           |      | $\phi^{0/}$         | $c'$ (kPa) |                       |                              |                                       |  |
| Loose silty SAND (Lateritic fill) | 0.00      | 3.50 | 28                  | 0          |                       | 5                            | Yes                                   |  |
| Soft PEAT                         | 3.50      | 4.75 |                     |            | 15                    | 15                           | Yes                                   |  |

|   |       |       |    |   |     |    |    |
|---|-------|-------|----|---|-----|----|----|
| Medium dense to dense SAND/SILT with organic matter | 4.75  | 6.90  | 34 | 0 |     | 30 | No |
| Medium dense SAND with little organic matter        | 6.90  | 8.50  | 30 | 0 |     | 15 | No |
| Stiff gravelly CLAY                                 | 8.50  | 11.00 |    |   | 100 | 75 | No |
| Soft to firm SILT/CLAY                              | 11.00 | 19.50 |    |   | 25  | 25 | No |
| Firm to stiff CLAY                                  | 19.50 | 23.00 |    |   | 60  | 40 | No |
| Very dense silty SAND                               | 23.00 | 24.10 | 38 | 0 |     | 65 | No |

### 9.3.15.2 Bedrock layer

The grade of the rock with the ultimate skin friction and the allowable end bearing capacities from different rock layers encountered within the drilled depth of the bedrock are given in Table 33.

Table 33 – Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock at the borehole locations

| Depth (m)    |        | Grade of rock | Ultimate skin friction (kPa) | Allowable end bearing capacity (kPa) |
|--------------|--------|---------------|------------------------------|--------------------------------------|
| From         | To     |               |                              |                                      |
| <b>BH 15</b> |        |               |                              |                                      |
| - 24.10      | -25.60 | Grade V/VI    | 150                          | 2000                                 |
| - 25.60      | -27.10 | Grade V/VI    | 150                          | 2000                                 |
| - 27.10      | -28.60 | Grade III     | 200                          | 250                                  |

|            |        |              |     |      |
|------------|--------|--------------|-----|------|
| -<br>28.60 | -30.10 | Grade III    | 200 | 3000 |
| -<br>30.10 | -31.55 | Grade III    | 200 | 4000 |
| -<br>31.55 | -33.05 | Grade III/II | 200 | 4000 |
| -<br>33.05 | -34.10 | Grade III    | 200 | 4000 |

### 9.3.16BH 16

#### 9.3.16.1 Subsurface layers

Following succession of layers, given in Table 34, are encountered during drilling for the boreholes. The estimated soil strength parameters together with the ultimate skin friction are also given in Table 34.

Table 34 – Strength parameters of different soil layers at the borehole locations together with the ultimate skin friction

| <b>BH 16</b>                       |           |       |                     |            |                       |                              |                                       |
|------------------------------------|-----------|-------|---------------------|------------|-----------------------|------------------------------|---------------------------------------|
| Layer                              | Depth (m) |       | Strength parameters |            |                       | Ultimate skin friction (kPa) | Possibility of negative skin friction |
|                                    | From      | To    | Drained             |            | Undrained $c_u$ (kPa) |                              |                                       |
|                                    |           |       | $\phi^{o/}$         | $c'$ (kPa) |                       |                              |                                       |
| Loose GRAVEL (lateritic fill)      | 0.00      | 9.00  | 26                  | 5          |                       | 8                            |                                       |
| Medium dense SAND                  | 9.00      | 16.00 | 32                  | 0          |                       | 30                           |                                       |
| Stiff sandy CLAY                   | 16.00     | 19.00 |                     |            | 75                    | 50                           |                                       |
| Soft to firm CLAY                  | 19.00     | 23.00 |                     |            | 20                    | 20                           |                                       |
| Firm PEAT/CLAY with organic matter | 23.00     | 25.00 |                     |            | 40                    | 30                           |                                       |

|                                       |       |       |    |   |  |    |  |
|---------------------------------------|-------|-------|----|---|--|----|--|
| Medium dense to dense SILT/silty SAND | 25.00 | 30.50 | 32 | 0 |  | 40 |  |
| Very dense silty SAND                 | 30.50 | 31.50 | 38 | 0 |  | 65 |  |

### 9.3.16.2 Bedrock layer

The grade of the rock with the ultimate skin friction and the allowable end bearing capacities from different rock layers encountered within the drilled depth of the bedrock are given in Table 35.

Table 35 – Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock at the borehole locations

| Depth (m) |        | Grade of rock | Ultimate skin friction (kPa) | Allowable end bearing capacity (kPa) |
|-----------|--------|---------------|------------------------------|--------------------------------------|
| From      | To     |               |                              |                                      |
| BH 16     |        |               |                              |                                      |
| -31.50    | -33.00 | Grade V       | 0                            | 2000                                 |
| -33.00    | -34.50 | Grade III/II  | 88                           | 3500                                 |
| -34.50    | -36.00 | Grade III     | 82                           | 4000                                 |
| -36.00    | -37.50 | Grade IV      | 30                           | 3000                                 |
| -37.50    | -38.90 | Grade II      | 94                           | 5500                                 |

### 9.3.17 BH 17

#### 9.3.17.1 Subsurface layers

Following succession of layers, given in Table 36, are encountered during drilling for the boreholes. The estimated soil strength parameters together with the ultimate skin friction are also given in Table 36.

Table 36 – Strength parameters of different soil layers at the borehole locations together with the ultimate skin friction

| <b>BH 17</b>  |           |       |                     |            |                       |                              |                                       |
|---|-----------|-------|---------------------|------------|-----------------------|------------------------------|---------------------------------------|
| Layer   | Depth (m) |       | Strength parameters |            |                       | Ultimate skin friction (kPa) | Possibility of negative skin friction |
|   | From      | To    | Drained             |            | Undrained $c_u$ (kPa) |                              |                                       |
|   |           |       | $\phi^{o'}$         | $c'$ (kPa) |                       |                              |                                       |
| Medium dense silty SAND/sandy SILT (lateritic fill) | 0.00      | 5.80  | 29                  | 0          |                       | 12                           | Yes                                   |
| Firm CLAY   | 5.80      | 8.20  |                     |            | 40                    | 30                           | Yes                                   |
| Medium dense clayey SAND/SAND                       | 8.20      | 13.00 | 30                  | 0          |                       | 20                           | Yes                                   |
| Loose SAND  | 13.00     | 13.50 | 28                  | 0          |                       | 10                           | Yes                                   |
| Soft to firm PEAT                                   | 13.50     | 15.60 |                     |            | 20                    | 20                           | Yes                                   |
| Stiff CLAY  | 15.60     | 18.00 |                     |            | 80                    | 60                           | Yes                                   |
| Firm PEAT   | 18.00     | 19.50 |                     |            | 25                    | 25                           | Yes                                   |
| Stiff sandy CLAY                                    | 19.50     | 22.00 |                     |            | 50                    | 40                           | -                                     |
| Firm organic SILT                                   | 22.00     | 24.80 |                     |            | 30                    | 25                           | -                                     |
| Medium dense SAND with organic matter               | 24.80     | 25.00 | 32                  | 0          |                       | 30                           | No                                    |
| Very dense SAND                                     | 25.00     | 32.85 | 38                  | 0          |                       | 65                           | No                                    |



### 9.3.17.2 Bedrock layer

The grade of the rock with the ultimate skin friction and the allowable end bearing capacities from different rock layers encountered within the drilled depth of the bedrock are given in Table 37.

Table 37 – Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock at the borehole locations

| Depth (m)    |        | Grade of rock | Ultimate skin friction (kPa) | Allowable end bearing capacity (kPa) |
|--------------|--------|---------------|------------------------------|--------------------------------------|
| From         | To     |               |                              |                                      |
| <b>BH 17</b> |        |               |                              |                                      |
| -32.85       | -34.35 | Grade IV      | 40                           | 2500                                 |
| -34.35       | -35.10 | Grade V/IV    | 20                           | 2500                                 |
| -35.10       | -36.10 | Grade III     | 48                           | 3000                                 |
| -36.10       | -37.40 | Grade III     | 50                           | 3500                                 |
| -37.40       | -38.90 | Grade II      | 98                           | 6000                                 |

### 9.3.18 BH 18

#### 9.3.18.1 Subsurface layers

Following succession of layers, given in Table 38, are encountered during drilling for the boreholes. The estimated soil strength parameters together with the ultimate skin friction are also given in Table 38.

Table 38 – Strength parameters of different soil layers at the borehole locations together with the ultimate skin friction

| <b>BH 18</b>             |           |      |                     |            |                       |                              |                                       |
|--------------------------|-----------|------|---------------------|------------|-----------------------|------------------------------|---------------------------------------|
| Layer                    | Depth (m) |      | Strength parameters |            |                       | Ultimate skin friction (kPa) | Possibility of negative skin friction |
|                          | From      | To   | Drained             |            | Undrained $c_u$ (kPa) |                              |                                       |
|                          |           |      | $\phi^{o/}$         | $c'$ (kPa) |                       |                              |                                       |
| Very loose clayey Gravel | 0.00      | 2.00 | 24                  | 5          |                       | 5                            | Yes                                   |

|  |       |       |    |   |     |    |     |
|--|-------|-------|----|---|-----|----|-----|
| Soft CLAY/SILT                               | 2.00  | 3.00  |    |   | 15  | 15 | Yes |
| Loose silty SAND                             | 3.00  | 4.00  | 27 | 0 |     | 5  | Yes |
| Soft PEAT                                    | 4.00  | 9.00  |    |   | 15  | 15 | Yes |
| Medium dense SAND with little organic matter | 9.00  | 11.00 | 29 | 0 |     | 15 | No  |
| Very stiff CLAY                              | 11.00 | 13.00 |    |   | 100 | 70 | No  |
| Firm to stiff CLAY/organic SILT              | 13.00 | 14.50 |    |   | 35  | 30 | No  |
| Medium dense SAND                            | 14.50 | 16.00 | 30 | 0 |     | 20 | No  |
| Loose SILT/Silty SAND                        | 16.00 | 23.70 | 27 | 0 |     | 7  | No  |
| Medium dense to dense silty SAND             | 23.70 | 28.20 | 33 | 0 |     | 30 | No  |

### 9.3.18.2 Bedrock layer

The grade of the rock with the ultimate skin friction and the allowable end bearing capacities from different rock layers encountered within the drilled depth of the bedrock are given in Table 39.

Table 39 – Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock at the borehole locations

| Depth (m) |        | Grade of rock | Ultimate skin friction (kPa) | Allowable end bearing capacity (kPa) |
|-----------|--------|---------------|------------------------------|--------------------------------------|
| From      | To     |               |                              |                                      |
| BH 18     |        |               |                              |                                      |
| -28.20    | -30.50 | Grade IV      | 200                          | 2500                                 |
| -30.50    | -31.70 | Grade IV      | 200                          | 2500                                 |

|        |        |           |     |      |
|--------|--------|-----------|-----|------|
| -31.70 | -33.20 | Grade IV  | 200 | 2500 |
| -33.20 | -35.00 | Grade IV  | 200 | 2500 |
| -35.00 | -36.50 | Grade IV  | 200 | 2500 |
| -36.50 | -37.50 | Grade IV  | 200 | 2500 |
| -37.50 | -39.00 | Grade III | 200 | 3000 |
| -39.00 | -40.00 | Grade III | 200 | 3000 |

### 9.3.19BH 19

#### 9.3.19.1 Subsurface layers

Following succession of layers, given in Table 40, are encountered during drilling for the boreholes. The estimated soil strength parameters together with the ultimate skin friction are also given in Table 40.

Table 40 – Strength parameters of different soil layers at the borehole locations together with the ultimate skin friction

| <b>BH 19</b>                                       |           |       |                     |            |                       |                              |                                       |
|--|-----------|-------|---------------------|------------|-----------------------|------------------------------|---------------------------------------|
| Layer  | Depth (m) |       | Strength parameters |            |                       | Ultimate skin friction (kPa) | Possibility of negative skin friction |
|  | From      | To    | Drained             |            | Undrained $c_u$ (kPa) |                              |                                       |
|  |           |       | $\phi^{o/}$         | $c'$ (kPa) |                       |                              |                                       |
| Medium dense silty GRAVEL/SAND with garbage (Fill) | 0.00      | 2.15  | 28                  | 0          |                       | 10                           | Yes                                   |
| Firm SILT/CLAY                                     | 2.15      | 5.40  |                     |            | 25                    | 25                           | Yes                                   |
| Firm PEAT  | 5.40      | 9.00  |                     |            | 20                    | 20                           | Yes                                   |
| Very soft PEAT                                     | 9.00      | 11.00 |                     |            | 10                    | 10                           | Yes                                   |
| Very dense silty SAND                              | 11.00     | 12.80 | 38                  | 0          |                       | 65                           | Yes                                   |
| Firm to stiff PEAT                                 | 12.80     | 18.00 |                     |            | 35                    | 30                           | Yes                                   |

|                                     |       |       |    |   |  |    |    |
|-------------------------------------|-------|-------|----|---|--|----|----|
| Loose sandy SILT/silty SAND         | 18.00 | 22.00 | 27 | 0 |  | 8  | No |
| Dense to very dense silty SAND/SAND | 22.00 | 26.00 | 35 | 0 |  | 50 | No |

### 9.3.19.2 Bedrock layer

The grade of the rock with the ultimate skin friction and the allowable end bearing capacities from different rock layers encountered within the drilled depth of the bedrock are given in Table 41.

Table 41 – Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock at the borehole locations

| Depth (m) |        | Grade of rock | Ultimate skin friction (kPa) | Allowable end bearing capacity (kPa) |
|-----------|--------|---------------|------------------------------|--------------------------------------|
| From      | To     |               |                              |                                      |
| BH 19     |        |               |                              |                                      |
| -26.00    | -26.50 | Grade V       | 100                          | 2000                                 |
| -26.50    | -28.00 | Grade V       | 100                          | 2000                                 |
| -28.00    | -30.40 | Grade V       | 100                          | 2000                                 |
| -30.40    | -32.00 | Grade V       | 100                          | 2000                                 |
| -32.00    | -34.00 | Grade V       | 100                          | 2000                                 |
| -34.00    | -35.50 | Grade V       | 100                          | 2000                                 |
| -35.50    | -36.50 | Grade V       | 100                          | 2000                                 |
| -36.50    | -38.00 | Grade V       | 100                          | 2000                                 |

### 9.3.20 BH 20

#### 9.3.20.1 Subsurface layers

Following succession of layers, given in Table 42, are encountered during drilling for the boreholes. The estimated soil strength parameters together with the ultimate skin friction are also given in Table 42.

Table 42 – Strength parameters of different soil layers at the borehole locations together with the ultimate skin friction

| <b>BH 20</b>                        |           |       |                     |            |                       |                              |                                       |
|-------------------------------------|-----------|-------|---------------------|------------|-----------------------|------------------------------|---------------------------------------|
| Layer                               | Depth (m) |       | Strength parameters |            |                       | Ultimate skin friction (kPa) | Possibility of negative skin friction |
|                                     | From      | To    | Drained             |            | Undrained $c_u$ (kPa) |                              |                                       |
|                                     |           |       | $\phi^{o'}$         | $c'$ (kPa) |                       |                              |                                       |
| Loose silty GRAVEL (Lateritic fill) | 0.00      | 3.20  | 26                  | 5          |                       | 5                            | Yes                                   |
| Medium dense GRAVEL                 | 3.20      | 10.65 | 30                  | 0          |                       | 12                           | Yes                                   |
| Firm gravelly CLAY/CLAY             | 10.65     | 17.00 |                     |            | 25                    | 25                           | Yes                                   |
| Medium dense SAND                   | 17.00     | 19.00 | 32                  | 0          |                       | 25                           | No                                    |
| Loose silty SAND                    | 19.00     | 20.50 | 29                  | 0          |                       | 12                           | No                                    |
| Very dense silty SAND               | 20.50     | 23.00 | 38                  | 0          |                       | 65                           | No                                    |

### 9.3.20.2 Bedrock layer

The grade of the rock with the ultimate skin friction and the allowable end bearing capacities from different rock layers encountered within the drilled depth of the bedrock are given in Table 43.

Table 43 – Grade of the bedrock with the recommended ultimate skin friction and allowable end bearing capacity of the rock at the borehole locations

| Depth (m)    |        | Grade of rock | Ultimate skin friction (kPa) | Allowable end bearing capacity (kPa) |
|--------------|--------|---------------|------------------------------|--------------------------------------|
| From         | To     |               |                              |                                      |
| <b>BH 20</b> |        |               |                              |                                      |
| -23.00       | -24.50 | Grade V       | 150                          | 2000                                 |

|        |        |              |     |      |
|--------|--------|--------------|-----|------|
| -24.50 | -26.30 | Grade V      | 150 | 2000 |
| -26.30 | -27.80 | Grade IV     | 200 | 2500 |
| -27.80 | -29.30 | Grade IV     | 200 | 2500 |
| -29.30 | -30.80 | Grade IV/III | 200 | 2500 |
| -30.80 | -32.30 | Grade IV     | 200 | 2500 |
| -32.30 | -33.80 | Grade III/II | 200 | 3500 |
| -33.80 | -35.30 | Grade III    | 200 | 3500 |
| -35.30 | -36.30 | Grade III    | 200 | 3500 |

#### 9.4 REFERENCE

1. Bieniawski, Z.T. (1989). *Engineering Rock Mass Classification*. John Wiley, New York,
2. Bowles, J. E., "Foundation analysis and design", 1996, 5<sup>th</sup> Edition. McGraw-Hill
3. Hong Kong Guidelines, "Foundation design and construction", 2006, Geotechnical engineering office, Civil Engineering and Development Department, The Government of the Hong Kong Special Administrative Region.
4. ICTAD/DEV/15, 1997, Guidelines for interpretation of site investigation data for estimating the carrying capacity of single piles for design of bored and cast in-situ reinforced concrete piles, Institute for Construction Training and Development, Ministry of Housing, Construction and Public Utilities, Colombo, Sri Lanka.
5. Tomlinson, M. J., *Pile Design and Construction Practices*, 1994, Fourth Edition, E & FN Spon, London.

**APPENDIX I**

---

**Figures**



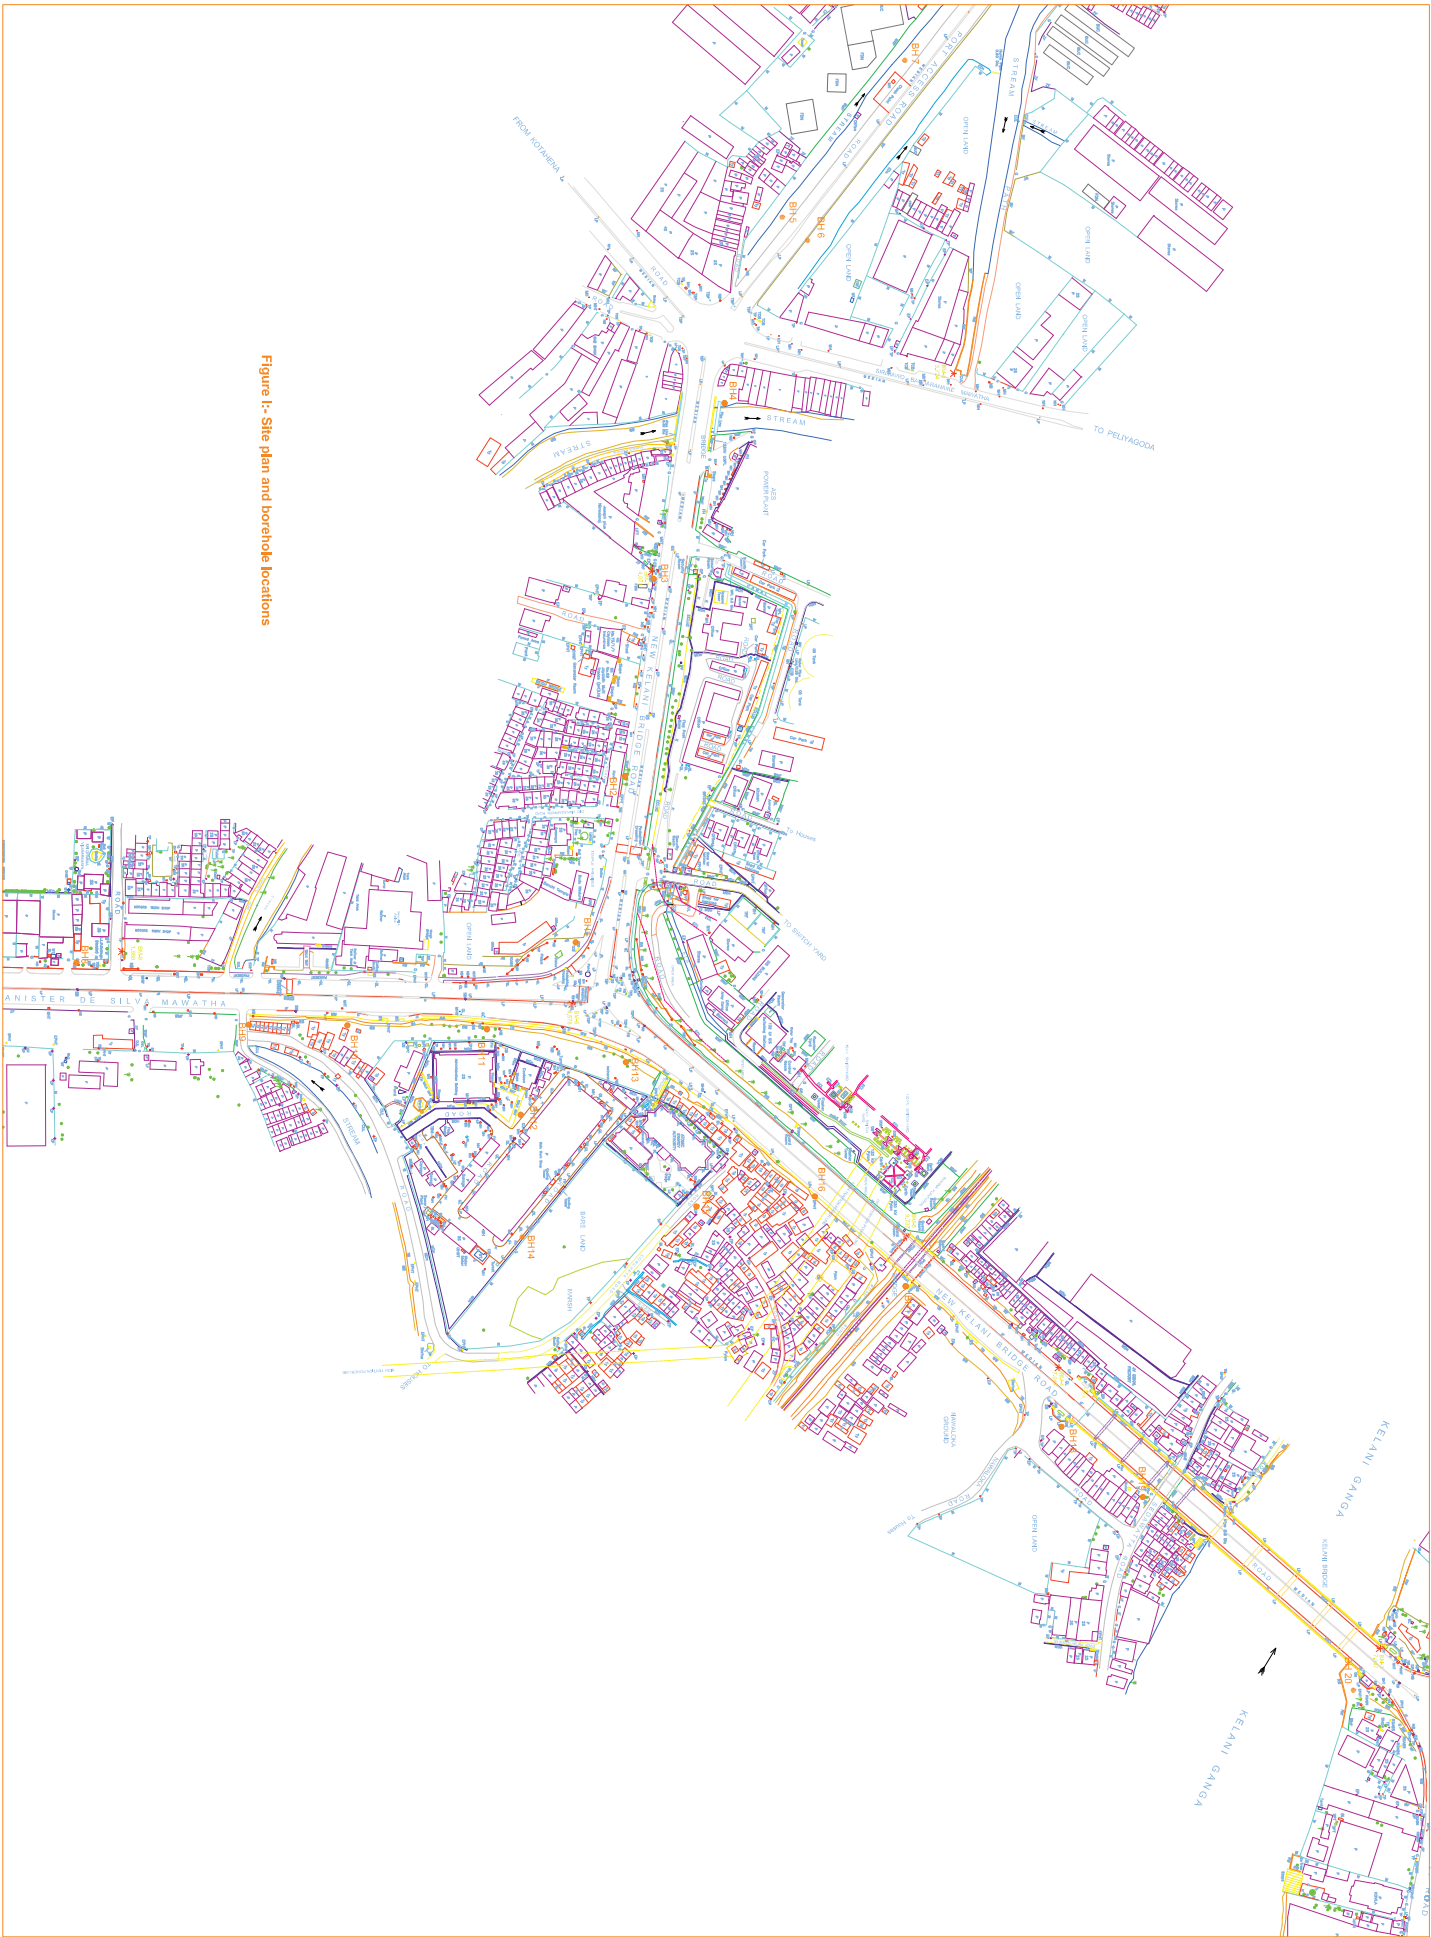


Figure 1:- Site plan and borehole locations

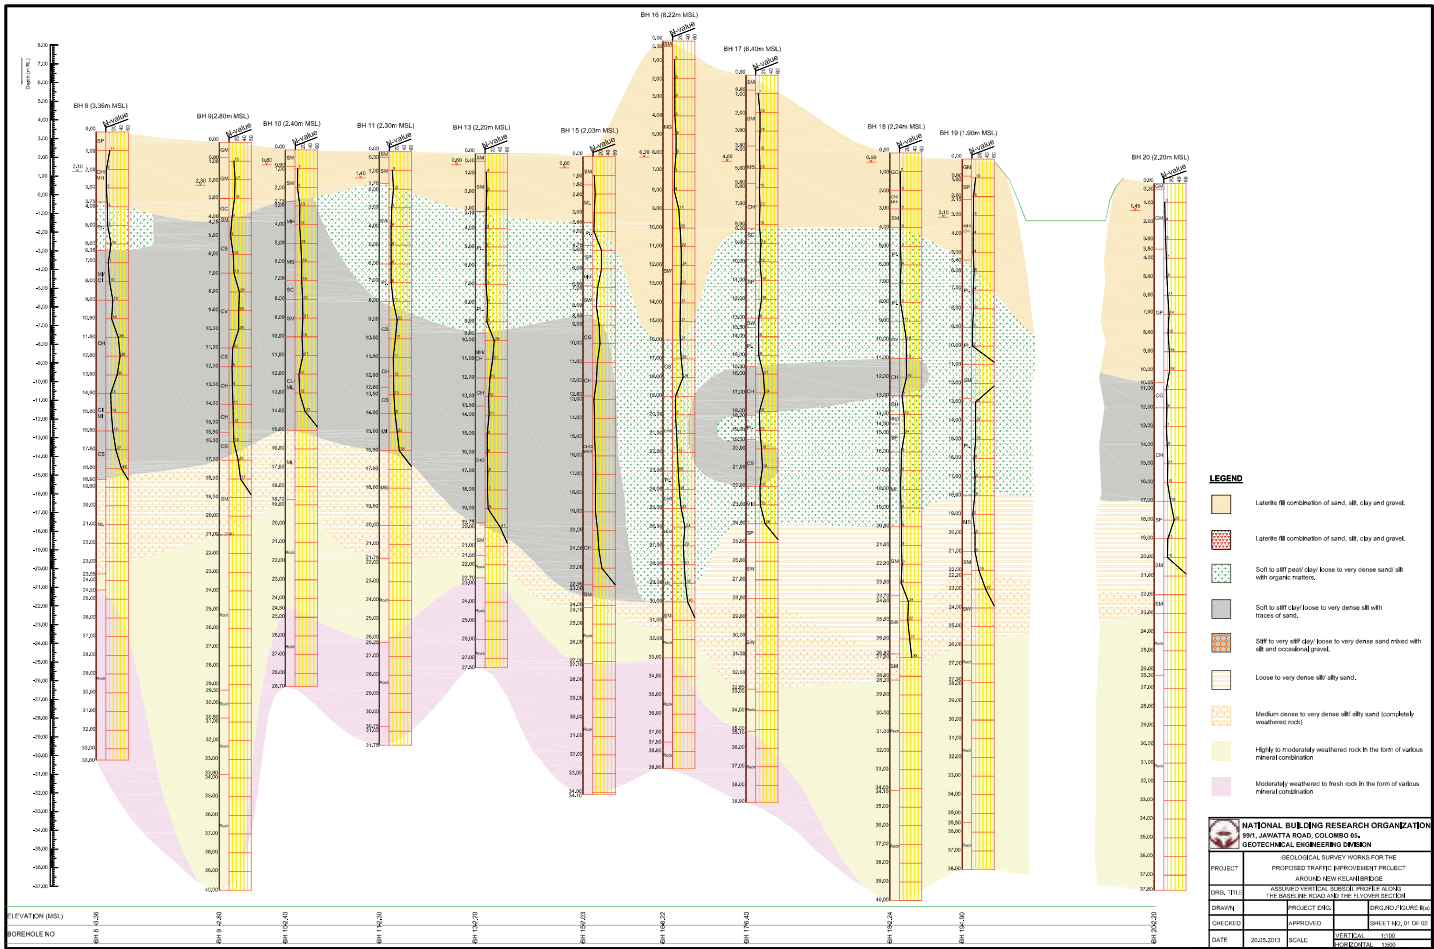


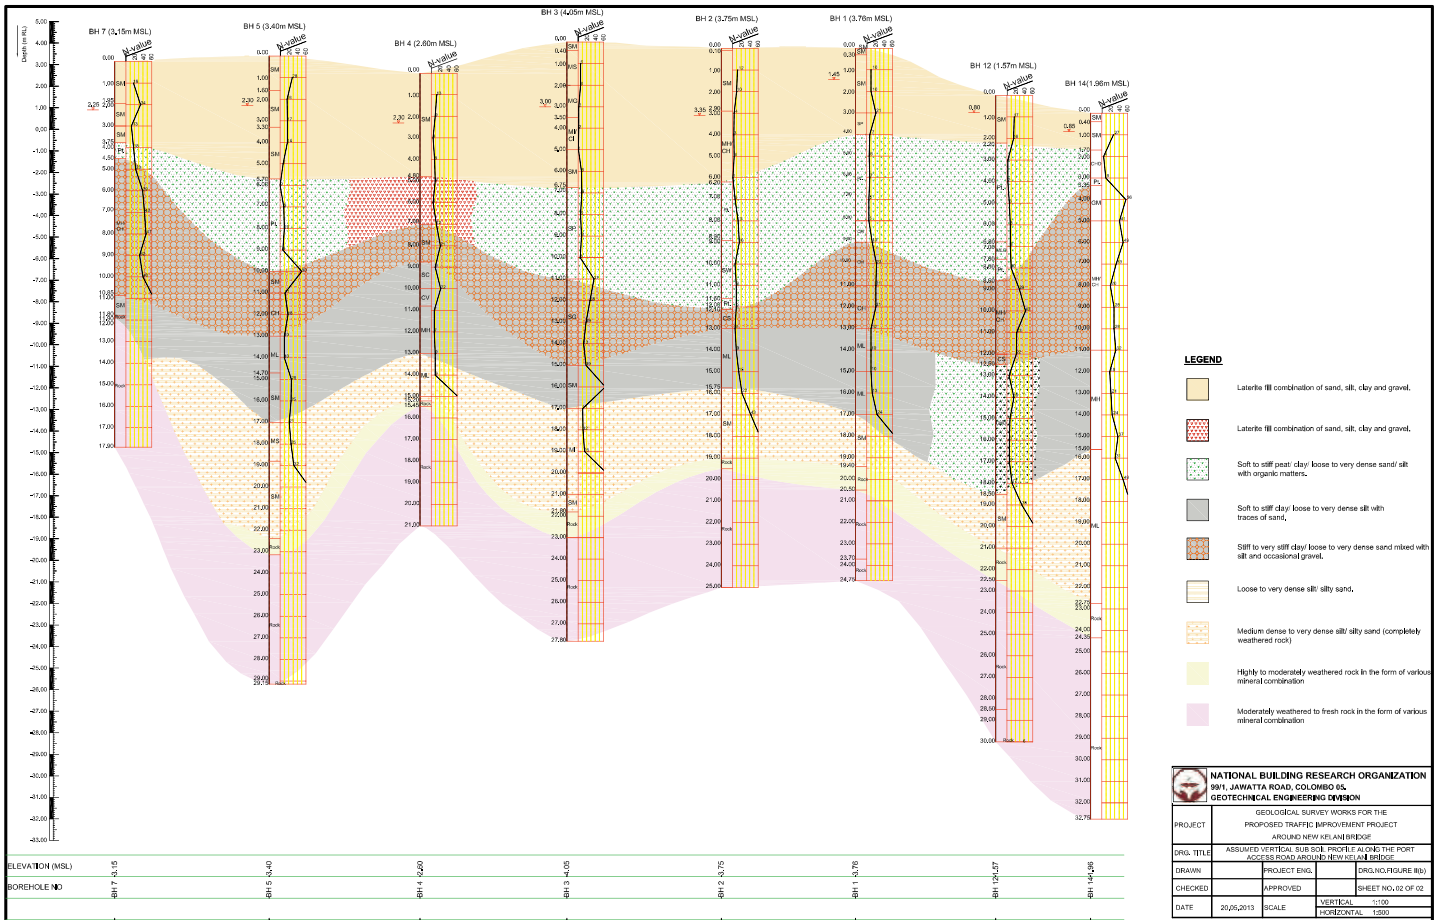



- LEGEND**
- Laterite III combination of sand, silt, clay and gravel.
  - Laterite III combination of sand, silt, clay and gravel.
  - Soft to stiff peat/clay/ loess to very dense sand/ silt with organic matters.
  - Soft to stiff clay/ loess to very dense silt with traces of sand.
  - Silt to very stiff clay/ loess to very dense sand mixed with silt and occasional gravel.
  - Loose to very dense silt/ silty sand.
  - Medium dense to very dense silt/ silty sand (completely weathered rock)
  - High to moderately weathered rock in the form of various mineral combination
  - Moderately weathered to fresh rock in the form of various mineral combination

|  |   |                       |                                     |
|--|---|-----------------------|-------------------------------------|
| <b>NATIONAL BUILDING RESEARCH ORGANIZATION</b> |   |                       |                                     |
| 99/1, JAWWATA ROAD, COLOMBO 05.                |   |                       |                                     |
| GEOTECHNICAL ENGINEERING DIVISION              |   |                       |                                     |
| PROJECT  | GEOLOGICAL SURVEY WORKS FOR THE PROPOSED TRAFFIC IMPROVEMENT PROJECT AROUND NEW KELANI BRIDGE |                       |                                     |
| DRG. TITLE                                     | ASSUMED FUTURE SUBSICE PROFILE AROUND THE PORT ACCESS ROAD AROUND NEW KELANI BRIDGE           |                       |                                     |
| DRAWN  | PROJECT ENG.  | DRG. NO. (FIGURE NO.) |                                     |
| CHECKED  | APPROVED  | SHEET NO. (2 OF 02)   |                                     |
| DATE   | 20/6/2013   | SCALE                 | VERTICAL: 1:50<br>HORIZONTAL: 1:500 |

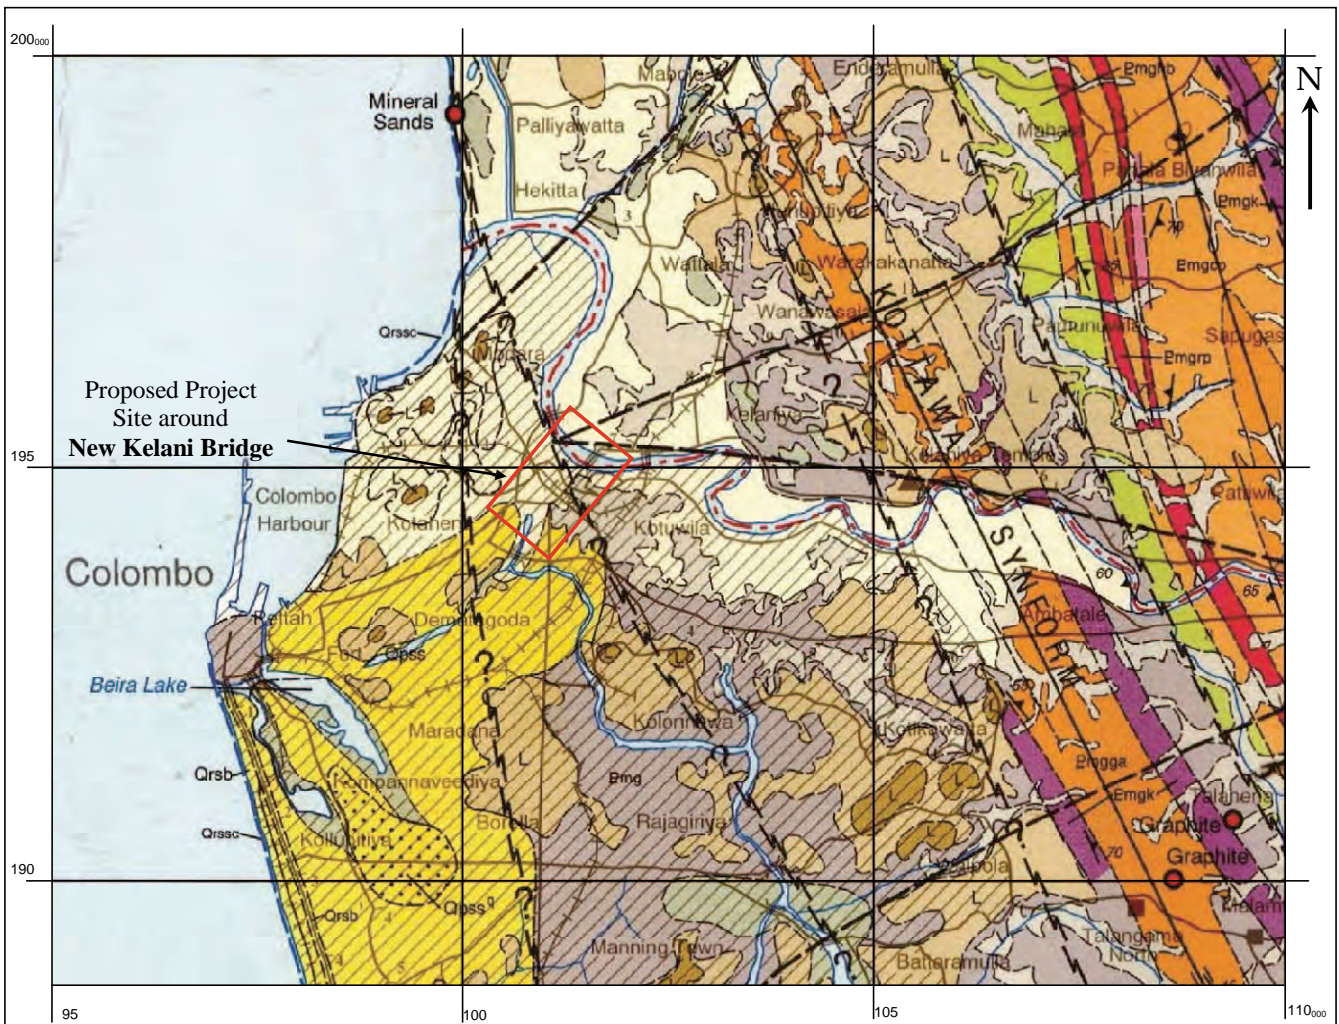

**Legend**

| EXPLANATION OF SYMBOLS                              |  | PROTEROZOIC METAMORPHIC ROCKS (no stratigraphic order implied)  |  | EXPLANATION OF LINE AND STRUCTURAL SYMBOLS                 |   |
|---|--|---|--|--|---|
| <b>SUPERFICIAL DEPOSITS</b>                         |  | <b>Lithologies principally (but not exclusively) of the Wannai Complex and associated Kadurannawa Complex</b> |  | --- Approximate or inferred geological boundary or contact |   |
|   | Laterite: discontinuous caps   |   | Granite gneiss: massive leucocratic quartzofeldspathic gneisses, quartz >20%, few mafics. <sup>H</sup> indicates late-stage alkali feldspar  |  | Geological boundary, between superficial deposits and solid formations                                    |
|   | Sandy, lateritic gravel  |   | Pegmatitic granulite gneiss: distinctive quartz-rich, leucocratic, white or pink, pegmatite-layered gneiss produced by deformation, usually ridge-forming  |  | Geological boundary, concealed  |
| <b>QUATERNARY - RECENT AND PLEISTOCENE DEPOSITS</b> |  |   | Alkali feldspar granite/gneiss/migmatite: unfoliated to foliated late-stage K-feldspar-rich intrusions and melts, includes Ambagaspiya type  |  | Fault, inferred from air photographs (tick shows downthrow side)  |
|   | Alluvium: sand, silt or clay   |   | Hornblende-biotite gneiss: massive to compositionally layered grey gneiss with quartz >20% plagioclase and garnet < ca 10%; trondelite composition   |  | Shear zone, inferred from air photographs (arrows denote shear sense where known)                         |
|   | Stiff brown or blue-grey organic rich clays, 'paddy clays'   |   | Biotite-hornblende gneiss: medium to dark grey gneiss, plagioclase > K-feldspar, quartz <15%, quartz monzonite to leucodiorite composition locally includes metadiorite metagabbro - Emgb  |  | Axial trace of antiform, and plunge   |
|   | Lagoonal and estuarine deposits: organic rich silt and clay includes lake and marsh deposits                             |   | Metagabbro: includes two pyroxene granulites and other dense mafic orthogneisses, garnet often present   |  | Axial trace of synform, and plunge  |
|   | Beach sand <sup>1</sup> etc. indicates older? Hoocene beach ridges and/or dunes?   |   | Undifferentiated Proterozoic gneisses: poorly exposed under thick residual soils   |  | Overturned antiform   |
|   | Dune sand  |   | Undifferentiated felsic orthogneisses: massive to thickly layered gneisses of restricted composition, lacking Al-rich minerals, but may have <10% garnet   |  | Overturned synform  |
|   | Beachrock: planar beds of calcareous cemented beach sand of past and present shore lines, often including heavy minerals | <b>Lithologies principally (but not exclusively) of the Highland Complex</b>                                  |  |  | Strike and dip of foliation (generally parallel to compositional layering)                                |
|   | Terrace gravel: loosely iron-cemented cobble gravels with a clay matrix  |   | Garnetiferous quartzofeldspathic gneiss (formerly 'garnet granulite'): leucocratic quartz-feldspar gneiss with abundant pink garnets, often >20%, weathers to iron-rich residual deposits  |  | Azimuth and plunge of lineation   |
|   | Grey and White Sands: unconsolidated bleached sands, in part dune sands (? for silica sand resource)                     |   | Garnet-sillimanite-biotite gneiss = graphite: pelitic schist or gneiss often cordierite bearing, <sup>H</sup> indicates garnet rich khondalitic gneisses   |  | Azimuth and plunge of minor fold  |
|   | Unconsolidated brown and grey coastal sands = ?Grey and White Sands  | <b>Late-stage intrusives (in general younger than 550 Ma)</b>   |  |  | Thrust or shear with thrust sense probable  |
|   |  |   | Quartzites: pure coarse-grained ridge-forming quartzites locally with <5% each of sillimanite, kaolinitised feldspar or biotite  |  | Thrust inferred   |
|   |  |   | Impure quartzites and quartz schists: with sillimanite, ± magnetite, ± garnet, often interlayered with biotite-bearing quartz-rich quartzofeldspathic gneisses   |  | Structure, form or trend lines, from air photographs  |
|   |  |   | Marble, usually coarse-grained and dolomitic, locally high calcite marble present  |  | Project Limits  |
|   |  |   | Calc-gneisses and/or granulites: calc-silicate gneisses with very variable mineralogy  |  | Extent of mineral resource, i.e. silica sand, gravel (or limits of patchy gravel spread) or clay deposits |
|   |  |   | Cordierite gneiss: granoblastic, with cordierite >15% and K-feldspar, biotite, quartz, ± sillimanite, garnet usually present   |  | Test Location at site   |
|   |  |   | Undifferentiated charnockitic biotite gneisses: extensive sequences of charnockitic-looking grey gneisses usually lacking hypersthene, though commonly with boudinaged orthopyroxene-bearing mafic layers, but may include some paragneisses   |  |   |
|   |  |   | Charnokitic gneisses: restricted outcrops, often ridge-forming, typically coarse-grained with characteristic brown or green greasy lustre; may lack hypersthene. Includes patchy <i>in situ</i> charnockites as well as partially retrogressed, bleached 'ex-charnockites' stipple indicates local charnockitisation |  |   |
|   |  |   | Undifferentiated paragneisses: well-layered, extensive and compositionally variable gneisses, locally containing garnet, biotite, sillimanite, ± cordierite  |  |   |
|   |  |   | Pegmatites: simple quartz-feldspar pegmatites with magnetite and/or allanite   |  |   |
|   |  | <sup>H</sup>  | <sup>H</sup> indicates extensive pink potash-rich veins and melts in any lithological unit   |  |   |

**Figure III – Geology Map of the Project Area**