

CHAPTER 6

INSTITUTIONAL DEVELOPMENT

TABLE OF CONTENTS

6.1	Current Institutional Environment.....	6-1
6.1.1	Background to the Organisation of the Water Supply Sector in RSA.....	6-1
6.1.2	DWAF.....	6-2
6.1.3	Water Boards (Bulk Water Supply).....	6-2
6.1.4	Specific Institutional Environment in the FS Area.....	6-3
6.2	Requirements of the Water Services Bill (1997).....	6-7
6.2.1	Introduction.....	6-7
6.2.2	Objectives of the Bill.....	6-7
6.2.3	Right of Basic Access.....	6-7
6.2.4	Duties of Water Services Authorities.....	6-8
6.2.5	Water Services Provider.....	6-8
6.2.6	Water Boards.....	6-8
6.2.7	Water Services Committees.....	6-8
6.2.8	Institutional Framework Created by the Bill.....	6-9
6.2.9	Fee for Services.....	6-9
6.2.10	General Observations.....	6-9
6.3	Needs Identified from Pilot Project Experiences.....	6-10
6.4	Institutional Structures: Bulk Water Supply.....	6-12
6.5	Establishment of Institutional Structures: Retail Water Supply.....	6-14
6.5.1	Institutional Options.....	6-14
6.5.2	Joint Venture Partnership Option.....	6-16
6.5.3	Criteria for Evaluating Options.....	6-18
6.5.4	Assessment of Options Against Criteria.....	6-18
6.5.5	Most Feasible Solution.....	6-18
6.6	Staged Institutional Development Plan.....	6-21
6.6.1	General.....	6-21
6.6.2	Implementing Agency and Master Schedule.....	6-21
6.6.3	Stage 1: 1998-2002.....	6-27
6.6.4	Stage 2: 2003-2007.....	6-29
6.6.5	Stage 3: 2008-2012.....	6-31
6.7	Roles and Responsibilities.....	6-32
6.8	Monitoring and Evaluation.....	6-34
6.8.1	Task Force/Forum.....	6-34
6.8.2	Requirements of the Water Services Bill.....	6-34

LSIT OF TABLES

Table 6-1	Districts to be Included in Highveld Water board Area.....	6-5
Table 6-2	Schedule for Establishment of HW.....	6-12
Table 6-3	Advantages and Disadvantages of Options for Services Provider.....	6-15
Table 6-4	Different Local Structure Model (Retail Supply).....	6-25
Table 6-5	Master Schedule of Institutional Development.....	6-26
Table 6-6	Action Plan (St.-1/Step-1).....	6-27
Table 6-7	Action Plan (St.-1/Step-2).....	6-28
Table 6-8	Action Plan (St.-1/Step-3).....	6-29
Table 6-9	Action Plan (St.-2/Step-1).....	6-30
Table 6-10	Action Plan (St.-2/Step-2).....	6-30
Table 6-11	Action Plan (St.-2/Step-3).....	6-31
Table 6-12	Action Plan (St.-3).....	6-32
Table 6-13	Roles and Responsibilities.....	6-32

LIST OF FIGURES

Figure 6-1	Highveld Water & Sanitation Authority.....	6-4
Figure 6-2	Bulk Water Supply Structure Serving Moretele 2 Feasibility Study Area.....	6-13
Figure 6-3	Structure of Proposed of a Possible HDC-HW Joint Venture.....	6-17
Figure 6-4	Moretele 2 Feability Study Area Option: First and Second Stage....	6-23
Figure 6-5	Moretele 2 Feability Study Area Option: Third Stage.....	6-24

CHAPTER 6 INSTITUTIONAL DEVELOPMENT

6.1 Current Institutional Environment

6.1.1 Background to the Organisation of the Water Supply Sector in RSA

(1) National Water Legislation

National water policy in South Africa was laid down in the Water Act of 1956 (Act 54 of 1956) which has had 34 amendments since its inception. The Act laid down regulations governing the construction and maintenance of water works and the responsibility for managing different parts of the water network. It defined three types of water management institutions:

- State Water and Irrigation Schemes.
- Irrigation Boards; and
- Water Boards.

State Water and Irrigation Schemes are managed by DWAF and financed from the Central Government's consolidated budget. Irrigation Boards are statutory bodies established by groups of farmers to provide a service in an area in which they all have a common interest. In the case of water boards, the Minister of Water Affairs and Forestry recommends the establishment of a Water Board for a specific area to distribute bulk water for urban, industrial or agricultural use by local, state, and some central government authorities.

(2) Changes to Policy

Act 54 of 1956 did not clearly define the functions and responsibilities of the Central and Provincial governments. The new Government has been mindful of these problems and has taken a number of important steps:

- A new Department of Water Affairs and Forestry (DWAF) was established in July 1994 to replace the old Department of Water Affairs and to assume responsibility for water resources management, water supply, sanitation, and forestry functions and to better meet and manage the water related objectives of the RDP.
- A policy document, the *White Paper on Water Supply and Sanitation Policy* was published in November 1994 to clearly set out the policy for the new department in regard to water supply and sanitation services.
- New legislation has been promulgated to replace existing legislation in the areas of Water Services and the Water Laws. The former is of direct relevance to the Study and is discussed in Section 6.2 below.

6.1.2 DWAF

DWAF has the national responsibility for ensuring that the water supply and sanitation needs of the people and of the economy which sustains them are met effectively. As part of the reform process within DWAF, a new *Chief Directorate of Community Water Supply and Sanitation* was established to promote water supply and sanitation. The responsibilities of the Chief Directorate are to:

- Assure effective on-going operation of potable water supply systems for which DWAF is responsible;
- To plan and promote the expansion of services in collaboration with provincial governments;
- To develop organisations at the local and regional level to achieve the goals of the RDP; and
- To monitor and regulate water supply and sanitation activities in accordance with the constitution.

The White Paper on water supply and sanitation is geared towards the establishment of a clear framework to enable Third Tier institutions to play their role in implementing service provision at the local level.

As concerns the Study Area the regional office of DWAF are located in Mmabatho and Nelspruit which are distant from the FS Areas. It should not therefore be expected that any significant support can be provided in the Feasibility Study Areas. The DWAF regional office has however contributed actively to the Study process.

6.1.3 Water Boards (Bulk Water Supply)

(1) Traditional Role

Water Boards will continue to function as autonomous, not-for-profit utilities, but will assume expanded responsibilities:

- They will continue to supply water to organized communities and individual consumers which may also include the provision of sanitation services;
- They will assist in the establishment of statutory LWC's and will provide technical and administrative training to LWC's and local authorities. To ensure that water boards fulfill their new role DWAF has made the board of directors of water boards more representative; changed their supply areas to include former homelands; redefined their functions to include supplying water to local communities where no authority exist and to include sanitation; and established new water boards where none exist.

(2) Changes to Role

A national study on the Scope and Functions of Water Boards was conducted to provide a framework for instituting necessary changes to existing as well as new water boards in areas not serviced by water boards so that they can undertake the duties and responsibilities outlined in the White Paper. The White Paper proposed that water boards increase the scope and extent of their functions to ensure that all South Africans have access to basic water supply and sanitation. To this end their new role is to:

- Establish a system of communications with communities within their area and explain the services and capabilities that the water board can offer;
- Establish procedures for the establishment of LWCS, including application for funding, technical assistance and training;
- Make funds available to LWCs including the provision of technical assistance in the planning of any local water supply and sanitation schemes; and
- Monitor the expenditure and application of funds for projects.

6.1.4 Specific Institutional Environment in the FS Area

(1) Highveldt District Council

As indicated in the description of the project area, the Feasibility Study Area falls within the Moretele 2 District of Mpumalanga Province, which in turn falls under the jurisdiction of HDC. HDC has its offices at Middleburg which is physically distant from the FS Area. There is therefore limited direct involvement in the Area although a HDC funded water supply project, is currently being implemented in the vicinity of the JICA pilot project.

HDC has limited resources and capacity to become directly involved in water supply in the area. As a result of this lack of capacity, zonal planning structures have not been implemented in the HDC area of jurisdiction.

HDC staff have kept up to date with the progress of the Study by attending key meetings and workshops.

(2) Highveld Water & Sanitation Authority (HWSA)


In terms of the same process of rationalising boundaries which was the motivation for the JICA Study on Magalies Water, the British Department for International Development has sponsored a project to look at the boundaries and options for the Upper Olifants River basin. This study includes the Moretele 2 and KwaNdebele areas which forms the western extremity, but also

covers a very large area to the east and south of the FS Area. The area currently has no single bulk water supplier.

A key question from the start of the JICA Study has been whether KwaNdebele and Moretele 2 will form part of the Magalies ESA or part of some, yet to be created, board / authority in the Highveld region. While the JICA Study has been able to including this area for planning purposes, for implementation purposes it is critically important that the future water supply authority in the region is determined.

The DFID study is in its second year and will be concluded later this year. Considerable progress has however been made which has resulted in an institutional infrastructure already having been put in place as is shown in Figure 6-1. Based on the conclusions reached and steps taken to date some assumptions will have to be made about the future institutional arrangements.

Figure 6-1 Highveld Water & Sanitation Authority

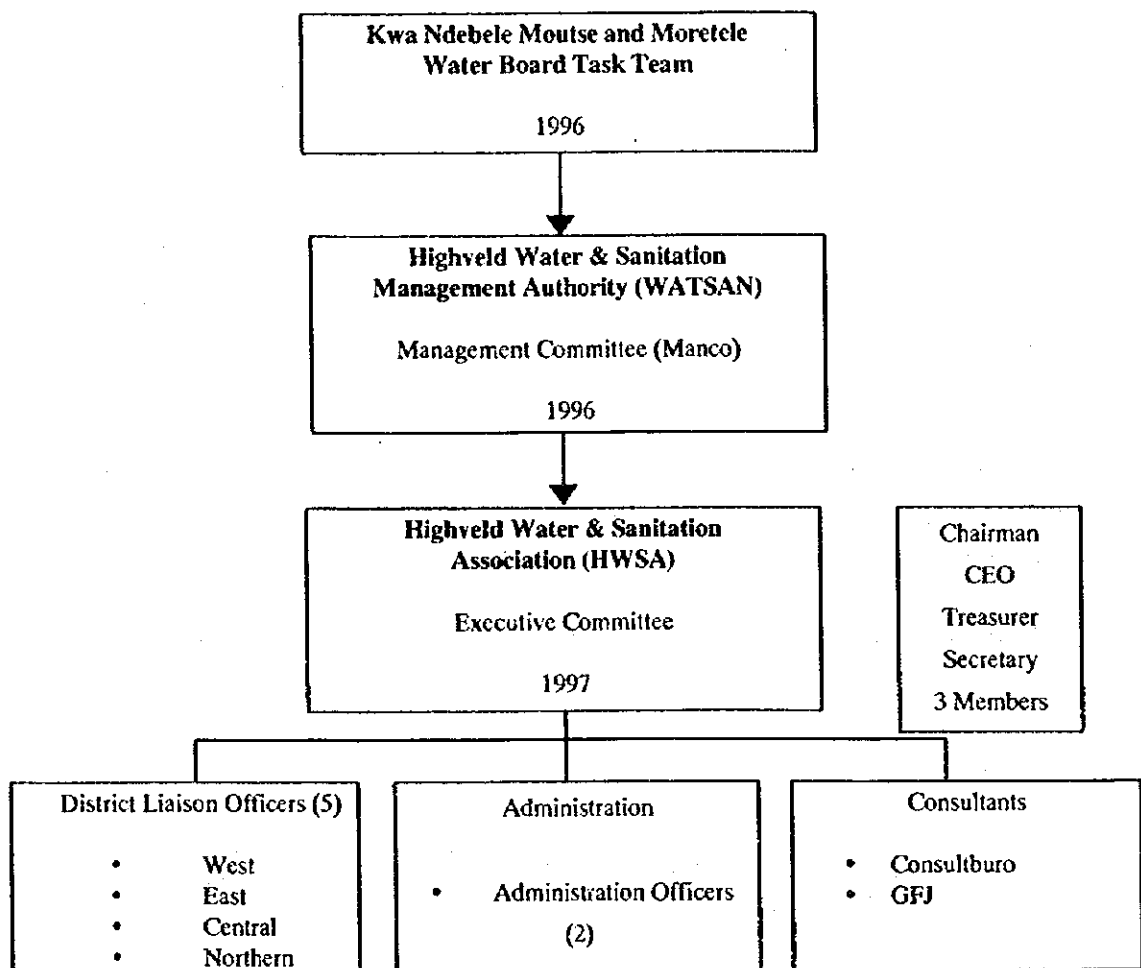

Key points of relevance which are noted from the WATSAN study to date are that:

- The process has been participatively structured with several large stakeholder workshops (Indabas) in the area. These culminated in a workshop in August attended by over one hundred and fifty delegates where a number of final decisions were taken on the future of the area.
- It has been unanimously agreed by the stakeholders to request the Minister to establish a new Water Board in the Upper Olifants River catchment area. The process of doing this has now commenced.
- The name preferred by the stakeholders is Highveld Water Board.
- The proposed jurisdiction of the new Water Board is the magisterial and local government areas which are listed in Table 6-1 which follows:

Table 6-1 Districts to be Included in Highveld Water Board Area

Districts	
Bronberg TRC	Mathanjana TLC
Bronkhorstspuit TLC	Mbibane TLC
Delmas TLC	Mdutjana TLC
Delmas TLC	Middelburg TLC
Ekgangala TLC	Middelburg TRC
Elandsrivier TRC	Mkombola TLC
Groblersdal Mag. District	Moutse TLC
Hendrina TLC	Oies TLC
KwaMhlanga TLC	Witbank TRC
	Witbank TLC
Plus portions of farms to include Rust de Winter Dam	

- The agreed mission for the new Water Board is: "Highveld Water is a regional water and sanitation authority that shall provide comprehensive water, sanitation and support services".
- For taking the process forward, institutional capacity has been created in the form of HWSA which is a corporate body with an executive committee and several staff including District Liaison Officers. An office has been opened at Kwamhlanga. HWSA's main purpose is to act as implementing agent for the new Water Board.
- Four district advisory forums have been established to involve stakeholders in the progress of the initiative and boundary resolution.

A final decision is in the process of being made by the Minister which will then be gazetted.

The reality as is illustrated by the above points is that a process is in place which has gained considerable inertia. Ideas on the future of the region are well developed and supported by stakeholders.

The new Water Board will in all likelihood be proclaimed by DWAF late in 1997 and inaugurated early in 1998.

(3) Local Authorities

The Moretele 2 area comprises 17 communities which are largely rural. No formal local authorities are yet in place i.e. existing structures are all transitional organizations and have little or no formal institutional capacity. Only once the local authorities create structures and have the financial resources to employ people to execute key functions can formal capacity be considered to exist.

(4) DWAF

The regional office of DWAF is located at Nelspruit which is some distance from the Moretele 2 Area. A district office is however located at Kwamhlanga which is close to the FS Area. From this office DWAF provides certain water supply services particularly where it has taken over the functions of NWWA. These are mainly rural services and in many cases involve supplying communities by road tanker. Some support can be provided in the FS Area by this DWAF regional office.

DWAF Mpumalanga has however contributed actively to the Study process particularly with regard to policy matters and this input will continue to be relevant to the Feasibility Studies.

DWAF Organization Development Officers working in the region have a good knowledge of local communities and this can be tapped for planning and institutional development purposes.

(5) Assessment

Requirements for the provision of water supply arising from the proposed Water Services Bill which need to be met were discussed in Section 6-1.

In the Moretele 2 Area no capacity is in place at local authority level to execute the function of future project implementation, operations and maintenance. Also the administrative capacity necessary to ensure effective cost recovery is not present. The local government structures are all transitional and will only in due course become fully fledged municipalities. Furthermore there are probably many areas where this transition may never occur given the rural nature of the

area and the prevailing socio-economic conditions. From a practical perspective alternative solutions therefore need to be considered.

The Water Board jurisdiction is in transitions and the proposed HW will have limited capacity initially. MW currently has less capacity in Moretele 2 than in the other Feasibility Study areas.

HDC has limited planning, implementation, operations and maintenance capacity and as a result cannot be expected to provide significant support in the Moretele 2 Area.

6.2 Requirements of the Water Services Bill (1997)

6.2.1 Introduction

The Bill was published for comment in May 1997 and will have a significant impact on the institutional structures in the water supply sector. The Government requested comments on the bill and to date a large number of submissions requesting modifications have been received. These submissions do not challenge the main provisions of the bill but rather deal with aspects of detail. It can therefore be assumed that the bill will pass through parliament largely unchanged. For the purposes of this study its main provisions have been used as the basis for institutional planning.

6.2.2 Objectives of the Bill

The objectives of the bill include inter alia the requirements for:

- Setting national standards and norms for tariffs.
- Preparation of water service development plans.
- A regulatory framework for water service institutions.
- Establishment of water boards
- Monitoring of water services.
- Financial assistance to water services institutions.
- A national information system on water services.

6.2.3 Right of Basic Access

Section 3 of the proposed Bill lays down two requirements:

- Firstly that everyone has a right of access to basic water supply and basic sanitation.
- Secondly that Water Services Authorities must take reasonable measures to realise

this right and plan to achieve it.

A Water Service Authority is essentially a municipality. In terms of the bill these institutions have a legal obligation to meet service requirements.

6.2.4 Duties of Water Services Authorities

The main duties as set out in the Bill are:

- Subject to certain conditions, to progressively ensure that all consumers and potential consumers in its area are provided with efficient, affordable, economic and sustainable water services.
- To prepare a water services develop plan for their area of jurisdiction. Key aspects of this plan are identification of the Water Services Providers, proposed infrastructure, water sources, capital outlays and operating costs.
- To provide the water services itself or to contract with a Water Service Provider to provide water services.

6.2.5 Water Services Provider

This is the function of actually providing the service (Water Services Provider) as distinct from the legal obligation to do so which resides with the Water Services Authority. The obligation to provide the services cannot be delegated. The actual provision of the service can be delegated by means of a contractual relationship. The draft Bill clearly specifies the terms and conditions for contracting out the Services Provider function.

6.2.6 Water Boards

Water boards are also dealt with in the Bill . These are not new structures and their primary function is to provide water to other water service institutions. The role of the water board as the bulk supplier is largely unaffected by the type of institution which is the Water Services Provider.

It is noted that bulk water is provided with the proviso that the board must not financially prejudice itself or other consumers in doing so.

6.2.7 Water Services Committees

Water Services Committees, are corporate bodies which can be established by the Minister in terms of the Bill to provide water supply within a service area where there is no Services

Authority to perform the function.

It is necessary that formation of a Water Services Committee has the support of the community or area served.

6.2.8 Institutional Framework Created by the Bill

Institutional options need to be built around the possibilities provided for in the proposed Water Services Bill. In summary there are four distinct institutional structures which could be involved in the service delivery process:

- Water boards providing bulk water supply.
- Water Services Authorities which must give effect to the right of all people to basic water and sanitation services.
- Water Services Authorities acting as Water Service Providers and delivering services directly to consumers.
- Water Services Providers which are third party institutions which the Authority contracts to deliver services on its behalf.

6.2.9 Fee for Services

It is important to note that the proposed bill also provides that the duty to supply water to consumers is subject to the duty of consumers to pay reasonable charges for the service.

6.2.10 General Observations

A Water Services Authority is essentially a municipality. It is not clear from the bill as to where this responsibility resides in situations where there is no municipality although it is understood that it then becomes the responsibility of the next level of government. In the Feasibility Study Area the local government structures are all transitional. Furthermore there are probably many areas where the transition to fully fledged municipalities may never occur. From a practical perspective alternative solutions will therefore need to be considered.

In areas that there are no municipalities and therefore no Services Authorities; by default this role will then fall on the district council. Because of the lack of capacity of district councils this creates another set of problems to be addressed.

6.3. Needs Identified from Pilot Project Experiences

(1) Overall Assessment

It is clear from interaction with the communities in the FS Areas that capacity in the following areas is very limited:

- Operation of water supply infrastructure.
- Maintenance of infrastructure.
- Collection of service revenues
- Administration of service delivery process.

(2) Lessons Learned

We note that the findings and lessons learned from the pilot projects are fully dealt with in a separate volume of the report. The intention here is to simply list the key lessons which must be taken into account in the planning form the feasibility studies:

- (a) Identification of the WSA and WSP roles are essential first steps in setting up a project.
- (b) The identified WSA and WSP (if not he community) should be involved in the planing process from the start.
- (c) Proper social, institutional and training assessment are essential parts of the planning process.
- (d) The community must be assessed in the context of the wide area in which resides taking into account factors in the area / other communities which may impact on the project e.g. illegal connections in neighboring communities and payment history.
- (e) In the context of (d) above some area planning initiatives may be necessary if the project is to succeed.
- (f) The establishment of PSCs need to be carefully coordinated and can be a time consuming process. An effective PSC is however an essential ingredient for success. Requirements include:
 - Involving all existing committees.
 - Ensuring representivity of all groups in the community e.g. women and young people.

- Initial training of the PSC in its role is essential.
 - Ongoing monitoring of the dynamics in the PSC is important.
 - The PSC must have decision making authority.
- (g) The last point above is particularly important and key decisions such as appointment contractors must be seen by the community to be made by the PSC.
- (h) Business planning must start early in the project life style and directly involve the community. This should be a very practical form planning focusing on how key aspects of the project will be handled e.g. tariff collection, operation and maintenance. RDP type business plans have in the past been to high level and generally be prepared by outsiders.
- (i) Some up front financial commitment from the community should be encouraged as a means of strengthening commitment to the project and ensuring sustainability.
- (j) Generally the amount of time to achieve sustainable plans is under estimated. This will also vary from community to community and the assessment referred to in (c) above is essential before time frames and budgets are finalised.
- (k) Training and mentoring be prominent in plans and require a substantive budget.
- (l) Institutional and development cost will vary from project to project and should therefore not be generalised without taking into account the needs of the particular community. These may be as low as 3% of total project cost or as high as 15%.

The implementation of pilot projects has therefore provided some very useful lessons which need to be taken into account in planning.

The Loding, Segokgo, Moletsie and Semohlase Project Steering Committee has been functioning, but not as effectively as in the other pilot project communities, as discussed fully in Volume 6.

As with other communities in the area cost recovery systems are very informal and uncoordinated.

The community is demonstrating a very limited capacity to organise and plan.

6.4 Institutional Structures: Bulk Water Supply

The FS Area does not fall within the traditional area of supply of any Water Board. The area will largely fall within the proposed jurisdiction of the proposed Highveld Water Board (although it is noted that detailed boundaries have not been finalised.) It must be assumed for the purpose of the study that HW will be the Water Board. Also that HW will in due course have the capacity to provide the bulk supply. An assessment of the schedule for establishment of HW is shown in Table 6-2 which follows:

Table 6-2 Schedule for Establishment of HW


Development Status	1997				1998				1999				2000			
	Q 1	Q 2	Q 3	Q 4	Q 1	Q 2	Q 3	Q 4	Q 1	Q 2	Q 3	Q 4	Q 1	Q 2	Q 3	Q 4
Approval by Minister																
Publication in Gazette																
Appointment of Board																
Appointment of CEO & Mgmt.																
Transfer of Assets to HW																
Develop O & M Structure																
Transfer of Staff to HW																
Implement Structure																
Develop Long Term Plans																
Fully Operational																

As with the other FS Areas, the financial viability of supply remains a major challenge for HW. The draft Water Services Bill lays down that a water board should not financially prejudice itself or other consumers in meeting bulk supply needs.

Figure 6-2 shows the proposed structure for bulk water supply to Moretele 2. It illustrates that HW will need to create a service structure or branch falling under the Weltevreden WTW to serve this area. This structure could include sub units for the East and West service blocks respectively.

The role of the water board as the bulk supplier is largely unaffected by the type of institution which is the Services Provider (i.e. retail supplier) as discussed below provided such supplier can meet the contractual commitments entered into in the bulk supply contract.

Figure 6-2 Bulk Water Supply Structure Serving Moretele 2 Feasibility Study Area

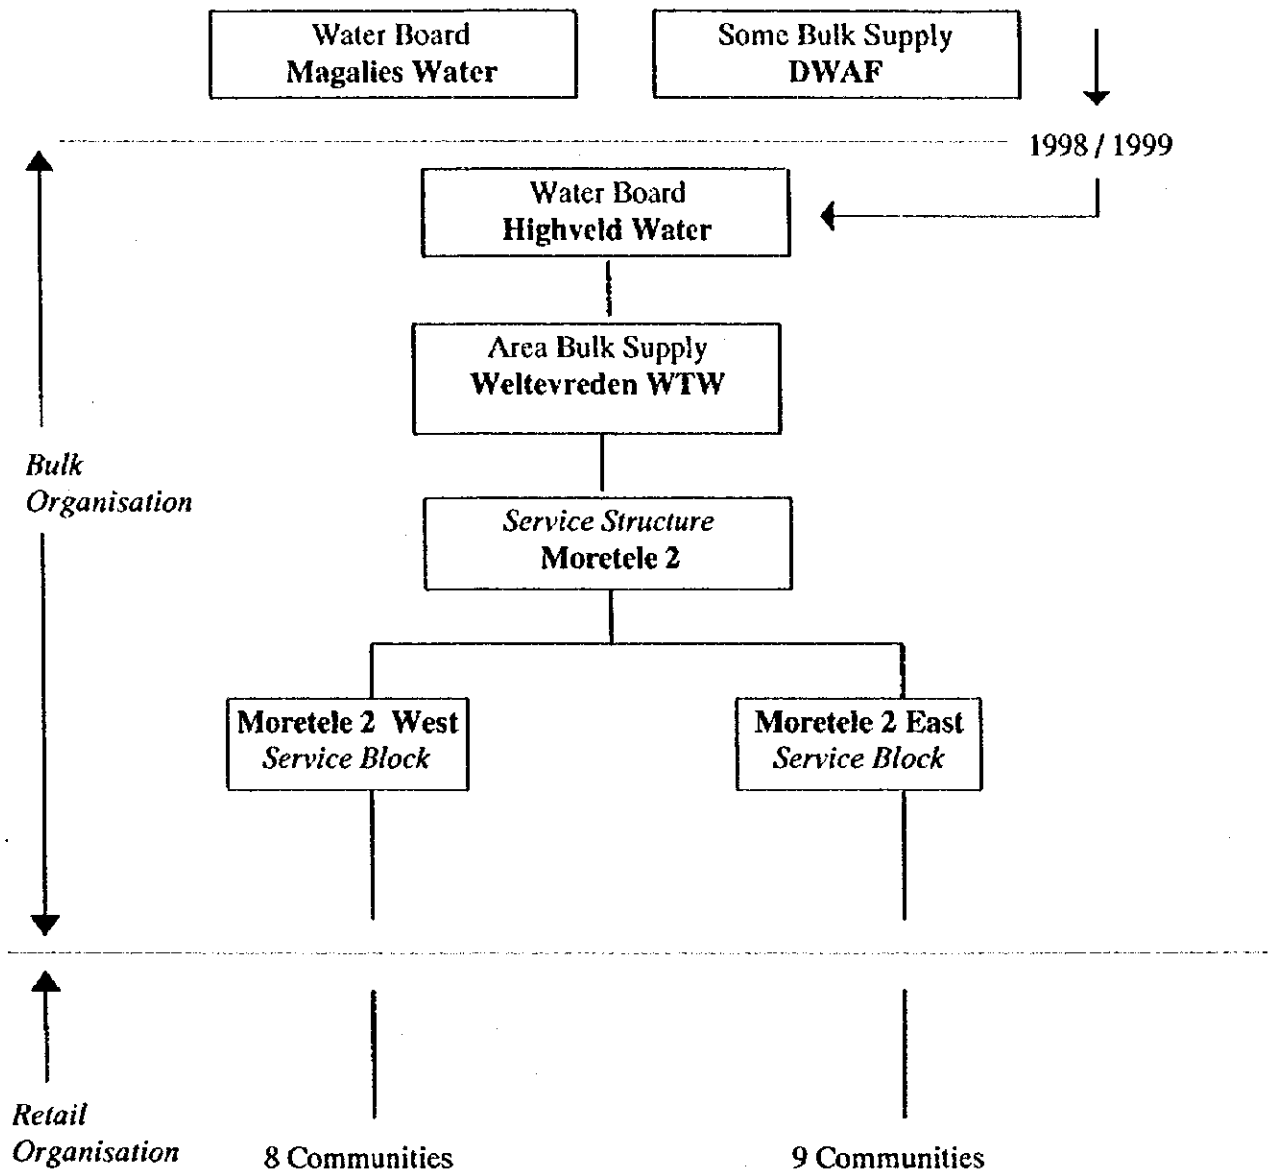

6.5 Establishment of Institutional Structures: Retail Water Supply

6.5.1 Institutional Options

The retail institutional options need to be built around the institutional models provided for in the proposed Water Services Bill which were discussed in Section 6.1.

In the Moretele 2 Area it has been indicated that there are no established local authorities and therefore no Services Authorities; by default this role will then fall on the district council. In practical terms because of the HDC's lack of O&M capacity this role will be difficult to achieve. The possible institutional options are as follows:

(1) HDC as Services Provider

In terms of this option HDC would need to become directly involved in service provision by setting up the necessary sub-structures within its organization to take on the functions of implementation, operations and maintenance. The result would be that HDC would have to create a fully staffed division to undertake the work. In terms of the provision of the draft bill this division would need to be accounted for separately from the other activities of the council.

(2) HDC Contracting with a Services Provider

There are two possibilities:

(a) Contracting with an Existing Institution / Structure

In terms of this option HDC would contract with an existing entity to fulfill the functions of service provision. A possibility is for HDC to contract with the Mpumalanga BoTT Consortium to perform some or all of the functions in the area.

(b) Contracting with a New Institution

In terms of this option HDC would contract with a new entity to fulfill the functions of service provision. This could be an existing institution which is new to the area, (i.e. one operating in the field of water supply in other parts of the country), or a totally new institution which has yet to be created. HDC and HW could consider the formation of a new institution for this purpose in the form of a joint venture partnership such as is being considered between MW and RDC / EDC in the other FS Areas. The joint venture idea is discussed more fully in Section 6.4.6.

(3) Water Committee Contracting with a Services Provider

In terms of this option the stakeholders in the area would call on the Minister to establish a Water Committee in the area. This Committee would be established as a corporate body which is allowed for in the proposed bill. There are then two possibilities for operation, either the Committee establishes its own institutional structure or contracts with another institution to be carry out the functions of service provision. Given that there is little institutional capacity in the Feasibility Study Area the possibility of a Water Committee being able to create its own working structure in the short term is doubtful. The route of the committee contracting with a Services Provider is more realistic

(4) Transitional Local Institution as Services Provider

While the three options outlined above assume a higher level institution in the role of Services Provider, the possibility of a community taking on the functions should not be ruled out. This seems unlikely in the short term given the lack of capacity and structure amongst communities in the Area. However in the medium to long term this option should be encouraged. It is not precluded by the three options above which should all have as an ultimate goal the transfer of the functions to local government institutions.

Some of the advantages and disadvantages of the above options are shown in Table 6-3 and these help to further expand understanding of the impact of choosing each of the different approaches:

Table 6-3 Advantages and Disadvantages of Options for Services Provider

Option	Advantages	Disadvantages
HDC as Services Provider	<ul style="list-style-type: none"> - Appropriate role for HDC. - Builds HDC's capacity. - Some existing capacity to support new functions. - Structure could serve other areas. 	<ul style="list-style-type: none"> - Limited resources to get structure going. - Establishing structure will take time. - May take HDC focus away from other strategic needs.
HDC Contracted Services Provider	<ul style="list-style-type: none"> - Role remains with HDC. - Could be quickly implemented. - Contractual requirements can be differentiated i.e. implementation, O&M. - Enables utilisation of existing capacity in the area e.g BoTT Contractor. 	<ul style="list-style-type: none"> - Opportunity for HDC to create more capacity internally missed. - Institutional development is taking place at one level up from communities. - Some conflicts of interest could arise.

Table 6-3 Advantages and Disadvantages of Options for Services Provider (Continue)

Option	Advantages	Disadvantages
Water Committee	<ul style="list-style-type: none"> - Closer to the transitional local structures and communities which is where the function ultimately belongs. - Creates a formal corporate entity to carry out the required functions. - Would create new / additional capacity in the area. 	<ul style="list-style-type: none"> - Will be time consuming to implement. - Could be perceived as a DWAF imposed solution. - Benefit limited to one specific area. - No existing capacity to support this development.
Transitional Local Authority as Service Provider	<ul style="list-style-type: none"> - Closer to the local communities which is where the function ultimately belongs. - Could be more than one service structure depending upon local situation. - Would create new / additional capacity in the area. 	<ul style="list-style-type: none"> - Will be time consuming to implement. - Subject to local political / community dynamics. - No existing capacity to support this development.

6.5.2 Joint Venture Partnership Option


It is relevant to note that in the other FS Areas the Water Board and District Councils have already agreed in principle to enter into a joint venture which will lead to the formation of a new organisation in a corporate form in the area. This is depicted in Figure 6-3. The functions of such and organisation would be:

- To act as Services Provider or to ensure that the role is fulfilled. (Main function).
- To provide support for small municipalities and contractors.
- To facilitate redeployment of staff into service delivery in the area.

The question to be considered is why a similar structure might not serve this FS Area equally well? There is no obvious reason why not other than to note that such a structure will only be possible once HW is in place i.e. the end of 1998. While such a structure has been agreed to in principle in the other FS Areas it will need to be motivated to both HDC and HW. However the learning experience of MW and RDC / EDC in North Mankwe and Klipvoor respectively will then be available which may make the implementation period much shorter.

Formation of such a structure will solve a number of issues around the question of responsibility for planning, implementation, operation and maintenance.

Figure 6-3 Structure of A Possible HDC - HW Joint Venture

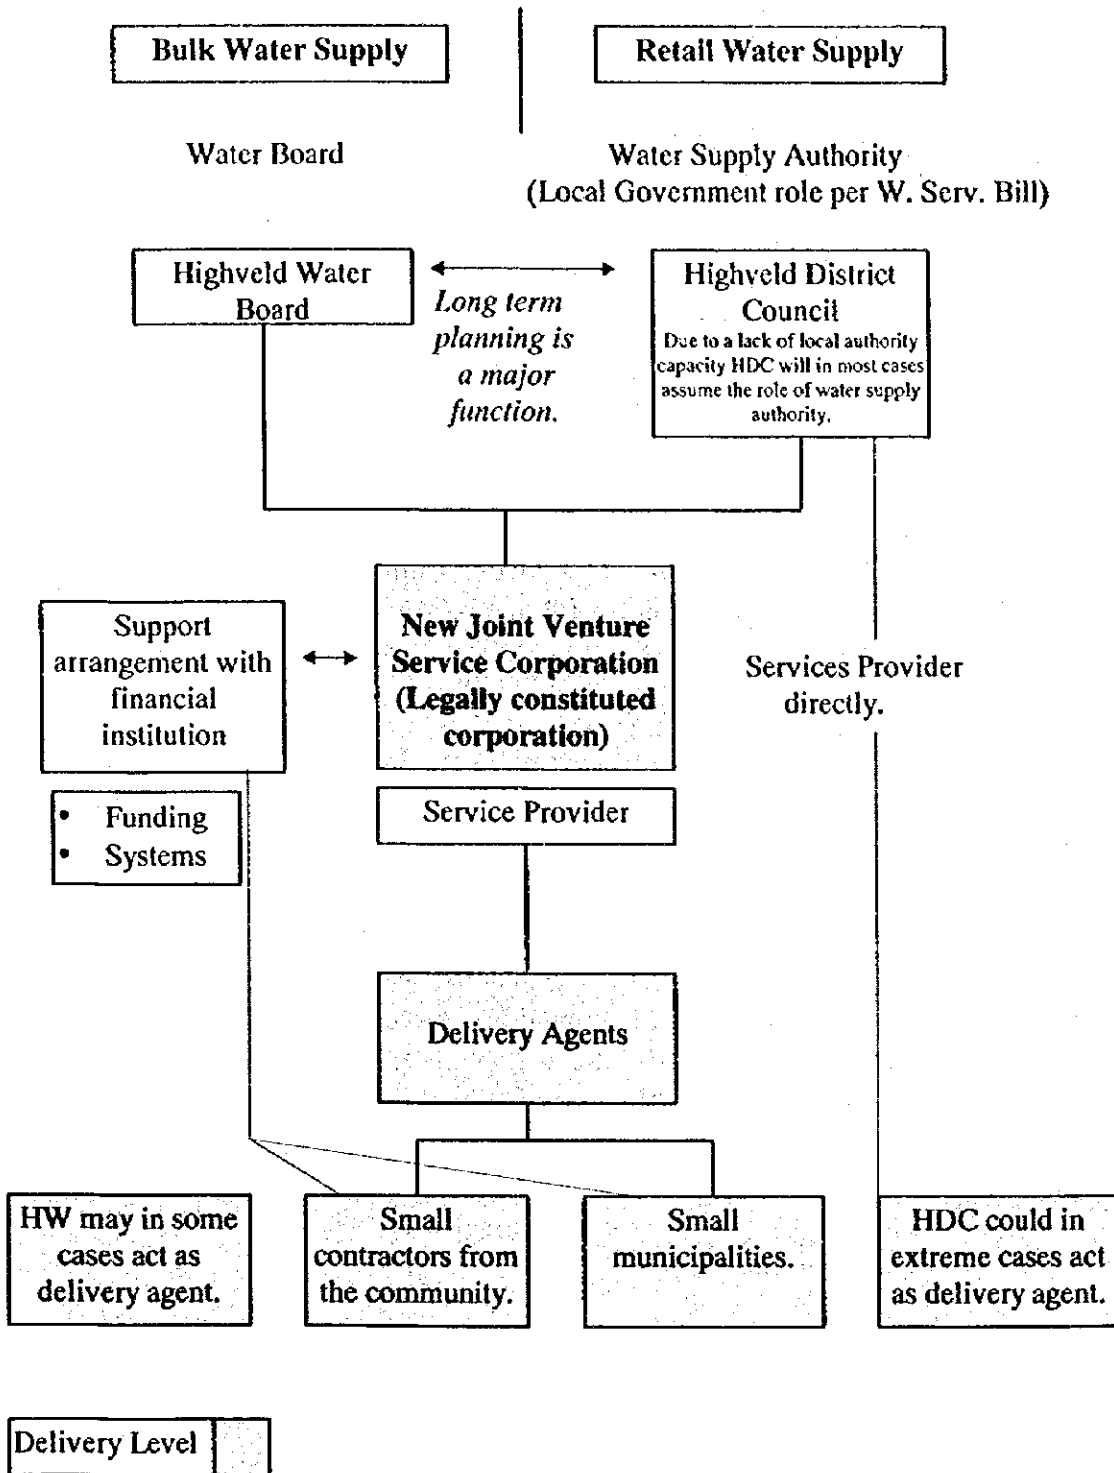

6.5.3 Criteria for Evaluating Options

Criteria which have been identified in this and other studies in the water sector against which institutional options can be evaluated are as follows:

- Will the proposed option promote **delivery** of water especially to remote and poor rural communities?
- Will the proposed option build **partnerships**, and produce a sustainable **institutional framework**?
- Will the proposed option achieve the **sustainable management** of existing and planned local and regional water schemes and infrastructure.
- Will the proposed option enjoy the **support of stakeholders?** (Regional, district and local government and communities).
- Is the period of implementation of the option realistic given the **urgency** of meeting needs?
- Is **capacity** available to implement the solution?
- Is the option **financially viable** in the medium-long term?
- Will the proposed option promote the necessary **strategic leadership** and management around regional water services?

6.5.4 Assessment of Options Against Criteria

Assessment of the options against the criteria, and discussion of the possibilities with key stakeholders, has led to the conclusion that there is no single option which will provide a solution to meet the needs in the FS Area. Rather that a solution which integrates the different options has the best probability of success. An integrated solution will also be acceptable to all stakeholders and this acceptance is essential to implementation of the option. The approach which has been adopted is therefore to develop a comprehensive solution integrating the different possibilities with particular attention given to the criteria of delivery, capacity, financial viability, sustainability and acceptability to stakeholders. It is also important to recognise the urgency of the needs. The approach is described in the next section.

6.5.5 Most Feasible Solution

Figure 6-4 illustrates solution which is proposed and described as follows.

(1) Bulk Supply

HW will be the bulk supplier as described in Section 6.4 and this does not need further elaboration.

(2) Water Services Provider (Area)

A HDC-HW Joint Venture Partnership should be formed to become the Services Provider in the FS Area as a whole. This role will require the JV to provide water services directly to communities or to intermediaries which may be created as discussed in Point (4) below.

The advantages of this JV functioning as Services Provider are that it could be put in place relatively quickly once HW is established given the learning experience and work done on this concept in the other FS Areas. This addresses the criteria of urgency. It will through links with its parent organisations also have some capacity to draw on. Delivery to communities is therefore more likely to take place in the short to medium term than without such a structure.

It is understood that this JV will not be constituted as a significant structure in its own right but rather as a vehicle for deploying resources and assuming contractual obligations. Staff are likely to be seconded to the JV on a transitional basis. Ultimately local authorities will be the main employers of O&M staff. It is therefore not appropriate to draw up an organisational structure chart.

(3) BOTT Contractor

DWAF has appointed a consortium in Mpumalanga to act as implementing agent for RDP water and sanitation projects in the Province on a build, operate, train and transfer basis. This is a private sector consortium with considerable capacity and is involved in all stages of project implementation. It is possible that an agreement could be reached with this consortium to implement the FS Area projects. This option should be considered given that HW will have very little planning and implementation capacity at first and will not be in a position to contribute resources to the HDC - HW JV. There are two ways the BOTT Contractor might become involved:

- (a) By means of an independent agreement between HDC - HW JV with the Contractor.**
- (b) By means of a tripartite agreement between DWAF, HDC - HW JV and the Contractor, whereby DWAF would extend the scope of the existing contract to include FS projects.**

It is noted that overall responsibility for services would at all times remain with HDC as the water services authority. The financing of projects would still have to be undertaken by HDC and HW in the case of retail and bulk respectively, (or jointly through the HDC - HW JV where appropriate).

(4) Community Level Structures (Local Services Provider)

It has become clear from the findings of the pilot projects that the sustainable supply of water to communities cannot be achieved unless some institutional capacity is in place at community level. Without such capacity being in place the criteria of sustainability and financial viability cannot be achieved. Thus while it has been strongly noted in Section 6.1.4 that there is no capacity at local level, the development of some capacity is essential to meeting service needs and therefore must be an integral part of the proposed solution.

Community level institutions will be the service providers at the point of delivery. The function at this level will need to operate in collaboration with the area Services Provider and it is likely that there will be contractual agreements in place between the two.

A variety of structures are possible at this level depending upon community size and service level.

(5) Intermediary Level Structures (Service Cooperatives)

There are seventeen communities in the FS Area with which the JV will need to interact in the process of service delivery. This presents a major challenge and given capacity limitations may lead to some communities being less well served than others. It is proposed that introducing an intermediary level structure may be important in coordinating service delivery. These intermediary structures have been shown in Figure 6-4 as "service cooperatives" for two reasons: Firstly the idea of sharing limited resources was introduced as a recommendation in the first phase of the JICA Study and was well received by stakeholders. Secondly in a number of circumstances water resources need to be managed on an area wide basis and this will require a "cooperative" approach. The form of such intermediary structures may range from simple coordinating committees, through formal constituted cooperatives (partnerships), to registered companies. Furthermore the need for such intermediaries will vary from one supply block to another and the form may change over time.

Introduction of this level of structure will contribute to achieving the criteria of acceptability amongst stakeholders of the service process and the promotion of leadership around planning and regional water management.

6.6 Staged Institutional Development Plan

6.6.1 General

The plans of institutional development and capacity building in water sector shall be prepared taking into account current situation of communities, project implementation plan and operation and maintenance schedules. In particular, institutional development of 3rd Tier in the project will be carried out by the following agencies concerned.

The master schedules of such development plan for the project divided into three stages, i.e 1st, 2nd and 3rd stages.

- (1) Agencies : Project Implementation Agency (infrastructure development) and Water Service Provider (operation and Maintenance)is JV between DC and WB or Bott, and Water Service Authority is District Council
- (2) Staged Development:
 - First (1st) Stage (1988-2002): Implementation of construction work and establishment of 3rd Tier institutional for Water Service Level A
 - Second (2nd) Stage (2003-2007): Implementation of up-grading of infrastructures and re-structuring of 3rd Tier organisation.
 - Third (3rd) Stage (2008-2012): Continuation of O & M and water tariff collection.

The concept charts of institutional development for each stages are illustrated in Figure 6-4 and 6-5 and staffing proposal for each service level tabulated in Table6-4.

- (3) Master Schedule:

Master schedule of each phases indicated in Table 6-5

6.6.2 Implementing Agency and Master Schedule

The plans which are outlined in the following sections are the responsibility of the implementing agency. For reference purposes it noted as identified in the report that:

- (1) Implementing Agency: RDP Level of Service

DWAF has responsibility for this level of service and acts as the implementing agent or appoints

an third party to undertake this function on its behalf. In Mpumalanga Province DWAF is undertaking this function itself.

(2) Implementing Agency: Higher Levels of Service

Higher levels of service are the responsibility of the local authorities which decide to provide such higher levels of service to users. These are thus the responsibility of the WSP which must act as the implementing agent for the aspects of projects which exceed the RDP minimum.

In the case of bulk supply the implementing agent is the water board for both RDP and higher levels of service.

Figure 6-4 Moretele 2 Feasibility Study Area Option : First and Second Stage

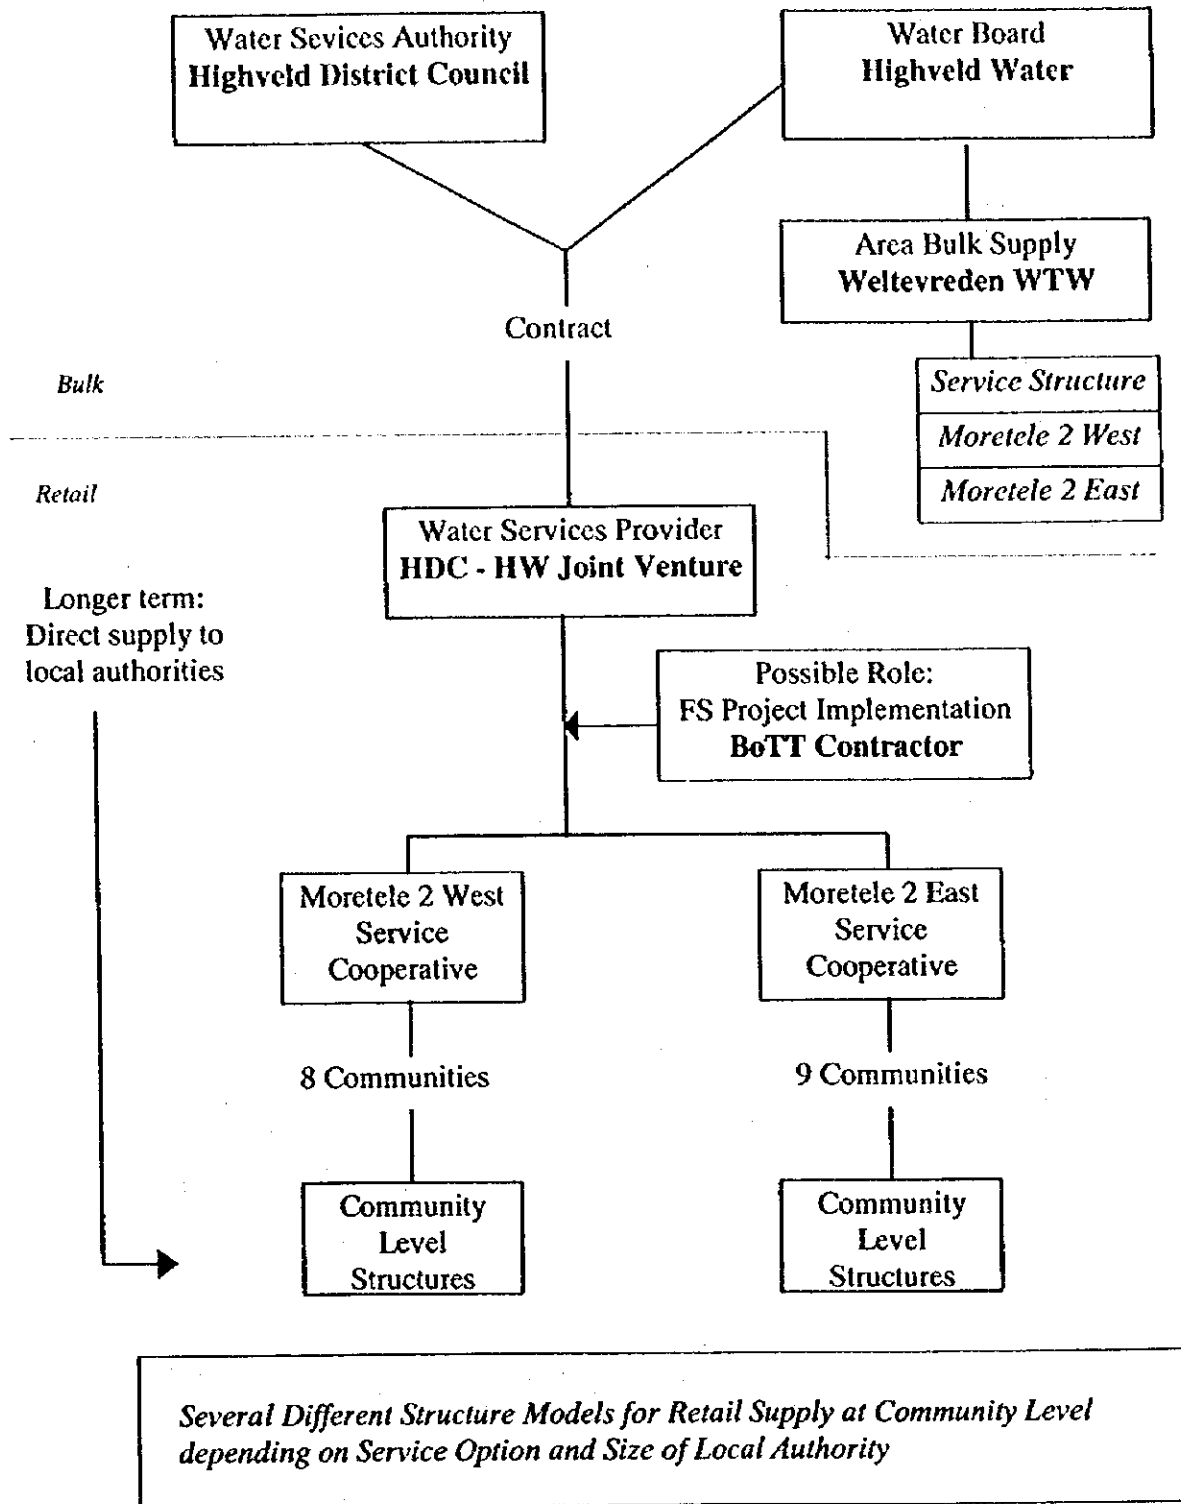


Figure 6-5 Moretele 2 Feasibility Study Area Option : Third Stage

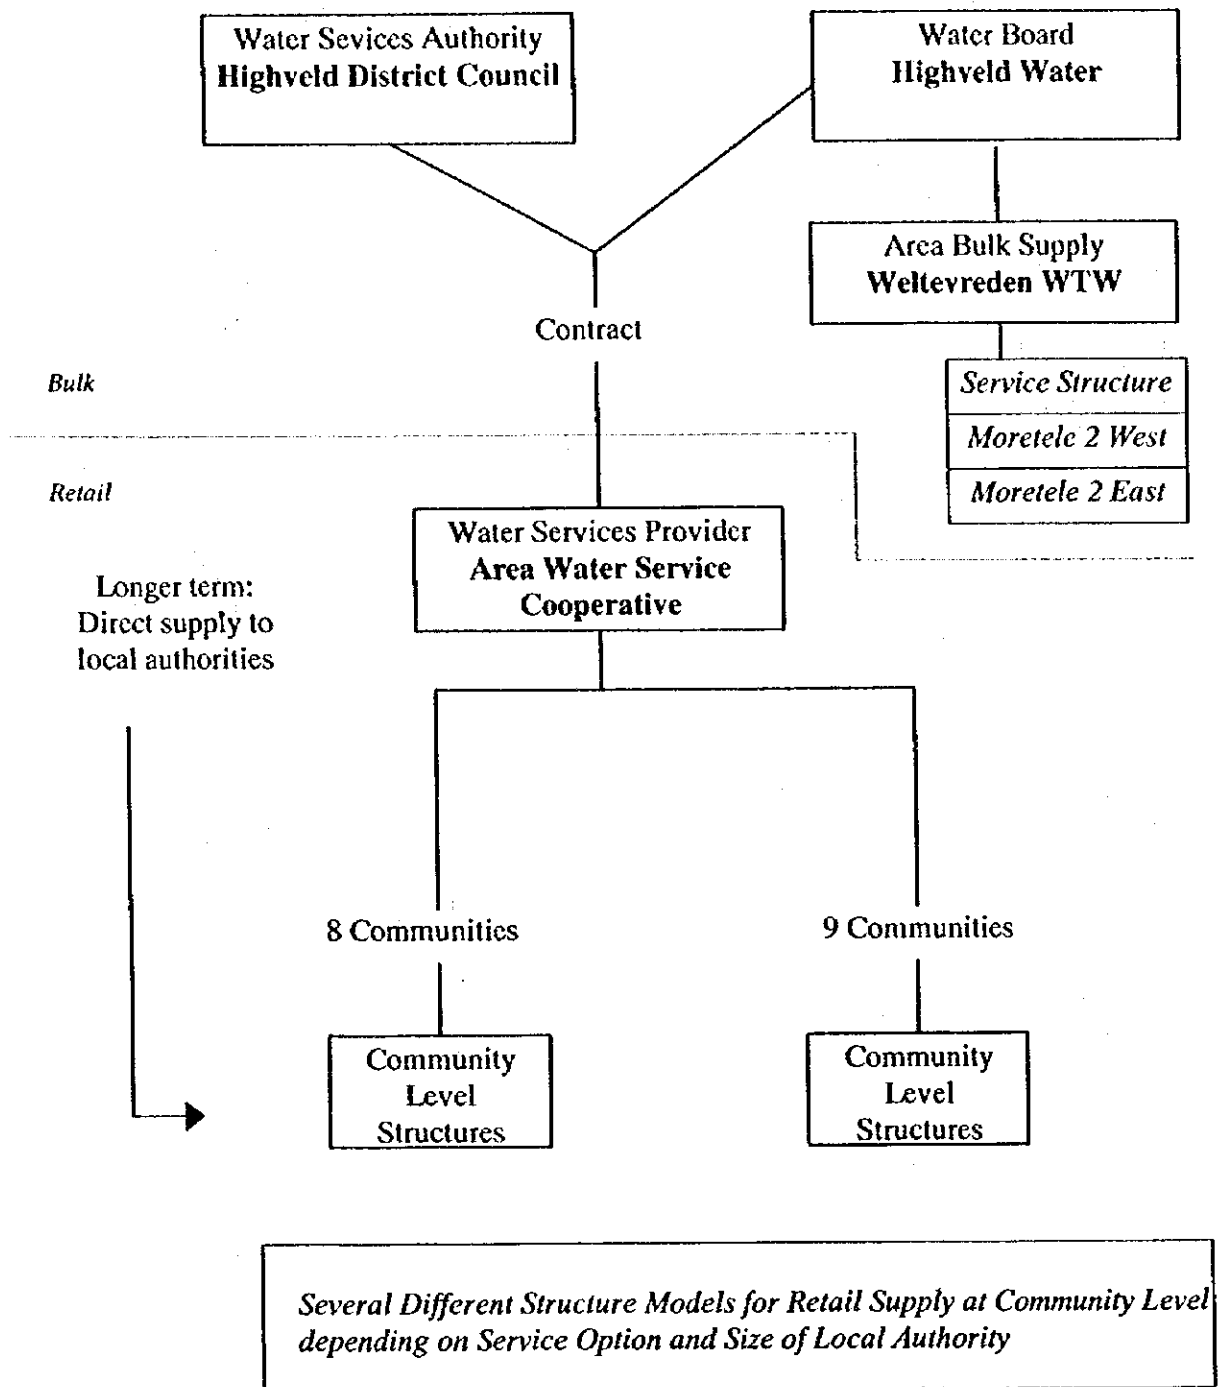


Table 6-4 Different Local Structure Models (Retail Supply)

Service Level A		
	Structure Model 1	Structure Model 2
Size	Small Community: e.g. 350 Households 2100 People	Medium: e.g. 800 Households 4800 People
Mngt	Water Committee: - Chair person - Vice Chair - Secretary - Treasurer	Water Committee: - Chair person - Vice Chair - Secretary - Vice Secretary - Treasurer
Staff	Operator (x 1) Water Bailiff (x 1) • Part-time employee/s. • Functions may be combined.	Bookkeeper / Administrator Operator (x 2) Water Bailiff (x 2) • Part-time employee/s.
Service Level B		
	Structure Model 3	Structure Model 4
Size	Small Community: e.g. 350 Households 2100 People	Medium: e.g. 800 Households 4800 People
Mngt	Water Committee: - Chair person - Vice Chair - Secretary - Treasurer	Water Committee: - Chair person - Vice Chair - Secretary - Vice Secretary - Treasurer
Staff	Operator (x 1) Pipe / Meter Maintenance (x1) Meter Readers / Collection Officers (x 2) • Some permanent positions. • Functions may be combined.	Bookkeeper / Administrator (x1) Operator (x 2) Pipe / Meter Maintenance (x2) Meter Readers / Collect. Officers (x 2) • Some permanent positions.

Table 6-5 Master Schedule of Institutional Development

Description	1998 - 2002					2003 - 2007					2008 - 2012				
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A. Construction Schedule															
(1) Level A Facility			■	■	■										
(2) Upgrading (1) Facility								■	■	■					
(3) Upgrading (2) Facility (if any)														
B. Water Supply Service															
(1) Service Level A					■	■	■	■	■	■					
(2) Service Level B (1)											■	■	■	■	■
(3) Service Level B (2)														
C. Institutional Development															
C1. Stage 1 Development															
(1) Contracting JV	■														
(2) Appointment of WSP	■														
(3) Establishment of LWCs	■	■	■	■											
(4) Preparation of Action Plan	■														
(5) Formation of BWSCs			■	■	■										
C2. Stage 2 Development															
(1) Strengthening of LWC/BWSCs						■	■	■	■	■					
(2) Operation of Basic Level Service					■	■	■	■	■	■					
(3) Consensus of Upgrading						■	■								
(4) Mentoring/Strengthening OM								■	■	■	■				
(5) Formation of AWSC									■	■	■				
(6) Fund / Loan Management						■	■	■	■	■					
C3. Stage 3 Development															
(1) Consolidation of AWSC										■	■				
(2) Permanent Operation										■	■	■	■	■	■
(3) Tariff Collection/ Loan Payment						■	■	■	■	■	■	■	■	■	■
(4) Mentoring/ Strengthening OM											■	■	■	■	■
C4. All Stages															
Capacity Building Activities	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■

6.6.3 Stage 1: 1998 - 2002

(1) Step 1: Preparatory Work

The main purpose of this step of the work is to get the policy decisions made necessary for project implementation to proceed, put in place the necessary institutional infrastructure and commence the process of engaging communities in planning.

Table 6-6 Action Plan (St.-1/Step-1)

Requirements	Notes	Responsibility
1) Formulation and achieving agreement on implementation and funding policy.	Policy responsibility for the sourcing of funding is essential.	DC
2) Establishment / designation of project implementation agency i.e. water service provider (WSP)	Establish JVs which is the key institution in the proposed structure. Once established these entities can take on the role of services Provider in the FS Areas and also the role of implementing agent for the FS projects.	HW and HDC
3) Preparation of basic work plan.		JV
4) Develop project initiation / promotion schedule and financial plan / budget.		JV
5) Recruitment of local consultants or private company to assist implementing agent with execution of work.	It is anticipated that due to lack of capacity identified amongst the key role players that outside assistance will be sought.	Implement. Agent: DWAF
6) Preparation of Short, Medium and Long Term Action Plans by local consultants.		DWAF or delegated party
7) Conduct basic socio-economic survey and institutional environment assessment.	This is the first step in the process of project implementation.	DWAF or delegated party
8) Establish / identify Local Water Committee / LPSC in each community providing for project promotion strategies and community awareness building.	Given that the proposed solution requires a level of institutional capacity to be developed at community level, it is essential that a programme is put in place in the stage 1 to achieve this. Such a programme will need to draw heavily on the experiences of the pilot projects.	DWAF or delegated party

(2) Step 2 : Initiation of Construction of Water Supply Infrastructure

The key focus during this step is to achieve the institutional development and functioning necessary for the implementation of the basic (i.e.RDP) level of service.

Table 6-7 Action Plan (St.-1/Step-2)

Requirement	Notes	Responsibility
1. Capacity building with LPSCs.	Ongoing capacity building to develop the foundations laid during Step 1 is essential.	DWAF or delegated party. Handover to WSP i.e JV
2. LPSC engagement of project planning and participation in decision making on project design and selection of contractors.	Active involvement by communities in all key decisions is necessary.	HDC - HW JV
3. Assistance with and involvement in the construction process.	Communities will participate in the construction process.	Contractor
4. Development of Operation and Maintenance plan for service level A.	In preparation of for the commissioning of the basic level of service infrastructure. Plans must detail the requirements in terms of: <ul style="list-style-type: none"> • Processes / systems. • Resources • Funding 	HDC - HW JV
5. Establishment of Block Water Supply Cooperatives (BWSC).	A lack of capacity within communities lead to the need identified in the pilot projects for a support infrastructure beyond the boundaries of each project. This has been addressed in the Study recommendations by the concept of BWSCs whereby communities can share capacity and scarce resources.	HDC - HW JV
6. Development of area support networks.	This is the first stage in the process of generating the interaction necessary for the ultimate formation of area water supply cooperatives which may take over the role of the JV.	HDC - HW JV
7. Preparation of a policy in respect of the proposed reserve / accumulation fund for higher levels service and the promotion of a project to achieve this to the communities.	Necessary for transition to stage 2 planning.	HDC - HW JV

(3) Step 3: Commissioning and Trial Operation of Initial Projects

This stage is concerned with the operationalising the initial basic level of service infrastructure which has been constructed and developing the necessary operations and maintenance strategies and plans necessary to ensure sustainability.

Table 6-8 Action Plan (St.1/Step-3)

Requirement	Notes	Responsibility
1. Review, evaluation and amendment of operating and training manuals as necessary.	Contractors have a history of not providing for hand over nor preparing adequate operations manuals. Monitoring is thus essential.	HDC - HW JV
2. Capacity building with LPSCs and local operating structures which have succeeded them. Focus on operations and maintenance.	Ongoing capacity building to develop the foundations laid during Step 1 and 2 is essential.	HDC - HW JV
3. Finalise and implement local operating structures.		HDC - HW JV
4. Conclusion of hand over agreements.		HDC - HW JV
5. Trial operation of infrastructure and mentoring of operations, maintenance and administration staff.	A major barrier to sustainability in the past has been the lack of mentoring involved in projects post handover.	HDC - HW JV
6. Formalise area service network and formulate plan with JV for transition to a cooperative to combine BWSCs into an overall organisation performing WSP role.		HDC - HW JV
7. Set up of reserve / accumulation fund for higher levels of service and commencement of collection of reserve contributions.	Establishment and accumulation of reserves from initial stages is essential if adequate reserves are to be built up to achieve the higher level of service.	HDC - HW JV

6.6.4 Stage 2: 2003 - 2007

(1) Step 1: Preparatory Work and Implementation of Process for Higher Service Level

Local structures developed during Stage 1 will need to be developed to play a full role in project implementation, commissioning and operation and maintenance. Also in the development of the process of planning and providing for up grading of service levels.

Table 6-9 Action Plan (St.-2/Step-1)

Requirement	Notes	Responsibility
1. Capacity building with local operating structures. Focus on operations and maintenance sustainability.	Ongoing capacity building to develop the foundations laid during Phase 1 is essential.	HDC - HW JV
2. Formulation and achieving agreement on implementation and funding policy for up-graded level of service.	Policy responsibility for new / additional sources of funding is essential.	HDC - HW JV
3. Preparation of basic plan.		HDC - HW JV
4. Develop project initiation / promotion schedule and financial plan / budget.	Up-graded level of service	HDC - HW JV
5. Recruitment of local consultants or private company to assist with execution of work.	It is anticipated that due to lack of capacity identified amongst the key role players that outside assistance will be sought.	HDC - HW JV
6. Preparation of detailed Action Plans by local consultants.	Implementation of up-graded level of service	For HDC - HW JV
7. Strengthening of BWSCs	Undertaking O & M and fees collection	WSP

(2) Step 2: Implementation of Higher Level of Service Projects**Table 6-10 Action Plan (St.-2/Step-2)**

Requirement	Notes	Responsibility
1. LPSC engagement in project planning and participation in decision making on project design and selection of contractors.	Active involvement by communities in all key decisions is necessary.	HDC - HW JV
2. Assistance with and involvement in the construction process.	Communities will participate in the construction process.	Contractor
3. Development of Operation and Maintenance plan for service level B.	In preparation of for the commissioning of the basic level of service infrastructure. Plans must detail the requirements in terms of: <ul style="list-style-type: none"> • Processes / systems. • Resources • Funding 	HDC - HW JV
4. Deposit of reserve funds and disbursement of credit loans	Management of reserve funds and loans	WSP

(3) Step 3: Commissioning and Trial Operation of High Service Level Projects

Intermediary structures necessary will need to be transformed to cater for Third Stage needs by rationalisation of BWSCs..

Table 6-11 Action Plan (St.2/Step.3)

Requirement	Notes	Responsibility
1. Review, evaluation and amendment of operating and training manuals as necessary.	Contractors have a history of not providing for hand over nor preparing adequate operations manuals. Monitoring is thus essential.	HDC - HW JV
2. Capacity building with local operating structures. Focus on operations and maintenance higher service level infrastructure.	Ongoing capacity building to develop the foundations laid during previous phases / stages is essential.	HDC - HW JV
3. Finalise and implement revised local operating structures.	Preparation of new water tariff system by used volume of water	HDC - HW JV
4. Conclusion of hand over agreements.		HDC - HW JV
5. Trial operation of infrastructure and mentoring of operations, maintenance and administration staff.	A major barrier to sustainability in the past has been the lack of mentoring involved in projects post handover.	HDC - HW JV
6. Re-structuring of BWSCs and JV organisations.	Objectives will be to: <ul style="list-style-type: none"> • Utilise local capacity built up during Stages 1 & 2 • Delegate to local authority level as much of the HDC - HW JV role as possible. • Reduce the umbrella role of the JV. 	HDC - HW JV and BWSC
7. Funds management		WSP

6.6.5 Stage 3: 2008-2012

Roles and responsibilities will change over time and realignment will necessarily need to take place. To illustrate this it is noted that in the second stage the JV structures may fall away with the intermediary structures amalgamating to fulfilling this role. In the long term as capacity is developed the local structures will take full responsibility for service provision themselves with no intermediary structures.

Table 6-12 Action Plan (St.-3)

Requirement	Notes	Responsibility
1. Capacity building with local operating structures. Focus on sustainability.	To achieve the situation where local structures assume responsibility for the Services Provider role there will need to be significant strengthening of these structures in the stage 2 to stage 3.	HDC - HW JV
2. Enhancement operations and maintenance performance on a continuous basis.		HDC - HW JV

6.7 Roles and Responsibilities

Given the proposed institutional solution and the requirements of the development plan outlined, it is important that the related roles and responsibilities are clear. It is proposed that these be as follows:

Table 6-13 Roles and Responsibilities

Bulk Water Supply			
Institution	Phase	Role	Responsibility
Highveld Water	Set-up	Leadership	<ul style="list-style-type: none"> Assisting HDC set up JV for service provision.
	Project Implementation	Bulk Supply.	<ul style="list-style-type: none"> Development of necessary bulk infrastructure.
		Retail Implementation Support	<ul style="list-style-type: none"> Technical design inputs Managing implementation aspects as delegated in JV agreement.
	Operation and Maintenance	Service Delivery Support	<ul style="list-style-type: none"> Coordination with Services Provider and providing agreed support.
Retail Water Supply			
Institution	Phase	Role	Responsibility
DWAF (i.r.o.RDP level of service) Highveld District Council (i.r.o.higher level of service)	Set-up	Leadership	<ul style="list-style-type: none"> Setting up JV with HW. Initiating programme to develop local level service structures.
	Implementation	Services Authority	<ul style="list-style-type: none"> Planning service delivery, (i.e. preparation of a plan as required in the WS Bill) Ensuring funding is sourced for delivery infrastructure.
	Operation and Maintenance		<ul style="list-style-type: none"> Ensuring service delivery takes place.

Table 6-13 Roles and Responsibilities (Continue)

Retail Water Supply			
Institution	Phase	Role	Responsibility
HDC - HW JV	Set-up	Leadership	<ul style="list-style-type: none"> • Implementing programme of local level structure / community development.
	Implementation	Implementing Agent.	<ul style="list-style-type: none"> • Detailed planning for projects. • Implementation of projects. • Commissioning of projects.
	Operation and Maintenance	Services Provider in the short term (area and local level) and medium term (area level).	<ul style="list-style-type: none"> • Operating local level supply in the short term. • Planning (and ensuring) hand over to local level structures. • Development programme necessary for hand over.
Intermediary Structures	Implementation	Leadership	<ul style="list-style-type: none"> • Coordination amongst stakeholder communities. • Area water supply planning coordination. • Cooperative ventures between communities.
	Operation and Maintenance.	Possible Services Provider in the stage 2.	<ul style="list-style-type: none"> • Operating area level supply in the stage 2 • Planning (and ensuring) hand over to local level structures. • Resource development and pooling of resources necessary for hand over.
Local Authorities / Communities	Set-up	Leadership.	<ul style="list-style-type: none"> • Setting up legitimate and effective PSCs and similar structures.
	Implementation	Implementing agent support.	<ul style="list-style-type: none"> • Inputs to planning process. • Contracting with Services Provider for service provision.
	Operation and Maintenance.	Services Provider at local level in the stage 2 and 3.	<ul style="list-style-type: none"> • Operating local level supply in the stage 1. • Planning (and ensuring) hand over to local level structures. • Institutional development programme necessary for hand over.

6.8 Monitoring and Evaluation

6.8.1 Task Force / Forum

It has been proposed that a task force or forum is put in place to take implementation forward after the conclusion of the JICA Study, particularly in the period before the provisions of the Water Services Bill are implemented, and the RDC-MW JV is in place. This proposal has been agreed to by the PSC. The main function of the group will be to monitor implementation of the recommendations made in the Final Report.

6.8.2 Requirements of the Water Services Bill

The Water Services Bill discussed in Section 5.2 makes specific provision in Section 19 for the process of the Water Services Authority reporting on progress in implementing water services. This reporting must be against a water services plan which covers inter alia:

(1) Five Year Period

The plan must cover a five year period including the detailed programme for the five year period.

(2) Method of Services Provision

This includes the appointed water service providers and the contractual relationships with them.

(3) Infrastructure

The proposed infrastructure necessary for delivering the services.

(4) Capital and Operating Cost

The estimated capital and operating costs of the water services and the financial arrangements to fund these services including tariff structures.

Reporting against the above itself is required to be done for each financial year within four months of the year end. A summary of the report is to be published in the area of operation.

Based on this report the Minister has powers to intervene and thereby ensure that the provision of service takes place.

CHAPTER 7

IMPLEMENTATION ARRANGEMENT

TABLE OF CONTENTS

7.1	Project Implementations Schedule	7-1
7.1.1	Overall Schedule.....	7-1
7.1.2	Implementation Schedule for Service Level A (Stage 1).....	7-1
7.1.3	Implementation Schedule for Service Level B (Stage 2).....	7-2

LIST OF FIGURES

Figure 7-1	Overall Implementation Schedule.....	7-3
Figure 7-2	Implementation Schedule (Infrastructure).....	7-4

CHAPTER 7 IMPLEMENTATION ARRANGEMENT

7.1 Project Implementation Schedule

7.1.1 Overall Schedule

The proposed project (Case C-1) will be implemented in three stages starting at year 1998 and ending 2012, comprising stage 1 (1998 – 2002), stage 2 (2003 – 2007) and stage 3 (2008 – 2012). The stage 1 involves preparation of water supply facilities under the service level A with necessary establishment of LWCs (Local Water Committees) and BWSCs (Block Water Supply Cooperatives). The Stage 2 includes commission and operation of the Level A services and preparation of upgrading the service level as well as restructuring of BWSCs. The stage 3 does commission and operation of the Level B services as illustrated in Figure 7-1.

7.1.2 Implementation Schedule for Service Level A (Stage 1)

An initial cost estimate has been prepared for both the level of service A and B, however detailed design would make it possible to arrive at more accurate costs. Strengthening the institutional capacity of the proposed Water Services Authority and Provider would commence during the implementation period through maximum mobilisation and involvement of the beneficial communities. The overall implementation will require a 5-year period. The first two years will be used for arranging the loan and finalising the detailed design while the remaining three years will be for construction works as shown in Figure 7-2.

The implementation schedule shows the first three quarters of 1998 during which arrangement of the loan funding will take place; the detailed design will follow and is scheduled for completion by late 1999. The first tenders for construction will be called at the beginning of 2000.

It is also envisaged that the construction work will be separated into two packages each corresponding to two of the four Supply Blocks in the Area. This arrangement will increase the amount of administration required but is necessary to ensure the completion of the project by the end of 2002, the target year for providing the RDP minimum level of services.

It is estimated that approximately 20 months will be required for construction in the Moretele 2 East Supply Block while 12 months will be adequate for the Moretele 2 West Supply Block. Priority is given to Moretele 2 East since this package includes the extension of the water treatment works at Weltevreeden. It also allows immediate commissioning of the system upon completion.

Careful scheduling of work during the construction stage in Moretele 2 West will also allow partial commissioning of the system to begin even before completion of the contract.

7.1.3 Implementation Schedule for Service Level B (Stage 2)

Basically, implementation of the stage 2 will start from year 2003 including two years for fund preparation, detailed design and tendering processes, three years for construction of upgrading facilities with test run and commissioning. During the said five years term, restructuring of water supply cooperatives will take place under the institutional development programme, through which sustainable operation and management of the water supply facilities will be assured. In some case that a certain community will not able to make consensus among members for upgrading the facilities, there will some room to implement the upgrading process as the stage 3.

Figure 7-1 Overall Implementation Schedule

Description	Stage 1					Stage 2					Stage 3				
	1998~2002					2003~2007					2008~2012				
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
1. Water Supply Service Level															
(1) RDP Service Level A															
(2) Up-Grading Level (1)															
(3) Up-Grading Level (2)															
2. Infrastructure Development															
(1) Fund arrangement															
(2) Detailed design and tendering															
(3) Construction works															
(4) Commissioning															
3. Operation and Maintenance															
(1) Stage 1 Project															
(2) Stage 2 Project															
4. Institutional Development															
(1) Stage 1 development															
(2) Stage 2 development															
(3) Stage 3 development															
5. Water Tariff Collection															
(1) Flat rate tariff															
(2) Quantity Based tariff															
6. Fund Sources															
(1) Reserve fund deposit															
(2) Loan repayment															

Figure 7-2 Implementaiton Schedule (Infrastructure)

Item	1998~2002					2003~2007					2008~	
	1	2	3	4	5	1	2	3	4	5	1	2
A. Stage 1												
1. Finance Arrangement	■											
2. Detailed Design		■	■									
- Selection of Consultants		■										
- Detailed Design			■									
3. Constrtuction			■	■	■							
- Contracting			■	■	■							
- Construction Supervision				■	■							
Package 1 (Moretele 2 East)				■	■							
Package 2 (Moretele 2 West)					■							
4. Institutional Developoment	■	■	■	■	■							
B. Stage 2												
1. Finance Arrangement					■	■						
2. Detailed Design						■	■					
- Selection of Consultants						■						
- Detailed Design							■	■				
3. Constrtuction Supervision								■	■			
- Contracting								■	■			
- Construction Supervision									■	■	■	
Package 1								■	■			
Package 2										■	■	
4. Institutional Developoment						■	■	■	■	■		
C. Stage 3												
OM and Institutional Reform											■	■

CHAPTER 8

ENVIRONMENTAL IMPACT ASSESSMENT

TABLE OF CONTENTS

8.1	Objectives and Scope of the Study	8-1
8.1.1	Objectives.....	8-1
8.1.2	Scope of the Study	8-2
8.2	Summary of the Proposed Infrastructure Plan.....	8-3
8.3	The Natural Environment.....	8-3
8.3.1	Climate	8-3
8.3.2	River Conservation Status	8-3
8.3.3	Water Quality.....	8-4
8.3.4	Aesthetics	8-4
8.3.5	Flora.....	8-4
8.3.6	Fauna	8-5
8.4	The Socio-Economic Environment.....	8-5
8.4.1	Recreation.....	8-5
8.4.2	Land use.....	8-5
8.4.3	Cultural/Historical Issues	8-5
8.4.4	Infrastructure	8-5
8.4.5	Interested and Affected Parties	8-6
8.5	Important Environmental Impacts.....	8-6
8.5.1	Negative impacts.....	8-6
8.5.2	Positive impacts	8-7
8.6	Conclusions and Recommendations.....	8-8
8.6.1	Conclusions	8-8
8.6.2	Recommendations	8-8
8.6.3	Futher Action.....	8-9

LIST OF TABLE

Table 8-1	Summary of the Proposed Infrastructure Plan (Service Level B)	8-3
-----------	---	-----

CHAPTER8 ENVIRONMENTAL IMPACT ASSESSMENT

8.1 Objectives and Scope of the Study

8.1.1 Objectives

The environmental impact assessment described in this Chapter constituted a study of the potential environmental impacts which can be expected from options considered for the Moretele 2 Area Feasibility Study which forms part of the Master Plan to expand the capacity of Magalies Water. Inevitably, development leads to modifications in the environment and negative environmental impacts, which often result from inappropriate management of development activities because of a lack of appreciation of the potential problems. All components of the environment that might be involved were identified so that appropriate ameliorative actions can be integrated with the project as a whole to obtain the best possible results.

It is important to note that the environmental study itself at this stage of the project preparation is also at a feasibility level and aims to prepare a prognosis of relevant issues. Accent has been placed on the impacts of the proposed pipelines and other related surface structures as these were seen as the elements causing greatest concern.

Relevant data from preliminary investigation reports was extracted to provide baseline information. Additional, more detailed information was obtained to update the existing information as was presented in the ROIP 1 Report (Relevant Environmental Prognosis Report).

The construction of pipelines, reservoirs and treatment works could have an impact on the socio-economic aspects, i.e. land use, settlement, infrastructure and population, and the ecological aspects, i.e. the vegetation, fauna, habitat, changes in flow regime and changes in water quality. The study was undertaken on an incremental basis with the relevant environmental impact prognosis phase (ROIP2) as the second feasibility step.

The ROIP 2 will identify the anticipated environmental impacts and state the feasibility of the proposed options from both an ecological and socio-economical and environmental viewpoint. The socio-economical impacts are presented in another module. The need for further more detailed studies will be identified from the data available at this point. The extent of further work needed on the ecological and socio-economical aspects will be defined in the ROIP 2 report.

The ROIP 2 constitutes an assessment of the potential environmental impacts which can be expected from options for extending the water supply network in the Moretele 2 FS Area.

8.1.2 Scope of the Study

The scope of this assessment is to investigate the environmental impacts associated with the proposed water treatment works, pipelines, reservoirs, elevated tanks and pumping stations to supply safe drinking water to the Area. The scheme considered is the preferred option which has been proposed to augment the water supply in the Area.

Accent has been placed on the impacts of the proposed pipelines and the other surface structures as this is seen as the component likely to cause the greatest impact over the largest area.

Three technical alternatives were evaluated during the Master Plan stage for the Moretele 2 Project Area. As part of this Feasibility Study, those alternatives were re-examined using the Case B water demand. For Service Level B (Case B) 90 % of households will be supplied through yard connections (85.6 lcd) and the remaining 10 % through standpipes (30 lcd) installed to the RDP level of service, giving a weighted average consumption rate of 80 lcd including an allowance of approximately 15 % for leakage.

The aspects that will be addressed in this report are:

- (1) the effect of abstraction from the Mkombo Dam and the Elands River downstream of the dam.
- (2) the impact of the construction of pipelines, pumping stations, reservoirs and elevated tanks. The main activities to be expected during the construction of the proposed developments are the following:
 - (a) Pre-construction phase: Surveying, clearing of vegetation and construction of access routes.
 - (b) Construction phase: Typical activities will be clearing of vegetation, stripping and stockpiling topsoil, excavations, disposal of excess material, transporting of pipes, drilling, blasting, additions or alterations to existing infrastructure and the importation of workers, including their accommodation and recreational facilities.
 - (c) Post-construction and operational phase: Rehabilitation of disturbed areas, operation and maintenance of the water treatment works, the pipelines, regional and service reservoirs, elevated tanks and pumping stations. Also included will be the impacts on sanitation due to the increased water consumption.

The ROIP 2 which incorporated in detail in Annex B report gives an overview of expected impacts and recommends further environmental investigations to be done during the detailed design stage.

8.2 Summary of the Proposed Infrastructure Plan

Features of the proposed Infrastructure Plan are summarised in Table 8-1 and the details are discussed in Chapter 4 of this report.

Table 8-1 Summary of the Proposed Infrastructure Plan (Service Level B)

Supply System	Facility	Specification	Quantity
(1) Bulk Water	Intake	Max. Q = 182.3 l/s	1
	Treatment Works	15.0 Mld	1
	Pumping station	Max. Q = 7.6 - 60.1 l/s	6
	Reservoirs	3,200 - 5,200 m ³	2
	Pipelines	Dia. 90 - 500 mm	135 km
(2) Retail Water	Reservoirs	20 - 490 m ³	52
	Pipelines	Dia. 63 - 200 mm	483 km
	Yard connections		14,733
	Standpipes		420

8.3 The Natural environment

8.3.1 Climate

The Moretele 2 Feasibility Study Area comprises Moretele 2 Magisterial District of Mpumalanga Province. The area is essentially rural in nature. Average annual rainfall is approximately 510 mm and summer rainfall predominates falling mainly between October and March. The area drains to the Gotwane, a tributary of the Elands River, and to Mkombo Dam. Annual average evaporation is over 2,200 mm and is higher in summer than in winter and annual monthly temperatures vary from 12 to 25° C. Prevailing winds are light to moderate in a north easterly direction and typical wind speeds are 2.5 to 3.5 m/s.

8.3.2 River Conservation Status

The conservation status of the rivers is likely to be poor in most instances, as all of the rivers are regulated by dams and weirs. The impact on the Gotwane River, a tributary of the Elands River, as a result of the proposed project is seen as negligible although it will depend on future management of the dam and the future rate of increase of return flows further upstream in the catchment.

8.3.3 Water Quality

The project will have limited impact on water quality but the water quality may have an impact on the project. If the water quality deteriorates, the purification costs will increase. The water quality changes that will take place will depend on the present and future land use activities but to a greater extent on return flows as referred to above.

The water is generally of a good quality for domestic use. No comment can be made on the bacteriological and other biological qualities of the water as data is not available.

The effluent from the water treatment works will be discharged into the Moretele River after sedimentation in ponds. The quality of the river water will not be negatively influenced because of the low sediment content of the return water and the small quantity of effluent (3 to 4% of the abstracted volume.)

The lack of adequate sanitation facilities in the proposed water supply area can have an impact on the surface and groundwater quality in the area and can also have a negative health implication.

8.3.4 Aesthetics

The aesthetics of the Moretele 2 Area is generally low as it is a rurally developed area with few undisturbed areas.

The construction of pipelines in the road reserve will cause some disturbance and scar the roadside on a temporary basis rather than a permanent basis as the pipeline will be buried. Erosion could be accelerated during construction. The manholes with isolating, air and scour valves will be visible.

The increased water consumption and the lack of adequate sanitation facilities can have an impact on the aesthetics of the supply area.

8.3.5 Flora

The dominant vegetation types in the Moretele 2 are mixed bushveld and sourish mixed bushveld. The proposed pipelines within existing road or pipeline reserves are not seen as areas of major impact as the areas are seen as having low aesthetic values and a highly disturbed natural environment. Construction activities could cause further disturbance of the area, which could result in the infestation of invasives which could be transported to the area in a number of ways.

8.3.6 Fauna

Most of the Project Area is disturbed and the proposed development will have a negligible effect on the mammals, birds, reptiles amphibians and other organisms in the area.

8.4 The Socio-Economic Environment

8.4.1 Recreation

The pipelines and other surface structures will have no impact on recreation.

8.4.2 Land use

In general the existing land use in the Project Area will be negligibly influenced except in areas where land is expropriated for reservoir sites.

8.4.3 Cultural/Historical Issues

Very little is known about the archaeological and historical sites in the Project Area.

8.4.4 Infrastructure

Access to secondary roads may be temporarily disrupted. The construction activities may also result in the premature degradation of the existing road surface due to the increase in heavy vehicle traffic.

Fences may be temporarily broken during construction and local residents should be aware of this in good time, in order to remove any livestock and children in those particular areas.

Disturbance of any existing infrastructure, power and telephone lines, will have a temporary disruptive impact.

8.4.5 Interested and Affected Parties

The construction activities will cause some disturbance and inconvenience to the local people.

Construction activities will cause a temporary influx of people which could lead to an artificial economic boom for the area. The influx of people could also lead to poaching and littering. These impacts could also include increased pressure on local resources for food and for accommodation and on community life. This impact is temporary and may not present a large impact.

There will be some employment opportunities for local people.

Apart from the visual impacts of construction work, there will also be a considerable level of noise, dust, vibration and increased traffic. This could have an adverse effect on the inhabitants of the area close to the construction activities, as well as on the aesthetics of the area. These effects are temporary.

8.5 Important Environmental Impacts

The important environmental impacts for the Project were discussed and incorporated in the ROIP 2 Report. The following is a summary of the negative and positive impacts of the proposed development on the environment.

8.5.1 Negative impacts

The following is a list of negative impacts that could arise due to the construction of the pipelines and related surface works. This is a comprehensive list and many of these impacts are not considered to be severe.

- (1) The construction of the pipelines and the related infrastructure could:
 - cause disturbance within the existing road reserves;
 - have a negative impact on the aesthetic value of an area;
 - cause erosion on the exposed slopes;
 - cause/accelerate the invasion by exotic terrestrial plants;
 - cause disturbance of a section of the river channels where pipelines crosses the channels;
 - cause increased sediment loads within the rivers.
 - noise pollution;

- water pollution;
- the introduction and encroachment of alien plants;
- inconveniences to affected local farmers and other local residents;
- social disruption;
- inconveniences to affected road users.

All these impacts are of a temporary nature during construction except for the invasion of exotic terrestrial plants.

- (2) The increased availability of drinking water in the Moretele 2 Area may have an impact on the sanitation of the area. As sanitation facilities are generally below the RDP level of a VIP latrine. It is expected that the area could be negatively impacted by the increased availability of water. It is expected that the waste and excess water will be discarded randomly. The areas surrounding houses and standpipes may become wet depending on the drainage potential of the soils in the area. This may also lead to an increase in the potential for pollution of the surface water in the area. Depending on the soil types and the groundwater potential of the area it may also impact the groundwater quality of the area. The lack of adequate sanitation facilities can also have a health implication for the communities. The impact would be greater if the Case B water supply option is pursued.

It is anticipated that after implementation of the proposed scheme groundwater would be utilised for non-potable and emergency purposes only.

- (3) At present very little information is available on the occurrence of archaeological and historical sites and a Phase 1 survey is proposed before any construction is started.

In summary, the major negative impacts include the disturbance of an already highly disturbed area of low ecological value, coupled with a low conservation status and aesthetic value. Another negative impact may be on the areas where wastewater is discarded.

8.5.2 Positive impacts

The major positive impacts are related to the availability of a reliable and safe water supply to an increased number of people in the Moretele 2 Area. Construction activities could cause temporary economic upliftment in the immediate vicinity.

8.6 Conclusions and Recommendations

8.6.1 Conclusions

The construction of pipelines and related infrastructure will not cause substantial disturbance. The environmental consequences associated with these impacts are not considered to be significant if managed during and after construction as stipulated in the Environmental Management Plan.

The impacts of abstraction from the Mkombo Dam are not considered to be significant, but with a degree of uncertainty.

The lack of sanitation facilities coupled with an increase in the drinking water supply can impact on the sanitation of the supply area particularly if the higher Service Level is adopted.

8.6.2 Recommendations

The issues to be determined in the detail design phase of the scheme are summarised as follows:

(1) Social impacts

- The social and economic impacts associated with construction disturbance on farming activities along the pipeline routes.
- This investigation should include meetings with the local communities to determine the preferences of the communities to any options or alternative developments, especially in the siting of the regional and service reservoirs.
- The lack of adequate sanitation facilities need to be investigated.

(2) Ecological impacts

- A Phase 1 archaeological survey of the proposed pipeline routes and especially the reservoir sites is recommended.
- General rehabilitation measures.
- Identify birds and their nesting sites where appropriate.
- Liaise with all the interested and affected parties.
- Compile an Environmental Management Plan for the construction phase and draw up appropriate rehabilitation guidelines to mitigate the disturbances and aesthetic impacts caused by the construction of the

- pipelines and associated infrastructure.
- Alert the contractor and labourers to the ecological and social impacts associated with the construction activities.
 - Landscaping specification for the river and canal crossings as well as the permanent access roads.

8.6.3 Further Action

Implementation agencies shall take necessary action on the conclusion of the committee meeting, which was held on 20th October 1997, for successful execution of the Project. The Minutes of Meeting for the committee incorporated in the Annex b of this report.

CHAPTER 9

PROJECT EVALUATION AND RISK ANALYSIS

TABLE OF CONTENTS

9.1	Engineering Aspects.....	9-1
9.1.1	Water Source and Water Supply System.....	9-1
9.1.2	Infrastructure Planning.....	9-1
9.1.3	Coordination with Existing RDP Projects.....	9-1
9.2	Insitutional Aspects.....	9-2
9.2.1	Water Service Aouothority.....	9-2
9.2.2	Water Service Provider.....	9-2
9.2.3	Community Involvement.....	9-2
9.3	Financial Aspects.....	9-3
9.4	Economic Aspects.....	9-4
9.4.1	General.....	9-4
9.4.2	Economic Benefit.....	9-4
9.5	Social Aspects.....	9-5
9.5.1	Special Consideration of Low Income Groups.....	9-5
9.5.2	Equitable Supply and Cost Sharing System.....	9-6
9.5.3	Unauthorised/Illegal Connection and Cost Recovery.....	9-6
9.6	Environmental Aspects.....	9-6

LIST OF TABLES

Table 9-1	Financial Internal Rate Return (FIRR) and NPV.....	9-3
Table 9-2	Result of Economic Analysis.....	9-5

CHAPTER 9 PROJECT EVALUATION AND RISK ANALYSIS

9.1 Engineering Aspects

9.1.1 Water Source and Water Supply System

Although the planned supply area extends over a rather thinly populated rural area with few prospects for future economic growth, it is proposed to supply the area with surface water. Groundwater as an alternative source is available but can not by could not satisfy the basic requirements concerning quality and quantity from a long-term sustainable viewpoint. In order to find the best option for supply through a surface water system, three alternative plans for an overall supply system were thoroughly examined from a basically technical viewpoint during the Study.

9.1.2 Infrastructure Planning

The proposed project has been planned and designed on the basis of the following conditions and background assumptions.

- The primary objective of the project is to meet the requirements of the “White Paper on Water Supply and Sanitation” in the project area; i.e. to provide the RDP minimum service level by the year 2002.
- Following DWAF policy, the proposed infrastructure plan for Level A included some allowance for upgrading the system, particularly the main pipelines as well as the other basic facilities, in order to avoid excessive cost over-runs when the system is upgraded to Level B.
- Maximum use will be made of locally applicable technology and available resources and materials including labour intensive construction work such as excavation and backfilling.

9.1.3 New Bulk Pipeline

In planning the project, it is concluded that the capacity of Weltevreden Water Treatment Works should be expanded and a new pipeline should be layed to connect the treatment works with the supply area. Weltevreden WTW has been operated and maintained by DWAF to

serve mainly the Kwandebile area, in which water tariffs have historically not been collected, and unauthorised and/or illegal connections are widespread. The system has also been extended on numerous occasions in a rather ad-hoc manner with little strategic planning. Inadequate treated water storage has been provided in the system which gives rise to high peak demands. This situation has brought about serious difficulties in maintaining the entire Weltevreden water supply system in a good condition. The prevailing unauthorised connections reduce the design pressures in the pipelines causing an inferior quality service, resulting in a low cost recovery rate which creates a vicious circle. It is hoped that by providing a separate pipeline to the Moretele 2 Area, the problems prevailing in Kwandebile will not be repeated.

9.2 Institutional Aspect

9.2.1 Water Service Authority

The proposed project is located within the jurisdiction of Highveld District Council (HDC), thus HDC will be the Water Services Authority under the proposed new Water Service Bill. As mentioned previously, HDC was established in 1994 and is organisationally and financially weak. Through implementation of the proposed project, HDC should take the necessary steps to strengthen its capacity with support from other external role players.

9.2.2 Water Service Provider

Since the DWAF and the other stakeholders concerned have decided to establish the Highveld Water Board (HW), the area of jurisdiction of which is very likely to cover the Moretele 2 FS Area, the HW will assume responsibility for bulk supply while AWSC will assume responsibility for retail supply. In view of the current lack of capacity of these two institutions, one alternative is to mobilise consultants.

9.2.3 Community Involvement

From the standpoint of project sustainability (even for Case A), it is vital that the beneficiary communities be involved and participate in the project from inception. Experience obtained from implementation of the pilot projects and general best practice should be used to provide feedback. Measures might include:

- Establishment of a Local Project Steering Committee (LPSC) involving all stakeholders within and outside the community;

- Preparation of a business plan in collaboration with the LPSC and the development of mutual understanding of the plan by the communities, particularly in tariff setting which is considerably higher than their expectation;

The importance of community involvement and a community driven (demand driven) approach is to motivate communities to accept responsibility and ownership of facilities and to manage, operate and maintain the system.

9.3 Financial Aspects

This section reviews the financial implications of providing Service Level B by initially providing Service level A and later upgrading (Case C-1). This is based on a sensitivity analysis for key elements of the project as well as the basic conditions and assumptions made in the financial analysis.

In view of the various real rates of interest applied in the various parts of DWAF, a net present value (NPV) for the two scenarios has been calculated with three different rates: 3%, 5% and 8%, as well as the FIRR. The results are summarised in Table 9-1 below.

Table 9-1 Financial Internal Rate of Return (FIRR) and NPV

	Units	Case C-1
1. NPV		
- RRI=3%	R x 1,000	17,221
- RRI=5%	R x 1,000	8,537
- RRI=8%	R x 1,000	1,616
2. FIRR		
- Original Case	%	9.3
- Tariff Recovery		
90%	%	7.1
80%	%	4.7
70%	%	2.0
- Capital Cost		
10% increase	%	8.0
20% increase	%	6.9

Among the various items tested for sensitivity including cost / tariff recovery, capital cost, O&M cost, administration cost, water demand (consumption) and reserved fund, the most sensitive item is the tariff collection / cost recovery rate. It was found that 95% recovery is marginal to the real rate of interest of 8%. Hence, institutional reinforcement for the proposed Services Provider as well as the third tier (HDC) and the beneficiary communities is a pre-requisite and absolutely essential. While the designated Services Provider of retail

water supply should mobilise a fund amounting to about R45.8 million (at constant 1997 price) for upgrading from Service Level A, the loan amount will be reduced to R27.3 million in combination with beneficiaries contribution to establish a reserve fund for the upgrading. Hence, Case C-1 will be a more realistic option when considering the present financial burden for HDC, who will be a partner in the JV system for retail water supply

9.4 Economic Aspects

9.4.1 General

The economic aspects of the project have been evaluated by calculating a net present value (NPV) and economic internal rate of return (EIRR). Since the economic analysis is focusing on efficient utilisation of limited resources available in the entire economy of the FS Area, all components of project cost and benefit have to be valued as the real cost to the national economy. In this connection, such transfer payment as taxes and interest must be deducted from the cost component, but subsidies and grants from Central Government must be included. Furthermore, unskilled labour costs and fuel costs have been converted to their real economic value by applying the conversion factors of 0.3 and 0.7, respectively. The calculation basis for this is detailed in Annex C.

9.4.2 Economic Benefit

Through the implementation of the proposed project, the following are, generally, identified and itemised as the key economic benefit:

(1) Key Economic Benefit

(a) Socio-economic benefit:

The proposed water supply scheme will improve access to potable water, reducing the time spent for water collection and cartage by women or children, who have born traditionally such responsibilities, resulted in providing extra free time and opportunities for them to spend on other activities (Service Level B);

Increased quantity of available water and stabilised water supply will ease the local residents and uplift the living standard of them (Service Level A and B); and

Improved quality water will save the fuel costs, particularly firewood, to be consumed for boiling unsanitary water to obtain drinkable water (Service Level A and B).

(b) Public health benefit

Improved quality and quantity of water will contribute to improve the public health conditions of the local residents through reducing water-borne diseases' cases such as Typhoid, Dysentery, Diarrhoea and Food Poisoning (Service Level A and B); and

Improved access to water will save women or children from collecting and cartage of water, resulted in enhancement of their public welfare.

(2) Quantifiable Benefit

Among the key economic benefits mentioned above, only the time (labour) - saving benefit arising from water collection and cartage activities was selected as a quantifiable benefit for the economic analysis. Thus, the economic benefit is estimated at R3.6 per day or R108 per month per household. Details of the calculation of this economic benefit are compiled in Annex C.

The results of the economic analysis are given in Table 9-2 below.

Table 9-2 Results of Economic Analysis

	Unit	Case C-1
1. NPV		
I=3%	R1,000	62,426
I=5%	R1,000	14,592
I=8%	R1,000	-24,525
2. EIRR	%	5.9

9.5 Social Aspects

9.5.1 Special Consideration of Low Income Groups

The viability of a water supply project is identified and considered subject to the supply side and taking into account the average income structure. In this Study, the tariff setting analysis has been carried out on the basis of supply side and demand side approaches. The income profile obtained from the community survey particularly showed that about 50% of respondents are below the poverty line. Although the average household income per month in the area is estimated to be R1,466, about one third of the community is categorised in the low income group with a monthly income of R337. However, the affordability of this low-income group has been considered resulting in the introduction of the staged development

9.5.2 Equitable Supply and Cost Sharing System

One disadvantage of the public/community standpipe system is that cost sharing occurs under a flat tariff system which benefits only some of the community members. This system benefits people living in close proximity to the standpipe. The unfairness of the system is expressed by those who live further away from the tap because they have to expend more time and effort collecting water than those who are located nearer to the tap. To address this issue and to work out a sustainable solution, a prepaid metering system is being tested at Ga Rasai, one of the four pilot projects carried out under the framework of this Study.

In this project, 90% of beneficiaries will finally be supplied with potable water through yard connections, which will reduce the labour required for water cartage on a daily basis. The main burden of transporting water is currently shouldered by women and children who have to waste time queuing in long lines at certain standpipes during the busiest times. For yard connections tariffs will be charged depending on water usage as measured by individual meters. It is hoped that this is a fairer system than public standpipes.

9.5.3 Unauthorised/Illegal Connection and Cost Recovery

It can generally be accepted that when beneficiaries are provided with a yard connection, the propensity for making unauthorised or illegal connections is extremely low. In the proposed scenario, Case C-1 however, the public-tap system is planned for the first 5 years of the project life. During this period, the potential threat or actual incidence of illegal or unauthorised connections could be extremely high. Especially for the Moretele 2 Area, the non-payment culture prevailing in nearby communities within the former Kwandebele, may adversely affect the project feasibility. To avoid or reduce the risk of such a non-payment culture developing (including the spread of illegal connections) it is vital to involve the beneficiaries from the beginning of the design stage and to motivate the importance of project sustainability through training, education and communication.

9.6 Environmental Aspects

The environmental impact assessment (EIA) was carried out under the DWAF framework for environmental management, namely ROIP2 and the findings are detailed in Chapter 8. The ROIP2 study concluded that no serious environmental impacts can be foreseen during implementation of the proposed project.

CHAPTER 10

CONCLUSIONS AND RECOMMENDATIONS

TABLE OF CONTENTS

10.1	Conclusions.....	10-1
10.2	Recommendations	10-2
10.2.1	Technical Issues.....	10-2
10.2.2	Institutional Issues.....	10-2
10.2.3	Financial Issues	10-2
10.2.4	Social Issues	10-3

10.1 Conclusions

Since groundwater was found not to be a sustainable alternative source to meet the basic requirements of community water supply, the conclusion of the Study was to supply water to communities using a surface water system, which is rather costly but will be more reliable and sustainable, taking into consideration the socio-economic situation in the FS Area. The proposed infrastructure plan has been made on the basis of two levels of services; Level A covers 100% of beneficiaries with the RDP minimum level as Case A, and Level B covers 10% and 90% of beneficiaries with the RDP level, and with the higher service level of yard connections, respectively as Case B.

The project planning and design had taken into consideration the DWAF policy that allows spare capacity to be provided to meet future demand growth and upgrading of service level, especially for main pipelines and other basic facilities so as to avoid excessive cost when demand increases and upgrading becomes necessary. Furthermore, three water supply alternatives were thoroughly reviewed and examined from a technical and financial viewpoint, from which the best alternative was chosen. This alternative includes the expansion of the existing Weltevreden water treatment works, and construction of new main pipeline linking the WTW and the service area.

From an integrated engineering, institutional, financial and socio-economic viewpoint, it would appear that neither simply implementing Case A nor Case B would be the best alternative considering the viability and sustainability of the project. To this end, it is proposed that a staged development approach, "Case C", be introduced that will start the project with Service Level A in the early years and then upgrade the system towards Service Level B. Under Case C the tariff during the first five-year period will not only cover the O&M cost but will also allow a reserve fund to be established for future upgrading of the service level. It is anticipated that the accumulation of the reserve fund will greatly improve the financial position of the Services Provider, by reducing the loan required from R45.8 million to R27.3 million at 1997 constant price.

10.2 Recommendations

In order to realise the proposed Moretele 2 Water Supply Project on a sustainable basis, the project should be promoted with the following recommendations.

10.2.1 Technical Issues

Prior to the project detailed design, it is a prerequisite that the water demand be reconfirmed through reviewing demography in the project area.

10.2.2 Institutional Issues

Full co-ordination, mutual understanding and communication among the role players over all three tiers shall be secured concerning their respective roles and responsibilities.

In terms of institutional reinforcement and/or strengthening:

- Full technical support of the Highveld Water Board by the first tier (DWAF Mpumalanga) is essential, especially in the early stages of the project implementation.
- Efficient utilisation of the private sector, especially consultants, for capacity building within beneficiary communities, for which the lessons and experiences obtained from the pilot project implementation shall be fully reflected.

10.2.3 Financial Issues

The first tier (DWAF) shall secure the initial capital cost of R147.8 million which covers Service Level A (RDP minimum level).

The second tier (HW) shall secure the initial capital cost for upgrading the system to Level B, amounting to R4.3 million.

The third tier or a proposed Services Provider for retail water shall secure R45.7 million for the capital cost of upgrading to Level B.

Beneficiary communities shall accept the set tariff which will include for a contribution to a reserve fund (total of R18.4 million including generated interest) for future upgrading even during the 5 year period at Service Level A.

All costs are expressed at 1997 constant prices.

10.2.4 Social Issues

As experienced in the pilot project implementation, positive participation of women in the planning and design of the project must be assured.

Within communities, due attention should be paid to low-income groups.

Beneficiary communities should be motivated to recognise that the water supply facilities are their property by contributing to payment for a reserve fund for upgrading the service level.