

JAPAN INTERNATIONAL COOPERATION AGENCY (JICA)

PEOPLE'S COMMITTEE OF HO CHI MINH CITY (PCHCMC)

MINISTRY OF PLANNING AND INVESTMENT (MPI)

THE SOCIALIST REPUBLIC OF VIET NAM

**THE DETAILED DESIGN STUDY
ON
HO CHI MINH CITY
WATER ENVIRONMENT IMPROVEMENT PROJECT
IN
THE SOCIALIST REPUBLIC OF VIET NAM**

FINAL REPORT

DRAFT BIDDING DOCUMENTS

**PACKAGE B :
PUMP DRAINAGE IMPROVEMENT**

VOLUME 2

JUNE 2001

PACIFIC CONSULTANTS INTERNATIONAL

TABLE OF CONTENTS

DIVISION A : GENERAL SPECIFICATION

SECTION 1	GENERAL SPECIFICATION
-----------	-----------------------

DIVISION B : TECHNICAL SPECIFICATION

SECTION 2	PREPARATORY WORKS
SECTION 3	EARTHWORKS
SECTION 4	CONCRETE WORKS
SECTION 5	PILING WORKS
SECTION 6	DIKES AND REVETMENTS
SECTION 7	SEWERS AND DRAINAGE STRUCTURES
SECTION 8	ROADS AND PAVEMENTS
SECTION 9	MISCELLANEOUS WORKS
SECTION 10	PUMP STATIONS AND SLUICEWAYS
SECTION 11	RETARDING PONDS
SECTION 12	MECHANICAL WORKS
SECTION 13	MINOR METALWORKS
SECTION 14	ELECTRICAL WORKS
SECTION 15	BUILDING WORKS
APPENDICES TO Sn. 13	STANDARD SPECIFICATION FOR BUILDING WORKS

DIVISION A

GENERAL

SECTION 1. GENERAL SPECIFICATION

TABLE OF CONTENTS

	Page
1.1 DESCRIPTION OF THE PROJECT.....	1-1
1.1.1 Overview of the Project.....	1-1
1.1.2 Contract Packages.....	1-1
1.1.3 Interfaces with Other Packages.....	1-2
1.1.4 Scope of Work for Package B	1-2
1.2 GENERAL INFORMATION.....	1-2
1.2.1 Site Conditions	1-2
1.2.2 Climate	1-3
1.2.3 Access to the Site.....	1-3
1.2.3.1 Location of Site	1-3
1.2.3.2 Existing Roads and Waterways.....	1-3
1.2.3.3 Load Limits.....	1-4
1.2.3.4 Tracked Vehicles.....	1-4
1.2.3.5 Safety	1-4
1.2.3.6 Construction of Additional Access Roads.....	1-4
1.2.3.7 Maintenance	1-4
1.2.4 Sources of Materials	1-4
1.2.5 Spoil Disposal Area.....	1-5
1.2.6 Water Supply, Power and Telephone Facilities.....	1-5
1.3 CONTRACT DOCUMENTS AND DRAWINGS	1-5
1.3.1 Contract Documents	1-5
1.3.2 Bid Drawings	1-5
1.3.3 Construction Drawings.....	1-5
1.3.4 Drawings to be furnished by the Contractor	1-6
1.3.4.1 General.....	1-6
1.3.4.2 Working Drawings	1-6
1.3.4.3 Shop Drawings	1-7
1.3.4.4 Drawings of the Temporary Works.....	1-7
1.3.4.5 As-Built Drawings.....	1-7
1.3.4.6 Other Drawings	1-7
1.3.4.7 Form and Presentation of Drawings	1-8
1.3.5 Submittal and Approval of Contractor's Drawings.....	1-9
1.3.5.1 General	1-9
1.3.5.2 Procedure for Submittal and Approval.....	1-9

1.3.5.3	Other Information	1-9
1.3.5.4	As-Built Drawings.....	1-10
1.3.6	Language and Units	1-10
1.3.7	Payment	1-10
1.3.7.1	Working Drawings and Shop Drawings	1-10
1.3.7.2	As-Built Drawings.....	1-10
1.3.7.3	Other Drawings	1-10
1.4	CONSTRUCTION PROGRAMME, CONSTRUCTION PLAN, PROGRESS REPORTS AND OTHER SUBMITTALS.....	1-11
1.4.1	General	1-11
1.4.2	Construction Programme	1-11
1.4.2.1	General	1-11
1.4.2.2	Revision of Programme	1-11
1.4.3	Construction Plan	1-11
1.4.3.1	General	1-11
1.4.4	Weekly Schedule	1-11
1.4.5	Monthly Progress Report	1-11
1.4.5.1	Written Report	1-11
1.4.5.2	Video Report	1-12
1.4.6	Daily Report	1-13
1.4.7	Other Submittals.....	1-13
1.4.8	Payment	1-13
1.5	PROGRESS MEETINGS.....	1-13
1.5.1	General	1-13
1.5.2	Payment	1-14
1.6	STANDARDS AND TESTS	1-14
1.6.1	Standards and Specifications	1-14
1.6.2	Inspection, Examination and Testing of Materials and Equipment ..	1-14
1.6.3	Tests and Testing Laboratory	1-15
1.6.4	Payment	1-15
1.7	MOBILISATION AND DEMOBILISATION.....	1-16
1.7.1	General	1-16
1.7.2	Equipment	1-16
1.7.3	Programme and Notice of Transportation	1-16
1.7.4	Payment	1-16
1.8	TEMPORARY FACILITIES.....	1-17
1.8.1	General	1-17
1.8.1.1	Extent of Temporary Facilities	1-17

1.8.1.2	Approval of Temporary Facilities	1-17
1.8.1.3	Removal of Temporary Facilities	1-17
1.8.1.4	Payment	1-17
1.8.2	Use of Construction Facilities and Work Areas	1-18
1.8.2.1	Location of Temporary Facilities.....	1-18
1.8.2.2	Restoration of Temporary Facilities Areas	1-18
1.8.2.3	Rights of Others to Use Construction Facilities.....	1-18
1.8.3	Establishment.....	1-18
1.8.3.1	General	1-18
1.8.3.2	Payment	1-18
1.8.4	Utilities	1-19
1.8.4.1	Water Supply System.....	1-19
1.8.4.2	Electric Power Supply.....	1-19
1.8.4.3	Telecommunication System.....	1-19
1.8.5	Temporary Roads and Bridges.....	1-20
1.8.5.1	General	1-20
1.8.5.2	Design Requirements for Temporary Roads and Bridges	1-20
1.8.6	Contractor's Site Office and Facilities.....	1-20
1.8.6.1	General	1-20
1.8.6.2	Construction Camp	1-21
1.8.6.3	Contractor's Site Office	1-21
1.8.6.4	Completion of Contractor's Site Office and Construction Facilities.....	1-21
1.8.7	Engineer's Site Office.....	1-21
1.8.7.1	General	1-21
1.8.7.2	Technical Requirements and Standards	1-21
1.8.7.3	Submissions	1-21
1.8.7.4	Time for Completion	1-22
1.8.7.5	Maintenance and Operation	1-22
1.8.7.6	Removal and Hand-over	1-22
1.8.7.7	Alternative Option of Rented Office Space.....	1-22
1.8.7.8	Payment	1-22
1.8.8	Transport Facilities for the Engineer.....	1-22
1.8.8.1	General	1-22
1.8.8.2	Maintenance of the Engineer's Transport Facilities	1-23
1.8.8.3	Measurement and Payment	1-23
1.8.9	Engineer's Accommodation	1-23
1.8.9.1	General	1-23

1.8.9.2	Payment	1-23
1.8.10	Garbage Disposal.....	1-23
1.8.10.1	Scope	1-23
1.8.10.2	Payment	1-24
1.8.11	Maintenance of Existing Public Roads	1-24
1.8.11.1	General	1-24
1.8.11.2	Contractor's Operations	1-24
1.8.11.3	Maintenance of Roads	1-24
1.8.11.4	Payment	1-25
1.9	UTILITY SERVICES SURVEY	1-25
1.9.1	General	1-25
1.9.2	Scope of Work.....	1-25
1.9.3	Measurement and Payment.....	1-25
1.9.3.1	Test Pits.....	1-25
1.9.3.2	Reinstatement of Road	1-26
1.10	SOIL INVESTIGATION	1-26
1.10.1	General	1-26
1.10.2	Soil Tests Required.....	1-26
1.10.3	Reporting.....	1-26
1.10.4	Measurement and Payment.....	1-26
1.11	SAFETY, HEALTH CONTROL AND SECURITY	1-27
1.11.1	General	1-27
1.11.2	Safety Precautions	1-27
1.11.2.1	General	1-27
1.11.2.2	Safety Officer.....	1-27
1.11.2.3	Temporary Fencing	1-27
1.11.2.4	Lighting	1-27
1.11.2.5	Signs.....	1-28
1.11.2.6	Other Safety Measures	1-29
1.11.2.7	Provision of Safety Equipment.....	1-30
1.11.2.8	Payment	1-30
1.11.3	Sanitary Arrangements	1-30
1.11.3.1	Scope of Work.....	1-30
1.11.3.2	Payment	1-30
1.11.4	Fuel Storage	1-30
1.11.4.1	General	1-30
1.11.4.2	Payment	1-30
1.11.5	Fire Prevention	1-30

1.11.5.1 General	1-30
1.11.5.2 Payment	1-31
1.11.6 Earthing	1-31
1.11.6.1 General	1-31
1.11.6.2 Payment	1-31
1.11.7 Medical and Health Services	1-31
1.11.7.1 General	1-31
1.11.7.2 Payment	1-31
1.11.8 Security	1-32
1.11.8.1 Responsibility of the Contractor.....	1-32
1.11.8.2 Payment	1-32
1.12 SURVEY AND MEASUREMENT OF THE WORKS.....	1-32
1.12.1 General	1-32
1.12.1.1 Bench Mark and Reference Points	1-32
1.12.1.2 Responsibility for Setting Out.....	1-32
1.12.2 Survey Data and Calculations	1-33
1.12.3 Payment	1-33
1.13 OTHER ITEMS.....	1-33
1.13.1 Information Board.....	1-33
1.13.2 Securities and Insurance	1-33
1.13.2.1 Performance Security and Advance Payment Security	1-33
1.13.2.2 Insurance.....	1-33
1.13.2.3 Payment	1-34
1.13.3 Audits by the Employer	1-34
1.13.3.1 General	1-34
1.13.3.2 Records	1-34
1.13.3.3 Payment	1-34
1.13.4 Liquidated Damages	1-34
1.13.4.1 Amount of Liquidated Damages	1-34
1.13.4.2 Maximum Damages	1-34
1.13.4.3 Other Rights of the Employer.....	1-34
1.13.5 Monthly Statement	1-34
1.13.5.1 General	1-34
1.13.5.2 Payment	1-35
1.13.6 Hours and Days of Working	1-35
1.13.7 Prevention of Water Pollution	1-35
1.13.7.1 Scope	1-35
1.13.7.2 Payment	1-35

1.14 MEASUREMENT AND PAYMENT (GENERAL)	1-35
1.14.1 General	1-35
1.14.2 Measurement and Tolerances	1-35
APPENDIX: REQUIREMENTS FOR ENGINEER'S OFFICE	1-38

SECTION 1. GENERAL SPECIFICATION

1.1 DESCRIPTION OF THE PROJECT

1.1.1 Overview of the Project

Ho Chi Minh City has been rapidly urbanized and expanded over the last 20 years without development of city infrastructure, particularly urban drainage and sewerage systems. Water pollution in canals and rivers, caused by direct discharge of domestic and industrial sewage, has resulted in an unsanitary, unhealthy environment. Solid waste dumping, housing development along canals and sludge accumulation have led to obstruction of waterway transportation. Low ground level combined with inadequate drainage systems result in periodic flooding of certain areas.

The Ho Chi Minh City Water Environment Improvement Project, in addressing the above problems, aims to contribute to the improvement of urban drainage and sewerage system of Ho Chi Minh City.

The project area covers an area of 3,065 ha which includes the central part of the city as well as the outlying areas of Thanh Da and Ben Me Coc. Certain elements of the overall project have been deferred to a future phase which, in the case of sewerage development, will integrate with works to be completed under the present project.

The main elements of the project are:

- Tau Hu – Ben Nghe canal improvement of 7.3 km
- Pump drainage improvement at Thanh Da (15.4 ha) , Ben Me Coc (1) (70.9 ha) and Ben Me Coc (2) (46.0 ha)
- Existing combined sewer improvement of 9.5 km
- Interceptor sewer of 12.2 km
- Conveyance sewer of 3.5 km
- Intermediate wastewater pumping station with a total pumping capacity of 133 m³/min
- Wastewater treatment plant with a capacity of 141,000 m³/day

1.1.2 Contract Packages

The project has been divided into packages for the purposes of implementation as follows:

Package A:	Tau Hu – Ben Nghe Canal Improvement
Package B:	Pump Drainage Improvement
Package C:	Interceptor Sewer Construction, Intermediate Wastewater Pumping Station Construction and Procurement of Sewer Cleaning Equipment
Package D:	Conveyance Sewer Construction and Existing Combined Sewer Improvement
Package E:	Construction of Wastewater Treatment Plant

1.1.3 Interfaces with Other Packages

The Works for Package B are independent of the works of other packages in the project and do not have common interfaces.

1.1.4 Scope of Work for Package B

The Works to be completed under this Package B aim to reduce the incidence of flooding in three areas, namely Thanh Da, Ben Me Coc (1) and Ben Me Coc (2).

The main elements of the work include, but are not limited to, the following:

Drainage Area	Area (ha)	Main Elements of Scope of Work
Thanh Da	15.4	Drainage pipes: 751 m (800 to 1,200 mm dia.) Concrete piled revetment: 75 m Pumping station: pump capacity 42 m ³ /min
Ben Me Coc (1)	70.9	Drainage pipes: 4,486 m (400 to 1,800 mm dia.) Earth Dike: 4,436 linear m Pumping station: pump capacity 42 m ³ /min
Ben Me Coc (2)	46.0	Drainage pipes: 3,890 m (400 to 1,800 mm dia.) Earth Dike: 3,940 linear m (Note that construction of a pumping station has been deferred until a future phase of the project)

Complete descriptions of the requirement are included in Drawings, the Specification, the Bill of Quantities and other documents comprising the Contract.

1.2 GENERAL INFORMATION

1.2.1 Site Conditions

(a) Thanh Da

The area is generally built up and the general surface level is around 0.9 to 1.2 m above datum

(b) Ben Me Coc (1)

The Eastern part of the area is generally built up whilst that of the Western portion is less developed. The general surface level is around 0.9 to 1.3 m above datum

(c) Ben Me Coc (2)

The area is semi developed. The general surface level is around 0.9 to 1.3 m above datum.

1.2.2 Climate

Ho Chi Minh City is located in the tropical monsoon zone and its climatic characteristics are almost uniform temperature, high humidity, and heavy precipitation. Meteorological observation has been carried out at Tan Son Nhat station since 1915.

Meteorological characteristics as recorded at the Tan Son Nhat station from 1976 to 1977 are as follows:

- The annual average temperature and relative humidity are 27.4 °C and 77.2 % respectively;
- Annual sunshine hours are 2,508 hours,

Annual average rainfall is 1,929 mm, of which about 93 % (1,788 mm) occurs during the rainy season starting from May to November with maximum monthly rainfall of 308 mm occurring in the month of August. Only about 7 % (141 mm) of annual rainfall occurs during the dry season from December to April.

1.2.3 Access to the Site

1.2.3.1 Location of Site

The Site of the Works is located in Ho Chi Minh City in the Socialist Republic of Vietnam and comprises three separate areas.

The Thanh Da portion is located in the Binh Thanh district and is on an island formed by the Saigon River and the Thanh Da canal.

The area described in the contract as Ben Me Coc (1) is located in District 8 of Ho Chi Minh City on an island formed by the Tau Hu canal, the Kinh Doi canal and other canals

The area described in the contract as Ben Me Coc (2) is located in District 8 of Ho Chi Minh City on an island formed by the Tau Hu canal, the Kinh Doi canal and other canals adjacent to Ben Me Coc (1).

1.2.3.2 Existing Roads and Waterways

A road bridge connects Thanh Da with other parts of Ho Chi Minh City.

A new road bridge connecting the island of Ben Me Coc (1) with other parts of the city is expected to be completed prior to the commencement of the Works.

For Ben Me Coc (2) light vehicular access is possible by an existing bridge which is unsuitable for the passage of heavy construction equipment.

Barge access is feasible by way of the surrounding canals to each of the three parts of the Site.

The port of Saigon is located near the confluence of the Ben Nghe Canal and the Saigon River.

The Contractor shall fully inform himself of the conditions of roads, traffic conditions, traffic regulations, waterway conditions and regulations governing navigation with respect to gaining access to the Site for the purposes of performing the Works and shall take all necessary actions to ensure availability of access to the Site as required.

1.2.3.3 Load Limits

- (a) The public roads and bridges have various load limits and the Contractor shall be responsible for determining the load limits existing at the time and ensuring that his Equipment does not exceed such limits. Before moving any heavy construction equipment into public roads and bridges, the Contractor shall make suitable arrangements with the appropriate Government authorities and obtain their approval for the passage of such traffic.
- (b) The Contractor shall use every possible means to prevent any public roads or bridges connecting with or on the road to the Site from being damaged by any traffic of the Contractor or his subcontractors.

1.2.3.4 Tracked Vehicles

The Contractor shall not travel tracked vehicles on any bituminous sealed road surface or bridge. Rubber tired vehicles conforming to applicable load restrictions will be permitted to use bituminous sealed roads and bridges.

1.2.3.5 Safety

The Contractor shall take necessary care at all times to ensure the convenience and safety of residents along or nearby the roads and streets used to access the Site.

1.2.3.6 Construction of Additional Access Roads

All additional roads required by the Contractor as temporary road on the Site shall be provided by the Contractor at his expense.

1.2.3.7 Maintenance

All damage caused to the public roads or bridges used by the Contractor for access to the Site shall be promptly repaired by the Contractor at his expense.

1.2.4 Sources of Materials

The following sources of materials are listed for information only. The Contractor shall satisfy himself as to the suitability of such sources.

Material	Source	Approx. Distance from Site
Sand and Gravel	Long Thanh District, Dong Nai Province	60 km
Sand Fill	Dong Nai River	40 km
Concrete Aggregate	Bien Hoa City, Dong Nai Province	30 km
Cement	Thu Duc District, HCMC	15 km
Concrete Reinforcement	Long Thanh District, Dong Nai Province	60 km
Precast Concrete Piles	Thuan An District, Binh Duong Province	25 km
Precast Concrete Pipes	Thu Duc District, HCMC	15 km

1.2.5 Spoil Disposal Area

Excavated material unsuitable for reuse as fill or surplus to requirements shall be disposed of in the area designated as a spoil disposal areas shown on the Drawings.

1.2.6 Water Supply, Power and Telephone Facilities

The above utilities are readily available in the vicinity of the site and the Contractor shall make his own arrangements for procurement of such utilities.

1.3 CONTRACT DOCUMENTS AND DRAWINGS

1.3.1 Contract Documents

The Contractor will be provided with a maximum of five (5) sets of Contract Documents for his own use. Bid Documents in the Contractor's possession shall be marked superseded or returned to the Employer after issue of the Contract Documents and will not be recognised in the administration of the Contract. Further instructions issued by the Engineer shall be kept at all times on the Site by the Contractor and shall be available to the Engineer and his staff.

1.3.2 Bid Drawings

The Drawings included in the Bidding Documents are to be used for bidding purposes only. The Drawings show the work to be carried out in accordance with the Contract as definitely and in as much detail as is possible at the time of bidding. The Contractor may use the Bid Drawings for placing preliminary orders for materials or for preparing Drawings of Temporary Works. However, the Bid Drawings shall not be used as a basis for fabrication of equipment or for construction of the Works.

1.3.3 Construction Drawings

Bid Drawings will be supplemented or superseded by such Construction Drawings as necessary for the purpose of the proper and adequate execution of the Works. Two (2) full size prints of such Construction Drawings will be issued by the Engineer to the Contractor in accordance with the construction programme required under the provisions of Clause 1.4. On receipt of the Construction Drawings, the Contractor shall check them carefully and advise the Engineer in writing of any discrepancies, errors or omissions and full instructions will be furnished to the Contractor should any discrepancies, errors or omissions be found. The Contractor shall be required to perform the Work in accordance with such Construction Drawings at the applicable rates bid in the Bill of Quantities for such work or work of a similar nature. Although the Drawings are prepared to scale, work shall be based upon dimensions shown on the Drawings and not on dimensions scaled from the Drawings.

The Engineer may, from time to time during the construction, issue further Drawings to supplement or amend the Construction Drawings, if deemed necessary. Such further Drawings shall become part of the Construction Drawings.

The Contractor shall be governed by figure dimensions as given on the Drawings. Where the required dimensions are not shown in figures, the Contractor shall obtain such dimensions from the Engineer before proceeding with the construction of the portion of the Works to which they refer. In every case, detailed Drawings shall take precedence over general Drawings.

When additional information regarding foundation or other conditions becomes available as a result of excavation work, further testing or otherwise, and if it is found desirable to make changes in the alignment, cross section, dimensions or design of the Works to conform to such conditions, the Employer reserves the right to make such changes as in the opinion of the Engineer are necessary or desirable, and the Contractor shall forthwith comply with any such direction of the Engineer.

Bid drawing may be used as construction Drawings, as defined above, when authorised, in writing, by the Engineer.

1.3.4 Drawings to be furnished by the Contractor

1.3.4.1 General

All of the various types of Drawings as stated hereinafter shall be prepared in a form approved by the Engineer and submitted in advance to give the Engineer sufficient time to review and approve them without causing any delay to the field works. The Contractor shall provide qualified staff and a sufficient number of draftsmen/CAD operators and assistants capable of producing all Drawings required.

All Drawings and supporting computations to be submitted by the Contractor for the Engineer's approval shall be in English. [All dimensions shall be given in the SI system of units with linear dimensions in mm.](#) The Drawings shall be in JIS A1 size (594 mm by 841 mm) unless otherwise specified or approved by the Engineer.

The Contractor shall be held responsible for all Drawings and documents not submitted within the time limits stipulated in Clause [1.3.5](#). and for all costs involved for delays and damages consequent thereto. Contractor's Drawings approved by the Engineer are to be used for construction.

1.3.4.2 Working Drawings

The Contractor shall prepare the working Drawings for all items of the Permanent Works on the basis of the Construction Drawings issued by the Engineer. The working Drawings shall show sufficient details of the structure of the works or the construction methods or procedures such as, but not limited to, and as applicable, excavation and embankment fillings, concrete reinforcement bar arrangement including bending/cutting schedule and bar list, expansion joints, contraction joints, construction joints, concrete placement details, waterstop layout, equipment installation, etc., by which the Contractor will proceed with the field construction and operation. Further, Drawings presenting full details of items not to be incorporated into the Permanent Works but which affect the quality of work such as concrete forms, supports, etc., shall also be included in the working Drawings. All the working Drawings related to any section on the Works shall be approved by the Engineer prior to the time the Contractor plans to perform such section of work.

1.3.4.3 Shop Drawings

Shop Drawings, shall be prepared by the Contractor, or the Contractor's materials/equipment supplier on behalf of the Contractor, to show the outline, dimensions, type of material, etc., of particular items indicated in the Drawings and/or Specifications and as directed by the Engineer. Such shop Drawings shall be submitted by the Contractor to the Engineer for approval.

1.3.4.4 Drawings of the Temporary Works

Thirty (30) days before starting any section of the temporary facilities specified in Clause 1.8 hereof, the Contractor shall submit to the Engineer for approval Drawings showing details of such facilities.

The Drawings for temporary facilities shall show the locations and other pertinent details of the principal components of the Contractor's Equipment, offices, quarters, warehouses, storage areas, workshops, labour camps and other temporary buildings and facilities which the Contractor proposes to construct in the Works area.

If any change is made in the items mentioned above during erection or after the items become operational, the Contractor shall submit revised Drawings showing such changes to the Engineer for approval.

1.3.4.5 As-Built Drawings

Throughout the period of construction, the Contractor shall maintain an up-to-date set of as-built Drawings for the various items of work completed. Such Drawings shall show all authorised changes to the Construction Drawings and Shop Drawings to the extent that they correctly portray the true "as-built" condition of each item of the Permanent Works. The format of the as-built Drawings shall be as approve by the Engineer.

The up-to-date set of as-built Drawings shall be subject to periodical inspection at the Site by the Engineer and if the Drawings are found unsatisfactory or not up-to-date the Contractor shall bring them up-to-date within fourteen (14) days after inspection. If any part of the permanent Works delineated on the Drawings is complete, the pertinent as-built Drawings, after approval by the Engineer, shall be signed by both the Engineer and the Contractor, or their representatives, and three (3) copies shall be kept by the Engineer.

The as-built Drawings shall be made on high quality reproducible paper so that clearly readable copies can be made. The finished set of as-built Drawings shall be submitted by the Contractor to the Engineer for his approval and transmittal to the Employer in the manner specified in Clause 1.3.5.

1.3.4.6 Other Drawings

Drawings other than those mentioned above, which are of a general nature, such as the proposed construction methods, temporary works for construction purposes, schematic diagrams and outlines of how various types of work are to be performed shall, as directed by the Engineer or as stipulated in the Contract Conditions and Specification, be submitted to the Engineer for approval.

1.3.4.7 Form and Presentation of Drawings

(a) General

All shop Drawings and Working Drawings produced by the Contractor or his subcontractors for this Contract shall use a common system of sizes, title blocks and numbers in accordance with this Clause, regardless of who produces the Drawings.

(b) Drawing Sizes and Standards

All Drawings shall be drawn in the accordance with Clause 1.3.4.7.

(c) Title Blocks

(i) The Contractor shall submit a sample of the title block he proposes to use for approval by the Engineer. The general format of the title blocks shall follow those of this Specification.

(ii) The Contractor or his subcontractor's title blocks shall show the Contractor's and subcontractor's name, the date, the title, and number of the drawing and each new issue of the drawing shall be identified by a revision letter as a part of the number. In addition each drawing shall show the following details in the lower right hand corner:

HO CHI MINH CITY
WATER ENVIRONMENT IMPROVEMENT PROJECT

PACKAGE B: PUMP DRAINAGE IMPROVEMENT

DRAWING NO.

(d) Numbering System

(i) Primary reference to drawing numbers on all Drawings, correspondence, operation, and maintenance instructions and elsewhere, shall be the number from the Engineer's numbering system, which system will be notified to the Contractor.

(ii) The Contractor may, if he desires, insert his own reference number in the appropriate place on the title block.

(iii) Drawing number shall be as allocated by the Engineer.

(e) Quality

The quality of working Drawings, shop Drawings, "as-built" Drawings and Drawings for temporary works shall be in accordance with Clause 1.3.5.

(f) Drawing Index

The Contractor shall compile a drawing index for all Drawings produced by himself and his subcontractors. The Contractor shall submit an up-to-date copy of each sheet of the index to the Engineer at three monthly intervals or on request.

(g) Drawings on Site

Copies of the latest revisions of all Drawings shall be sent to the Contractor's site office as soon as possible after they are approved. The Drawings shall be available at all reasonable time for inspection by the Engineer.

1.3.5 Submittal and Approval of Contractor's Drawings

1.3.5.1 General

- (a) It is to the Contractor's advantage to prepare his Drawings and submit them to the Engineer at the earliest possible time to avoid delay in the fieldwork due to lack of approved Drawings on hand for the construction crew.
- (b) Any work done prior to the Engineer's approval of the Drawings shall be at the Contractor's risk. Approval by the Engineer of the Contractor's Drawings shall not relieve the Contractor from any of his obligations in the complying with the provisions of the Contract.

1.3.5.2 Procedure for Submittal and Approval

- (a) Unless otherwise specified the Contractor shall submit his working drawing, shop Drawings and other required Drawings to the Engineer for approval at least twenty eight (28) days prior to the commencement of construction of any particular item of work. Shop Drawings for any particular item which has to be fabricated outside of the Site shall be submitted [within 120 days of the Notice to Proceed and in all cases](#), early enough to allow adequate time for review, approval, fabrication, transportation and receipt at the Site.
- (b) Four (4) clearly readable print copies of each drawing shall be submitted to the Engineer by means of a standard transmittal sheet. The format of the transmittal sheet shall be as approved by the Engineer.
- (c) The Engineer shall have the right to direct the Contractor to provide additional details and change in the Drawings if they are necessary to ensure compliance with the provisions and intent of the Specifications. Within thirty (30) days after the receipt of the Drawings submitted by the Contractor, the Engineer shall return one (1) copy thereof to the Contractor marked "Approved for Construction", "Approved for Construction-Except as Noted", or "Not Approved Resubmit".
- (d) The return and receipt of any approved drawing shall be deemed to authorise the Contractor to proceed with the work covered by such drawing, but before proceeding with the work the Contractor shall first submit to the Engineer by logged transmittal sheet two (2) prints of each drawing. When requested by the Engineer, one (1) transparency of working Drawings and shop Drawings shall also be submitted together with two (2) prints. Copies of all approved Drawings shall be maintained at the Contractor's site office in proper order.
- (e) When correction or revision is directed on the Contractor's submitted Drawings, the Contractor shall make the necessary corrections and/or revisions in a timely manner and shall resubmit them in two (2) copies to the Engineer in the same manner as for new drawing. This procedure shall continue until the Drawings have been finally approved.

1.3.5.3 Other Information

All applicable requirements of this Clause shall apply equally to other submittals described in [Clause 1.4](#).

1.3.5.4 As-Built Drawings

Within one (1) month following the issue of the Certificate of Completion of the Works, the Contractor shall furnish to the Engineer, for his approval; and transmittal to the Employer, the final version of as-built Drawings. These as-built Drawings shall consist of:

- (a) Two (2) sets of transparent polyethylene sheets ;
- (b) Three (3) sets of full-sized (A1 size) bound copy ; and
- (c) Ten (10) sets of reduced size (A3 size) bound copy.
- (d) Two (2) sets of CD ROM of all Drawings prepared by CAD

1.3.6 Language and Units

The English language shall be used for all Drawings, specifications and other submissions by the Contractor except that Operation and Maintenance Manuals shall be prepared in both English and Vietnamese.

SI Units shall be used on in all Drawings, specifications and other submissions by the Contractor. Where printed information uses other units the equivalent SI units shall be shown.

1.3.7 Payment

1.3.7.1 Working Drawings and Shop Drawings

Payment for shall be made at the Lump Sum price entered in the Bill of Quantities.

For the purposes of monthly progress payments the amount completed, expressed as a percentage of the total number of Working and Shop Drawings required to be completed by the Contractor, shall be determined. Payment shall be calculated by multiplying the percentage completed by the lump sum entered in Bill of Quantities. Payment for Drawings shall never exceed the lump sum entered in the Bill of Quantities.

1.3.7.2 As-Built Drawings

Payment for shall be made at the Lump Sum price entered in the Bill of Quantities.

For the purposes of monthly progress payments the amount completed, expressed as a percentage of the total number of As-Built Drawings required to be completed by the Contractor, shall be determined. Payment shall be calculated by multiplying the percentage completed by the lump sum entered in Bill of Quantities. Payment for Drawings shall never exceed the lump sum entered in the Bill of Quantities.

1.3.7.3 Other Drawings

No separate payment shall be made for other categories of Drawings describe in this Clause 1.3 and the cost of preparing such Drawings shall be deemed to be included in the rates and lump sum prices of other items in the Bill of Quantities.

1.4 CONSTRUCTION PROGRAMME, CONSTRUCTION PLAN, PROGRESS REPORTS AND OTHER SUBMITTALS

1.4.1 General

The Contractor shall prepare and submit a construction programme, a construction plan, progress reports and other required documents in the manner specified herein.

1.4.2 Construction Programme

1.4.2.1 General

The Contractor shall prepare a construction programme in accordance with Conditions of Contract, Part II, Sub-Clause 14.1.

1.4.2.2 Revision of Programme

If in the course of execution the rate of progress of the Works or any section thereof falls behind the Contractual Construction Programme the Contractor shall prepare a revised programme in accordance with Conditions of Contract, Part II, Sub-Clause 14.2.

1.4.3 Construction Plan

1.4.3.1 General

Within twenty eight days of receiving the notice to proceed in accordance with Sub-Clause 41.1 of the Conditions of Contract, the Contractor shall submit a revised general construction plan including a detailed list of equipment to be mobilised, particulars of Temporary Works and method statements for major items of work to the Engineer for approval. The plan shall be prepared on the basis of the Construction Schedule and Method Statement submitted by the Contractor with his Bid. Any instructions given by the Employer and/or the Engineer on and after award of the Contract shall be incorporated.

1.4.4 Weekly Schedule

The Contractor shall, at the end of each week, submit to the Engineer for his review and comments two (2) copies of a weekly schedule for the succeeding week in a form approved by the Engineer. The schedule shall contain appropriate comments with regard to the work to be performed on each major item as well as other construction work related to the execution of the Works including procurement of materials, transportation of materials and equipment, preparation of Drawings and other items required by the Engineer.

1.4.5 Monthly Progress Report

1.4.5.1 Written Report

The Contractor shall submit, before the tenth (10th) day of each month or at any time designated by the Engineer, five (5) copies of a monthly progress report in a form acceptable to the Engineer detailing the progress of the Works during the preceding month. The report shall contain, but not be limited to, the following items:

- (a) A brief but detailed description of all works executed during the reporting month together with a cumulative summary of progress to date for each main activity.
- (b) Total overall percentage of work completed up to the end of reporting month as well as the total overall schedule percentage completed and the forecast completion date computed by the critical path method (or other method previously approved by the Engineer) as of the end of the reporting month with appropriate comments on progress.
- (c) Actual percentage of each main work item completed, as well as their schedule percentage, with appropriate comments on their progress. The percentages shall be provided for each month and cumulatively.
- (d) Schedule of activities to be started within the succeeding two (2) months with the forecast starting and completion dates. If the dates are different from those shown on the approved Construction Programme an explanation shall be given.
- (e) List of manpower by trade, and supervisory personnel by position, employed during the reporting month.
- (f) List of Construction Equipment and materials on Site used in the execution of the Works including those that arrived at or were removed from the Site. The records shall include duration for which Equipment was not in working order.
- (g) General description of the weather conditions during the reporting month including records of each rainfall duration.
- (h) List of each accident involving, lost time, and/or death of any person, damage suffered by Works, properties and equipment.
- (i) Occurrence of any event or condition that might delay or prevent completion of the Works in accordance with the current, approved Construction Programme and the steps taken by the Contractor to correct the situation.
- (j) Schedule of the amount of payments received to date and the amount of any monthly invoice submitted but not yet paid.
- (k) Estimated amount of payment from the Employer to the Contractor for the succeeding month.
- (l) Colour photographs (not smaller than 8 cm x 12 cm) of the work progress of all major components of the Works from start to completion taken at locations directed by the Engineer. A brief description and date of each photograph shall be stated. The date shall be imprinted in each negative and photograph. A minimum of two photographs shall be taken of each major component under construction in the month including temporary works.
- (m) Any other matters which may be required under the Contract or statement concerning any matter arising from or relating to the execution of the Works during the reporting month.

1.4.5.2 Video Report

The Contractor shall make a video tape recording of the progress of the Works on a monthly basis and shall engage a professional recording company approved by the Engineer to carry out the work.

The monthly recording shall be of 10 minutes duration and shall be carried out throughout the duration of the Contract or as directed. Additional recordings may be necessary to record significant milestone events.

A copy of each monthly recording shall be submitted to the Engineer. The recording shall be accompanied with dialogue, in English, describing the events recorded.

At the completion of the Works the monthly recordings shall be compiled and edited into a single recording of one hours duration, or as directed, complete with approved dialogue and soundtrack and submitted to the Engineer.

1.4.6 Daily Report

The Contractor shall prepare daily and periodical reports in a form approved by the Engineer. The following items:

- (a) Weather conditions;
- (b) Staff and labour force employed on the work;
- (c) Materials and Equipment on Site;
- (d) Work in progress including locations and estimates of daily production;
- (e) Work in preparation;
- (f) Accident or any other reason causing a suspension of the work;
- (g) Occurrence of any event or condition that might delay the progress of work; and
- (h) All other information relevant to the progress of the Works.

1.4.7 Other Submittals

During the course of the Works the Contractor shall submit to the Engineer for approval construction programmes, design computations, financial schedules, construction plans, various plans of work, survey, tests and operation, reports on the results of survey, test and inspection, written description of equipment to be used, pamphlets, brochures and samples of materials and equipment, and other required documents and goods as prescribed in this Specification and as directed by the Engineer. Such submittal of documents and goods shall be made in advance to avoid causing any delay to the field works. The procedure for submittal and approval shall be in the same manner as specified in Clause 1.3.5.

1.4.8 Payment

Except as otherwise specified, separate payment will not be made for complying with the requirements of Clause 1.4 and all costs shall be deemed to be included in the rates and lump sum prices entered in the Bill of Quantities.

1.5 PROGRESS MEETINGS

1.5.1 General

A regular meeting between key personnel of the Engineer and the Contractor's authorised representative shall be held once a week at a time agreed upon by both parties to discuss the progress being made, the work proposed for the forthcoming week and any problem having a direct bearing on the immediate or near term work activities.

1.5.2 Payment

Except as otherwise specified, separate payment will not be made for complying with the requirements of Clause 1.5 and all costs shall be deemed to be included in the rates and lump sum prices entered in the Bill of Quantities.

1.6 STANDARDS AND TESTS

1.6.1 Standards and Specifications

All materials and equipment to be furnished and installed for the Works and all construction works to be executed under the Contract shall conform to the respective standards and specifications stated in the Specification. Where applicable standards and specifications for any material, equipment and construction are not stated in the Specification, they shall conform to the latest edition of the relevant standards of the following organizations:

JIS	:	Japanese Industrial Standard
ISO	:	International Standards Organization
AASHTO	:	American Association of State Highways and Transportation Officials
ANSI	:	American National Standards Institute
ASTM	:	American Society for Testing and Materials
BS	:	British Standards
TCVN	:	Vietnamese Codes
JEC	:	Japanese Electro-Technical Committee Standard
JEM	:	Japanese Electric Machine Industry Association Standard
JCS	:	Japanese Cable-Makers Association Standard
IEC	:	International Electrical Committee

If the Contractor proposes equivalent standards or specifications for materials and equipment, he shall state the exact nature of the proposed change and shall submit complete standards and specifications in English, including information and data on such materials and equipment, for approval of the Engineer. Such submittal shall be made in sufficient time for approval by the Engineer and failure to do so the purchase of any proposed equivalent materials and equipment prior to the approval of the Engineer shall be at the Contractor's risk.

The Contractor shall have available in his site office at all times at least one (1) copy of every standard referred to in this Specification or necessary for the execution of the Works.

[In the event of a Vietnamese standard being more stringent than the specified standard, the Vietnamese standard shall govern.](#)

1.6.2 Inspection, Examination and Testing of Materials and Equipment

Materials and equipment furnished by the Contractor, which will be incorporated in the Permanent Works, shall be subject to inspection, examination and test as provided in the Contract. To allow sufficient time to provide for inspection, examination and testing, the Contractor shall submit to the Engineer at the time of issue, copies in duplicate of all orders, including Drawings and other pertinent information covering the materials

and equipment to be furnished by the Contractor, or shall submit other evidence in the event of such orders being issued verbally or by letter. The inspection, examination and testing of materials and equipment or the waiving of inspection, examination and testing thereof shall in no way relieve the Contractor of the responsibility for furnishing materials and equipment meeting the requirements of this Specification.

All examinations and tests shall be carried out by the Contractor in the presence of the Engineer in accordance with the normal practice for such examination and tests. The Contractor may carry out the examinations and tests with his staff and equipment available at the Site. Examinations and tests carried out off the site shall be made at a laboratory approved by the Engineer.

The Engineer shall be at liberty to reject any material or item of Plant that does not comply with the requirements of the Contract notwithstanding any previous approval thereof. The Contractor shall not be entitled to any extra payment or extension of time for completion of the Works on account of the rejection of materials due to their non-compliance with the requirements of the Contract, or of the waiting time required for carrying out the examinations and tests.

The Contractor shall furnish test samples as requested and shall provide reasonable assistance and co-operation as necessary to permit tests to be performed on materials or work in place, including reasonable stoppage of work during testing.

1.6.3 Tests and Testing Laboratory

The Contractor shall provide a site laboratory equipped with sufficient apparatus and staffed by qualified personnel for the control of concrete placement and compaction of fill materials. Other testing, such as concrete cylinder testing, shall be carried out at a laboratory approved by the Engineer at the Contractor's expense.

The Contractor shall carry out all field tests such as compaction tests, concrete workability tests and so on in accordance with the manner and frequency prescribed in the Specification and shall provide the testing equipment and apparatus, testing staff, labour and consumables necessary for carrying out his field testing. The Contractor shall prepare schedules of his field and laboratory testings taking into account the work progress schedule and shall submit them to the Engineer for approval.

The Engineer will supervise the Contractor's testing for the purpose of adequate and sufficient quality control of the Works during its execution. The cost of all testing shall be borne by the Contractor.

All test reports shall be submitted to the Engineer as soon as possible and within 24 hours of their completion.

1.6.4 Payment

Separate payment will not be made for complying with the requirements of this Clause 1.6 and all costs shall be deemed to be included in the rates and lump sum prices entered in the Bill of Quantities for the items to which the standards and tests apply.

1.7 MOBILISATION AND DEMOBILISATION

1.7.1 General

Mobilisation shall refer to the transportation of Contractor's Equipment, based on the construction programme submitted by the Contractor in accordance with Clause 14 of the Conditions of Contract, from the place of origin to the Site where they are to be used. When the mobilisation has been substantially completed to the extent the Works can be effectively performed and obtain the scheduled progress, the Contractor shall submit the required documentation for the Engineer's approval and certification. Subject to the authorisation of the Engineer the Contractor may at any time during the execution of the Works, make alteration, reduction and/or improvement to the Equipment.

Demobilisation shall be made after the written approval of the Engineer and shall include the removal of the Contractor's Equipment from the Site.

1.7.2 Equipment

The Contractor shall furnish the necessary Contractor's Equipment, as defined in Clause 1 of the Conditions of Contract, required for the execution of the Works. The Engineer may, if he consider it necessary for the execution of the Works in accordance with the Contract, instruct the Contractor to furnish additional Equipment. All equipment to be furnished by the Contractor shall be complete with all spare parts and the Contractor shall maintain a sufficient stock of such spare parts to ensure the efficient execution of the Works.

1.7.3 Programme and Notice of Transportation

Concurrently with the submittal of the programme in accordance with [Clause 14](#) of the Conditions of Contract, the Contractor shall furnish the Engineer with a complete transportation programme for Equipment, showing, in detail, the sequence of transportation and delivery on the Site to comply with his proposed construction programme.

The Contractor shall keep the Engineer informed of the arrival of Contractor's Equipment and materials at the Site.

1.7.4 Payment

Payment for mobilisation and demobilisation will be made at the lump sum price tendered therefore in the Bill of Quantities. Progress payment will be made in the following manner :

- (a) Seventy percent (70 %) of each approved Sub-item of the lump sum price tendered in the Bill of Quantities will be paid upon certification by the Engineer that mobilisation has been substantially completed for each item of equipment shown in the Contractor's breakdown submitted with his bid.
- (b) The remaining thirty percent (30 %) of each approved Sub-item of the lump sum price tendered in the Bill of Quantities will be paid upon certification by the Engineer that the demobilisation of concerned equipment has been completed for each of the items of plant or equipment mentioned above.

Monthly estimates of progress for payments of mobilisation and demobilisation shall be supported with appropriate records and documents showing that mobilisation or demobilisation for each item of equipment as mentioned above has been completed during the month for which the estimate is prepared.

1.8 TEMPORARY FACILITIES

1.8.1 General

1.8.1.1 Extent of Temporary Facilities

For the purposes of this Clause temporary facilities shall mean those parts of the Temporary Works required for the purposes of the establishment, gaining and maintaining access to the site and continuing obligations for managing the site as described hereunder. Other Temporary Works which are associated with the executions of the Works such as shoring, formwork, etc. are addressed elsewhere.

All Temporary Facilities shall be provided, installed, operated, maintained and subsequently removed by the Contractor, except as otherwise provided in the Contract.

1.8.1.2 Approval of Temporary Facilities

The Contractor's proposal for the erection of all Temporary Facilities shall be in accordance with the proposals submitted with his Bid or with such modifications as approved by the Engineer from time to time.

The Contractor shall submit to the Engineer for approval, twenty eight (28) days from the receipt of the notice to proceed, the revised general plan of Temporary Works, based on the proposals in the Bid, layout, dimension, installation programme and schedule. The Engineer may direct the Contractor to modify or change the proposals, if in the opinion of the Engineer it is deemed necessary. Such direction of the Engineer shall not relieve the Contractor from any of his obligations and responsibilities under the Contract.

Before starting any part of Temporary Facilities the Contractor shall, at least twenty eight (28) days before starting construction, submit to the Engineer for the approval the detailed proposal for such part of the Temporary Works including plans, Drawings, schedules, and other information as specified in Clauses 1.3 and 1.4 of the General Specification which will supplement or modify the general plan of the Temporary Works already submitted by him.

1.8.1.3 Removal of Temporary Facilities

Unless otherwise directed or approved by the Engineer, all Temporary Works constructed by the Contractor shall be removed and the area made safe, vegetation and natural drainage reinstated all to the satisfaction of the Engineer prior to the end of the Defects Liability Period.

1.8.1.4 Payment

Separate payment will not be made for Temporary Facilities and all the costs thereof shall be deemed to be included in the lump sum prices entered in the Bill of Quantities for Establishment.

1.8.2 Use of Construction Facilities and Work Areas

1.8.2.1 Location of Temporary Facilities

The Contractor shall, as far as practicable, lay out the Temporary Works within the Site.

1.8.2.2 Restoration of Temporary Facilities Areas

Before acceptance of the Works by the Employer the Contractor shall restore the land occupied by the Temporary Works as nearly as practicable to its original condition or to a condition to the satisfaction of the Engineer.

1.8.2.3 Rights of Others to Use Construction Facilities

Other contractors employed by the Employer and their workmen and workmen of the Employer and of other Government authorities who will be carrying out work on or near the Site of the Works shall have the right to use, without charge, the access facilities, including bridges and roads, of which the Employer has given possession to the Contractor or which have been constructed or acquired by the Contractor for use in constructing the Works. Other contractors requiring to use such facilities shall be required to make application to and receive the approval of the Engineer before use.

1.8.3 Establishment

1.8.3.1 General

An item has been included in the Bill of Quantities for Establishment which item shall be deemed to include the cost of provision, erection and removal if required, of all Temporary Works at the Site including the Engineer's site office, the Contractor's site office, buildings, temporary fences, sanitary facilities, medical facilities, fixed construction facilities including but not limited to workshops, electric power supply, water supply, telecommunications, temporary roads, bridges and jetties, traffic control (including waterway traffic) and other temporary facilities required for the execution of the works and cleaning-up and restoration of the Site on completion.

1.8.3.2 Payment

The Contractor shall provide a breakdown of the lump sum for Establishment in accordance with Sub-Clause 57.2 of the General Conditions of Contract. The breakdown shall be arranged such that it includes not more than ten (10) sub-items which can be readily recognised and measured for payment purposes.

Payment for Establishment will be made at the lump sum price entered in the Bill of Quantities. Progress payments for work under each sub-item will be made as follows:

- (a) Sixty percent upon certification by the Engineer that work under each sub-item is substantially complete.
- (b) Ten percent upon certification by the Engineer that the facility under each sub-item has been removed.
- (c) Thirty percent to be distributed uniformly over the duration of the Contract.

1.8.4 Utilities

1.8.4.1 Water Supply System

The Contractor shall ensure that there is an adequate supply of water to the Engineer's Site Office as specified in Sub-Clause 1.8.7, his offices, laboratory, labour quarters, workshops, batching plant and other places on the Site where water is required in accordance with the Contractor's proposal in his Bid and approved in the Letter of Acceptance or as otherwise approved by the Engineer. Water for the human use shall be of a standard equal to the domestic town water supply in Ho Chi Minh City.

The Contractor shall supply to the Engineer's Site Office and Facilities, and to all work areas, an adequate supply of purified, bottled water

1.8.4.2 Electric Power Supply

The Contractor shall be responsible for providing at the Site, all electric power required for his construction activities, his site office, his labour camps, the Engineer's site office and any other areas where electric power is required.

The method of supplying such electrical power to the various parts of the Site shall be as proposed by the Contractor in his Bid and approved in the Letter of Acceptance or as otherwise approved by the Engineer.

The Contractor shall design and install the electrical power supply system in accordance with the requirements of the relevant Vietnamese codes of practice and the requirements of the power supply authority.

1.8.4.3 Telecommunication System

(a) General

The contractor shall supply, install and maintain telephone (fixed line and mobile) and facsimile facilities for the purposes of communication between the Engineer and the Contractor and in the various parts of the site.

(b) Telephone Requirements for Engineer's Office

Three external lines shall be provided to the Engineer's site office for the exclusive use of the Engineer. All external lines shall be capable of international direct dialling.

Separate metering shall be provided for the external lines and the Contractor may charge the Employer for international calls but not for calls made within Vietnam.

(c) Telephone Requirements for the Contractor's Site Office

The Contractor shall provide the quantity and type of communications facilities he deems necessary for the execution of the Works which shall not be less than two external telephone lines.

(d) Payment

Separate payment will not be made for complying with the requirements of this Sub-Clause and all costs shall be deemed to be included in the lump sum price for Establishment in the Bill of Quantities.

1.8.5 Temporary Roads and Bridges

1.8.5.1 General

The Contractor shall construct and maintain temporary access facilities, including haul and access roads, bridges, jetties and the associated drainage and watercourse crossing facilities necessary for the execution of the Works.

The Contractor shall make the necessary arrangements with the appropriate Local Government Authorities and private landowners where new temporary access and haul roads are required through private land.

Not less than thirty (30) days before the Contractor intends to commence construction of any part of the temporary construction roads, the Contractor shall submit to the Engineer for approval a detailed construction plan including:

- (a) The location and design of the temporary construction roads, including the associated drainage; and
- (b) The construction method and construction time schedule of such temporary construction roads,

The location of these roads shall be in accordance with the Contractor's proposals submitted with his Bid and approved in the Letter of Acceptance or as otherwise approved by the Engineer.

1.8.5.2 Design Requirements for Temporary Roads and Bridges

The temporary construction roads shall be designed so as to generally have a driveway width of not less than 6.0 m

The Contractor shall provide a gravel pavement or other measures in stretches where trafficability is in the opinion of the Engineer, not sufficient for the efficient transportation of Contractor's Equipment and materials.

Where the temporary construction roads cross existing watercourses, the Constructor shall provide an appropriate section of concrete or steel pipe or other means to allow water discharge. The Contractor shall be responsible for the repair at his own expense of any damage to the temporary construction roads caused by the passage of heavy equipment and trucks used by the Contractor or his subcontractors for the execution of the Works. On the completion of the Works, such temporary construction roads shall be removed and the land restored to its original condition to the satisfaction of the Engineer.

1.8.6 Contractor's Site Office and Facilities

1.8.6.1 General

The Contractor shall provide, maintain and operate the Contractor's Site office and construction facilities which include, among other things, staff quarters, warehouse, workshop, laboratory, labour camp and other temporary buildings and facilities necessary for the execution of the Works, and shall remove them upon the completion of the Works except as otherwise specified in the Contract or directed by the Engineer. The Contractor shall be solely responsible for providing the land for his site office and facilities.

The Contractor shall submit revised [Drawings showing the site](#), layout plans and general particulars of such temporary buildings and facilities to the Engineer for his approval. The construction of any buildings or facility shall not be started until the Contractor's proposals have been finally approved by the Engineer.

1.8.6.2 Construction Camp

The Contractors shall construct his construction camp as proposed in his Bid and approved in the Letter of Acceptance. It shall include housing camps and other facilities and amenities for his employees and for the employees of his subcontractors.

The Contractor's staff quarters and labour camp shall be provided with all the necessary services for drainage, electricity, lighting, roads, paths, parking spaces, fencing, sanitation including sewage treatment, water supply, kitchen, fire prevention and fire fighting equipment.

1.8.6.3 Contractor's Site Office

The Contractor shall provide the Site office as soon as the preparatory work at the Site takes place. The Site office shall be constructed with all the necessary facilities for drainage, lighting, sanitation, parking spaces, etc.

1.8.6.4 Completion of Contractor's Site Office and Construction Facilities

The Contractor shall notify the Engineer in writing as soon as the temporary buildings and facilities have been constructed and are ready for operation. The Engineer shall certify that such buildings and facilities have been constructed in accordance with the approved plans.

1.8.7 Engineer's Site Office

1.8.7.1 General

The Contractor shall design, construct, operate, maintain and demolish after completion of the Works, the Engineer's site office.

The office shall have a gross floor area of not less than 220 m²

The Engineer's site office shall be constructed at a location in close proximity to the Contractor's office and shall comply with the general design requirements included or referred to in the [Appendix to the General Specification](#).

The buildings shall be fully air conditioned and provided with the utility services as specified in Sub-Clause 1.8.4. and with the furniture and office equipment listed in [the Appendix to the General Specification](#)

1.8.7.2 Technical Requirements and Standards

The Engineers Office shall be constructed to a good quality standard and shall be fit for its intended purpose. All work shall comply with Vietnamese Codes, Standard and local Authority requirements.

1.8.7.3 Submissions

The Contractor shall make detailed proposals for the provision of the facilities included in Sub-Clause 1.8.7 in the form of detailed design Drawings, schedules of finishes, materials lists, construction programme and specifications, all of which shall be subject to the Engineers approval. Procedures shall be in accordance with Sub-Clause 1.3.

1.8.7.4 Time for Completion

The Engineer's Site Office shall be completed within 3 months of the Commencement Date

1.8.7.5 Maintenance and Operation

The Contractor shall ensure that the Engineer's Site Office and Facilities are at all times maintained in good order and provided with the utility services specified in Sub-Clause 1.9.4.

1.8.7.6 Removal and Hand-over

At the conclusion of the Contract the Contractor shall remove all of the buildings and facilities provided under this Clause and reinstate the area to the satisfaction of the Engineer and all items of furniture and equipment shall be handed over to the Employer.

1.8.7.7 Alternative Option of Rented Office Space

As an alternative to the above, the Contractor may propose to provide equivalent rented office space in a modern, air conditioned building in Ben Me Coc, Ho Chi Minh City. Acceptance of an alternative option is at the sole discretion of the Engineer.

1.8.7.8 Payment

Separate payment will not be made for complying with the requirements of Sub-Clause 1.8.7 and all costs shall be deemed to be included in the lump sum price for Establishment in the Bill of Quantities.

1.8.8 Transport Facilities for the Engineer

1.8.8.1 General

The Contractor shall provide transport facilities as specified hereunder for the exclusive use by the Engineer and his staff for the purpose of construction supervision throughout the duration of the Contract commencing within 56 days of the issue of the Letter of Acceptance.

The transport facilities shall include the following:

- (a) One (1) New, four-door four-wheel drive, Toyota Land Cruiser or equivalent including driver;
- (b) One (1) New two-wheel drive Toyota Previa van or equivalent
- (c) Two (2) New Honda Dream motor cycles or equivalent.

The Contractor shall arrange for payment of all vehicle registration and comprehensive insurance fees for each vehicle.

All vehicles shall be registered and ownership shall be vested with the Employer.

In the event that the above facilities cannot be provided within the said 56 days, the Contractor shall arrange temporary vehicles for the Engineer's use for interim period until the specified facilities have been provided.

Following completion of the Contract the vehicles shall be handed over to the Employer in good condition.

1.8.8.2 Maintenance of the Engineer's Transport Facilities

The Contractor shall arrange to service and repair vehicles at regular intervals in accordance with the manufacturers' recommendations and provide all necessary spare parts to maintain the vehicles in a proper and safe running condition.

All consumables, including fuel, oil, filters, etc., required for the vehicles shall be provided by the Contractor.

If any vehicle requires maintenance for a period exceeding 2 days, the Contractor shall provide an alternative vehicle to the vehicle being repaired for the use of the Engineer.

1.8.8.3 Measurement and Payment

Payment for the provision of transport of the Engineer shall be made at the Lump Sum Price entered in the Bill of Quantities and shall include full compensation for the cost of providing the vehicles, drivers, maintenance, insurance, consumables and any other incidental costs.

Payment shall be made as follows:

60 % of the lump sum shall be paid upon delivery of all of the specified vehicles

The remaining 30 %, representing operation cost, shall be made in uniform monthly payments over the duration of the Contract.

1.8.9 Engineer's Accommodation

1.8.9.1 General

The Contractor shall provide accommodation for the Engineer commencing 28 days after the date of the Letter of Acceptance and extending to the date of Completion plus 1 month in accordance with the following requirements.

Type of Accommodation: One (1) two-bedroom, fully-furnished, air conditioned, serviced apartment

Location: Located in a modern apartment building situated in District 1,2, or 3 of Ho Chi Minh City

1.8.9.2 Payment

Payment shall be made at the monthly rate entered in the Bill of Quantities which shall be full compensation for all cost of providing the said accommodation.

1.8.10 Garbage Disposal

1.8.10.1 Scope

The Contractor shall undertake the collection of and disposal of all garbage from within the Contractor's Site office, the Contractor's Temporary Facilities, the Engineer's Site office and other areas used in connection with the Works. Garbage collections shall be made at least twice each week and shall continue until completion of the Works.

Garbage shall be disposed of in a manner acceptable to the relevant local authority.

1.8.10.2 Payment

Separate payment will not be made for the provision for garbage disposal and the cost of this work shall be deemed to be included in the lump sum price entered in the Bill of Quantities for Establishment.

1.8.11 Maintenance of Existing Public Roads

1.8.11.1 General

The Contractor shall maintain all roads within the vicinity which he uses for purposes of carrying out the Works required by this Contract

1.8.11.2 Contractor's Operations

If the Contractor's operations obstruct or hinder the passage of traffic on the roads described in Sub-Clause 1.8.11, the Contractor shall provide and maintain for the duration of such disruption an alternative route, approved by the Engineer, of a standard not less than that of the road so affected.

Existing roads and bridges have load limits which the Contractor shall be responsible for determining. Before moving any heavy construction traffic into highways, roads, and bridges, the Contractor shall make suitable arrangements with the relevant authorities and obtain their approval for the passage of such traffic.

The Contractor shall not travel tracked vehicles or equipment on any bituminous sealed road surface. Rubber-tired vehicles conforming to applicable load restrictions will be permitted to use bituminous sealed road surfaces.

All the work of improvements or modifications on the existing public roads made by the Contractor for his own convenience shall be at the Contractor's own risk and expense.

1.8.11.3 Maintenance of Roads

The Contractor shall nominate public roads to be used by him during the execution of the Works in his construction plan. Prior to the commencement of the use of such roads, a joint inspection shall be carried out by the Engineer and the Contractor to document their conditions.

All damage caused by the Contractor's operations to the nominated roads shall be promptly repaired by the Contractor. At the end of the use by the Contractor of any particular section of public road, or completion of the Contract, whichever is the earlier, the Contractor shall ensure that the nominated roads used by him are reinstated to a condition equal to or better than the condition documented in the pre-commencement joint inspection referred to above. All expenses relating to the maintenance of public roads shall be borne by the Contractor.

In fulfilling his obligation for maintaining roads the Contractor shall:

- (i) reinforce to pass his traffic, if necessary, and keep in good working condition at all times all road structures, bridges, culverts, drains and other waterways;
- (ii) patch potholes with approved materials, keep the road surfaces in good repair, and perform all grading and necessary resurfacing;

- (iii) maintain all fenders, posts, guideposts, guard posts, rails, fencing, signs, signposts and other roadside structures;
- (iv) keep road surfaces and shoulders free from all earth, mud, stones, timber, rubbish, and other debris and materials removed from the Works;
- (v) adequately maintain cut-slopes and fill-slopes of the roads and appurtenant drainage ditches; and
- (vi) keep the road surface watered where dust is likely to be a safety or health problem.

1.8.11.4 Payment

Separate payment will not be made for complying with the requirements of Sub-Clause 1.8.12, and the cost of this work shall be deemed to be included in the various rates and lump sum prices entered in the Bill of Quantities.

1.9 UTILITY SERVICES SURVEY

1.9.3 General

The precise location of existing underground utility services is not known. The Contractor shall be responsible for determining the location and protection of all such underground services and shall be responsible for the cost of reinstating any utility service damaged by him during the execution of the Works.

1.9.4 Scope of Work

Prior to commencement of any part of the Works, the Contractor shall consult with the relevant public authorities, utility companies or private owners about existing utility services. With consent, and in the presence, of the public authorities, utility companies, private owners and the Engineer, the Contractor shall excavate, by hand, test pits to identify the type, size, level, location, direction and number of underground utility services.

Following determination of the presence and location of such utility services, the Engineer may direct minor relocation of the Permanent Works.

All exploratory pits or trenches shall be backfilled in accordance with the requirements of Section 3, Earthworks, and a temporary pavement comprising 200 mm gravel and 30 mm asphalt concrete shall be constructed to the approval of the Engineer.

1.9.5 Measurement and Payment

1.9.5.1 Test Pits

Measurement shall be made of the volume of test pits excavated and subsequently backfilled.

Payment shall be made at the rate entered in the Bill of Quantities which shall be full compensation for consulting with public utility authorities and private owners, excavating test pits and their backfilling on completion and shall include the cost of all materials, labour and equipment and all other things necessary to complete the work.

1.9.5.2 Reinstatement of Road

Measurement shall be made of the area of road reinstated.

Payment shall be made at the rate entered in the Bill of Quantities which shall include the cost of all material, labour and equipment to construct the temporary pavement.

1.10 SOIL INVESTIGATION

1.10.1 General

The Contractor shall, when directed by the Engineer, carry out test drilling with core recovery and in situ testing for the purpose of determining sub-surface geological conditions at piling sites or elsewhere within the Site. The locations, directions and depth of each test drilling shall be as directed by the Engineer.

1.10.2 Soil Tests Required

In situ and laboratory testing and the relevant standards to which tests shall be performed shall be in accordance with the following:

TEST	TESTING FREQUENCY
Standard Penetration (ASTM D 1586) 2m	every 1 m
Vane Shear Test (ASTM D 2573)	every 5 m
Specific Gravity (ASTM D 854)	every 5 m
Natural Water Content (ASTM D 2216)	every 5 m
Grain Size Analysis (ASTM D 422)	every 5 m
Liquid Limit Test (ASTM D 423)	every 5 m
Plastic Limit Test (ASTM D 424)	every 5 m
Wet Density Test (Calliper method)	every 5 m
Unconfined Compression (ASTM D 2166)	every 5 m
Consolidation Test (ASTM D 2435)	every 5 m

1.10.3 Reporting

Upon completion of testing, the Contractor shall prepare and submit to the Engineer five (5) copies of a Soil Testing Report in a format to the Engineer's approval.

1.10.4 Measurement and Payment

Payment test drilling will be made at the unit rate per metre depth of bore hole entered in the Bill of Quantities, which rate shall constitute full compensation for the cost of all labour, tools, equipment and materials for the test drilling, performing standard penetration tests, vane tests, recovering cores, laboratory testing, analysis, preparation of report, and preparation of all other items necessary to complete the work.

1.11 SAFETY, HEALTH CONTROL AND SECURITY

1.11.1 General

The Contractor shall be responsible for all safety, health controls and security and shall submit to the Engineer details of the organization and regulations for these purposes.

1.11.2 Safety Precautions

1.11.2.1 General

The Contractor shall comply with any safety instruction given by the Engineer. In the performance of the Works, the Contractor shall exercise every reasonable precaution to protect from injury persons or property. The Contractor shall erect and maintain all necessary temporary fencing, barricades, barriers, signs and lights and provide fire alarm, fire extinguishing and fire fighting services at strategic points on the Site and adequate ventilation, lighting and safe working conditions for his workmen engaged in the performance of the Works. The Contractor shall adopt and enforce such rules and regulations as may be necessary and desirable in the work and in its supervision. Safety measures shall include but shall not be limited to those measures mentioned in this Clause.

The Contractor shall comply with the International Regulations for Prevention of Collision at Sea and any special requirements applicable to marine vessels engaged in activities related to the Contract.

1.11.2.2 Safety Officer

In amplification of the requirements of the General Conditions of Contract Part II, Sub-Clause 34.10, the Contractor shall constantly employ during the progress of the Works an employee qualified in safety, and familiar with the type of work being performed, whose assignment shall include initiation of measures for the protection of health and the prevention of accidents and who shall see, by personal inspection, that all safety rules and regulations are enforced. The Contractor shall hold regularly scheduled safety meetings at least once each month with his Engineers, supervisors and foremen and, when directed, with the Engineer. The Contractor shall keep the Engineer advised as to when these meetings are to be held and shall provide the Engineer with a copy of the proposed agenda.

1.11.2.3 Temporary Fencing

The Contractor shall erect, maintain and remove suitable and approved temporary fencing to enclose such areas of the Permanent Works and areas of land occupied by the Contractor within the Site as may be necessary to implement his obligations under the Contract in approved manner. Where any temporary fence has to be erected, it shall be of the type required by and shall be erected to the satisfaction of, the Government authority concerned.

1.11.2.4 Lighting

- (a) In the event of night work being carried out, the Contractor shall provide sufficient lighting to ensure that in all places where work is in progress :

- (i) safe working conditions are provided for the Contractor's personnel and the Engineer;
 - (ii) the Works can be constructed in complete compliance with the Contract; and
 - (iii) a complete inspection of all Works in progress can be made by the Engineer.
 - (iv) Lighting of vessels shall be in accordance with the International Regulations for Prevention of Collision at Sea and any special requirements applicable to vessels engaged in activities related to the Contract. In addition adequate deck lighting shall be provided on all barges and tugs operating at night.
- (b) Unless otherwise directed by the Engineer, the minimum illuminance on ground or working surfaces to be provided for the various operations or work areas shall be as tabulated below :

ILLUMINANCE		
OPERATION OR AREA	Design Value (Lux)	Minimum Measured Value (Lux)
Construction Site in General	50	20
Concrete placing	100	50
Maintenance shops and Auxiliary Buildings	300	200
Deck Lighting	50	20

- (c) All moving equipment or plant used during night operations shall be equipped with sufficient lights and reflectors.
- (d) Not less than fourteen (14) days before the start of any night operations, the Contractor shall submit to the Engineer his proposals for lighting in the areas in which he proposes to work at night. The Contractor shall modify the proposals if directed and shall not begin operations at night, until the proposals for lighting have been approved.
- (e) The submission to or approval by the Engineer of the Contractor's proposals for lighting shall not relieve the Contractor of any of his liabilities or obligations under the Contract.

1.11.2.5 Signs

- (a) The Contractor shall provide all necessary signs for the Works. These shall include, but not be limited to
 - standard road signs;
 - warning signs;
 - danger signs;
 - control signs;
 - safety signs; and
 - direction signs.

- (b) Wording on all signs shall be in the Vietnamese and English languages. The size, colour, lettering and location of all signs will be subject to approval, and attention shall be paid to international system of signs.
- (c) The Contractor shall maintain all signs placed by himself as well as those placed by the Employer.
- (d) If the Engineer considers that the system of signs provided by the Contractor is inadequate to ensure safety, or unsatisfactory in other respects, the Contractor shall add to, amend, or otherwise change the system to the satisfaction of the Engineer.

1.11.2.6 Other Safety Measures

- (a) When working in the vicinity of electrical equipment and in the interest of safety and security, the Contractor shall complete the erection of any safety fencing around electrical and mechanical equipment by the time that the said apparatus is connected to any electrical supply.
- (b) Use of Lasers - The use of lasers on the Site shall be done with due regard to eye hazard and all personnel working on the site shall be warned accordingly.
- (c) Safety instructions - Within 56 days of receiving the notice to proceed the Contractor shall, at his own cost, supply and issue to his employees, those of his subcontractors and the Engineer, in English, Vietnamese and in other languages used by his employees at the Site, a booklet containing safety regulations based on good practice. The booklet shall be pocket size and issued to each person employed at the Site. Proof copies of the booklet shall be submitted to the Engineer for approval before printing and amendments shall be made to the booklet to his entire satisfaction. The Contractor shall issue the booklet immediately after printing and ensure that all employees are fully conversant with the instructions. Safety instructions shall deal with all safety including but not limited to the following items where relevant to the Works :
 - (i) operation of vessels
 - (ii) protective clothing, headgear and footwear;
 - (iii) use of lifting equipment;
 - (iv) earthmoving;
 - (v) formwork and reinforcement erection;
 - (vi) concreting;
 - (vii) routine for accidents or fires; and
 - (viii) watchman, warning notices and barriers
 - (ix) electrical safety

The Contractors shall allow for ten (10) booklets in the English language for the use of the Engineer.
- (d) Accident Report - The Contractor shall promptly report to the Engineer, in a form to be prescribed, all accidents involving death or serious injury to staff or workmen, and shall furnish monthly reports of all accidents to staff or workmen involving loss of time, giving such information as may be directed.

1.11.2.7 Provision of Safety Equipment

All persons employed on the Works are to be provided with safety equipment appropriate to the tasks upon which they are engaged such as helmets and safety equipment shall be compulsory as deemed necessary by the Engineer.

1.11.2.8 Payment

Separate payment will not be made for complying with the provisions of Sub-Clause 1.11.2 and all costs shall be deemed to be included in the rates and lump sum prices entered in the Bill of Quantities.

1.11.3 Sanitary Arrangements

1.11.3.1 Scope of Work

The Contractor shall keep the Site in a clean and hygienic condition, and shall provide and maintain sanitary conveniences for use of the persons employed in the Works to the extent, in the manner and at such places as approved by the Engineer and by any Government health authority concerned. All persons connected with the Works shall be enjoined to use these conveniences. Sewage shall be disposed of in a hygienic manner.

1.11.3.2 Payment

Separate payment will not be made for complying with the requirements of Sub-Clause 1.11.3 and all costs shall be deemed to be included in the item in the Bill of Quantities for Establishment

1.11.4 Fuel Storage

1.11.4.1 General

- (a) The Contractor shall make arrangement for the transportation, storage and handling of fuels in a safe manner to protect the public in accordance with the laws and security regulations of the Socialist Republic of Vietnam.
- (b) Above-ground gasoline and liquefied petroleum gas storage tanks shall not be located within 100 meters of any building.

1.11.4.2 Payment

Separate payment will not be made for complying with the requirements of Sub-Clause 1.11.4 and all costs shall be deemed to be included in the item in the Bill of Quantities for Establishment.

1.11.5 Fire Prevention

1.11.5.1 General

The Contractor shall take every precaution to prevent fire occurring on or about the Site. The Contractor shall comply with the laws and regulations of the appropriate Government authority relating to fires and shall provide fire fighting equipment, which the Engineer considers to be suitable and

adequate, ready to use in all structures, buildings or the works under construction, including his labour camps and ancillary buildings. The Contractor shall maintain such equipment and such additional fire fighting equipment as may be required, in good working condition until the Works are accepted by the Employer.

The Contractor shall extinguish promptly any fire which may occur on the Site wherever the fire may originate. In this regard, he shall employ all requisite equipment and manpower for fire fighting up to the limits of his equipment and manpower employed at the Site including the equipment and manpower of his subcontractors.

1.11.5.2 Payment

Separate payment will not be made for complying with the requirements of Sub-Clause 1.11.5 and all costs shall be deemed to be included in the various rates and lump sums entered in the Bill of Quantities.

1.11.6 Earthing

1.11.6.1 General

All appliance and facilities which are possibly subject to lightning strikes shall be electrically grounded and the effectiveness of such grounding shall be periodically checked by the Contractor.

1.11.6.2 Payment

Separate payment will not be made for complying with the requirements of Sub-Clause 1.11.6 and all costs shall be deemed to be included in the various lump sums and rates entered in the Bill of Quantities.

1.11.7 Medical and Health Services

1.11.7.1 General

- (a) The Contractor shall provide a person qualified in first aid at all working hours on the Site.
- (b) The Contractor shall provide a first aid unit on the Site for treatment of casualties in conformity with the requirements of all duly constituted medical and health authorities. The Contractor shall provide such first aid units and shall be responsible for and bear all costs in connection with the first aid services including removal by ambulance of injured or sick employees to hospital in Ho Chi Minh City or other places.
- (c) The Contractor shall provide first aid services for the Employer's and Engineer's staff working on the Site.

1.11.7.2 Payment

Separate payment will not be made for medical and health facilities provided by the Contractor for his employees, for his subcontractors and the Employer's and Engineer's staff, as required by this Clause, and all costs shall be deemed to be included in the various rates and lump sums entered in the Bill of Quantities.

1.11.8 Security

1.11.8.1 Responsibility of the Contractor

- (a) The Employer will specify overall security requirements for the project and the Contractor shall perform to such requirements and be responsible for such action of his personnel in respect of such requirements.
- (b) The Contractor shall be responsible for the security of the Works and the at Site and shall provide and maintain continuously and adequate security force to fulfil these obligations. The duties of the Contractor's security force shall include, but not be limited to, maintenance of order on the Site, provision of all lighting, fencing, guards, flagmen, all other measures necessary for the protection of the Works within the Site, all material delivered to the Site, the public, and all persons employed in connection with the Works, continuously throughout working and non-working periods, including nights, Sundays and holidays, for the duration of the Contract.

1.11.8.2 Payment

- (a) Separate payment will not be made for the provisions of security services and all costs shall be deemed to be included in the various rates and lump sum prices entered in the Bill of Quantities.

1.12 SURVEY AND MEASUREMENT OF THE WORKS

1.12.1 General

1.12.1.1 Bench Mark and Reference Points

Reference points have been established on the Site by the Employer as shown on the Drawings or as advised by the Engineer. The Contractor shall use the co-ordinates and elevations of such reference points in setting out the Works. Any reference points damaged as the result of action by the Contractor shall be replaced by the Contractor at his own expense.

The Contractor may establish temporary reference points for his own convenience but each point shall be of a design and at a location approved by the Engineer. Each point shall be accurately related to the points established by the Employer.

1.12.1.2 Responsibility for Setting Out

The Contractor shall be solely responsible for the correct setting out of the Works and shall employ experienced and qualified surveyors approved by the Engineer.

The Contractor shall furnish all materials, labour and equipment including stakes, templates, patterns, platforms and special labour that may be required by the Contractor in setting out any part of the Works. The Contractor shall use survey equipment of the type and accuracy to permit correct setting out and control of the Works.

Before performing the pre-construction surveys the Contractor shall give the Engineer at least 7 days notice before commencing such survey in order that the Engineer or his representative can witness and verify levels and other data so determined. The original surface level determined shall be subject to the Engineer's approval.

The Contractor shall co-operate with the Engineer in checking the setting-out and in performing the measurement surveys for record and payment purposes. The Contractor shall render all necessary assistance to the Engineer and shall provide, as required for the use of the Engineer, sufficient quantities of pegs, poles, straight edges, stagings, moulds, templates, profiles, survey assistants, labourers and transport (including boats where required) for checking the Contractor's setting-out and for measurement of the Works.

1.12.2 Survey Data and Calculations

The Contractor shall submit all survey data, information, calculations, results and records to the Engineer as soon as they are available.

1.12.3 Payment

Payment for surveying shall be made at the lump sum entered in the priced Bill of Quantities. Monthly progress payments shall be made in proportion to the progress of the Work.

1.13 OTHER ITEMS

1.13.1 Information Board

The Contractor shall provide three free-standing boards for the purpose of providing information in English and Vietnamese about the project to the public.

The boards shall be not less than 2500 x 2500 and shall be of galvanized steel construction. The lower edge of the board shall be 1200 above adjacent ground level and shall be mounted on suitable posts with struts in concrete footings. The paint to be used shall be sunshine resistant. The Contractor shall be responsible for the repair and maintenance of the boards until completion of the Works.

The information to be displayed and the locations shall be directed by the Engineer and the design of the supporting structures shall be subject to the Engineer's approval.

1.13.2 Securities and Insurance

1.13.2.1 Performance Security and Advance Payment Security

The Contractor shall furnish an Advance Payment Security and a Performance Security and in accordance with Sub-Clauses 60.7 and 10.1 of the Conditions of Contract to ensure the refund of the Advance Payment and for the due performance of the Contract respectively.

1.13.2.2 Insurance

The Contractor shall effect certain insurances relating to the Contract in accordance with of the Conditions of Contract.

In handling compensation to workmen under the above Clauses, the Contractor shall arrange that any compensation amount determined shall be paid without delay by the Contractor to the workmen entitled to such compensation irrespective of the time for payment of insured amount from the Insurance company to the Contractor.

1.13.2.3 Payment

Separate payment will not be made for complying with Sub-Clause 1.12.2 and the Conditions of Contract and all costs shall be deemed to be included in the rates and lump sums for the various items entered in the Bill of Quantities.

1.13.3 Audits by the Employer

1.13.3.1 General

The Employer shall be entitled at his discretion to conduct audits as necessary for his own investigation in connection with :

Costs incurred in the event of termination of the Contract as provided in Clause 65 and 66 of the Conditions of Contract;

Other costs that the Contractor may claim to the Employer, which are not specifically covered by the terms of the Contract.

1.13.3.2 Records

The Contractor is obligated to keep accurate and up-to-date accounts and records concerning the above items.

1.13.3.3 Payment

Separate payment will not be made for complying with the requirements of this Clause and all costs shall be deemed to be included in the rates and lump sums entered in the Bill of Quantities.

1.13.4 Liquidated Damages

1.13.4.1 Amount of Liquidated Damages

If the Contractor should fail to complete the Works within the Time of Completion as stated in the Appendix to Bid, the Contractor shall pay to the Employer liquidated damages pursuant to Clause 47 of the Conditions of Contract.

1.13.4.2 Maximum Damages

The maximum amount of liquidated damages payable or allowable to the Employer will be limited to the amount stated in the Appendix to Bid.

1.13.4.3 Other Rights of the Employer

Nothing contained in this Clause shall prejudice or affect any other rights of the Employer under the Contract.

1.13.5 Monthly Statement

1.13.5.1 General

The Contractor shall submit a monthly statement in accordance with the requirements of [Clause 60](#) of the Conditions of Contract. The monthly statement shall be accompanied by copies of all survey notes, records of measurements and calculation which the Engineer has directed to be prepared by the Contractor in support of the amounts claimed for the work executed.

1.13.5.2 Payment

All costs associated with the submission of the monthly statement shall be deemed to be included in the rates and lump sum prices entered in the Bill of Quantities.

1.13.6 Hours and Days of Working

Before commencement of work on the Contract, the Contractor shall notify the Engineer, in writing, of the days, hours and of the number of shifts that he proposes to work and shall give at least 48 hours notice to the Engineer of any changes to such hours of working and/or number of shifts that may be necessary during the currency of the Contract.

1.13.7 Prevention of Water Pollution

1.13.7.1 Scope

The Contractor's construction activities shall be performed by methods that prevent entrance or accidental spillage of solid matter, contaminants, debris and other objectionable pollutants and wastes into streams, flowing or dry water courses and underground water sources. Such pollutants and wastes include but not restricted to refuse, garbage, cement, concrete, sewage effluent, industrial waste, oil and other petroleum products. The Contractor shall submit his plan showing the location and design of the water pollution prevention systems and facilities to the Engineer for approval.

1.13.7.2 Payment

Separate payment will not be made for complying with the provisions of this Clause, and the costs shall be deemed to be included in the rates and lump sum prices entered in the Bill of Quantities.

1.14 MEASUREMENT AND PAYMENT (GENERAL)

1.14.1 General

The method of measurement shall be in accordance with the methods and procedures stipulated in the particular Clauses and as set forth herein.

The various unit rates and lump sums for each work item entered in the Bill of Quantities shall be deemed to have included full compensation for supplying all materials, labour, equipment consisting of owning, operation and repair costs, and other expenses necessary to complete the work in accordance with the Drawings, the Specifications, the instructions of the Engineer and compliance with all other obligations, including rectification of defects, as required under the Contract.

1.14.2 Measurement and Tolerances

This Clause explains the tolerance for measuring the dimensions of the work and the method of calculation of the quantity of the work completed in the following categories:

Category - 1 (linear metres, m)

The work item shall be measured to the second decimal place of a metre and be approved by the Engineer at every work stage on an inspection sheet.

The amount of payment will be determined by multiplying the measured length by the unit rate and then rounding the result to the nearest integer.

Category - 2 (square metres, m²)

The work item shall be measured to the second decimal place of a square metre by multiplying the two dimensions, measured to two decimal places, and rounded off, and approved by the Engineer at every work stage on an inspection sheet.

The amount of payment will be determined by multiplying the measured area by the unit rate and then rounding the result to the nearest integer.

Category - 3 (Hectare, ha)

Not used

Category – 4 (cubic metres, m³)

The work item shall be measured to the second decimal place of a cubic metre by multiplying the three dimensions, measured to two decimal places of a metre, and rounded off and approved by the Engineer at every work stage on an inspection Sheet.

The amount of payment will be determined by multiplying the measured volume by the unit rate and then rounding the result to the nearest integer.

Category - 5 (Lump Sum Item)

The method of measurement and payment shall be as set out in the respective payment Clause for each of the following items for which payment is by lump sum.

Category - 6 (mass)

a) (Mass in kg)

The work item shall be measured to the second decimal place of a metre and multiplied by the approved mass per metre at every work stage on an inspection sheet.

The amount of payment will be determined by multiplying the calculated quantity by the unit rate and then rounding the result to the nearest integer.

b) (Mass in tonne, Note: 1 tonne = 1000 kg mass)

The mass shall be determined by reference to delivery notes from the specialised supplier, duly approved by the Engineer or his representative, to the accuracy of the third decimal place of a tonne (1 kg).

The amount of payment will be determined by multiplying the approved quantity by the unit rate and then rounding the result to the nearest integer.

Category - 7 Number (No.) or set

The work item shall be measured to the exact number of items installed (or item of work performed) and approved by the Engineer at every work stage on an Inspection Sheet.

The amount of payment will be determined by multiplying the number by the unit rate.

Category – 8 Litre

The volume shall be determined by reference to dip sticks before and at the end of spraying work and shall be recorded on an inspection sheet and approval by the Engineer at every stage of the work.

The amount of payment will be determined by multiplying the whole number of litres by the unit rate.

Category – 9 Month

The applicable time shall be measured in months. Fractions of a month shall be calculated on the basis of 1 day equal 1/30 month.

The amount of payment will be determined by multiplying number of months, expressed to 3 decimal places by the unit rate.

APPENDIX: REQUIREMENTS FOR ENGINEER'S OFFICE

Location	For a purpose-built office, in close proximity to the Contractor's office. For rented office space, in Ben Me Coc at a location subject to the Engineer's approval
Gross Area (minimum)	220 m ²
Air Conditioning	Required throughout
Utility Rooms	Kitchen fitted with sink and tea and coffee making facilities, Male and female toilets Store room fitted with shelving
External Works Office Furniture and Equipment, general	Paving, lighting, car parking area, security fencing All shall be new and of good quality
Office furniture required	Desks with lockable drawers complete with chairs for 20 persons Meeting table with 10 chairs Book shelves (4 units) Filing cabinets (4 units)
Equipment Required	10 Desktop computers (IBM-type, 700 MHz or greater, 128 Mb DRAM, 30 GB Hard disk plus all devices for network operation) 1 Server (complete with all necessary software) and local area network connecting all computers and output devices. Each desktop computer shall be loaded with the following software: <ul style="list-style-type: none"> • Microsoft Windows latest version. • Microsoft Office latest version • Virus Protection Program latest version • AutoCAD latest version • Any other software necessary for proper network operation 1 Laser Jet Printer capable of printing A3 size, complete with all accessories and consumables 1 Inkjet Plotter capable of plotting A1 size Drawings complete with all accessories and consumables 1 Inkjet Colour Printer capable of printing A3 size 1 Photo copy machine of commercial quality capable of copying A3 size and collating 1 facsimile machine 1 Potable water cooler/dispenser Miscellaneous office equipment including hole punches, scissors, staplers etc.

DIVISION B

TECHNICAL SPECIFICATION

SECTION 2. PREPARATORY WORKS

TABLE OF CONTENTS

	Page
2.1 GENERAL	2-1
2.2 CARE OF WATER	2-1
2.2.1 General	2-1
2.2.2 Dealing with Water	2-1
2.2.3 Removal of Water	2-2
2.3 CLEARING AND GRUBBING	2-3
2.3.1 General	2-3
2.3.2 Definition of Extent	2-3
2.3.3 Requirements	2-3
2.4 DEMOLITION WORKS	2-3
2.4.1 General	2-3
2.4.2 Scope	2-3
2.4.3 Method of Execution	2-3
2.5 MEASUREMENT AND PAYMENT	2-4
2.5.1 Care of Water	2-4
2.5.1.1 Coffering and Dewatering	2-4
2.5.1.2 Other Items	2-4
2.5.2 Clearing and Grubbing	2-5
2.5.3 Demolition Works	2-5

SECTION 2. PREPARATORY WORKS

2.1 GENERAL

This section covers the general and specific requirements for preparatory works including care of water, clearing and grubbing and demolition works to be carried out for construction of various works in [Package B](#).

2.2 CARE OF WATER

2.2.1 General

The Contractor shall be responsible for the removal of all water encountered during the execution of the whole of the Works.

The Contractor shall design, construct and maintain all temporary diversion and protective works which are necessary for construction and to prevent surface, drainage and groundwater from entering excavations and shall furnish all materials required therefor.

The Contractor shall be responsible for and shall repair, at his expense, any damage to foundations, excavation slopes or any other parts of the Works caused by water, floods or by his failure to protect the Works in accordance with the requirements of this Clause

2.2.2 Dealing with Water

Where it is required that construction shall proceed with flow of water in rivers, canals, sewers etc. it shall be necessary to isolate the site of the structure to be constructed from the flow of water. Suitable coffer dams, canals, flumes, drains or other temporary diversion and protection works shall be constructed without interruption or interference with the flow of water in the rivers, canals, sewers etc. The Contractor shall construct sufficient temporary works as described above to deal adequately with surface and groundwater sources to enable the construction of the Permanent Works to the satisfaction of the Engineer.

Where it is required to work in an operational sewer or connection to existing sewer, it will be necessary to divert the existing flows in the sewers to isolate the working area. Where gravity diversion is not possible, the Contractor may be required to utilize over pumping at these locations.

The Contractor shall submit for the approval of the Engineer the location, size, diversion flow requirement and other relevant details including materials proposed for the construction of the temporary works described above. In the case of over pumping, the Contractor shall maintain one (1) stand-by pump of capacity at least equal to the largest duty pump available on site at all times. The Contractor shall include provisions for maintaining flows during rainstorms by means of over topping, removal of flow barriers or otherwise to prevent artificial flooding at the upstream locations of the particular site.

The Contractor shall submit Drawings and calculations showing his proposed method, dimensions and sizes of cofferdam construction. Approval of the Drawings and calculations by the Engineer will not in any way relieve the Contractor of the responsibility for the adequacy of the design for strength and stability or for the safety of the people working therein.

The interior dimensions of cofferdams shall be such as to give sufficient clearance for the construction and removal of any required forms and the inspection of the interior and to permit pumping outside the forms.

Cofferdams that tilt or move laterally during construction shall be corrected as necessary at the expense of the Contractor. In case the structure is damaged it shall be repaired as directed by the Engineer at the expense of the Contractor.

Unless otherwise provided, cofferdams shall be removed after the completion of the structure in a manner so as not to disturb or mar the finished work.

2.2.3 Removal of Water

Much of the Works are located below the normal water level in the Saigon River or canals (which are tidal) and removal of water from excavations is required in order to carry out all construction operations under dry conditions. The Contractor's method of removal of water from foundation excavations shall be subjected to the approval of the Engineer.

Subject to approval of the Engineer, water from excavations shall be disposed of by pumping or gravity diversion directly to the canals or river.

Before commencement of excavation for foundation works for the structures of the Works and/or related structures, the Contractor shall submit the method for removal of water, installation and details of the proposed dewatering system he proposes to use.

Any dewatering system adopted by the Contractor shall be operated in such a way that the groundwater level outside the excavation is not reduced to the extent that would cause damage or endanger adjacent structures or property or loss of fines from adjacent ground which could cause adverse effects.

The Contractor shall be required to ensure that the bottom of excavations are free of water prior to placement of concrete or embankment/filling material. Such controls may require supplementary approved dewatering methods by the use of perforated pipe or under drains leading to sumps from which water shall be pumped. The water pumped out from the foundation shall be diverted directly to the river/canals or through existing drains or pipes without allowing it to flow overland causing inundation of properties, etc.

Cofferdams shall be constructed so as to protect newly cast concrete from sudden rising of the water and to prevent damage to the foundation by erosion.

Pumping and dewatering from the interior of any foundation enclosure shall be done in such a manner as to preclude the possibility of the movement of water through or alongside any concrete being placed. No pumping or dewatering will be permitted during the placing of concrete nor for a period of at least 24 hours thereafter unless it is done from a suitable sump separated from the concrete work by a water tight wall. The wall shall be extended sufficiently far below the bottom of the sump so that no material from the concrete can penetrate into the well. The design of this sump shall be made to the Engineer's satisfaction.

Excavations shall be kept dry down to at least 100 mm below foundation level prior to and during placing concrete. Placing concrete under water will only be permitted if indicated on the Drawings or permitted by the Engineer.

2.3 CLEARING AND GRUBBING

2.3.1 General

The Contractor shall carry out clearing and grubbing of the areas directed by the Engineer in accordance with this Clause.

2.3.2 Definition of Extent

The extent of the area for clearing and grubbing shall be agreed by the Engineer prior to commencement by the Contractor.

2.3.3 Requirements

The Contractor shall remove and dispose of all stumps, veins, brush, grass, roots, vegetation, fences, rocks, masonry, trash, debris, building rubble, building foundations and other objectionable matter within the area to be occupied by the permanent works.

Where directed by the Engineer, the holes resulting from grubbing operations shall be filled with approved materials which shall be placed and compacted to the same density as the adjoining soil.

All waste materials resulting from the clearing and grubbing work shall be transported to the designated spoil disposal area then spread and buried to the approval of the Engineer.

Any combustible material shall be removed from the site and burnt. Burning on site shall not be permitted.

All salvageable materials shall remain the property of the Employer and shall be transported and stacked at locations as directed by the Engineer.

2.4 DEMOLITION WORKS

2.4.1 General

The Contractor shall carry out demolition works in accordance with the requirements of this Clause.

2.4.2 Scope

The work consists of the complete demolition and removal of existing concrete and masonry and timber structures which are required to be removed for the purpose of clearing the site for the construction of the [dike on the Saigon River](#) and other areas indicated in the Drawings, listed in the Bill of Quantities or as directed by Engineer.

2.4.3 Method of Execution

Structures to be demolished shall be broken into units of sufficiently small size so as to be safely handled and removed from the site.

All waste materials resulting from the demolition work shall be transported to the designated spoil disposal area then buried to the approval of the Engineer.

Any combustible material shall be removed from the site and burnt. Burning on site shall not be permitted.

All salvageable materials shall remain the property of the Employer and shall be transported and stacked at locations as directed by the Engineer.

2.5 MEASUREMENT AND PAYMENT

2.5.1 Care of Water

The Contractor shall provide a breakdown of the lump sums for Care of Water in accordance with Sub-Clause 57.2 of the General Conditions of Contract. The breakdown shall be arranged such that it includes not more than ten (10) sub-items which can be readily recognised and measured for payment purposes.

Payment for care of water will be made at the lump sum price entered in the Bill of Quantities. Progress payments for work under each sub-item will be made as follows:

2.5.1.1 Coffering and Dewatering

Where the approved breakdown of the lump sum includes a component for Coffering and Dewatering, payment shall be made for the section of coffering and for the dewatering of the its enclosed area and the subsequent removal of the section of cofferdam and all associated equipment as follows:

- 40 % on completion of the cofferdam
- 30 % on completion of all dewatering following completion of the permanent works protected by the cofferdam
- 30 % on the complete removal of the section of cofferdam to the approval of the Engineer

2.5.1.2 Other Items

Other items included in the Contractor's breakdown of the lump sum for Care of Water shall be paid in proportion to their completion.

Items to be paid under this Clause are as follows:

Pay Item No.	Description	Unit of Measurement
2.1.1.1	Care of Water	L.S.
2.2.1.1		
2.3.1.1		
2.4.1.1		
3.1.1.1		
3.2.1.1		
3.3.1.1		
3.4.1.1		
3.5.1.1		
4.1.1.1		
4.2.1.1		

2.5.2 Clearing and Grubbing

Measurement for payment will be made in square metres (m²) of the area actually cleared and grubbed and approved by the Engineer.

Payment will be made at the rate entered in the Bill of quantities and include the entire cost of completing the work including materials, labour, equipment, transportation and disposal of material and all associated costs. Clearing in excess of the approved area shall not be paid for.

Items to be paid under this Clause are as follows:

Pay Item No.	Description	Unit of Measurement
2.1.1.2	Clearing and Grubbing	m ²
2.2.1.2		
2.3.1.2		
2.4.1.2		
3.1.1.2		
3.2.1.2		
3.3.1.2		
3.4.1.2		
3.5.1.2		
4.1.1.2		
4.2.1.2		

2.5.3 Demolition Works

Measurement shall be made of volume of existing structures demolished and removed in accordance with the specification and to the approval of the Engineer.

Payment shall be made at the rate entered in the Bill of Quantities which shall include the entire cost of completing the work including materials, labour, equipment, transportation and disposal material and all associated costs.

Items to be paid under this Clause are as follows:

Pay Item No.	Description	Unit of Measurement
2.3.1.3	Demolition of stone masonry: including hauling and disposal in designated area	m ³
3.3.1.3		
2.3.1.4	Demolition of revetment: including hauling and disposal in designated area	m ³
3.4.1.3		

SECTION 3. EARTHWORKS

TABLE OF CONTENTS

	Page
3.1 GENERAL	3-1
3.1.1 Character of Strata.....	3-1
3.1.2 Earthworks to Dimensions, Lines and Levels.....	3-1
3.1.3 Method of Excavation.....	3-2
3.1.4 Unsuitable Materials.....	3-2
3.1.5 Transportation of Excavated Material	3-2
3.1.6 Disposal of Excavated Materials.....	3-2
3.1.7 Submittals.....	3-2
3.2 EXCAVATION.....	3-3
3.2.1 Channel Excavation	3-3
3.2.1.1 General	3-3
3.2.1.2 Trimming Tolerances.....	3-3
3.2.1.3 Excavation Beyond True Line	3-3
3.2.1.4 Inspection and Survey	3-4
3.2.2 Common Excavation	3-4
3.2.2.1 General	3-4
3.2.2.2 Support of Excavation	3-4
3.2.2.3 Inspection of Excavation.....	3-4
3.2.2.4 Ventilation	3-4
3.2.2.5 Excavation Beyond True Line	3-5
3.2.3 Excavation of Trench	3-5
3.2.3.1 General Requirements	3-5
3.2.3.2 Removal of Pavement	3-5
3.2.3.3 Trench Widths for Sewer Lines	3-5
3.2.3.4 Protection of Existing Utilities and Trees	3-5
3.2.4 Excavation of Pits for Manholes	3-6
3.3 FILL	3-6
3.3.1 General	3-6
3.3.2 Materials	3-6
3.3.3 Soil Tests	3-7
3.3.4 Placing, Compaction and Moisture Content of Fill	3-8
3.3.5 Preparation of Surface under Fill	3-9
3.3.6 Filling Adjacent to Structures.....	3-9

3.3.7	Backfilling	3-9
3.3.8	Backfilling of Sewer Trenches	3-9
3.3.9	Gravel Placement.....	3-10
3.4	RIP RAP	3-10
3.4.1	General	3-10
3.4.2	Material	3-10
3.4.3	Preparation	3-10
3.4.4	Selection and Placement	3-10
3.5	MEASUREMENT AND PAYMENT	3-10
3.5.1	Excavation	3-10
3.5.1.1	Common Excavation	3-10
3.5.1.2	Channel Excavation below Water Level	3-12
3.5.2	Fill	3-12
3.5.2.1	Earth Fill or Earth Backfill	3-12
3.5.2.2	Sandy Soil Fill or Sandy Soil Backfill.....	3-13
3.5.2.3	Sand Bedding or Sand Backfill	3-13
3.5.2.4	Free Draining Gravel	3-14
3.5.2.5	Gravel Bedding	3-14
3.5.2.6	Rip Rap	3-15

SECTION 3. EARTHWORKS

3.1 GENERAL

This section covers the general and specific requirements for earthworks to be carried out under the Contract which include, but are not limited to, excavation and backfilling of sewer trenches, excavation of retarding ponds, earthworks for pumping stations, and other works in the Than Da and Ben Me Coc 1 and 2 areas.

3.1.1 Character of Strata

The Contractor shall acquaint himself with all available data regarding earthworks and the character of strata and materials to be excavated and used as filling. He shall satisfy himself as to :

- the general circumstances at the Site of the Works
- any obstructions thereon
- the form of river or canal bed and banks
- his obligations for care of water
- the flow of water in the river or canals
- flow of water in existing sewers
- tidal effects
- springs, subsoil and river water
- the surface of the ground
- possible subsidence of soft ground
- poor materials
- possibility of floods
- slipping clay
- running sand
- trees, brushwood, timber and debris
- floating debris
- obstructions of any kind and material of whatever nature.

Rates entered in the Bill of Quantities shall reflect the Contractor's own assessment of risk and influence that these matters may have on his costs and no subsequent adjustments shall be made to rates for any reason.

3.1.2 Earthworks to Dimensions, Lines and Levels

All earthworks shall be carried out to the dimensions, lines and levels as shown on the Drawings, or to such other dimensions, lines and levels as may be ordered by the Engineer. Dimensions and lines, which are based on or related to ground levels, shall be referred to the Engineer before commencing earthworks at any location.

For the purpose of the Specification the term original surface level shall refer to the ground or canal/river/pond bed surface before the start of earthworks

as measured by the Contractor and approved by the Engineer in accordance with [Clause 1.12](#) of Section 1, General Specification.

3.1.3 Method of Excavation

The Contractor shall carry out excavation in whatever material may be encountered and by any method or combination of methods he considers most suitable subject to any restrictions herein.

The Contractor shall give due consideration to the matters in [Clause 3.1.1](#) (Character of Strata), [Clause 2.2](#) (Care of Water) of [Section 2](#), location and access to soil disposal areas, fill and stock pile areas and all other relevant factors.

3.1.4 Unsuitable Materials

Excavated materials which, in the opinion of the Engineer, do not meet required Specifications for fill, embankment or backfill shall not be used for such purpose and shall be transported to the designated spoil disposal area.

3.1.5 Transportation of Excavated Material

The transportation of excavated material to fill, embankment, backfilling or stockpile site or disposal of excess or unsuitable materials shall be carried out in accordance with the approved schedule of earthworks operations. The Contractor shall transport material by the most appropriate route between excavation and placement or disposal areas using, as far as practical, access and haul roads within the site or by the use of waterborne transport (eg barges). Protective measures shall be made and maintained throughout the duration of the Works for the safety of operations both on-site and off-site.

When hauling by road, off-site loads shall be trimmed to prevent spillage. Wet materials to be hauled shall be dried sufficiently prior to loading to prevent spillage by leaking. Any damage or unsightly appearance on the surface of any road caused by the Contractor's hauling operation shall be reinstated by the Contractor at his own expense.

When hauling by barge is carried out it shall be done in accordance with the safety provisions of Section 1, General Specification.

3.1.6 Disposal of Excavated Materials

Excavated material which, in the opinion of the Engineer, is suitable for use in filling, embankment or backfill may be transported directly to its final position, stock piled, or placed as otherwise approved by the Engineer.

Unsuitable soil or surplus excavated materials shall be disposed of in the designated spoil disposal area. The Contractor shall trim and grade spoil tips to profiles, heights and levels approved by the Engineer. He shall also maintain without interruption the flow of water courses affected by tips and comply with any other arrangement at the site existing between the Engineer and any other parties involved.

3.1.7 Submittals

Pursuant to [Clause 1.4.7](#) of Section 1, prior to the commencement of any earthworks operation, the Contractor shall submit to the Engineer, for his approval, method statements. Such method statements shall include, but not be limited to the following:

- Equipment to be used
- Materials to be procured and their sources and properties
- Haul routes
- Stock pile areas
- Safety measures to be taken to protect the Works, the site personnel and the public
- Detailed Drawings of all temporary works with particular attention given to the shoring of trenches and deep excavations for sewer line construction.
- Computations to support the design of temporary works
- Method of grouting voids during sheet piling withdrawal
- Dewatering methods
- Lighting and ventilation to be used in deep excavations and confined spaces
- Measures to be taken to ensure that the public can safely pass the works
- Proposed working hours

3.2 EXCAVATION

3.2.1 Channel Excavation

3.2.1.1 General

The work covered by this Clause relates to excavation within the canal or river and below water level.

For the purposes of this contract Channel Excavation below Water Level shall refer to the excavation carried beyond the toes of revetments or sewer outlet structures and will usually be carried out under water (with the exception of at very low tides in some places).

The Contractor shall carry out all channel excavation in whatever material may be encountered in accordance with these Specifications, the Drawings and any directions of the Engineer. The Contractor shall provide and operate all necessary excavating, lifting, hauling, transport and other equipment to deal with any type of material encountered. Excavation for the various works shall be carried out to such widths, lengths, depths and profiles as shown on the Drawings, or to such other dimensions as may be ordered by the Engineer in writing.

3.2.1.2 Trimming Tolerances

Excavated surfaces shall be trimmed to the lines and grades as shown in the Drawings or to other lines and grades as may be directed by the Engineer. The bed level of the canals at any cross section shall be trimmed to a tolerance of 0 mm above the specified elevation and not more than 200 mm below the specified elevation.

3.2.1.3 Excavation Beyond True Line

The waterway channels shall be cut to the lines and level as shown in the Drawings and to the tolerances stated in [Clause 3.2.1.2](#).

For all parts of the waterway channels, for whatever reason and cause, unless as a result of the Engineer's direction, the Contractor shall, at his own expense, make good the excavation to the required line and level with approved material and in such a manner as the Engineer may approve. Where over-excavation is not detrimental to canal flow and not unsightly, the Engineer may, at his sole discretion, waive the requirement for making good such over-excavation. Any under excavation beyond the stated tolerances shall be corrected.

3.2.1.4 Inspection and Survey

The Contractor shall measure work in progress by means of appropriate survey methods and in the presence of the Engineer or his representative.

The Engineer will carry out inspection of work progress and measurement of work completed assisted by the Contractor who shall provide boats, boatmen, labourers, materials and all other items necessary for the Engineer's use.

3.2.2 Common Excavation

3.2.2.1 General

This [Clause 3.2.2](#) refers to all common excavation to be carried out under the Contract and shall be read in conjunction with [Clause 3.1](#).

Common excavation is the open-cut excavation of all materials including, but not limited to soil, sand, gravel, clay, silt, sediments, etc. excluding rock as determined by the Engineer. Any excavation without a classification of the material generally shall mean common excavation.

The Contractor shall carry out all common excavation in whatever material may be encountered in accordance with these Specifications, Drawings and any directions of the Engineer. The Contractor shall provide and operate all necessary excavating, lifting, hauling, transport and other equipment to deal with any type of material encountered. Excavation for the various works shall be carried out to such widths, lengths, depths and profiles as shown on the Drawings, or to such other dimensions as may be ordered by the Engineer in writing.

3.2.2.2 Support of Excavation

Where necessary the sides of all excavations shall be properly shored up and supported with strutting and planking, and the sides shall be close sheeted where necessary to prevent the entry of running sand, mud and the like.

Furthermore, where excavation is being carried out in trenches, pits or other confined spaces the Contractor shall give particular care to the safety of workers and shall follow the appropriate recommendations in BS 6031 – Code of Practice for Earthworks.

3.2.2.3 Inspection of Excavation

When any excavation has been completed and trimmed, the Engineer shall be informed so that he may make a formal inspection. No excavation shall be backfilled or covered with concrete until it has been inspected and the Contractor has been authorised to proceed.

3.2.2.4 Ventilation

The Contractor shall provide adequate ventilation and efficient apparatus to keep all excavations, headings and places of work free from all gasses,

whether generated in the strata or otherwise, and he shall take precautions to ascertain that they are in a safe condition before allowing workmen to enter.

3.2.2.5 Excavation Beyond True Line

Where any over-excavation occurs for whatever reason or cause, unless as a result of the Engineer's direction, the Contractor shall, at his own expense, make good those excavations to the required line and level with :

- 1) approved material and in such manner as the Engineer may direct where the excavation is other than for concrete work; or
- 2) concrete of the same grade as that to be used in the true excavated shape, unless directed otherwise by the Engineer, where the excavation is for concrete work.

3.2.3 Excavation of Trench

3.2.3.1 General Requirements

Excavation of trench shall be performed in accordance with the requirements of Clause 3.2.1 and this Clause 3.2.2.

Excavation methods and equipment to be used for trenches shall be suitable for the particular work. Trenching shall be to the lines and grades shown on the Drawings and to the required width and depth. Excavation to the final trench bottom shall be done in such a way as to leave the bottom undisturbed. All excavation of trench shall be done in the dry.

No excavation of trench shall be carried out until the Contractor's method statement has been approved by the Engineer. Approval of the Contractor's method statement shall not relieve the Contractor of his obligations or liabilities under the Contract.

3.2.3.2 Removal of Pavement

Pavement to be removed during excavations shall be cut along straight parallel lines before excavating to provide a uniform edge and minimize the amount of pavement disturbed.

Asphalt pavement shall be cut with vertical sides. Settlement and cracks in bituminous pavement are to be restored to the approval of the Engineer.

Concrete curbs shall be sawn with vertical sides in line with the sides of the trench or, in the case of precast block, sufficient blocks shall be removed and stockpiled for future reinstatement.

3.2.3.3 Trench Widths for Sewer Lines

Trenches shall be excavated to the widths shown on the Drawings which shall include the thickness of sheeting, bracing, sheet piling used as temporary works to support the sides of the trench. Over excavation of the width of trenches for sewer lines shall be corrected by backfilling to the crown level of the sewer pipe to be constructed in the trench and re-excavating to the required width.

3.2.3.4 Protection of Existing Utilities and Trees

Existing facilities, including water pipelines, electrical cables, telephone cables and existing sewers shall be supported as necessary and protected

from damage during all phases of construction, and they shall be kept in full operation during the work of this Contract.

Trees and their root structures intended to remain must be protected during excavation to the satisfaction of the Engineer.

3.2.4 Excavation of Pits for Manholes

Excavation of pits for manholes for sewer or stormwater pipeline construction shall be carried out with the same provisions as specified in Clause 3.2.2 and as follows.

The widths of pits shall be constructed to 1m (including the thickness of shoring) beyond the external face of the structure unless otherwise directed or approved by the Engineer.

3.3 FILL

3.3.1 General

The work described in this Clause shall consist of the furnishing of necessary materials and selecting, stockpiling and blending if required, transporting, placing, spreading, adjustment of moisture content, compaction, shaping and doing incidental items of work to construct the finished fill to the lines, grades and profiles as shown on the Drawings or as directed by the Engineer.

The Contractor shall make due allowance for consolidation and settlement whether compaction is specified or not, such that the levels, widths and dimensions of the finished surfaces at the end of the Defects Liability Period shall not be less than the levels and dimension shown on the Drawings.

All filling and embankments shall be constructed to the lines and levels shown on the Drawings or established by the Engineer.

Backfilling of trenches and filling adjacent to structures is also included in this category of work.

Accumulation of material at the base of embankment slopes will not be permitted.

3.3.2 Materials

Materials to be used for the various types of fill, backfill or bedding shall conform to the requirements specified herein or as approved by the Engineer.

(a) Earth Fill (selected from Common Excavation)

Material to be used shall be extracted and selected from excavated material from common excavation, and shall not contain roots, turf or clod exceeding 75 mm in size or organic matter of any kind and shall be approved by the Engineer.

(b) Sandy Soil Fill

Sandy soil fill material shall be clean well graded sand, free of organic or other deleterious matter conforming to the following requirements:

- The percentage, by weight passing the 0.075 mm sieve shall be less than 35%
- The uniformity Coefficient (Uc), defined as D_{60}/D_{10} shall not be less than 4

This material is commonly known as "black sand" in Vietnam.

(c) Sand

Sand bedding material shall consist of natural sand, having clean, hard and durable particles, and it shall be free from clay, organic matter, and other deleterious materials. It shall be uniformly graded and shall meet the following grading requirements :

Sieve Size (mm)	Cumulative Passing Percentage by Weight
9.5	100
4.75	95 - 100
2.36	80 - 100
1.18	50 - 85
0.600	25 - 60
0.300	10 - 30
0.150	2 - 10

This material is commonly known as “yellow sand” in Vietnam.

(d) Free Draining Gravel

Gravel for use in Free Draining Gravel shall consist natural gravel or crushed stone which shall be hard and durable and which will not break down or deteriorate in service and shall be clean and free from clay, organic matter or other deleterious materials. The maximum particle size shall be 40mm and the minimum particle size shall be 20 mm.

(e) Gravel

Gravel for use in [gravel bedding or gravel fill](#) shall consist natural gravel or crushed stone which shall be hard and durable and which will not break down or deteriorate in service and shall be clean and free from clay, organic matter or other deleterious materials. The plasticity index shall be not greater than 10 and the grading shall comply with the following requirements.

Sieve Size (mm)	Cumulative Passing Percentage by Weight
50	100
4.5	25 - 90
.075	0 - 10

3.3.3 Soil Tests

Tests on materials for use as fill or backfill materials shall be performed by the Contractor and shall enable determination of soil characteristics, suitability, dry density/moisture content relationships and the like. A formal report of all tests shall be prepared by the Contractor and approved by the Engineer. Tests shall be performed by the Contractor prior to commencement of earthworks, and every time soil characteristics change. Tests shall include but not be limited to the following :

- a) Compaction (AASHTO T 99) (Dry Density)
- b) Particle size distribution
- c) Specific gravity
- d) Moisture content
- e) Plastic limit, Liquid limit
- f) Direct shear

Test results shall be submitted to the Engineer for approval.

Field compaction tests of compacted filling shall be made on each layer and at a frequency of one test for every 300 m².

For backfilling of trenches, field compaction tests shall be made for every layer in each section of work undertaken or as otherwise directed by the Engineer.

The Contractor shall prepare a soil test programme in conjunction with his earthworks operation schedule and submit it to the Engineer for approval.

3.3.4 Placing, Compaction and Moisture Content of Fill

This Clause relates to the earth fill and sandy soil fill as shown on the Drawings.

Prior to commencement of filling, the Contractor shall carry out, under direct supervision and to the satisfaction of the Engineer, a series of field tests to determine optimum conditions and minimum number of passes of each type of equipment required to achieve the specified compaction for each type of fill material.

Fill material shall not be placed when, in the opinion of the Engineer, satisfactory results cannot be achieved due to heavy rain or other adverse conditions.

Fill shall be spread and compacted in approximately horizontal layers of uniform moisture content and uniform compacted thickness not exceeding 200 mm (or to lesser thickness as specified elsewhere). Filling operations shall be such as to ensure that materials will be blended sufficiently to achieve the highest practicable dry density and stability. Where the surface of any layer of filling is too dry or too smooth to bond properly with the next layer of material, it shall be moistened and/or scarified in an approved manner to provide a satisfactory bonding surface before the next layer is placed.

The moisture content of filling shall be carefully controlled, either by natural drying or wetting with a fine spray, to achieve optimum values. Fill material shall be compacted to a density of not less than 90% maximum standard dry density determined in accordance with AASHTO T 99. For portions of fill upon which road pavements are to be constructed the upper 300 mm of fill material directly below the road pavement shall be compacted at optimum moisture content to a compaction of 95% maximum standard dry density in accordance with AASHTO T 99 for the full width of the roadway or for the full width of the trench as the case may be. Where practical, as determined by the Engineer, moistening of the material shall be performed at the site of stockpiles but such moistening shall be supplemented by fine spraying at the time of compaction, if necessary. Where moisture content is beyond the optimum range, the operation shall not proceed except with the specific approval of the Engineer, until the material has been conditioned by wetting or drying to achieve a moisture content in the required range.

All compaction equipment shall be approved by the Engineer in writing before commencement of any filling operations.

3.3.5 Preparation of Surface under Fill

Filling shall not be placed on any portion of embankment foundation until such foundation has been cleared, stripped of topsoil, suitably prepared and has been approved by the Engineer. Tests pits, trenches and cavities resulting from the removal of unsound foundation materials or for inspection of sub-surface conditions shall be filled with selected materials.

Foundation material which does not have a density in the undisturbed condition as specified for the fill material to be placed upon it shall be moistened and compacted to specified dry density or shall be removed, filled and compacted or shall be treated in a manner as directed by the Engineer.

3.3.6 Filling Adjacent to Structures

Filling adjacent to structures shall be placed and compacted to avoid damage to such structures. Compaction adjacent to structures shall be carried out by hand or with suitable hand-operated equipment in horizontal layers not exceeding 150 mm thickness after compaction.

Unless otherwise specified or permitted by the Engineer, filling shall not be placed and compacted adjacent to concrete until at least fourteen (14) days after the placing of the concrete.

3.3.7 Backfilling

Backfill comprising approved materials complying with the specification for filling provided in [Clause 3.3.2](#), shall be placed and compacted adjacent structures or in trenches generally in accordance with [Clause 3.3.4](#), as shown on the Drawings or as directed by the Engineer.

Prior to commencement of backfilling adjacent to structures, the area shall be cleared of all formwork and other temporary works. Compaction shall be carried out by hand or with suitable hand operated equipment so as to achieve specified compaction without damage to structures. Backfilling material shall be wetted or allowed to dry in order to achieve optimum moisture content for compaction.

Backfilling shall be placed and compacted in continuous horizontal layers of not more than 150 mm compacted thickness. Unless otherwise specified, backfilling shall be compacted to 90% of the maximum dry density as determined in the laboratory compaction test referred to in [Clause 3.3.3](#).

Unless otherwise specified or permitted by the Engineer, backfilling shall not be placed and compacted adjacent to concrete until at least fourteen (14) days after the placing of concrete.

Compaction of backfilling material placed above buried concrete, however, shall not be permitted to be carried out with vibrating equipment except with the prior approval of the Engineer.

3.3.8 Backfilling of Sewer Trenches

For trenches less than 4 m deep and where timber sheeting is used, backfill shall be placed in layers as described above, while trench support is being concurrently partly withdrawn.

For deeper trenches, where sheet piling support has been used, backfilling shall be completed up to the subgrade level before sheet piling is withdrawn.

This Clause shall be read in conjunction with [Clause 7.5.1](#) which specifies special requirements for backfilling around pipes.

3.3.9 Gravel Placement

This Clause covers the requirements for placing gravel bedding or free draining gravel in the locations as shown on the Drawings or as directed by the Engineer.

Materials shall comply with the requirements of Clause [3.3.2](#)

Gravel shall be placed and compacted in continuous horizontal layers of not more than 150 mm compacted thickness. Each layer shall be compacted until it is stable and dense and shows no movement under compaction.

Unless otherwise specified or permitted by the Engineer, backfilling shall not be placed and compacted adjacent to concrete until at least fourteen (14) days after the placing of concrete.

Compaction of backfilling material placed above buried concrete, however, shall not be permitted to be carried out with vibrating equipment except with the prior approval of the Engineer.

3.4 RIP RAP

3.4.1 General

This Clause refers to the construction of rip rap for protection of the toes of revetments as shown on the Drawings or directed by the Engineer.

3.4.2 Material

Stone shall be clean, hard, and durable with a specific gravity not less than 2.5.

Samples of stone proposed for use in rip rap construction shall be submitted to the Engineer for his approval.

3.4.3 Preparation

Where applicable, surfaces on which rip rap is to be placed shall be completed to the satisfaction of the Engineer prior to placing rip rap.

3.4.4 Selection and Placement

Stones of size 250 mm to 300 mm in maximum dimension in accordance with Clause [3.4.2](#) shall be selected for use.

Stones shall be carefully placed such they are stable, closely interlock with adjacent stones and are arranged such that they comply with the lines, levels and profiles of the stone facing as shown on the Drawings to a tolerance of + or – 100 mm. Particular care shall be taken not to damage other parts of the revetments when placing rip rap. Any such damage caused shall be rectified by the Contractor at his expense.

3.5 MEASUREMENT AND PAYMENT

3.5.1 Excavation

3.5.1.1 Common Excavation

Measurement of the volume of common excavation will be made using the average end area method.

Measurement for payment shall not be made of over-excavation beyond the lines, levels and profiles shown on the Drawings except as provided herein.

For common excavation of trenches, measurement shall include allowance for working space around the structure to be constructed in the trench plus the volume occupied by the shoring approved by the Engineer.

Where the Engineer has permitted open cut excavation without shoring, the volume shall include working space around the structure to be constructed plus battering of the cut slope to an angle approved by the Engineer.

The working space around structures shall be 600 mm unless otherwise approved by the Engineer.

Payment shall be made at the rate entered in the Bill of Quantities and shall include the entire cost of completing the excavation from the approved original surface levels down to the lines, levels and profiles shown on the Drawings including materials, labour, equipment, transportation and any other associated costs.

No payment shall be made for over-excavation beyond the approved lines.

Payment shall be deemed to include allowance for the cost of:

- 1) excavation through any material and to any depth
- 2) trimming to the correct profiles, lines and levels as shown in the Drawings
- 3) separating and setting aside those excavated materials suitable for re-use for other purposes and transporting to spoil those materials unsuitable for re-use or surplus to requirements
- 4) transporting excavated materials to the designated spoil disposal areas, stockpiles or to areas to be filled with approved material..
- 5) preparation, clearing and operation of spoil disposal areas as described in this Specification.
- 6) Material, labour and equipment for the shoring of the sides of excavations (including trenches)
- 7) Materials, labour and equipment required for the grouting of the void remaining after the extraction of sheet piling

The following pay items shall be measured and paid under this Clause:

Pay Item No.	Description	Unit of Measurement
2.1.2.1 2.2.2.1 2.3.2.1 2.4.2.1 3.1.2.1 3.2.2.1 3.3.2.1 3.4.2.1 3.5.2.1 4.1.2.1 4.2.2.1	Common Excavation: including hauling and disposal in designate area	m ³
2.2.2.2 3.2.2.2 4.2.2.2	Common Excavation: including hauling to stockpile in vicinity of the Site	m ³

3.5.1.2 Channel Excavation below Water Level

Measurement of the volume of Channel Excavation below Water Level will be made using the average end area method of calculation for that portion of the volume of channel as defined in [Clause 3.2.1.1](#). Measurement for payment shall not be made of over-excavation beyond the lines, levels and profiles shown on the Drawings.

Payment shall be made at the rate entered in the Bill of Quantities and shall include the entire cost of completing the excavation from the approved original surface levels down to the lines, levels and profiles shown on the Drawings including materials, labour, equipment, transportation and any other associated costs.

No payment shall be made for over-excavation

Payment shall be deemed to include allowance for the cost of:

- 1) excavation through any material and to any depth
- 2) trimming to the correct profiles, lines and levels as shown in the Drawings
- 3) transporting excavated materials to the designated spoil disposal area.
- 4) preparation, clearing and operation of spoil disposal areas as described in this Specification.

The following pay items shall be measured and paid under this Clause:

Pay Item No.	Description	Unit of Measurement
3.2.2.3 4.2.2.3	Channel Excavation below Water Level: including hauling and disposal in designated area	m ³

3.5.2 Fill

3.5.2.1 Earth Fill or Earth Backfill

Measurement of the volumes of earth fill or earth backfill shall be made of the actual volume in cubic meters as determined by the measurement taken before and after filling operation. No measurement and payment shall be made for unauthorised filling outside the lines shown on the Drawings.

For backfilling of trenches, measurement shall include allowance for working space around the structure to be constructed in the trench plus the volume occupied by the shoring approved by the Engineer as for excavation.

For filling, where the Engineer has permitted open cut excavation without shoring, the volume shall include working space around the structure to be constructed plus battering of the cut slope to an angle approved by the Engineer as for excavation.

Payment shall include the cost, hauling from stockpile, placing, watering, levelling, compacting and testing of the materials of in-place fill. Payment shall also include cost of preparation of surface prior to placement of fill or backfill and trimming of slopes and all labour, materials and equipment necessary to complete the work.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.2.2.5 2.3.2.2 3.2.2.6 4.2.2.6	Earth Backfill from stockpile: including hauling and placement	m ³

3.5.2.2 Sandy Soil Fill or Sandy Soil Backfill

Measurement of the volumes of earth fill shall be made of the actual volume in cubic meters as determined by the measurement taken before and after filling operation. No measurement and payment shall be made for unauthorised filling outside the lines shown on the Drawings.

For backfilling of trenches, measurement shall include allowance for working space around the structure to be constructed in the trench plus the volume occupied by the shoring approved by the Engineer as for excavation.

For filling, where the Engineer has permitted open cut excavation without shoring, the volume shall include working space around the structure to be constructed plus battering of the cut slope to an angle approved by the Engineer as for excavation.

Payment shall include the cost of procurement, hauling, placing, watering, levelling, compacting and testing of the materials of in-place fill. Payment shall also include cost of preparation of surface prior to placement of fill or backfill and trimming of slopes and all labour, materials and equipment necessary to complete the work.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.1.2.4 3.1.2.3 3.3.2.2 3.5.2.2 4.1.2.3	Sandy Soil Fill: including supply and placement	m ³
2.2.2.4 2.3.2.3 3.1.2.2 3.2.2.5 3.3.2.3 3.4.2.3 4.1.2.2 4.2.2.5	Sandy Soil Backfill: including supply and placement	m ³

3.5.2.3 Sand Bedding or Sand Backfill

Measurement shall be made of the volume of sand bedding with materials as described in Clause 3.3.2. to the lines and levels as shown on the Drawings.

Payment will be made at the rate entered in the Bill of Quantities and shall include the entire cost of completing the work including material, labour, equipment, transportation and any other associated costs.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.2.4.2 2.2.5.2 2.3.3.3 3.2.4.2 3.2.5.2 3.2.6.2 3.3.3.3 3.3.4.2 3.4.3.2 3.5.3.2 4.2.4.2 4.2.5.2 4.2.6.2	Sand Bedding: including supply and placement	m ³
2.2.2.3 3.2.2.4 4.2.2.4	Sand Backfill: including supply and placement	

3.5.2.4 Free Draining Gravel

Measurement shall be made of the volume of free draining gravel with materials as described in Clause 3.3.2. to the lines and levels as shown on the Drawings.

Payment will be made at the rate entered in the Bill of Quantities and shall include the entire cost of completing the work including material, labour, equipment, transportation and any other associated costs.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.1.2.5 3.2.6.7 3.3.4.6 3.4.4.6 4.2.6.7	Free Draining Gravel: including supply and placement	m ³

3.5.2.5 Gravel Bedding

Measurement shall be made of the volume of gravel bedding with materials as described in Clause 3.3.2. to the lines and levels as shown on the Drawings.

Payment will be made at the rate entered in the Bill of Quantities and shall include the entire cost of completing the work including material, labour, equipment, transportation and any other associated costs.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.1.2.3 3.4.4.2	Gravel Bedding: including supply and placement	m ³

3.5.2.6 Rip Rap

Measurement shall be made of the volume of rip rap with materials as described in Clause 3.3.2. to the lines and levels as shown on the Drawings.

Payment will be made at the rate entered in the Bill of Quantities and shall include the entire cost of completing the work including material, labour, equipment, transportation and any other associated costs.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.1.2.9 2.3.3.12 3.2.6.10 3.3.3.12 3.4.3.11 4.2.6.10	Rip Rap 250 – 300 dia : including supply and placement	m ³

SECTION 4. CONCRETE WORKS

TABLE OF CONTENTS

	Page
4.1 GENERAL	4-1
4.2 CONCRETE	4-1
4.2.1 Description	4-1
4.2.1.1 Scope	4-1
4.2.1.2 Concrete Classes and their Use	4-1
4.2.1.3 Mix Design	4-2
4.2.1.4 Sampling of Concrete	4-3
4.2.1.5 Strength Requirements	4-4
4.2.2 Materials.....	4-6
4.2.2.1 General	4-6
4.2.2.2 Cement	4-6
4.2.2.3 Admixtures	4-6
4.2.2.4 Water	4-7
4.2.2.5 Fine Aggregate	4-7
4.2.2.6 Coarse Aggregate	4-8
4.2.2.7 Test of Aggregate	4-10
4.2.2.8 Expansion Joint Materials	4-10
4.2.2.9 Storage of Materials	4-10
4.2.3 Equipment and Tools.....	4-10
4.2.3.1 Batching Plant and Equipment	4-11
4.2.3.2 Mixers	4-11
4.2.3.3 Vibrators	4-12
4.2.3.4 Forms	4-12
4.2.3.5 Batching and Transporting Materials	4-13
4.2.3.6 Mixing Concrete.....	4-13
4.2.3.7 Retempering Concrete	4-15
4.2.3.8 Consistency	4-15
4.2.4 Construction	4-15
4.2.4.1 General	4-15
4.2.4.2 Foundation	4-16
4.2.4.3 Falsework	4-16
4.2.4.4 Formwork	4-16
4.2.4.5 Reinforcement	4-16

4.2.4.6	Placing Concrete	4-17
4.2.4.7	Curing Concrete	4-20
4.2.4.8	Removal of Formwork and Falsework	4-21
4.2.4.9	Finishing Concrete.....	4-22
4.2.4.10	Cleaning Up.....	4-23
4.3	REINFORCING STEEL BARS.....	4-23
4.3.1	Description	4-23
4.3.2	Materials.....	4-24
4.3.3	Construction	4-24
4.3.3.1	Fabrication	4-24
4.3.3.2	Placing.....	4-24
4.3.3.3	Splicing	4-25
4.4	MEASUREMENT AND PAYMENT	4-25
4.4.1	Concrete.....	4-25
4.4.2	Reinforcing Steel Bar.....	4-26
4.4.3	Expansion Joints	4-28

SECTION 4. CONCRETE WORKS

4.1 GENERAL

This section covers the general and specific requirements for the mixing, placing and use of concrete of the various classes to be used in the structures, precast concrete units and non-structural applications in the Works for Package B which includes the use of concrete in dikes, sewers, revetments, sluiceways, buildings, landscaping works and all works in which concrete is specified, shown on the Drawings or directed to be used by the Engineer.

All concrete works shall be constructed in accordance with these specifications, to the lines, grades and dimensions shown on the Drawings, and as directed by the Engineer.

References to concrete classes A, B or C or to bridge work shall be disregarded as they are not applicable to the Works in Package B.

4.2 CONCRETE

4.2.1 Description

4.2.1.1 Scope

Portland cement concrete shall consist of a mixture of cement, water and coarse and fine aggregates.

4.2.1.2 Concrete Classes and their Use

The use of each class of concrete shall be as follows unless otherwise specified, shown on the Drawings, or directed by the Engineer :

Table 4.2.1.2

CLASS	USE OF EACH CLASS OF CONCRETE	STRENGTH* MPa
A	Jacking pipes	50
B	Prestressed concrete for bridge girders	42
C	Diaphragm wall	30
D	Precast concrete	25
E	General use reinforced concrete	21
F	Plain (unreinforced) concrete	18
G	Levelling concrete	10

*Note: Minimum 28-day compressive strength by cylinder test (300 mm x 150 mm diameter).

Note that only concrete classes E, F and G are applicable to this contract package.

4.2.1.3 Mix Design

No structural concrete shall be placed in the Works until the relevant mix has been approved by the Engineer.

The Contractor shall submit to the Engineer for his consent details of the concrete mix design, including the water-cement ratio proposed to be used for each class of concrete. These details shall be supplied six (6) weeks in advance of placing that particular class of concrete in the work so as to permit strength tests to be made from trial mixes.

The maximum aggregate size shall be 25 mm for reinforced concrete and 15 mm for secondary concrete unless otherwise directed by the Engineer.

(a) Trial Mixes

The trial mixes shall be carried out using samples of the materials submitted, and in the proportions proposed, by the Contractor. Alternatively the Engineer may request the Contractor to prepare, at the Contractor's expense, a trial mix of each class of concrete proposed to be used incorporating only such materials as have been tested and their use consented to by the Engineer. The trial mixes shall be made in the presence of the Engineer or his representative using the plant and the degree of quality control proposed for the work. Each mix shall be tested for slump, workability and strength.

If the coarse aggregate or fine aggregate is composed of more than one material or size of material the mix proportions of each shall be specified separately. Samples of each type of material and/or each size of material shall also be supplied by the Contractor as specified in Clause 4.2.2

The Proportions of the concrete mixes shall be designed by the Contractor to satisfy the specified requirements of strength, grading and consistency.

Unless otherwise specified or consented to by the Engineer, slump, water cement ratio and cement content shall conform to the values in Table 4.2.1.3.

Table 4.2.1.3

Class /1	Strength MPa /2	Minimum Cement Content (kg/m³) /3	Maximum Water/Cement Ratio by mass	Slump (mm) /4
A /5	50			
B	42	470	0.375	80 ± 20
C /6	30	370	0.45	180 ± 25
D	25	330	0.60	80 ± 20
E	21	268	0.60	80 ± 20
F	18	280	0.60	80 ± 20
G	10	200	0.60	80 ± 20

Notes:

1. Class of concrete shall be applied as shown in Clause 4.2.1.2.
2. Minimum 28-day compressive strength by cylinder test (300 mm x 150 mm diameter) determined in accordance with the requirements of AASHTO T22 and 23.
3. Concrete to be placed under water shall have a minimum cement content of 400 kg/m³.
4. Slump will be determined in accordance with AASHTO T119 or JIS A 1101.
5. Concrete Class A shall not be batched by the Contractor but shall be supplied by a specialist manufacturer of jacking pipes
6. Concrete Class C, which is to be used exclusively for diaphragm wall construction, shall contain admixtures subject to the provisions of Clause 4.2.2.3.

(b) Trial Mix Results

Prior to consent being given to a mix by the Contractor its compressive strength and shrinkage at 28 days will be checked from trial mixes.

A minimum of 20 specimens shall be cast for the purpose of ascertaining the compressive strength of the trial mix.

Laboratory test results on samples from trial mixes shall show an adequate working strength margin, in accordance with normal good practice, so that the probability of site working strength test values falling below the minimum specified strength shown in Table 4.2.1.2 is reduced to a value not exceeding 5%.

In the case of urgency or for mixes which contain special admixtures, or are steam cured the Engineer may give a provisional consent based on tests at an earlier age than 28 days but tests at age 28 days shall be the basis of final consent.

No change in the source or character of the materials shall be made without due notice to the Engineer and no new materials shall be used until the Engineer has accepted such materials and has designated new proportions based on tests or trial mixes as provided herein. Should the changes due to the new materials require an increase in the amount of cement, no additional payment shall be made to the Contractor for the cost of such additional cement.

4.2.1.4 Sampling of Concrete

In order to assess compliance of concrete during construction, the Contractor shall prepare and cure test specimens which shall be tested at 7 days and 28 days as determined by the Engineer, or at any other interval that may be deemed necessary to determine the strength of concrete. (Site Working Strength).

(a) Specimens shall be made in pairs as follows:

(i) For batches for Individual Pours

- < 1 m³

Not more than one sample shall be taken from which not less than 2 specimens shall be tested.

- For batches > 1 m³ < 20 m³

Not more than two samples shall be taken from which not less than 4 specimens shall be tested.

(ii) Continuous Pours

For any given section of the work that does not qualify as bulk concrete i.e. $> 20 \text{ m}^3 < 100 \text{ m}^3$ a minimum of three random samples shall be taken from which not less than 6 specimens shall be tested.

For any given section of the work that is considered as bulk concrete i.e. $> 100 \text{ m}^3$ a minimum of four random samples shall be taken for every 100 m^3 of concrete or fraction thereof greater than 100 m^3 placed during one day's work or as deemed necessary by the Engineer from which not less than eight specimens shall be tested.

- (b) Irrespective of the quantity, every day's production of concrete shall be tested both for strength and for slump and every structure and every component of every structure shall likewise be so tested for strength and for slump. The checking and testing of the concrete shall be the prerogative of the Engineer, and he may increase the specified strength and condition as required for the project.

The concrete test specimens will be tested by the Contractor at a conveniently located and properly equipped laboratory.

The Contractor shall take, on his own responsibility, every precaution to prevent injury to the test specimens during handling, transporting and storing.

4.2.1.5 Strength Requirements

(a) Specimen Preparation

The ultimate compressive strength of the concrete shall be determined on specimens obtained and prepared in accordance with AASHTO T141 (ASTM C 172) and AASHTO T23 (ASTM C 31). Test cylinders shall conform to AASHTO T126 (ASTM C 192).

The compression test performed on cylinders shall be according to specifications AASHTO T22 (ASTM C 39).

(b) Compressive and Flexural Strength

The average site working strength value of any 4 consecutive results of the 28 day tests shall not be less than the minimum strength specified in [Table 4.2.1.2](#) for the respective class of concrete. In the event of failure to comply with this requirement all of the concrete in all the batches represented by such samples and specimens, including any batches within the sequence which were not sampled shall be deemed not to comply with the strength requirement of this Clause.

If at any time the average of any 4 consecutive results of 7 day tests falls below 70% of the prescribed minimum value at 28 days for compressive strength or below 80% of the prescribed minimum value at 28 days for flexural strength the cement content of the concrete will be increased by at least 20 kg per cubic metre of compacted concrete, without extra payment, until any necessary mix modifications have been agreed following examination of 28 day tests.

(c) Characteristic Strength

The characteristic strength of the various classes of concrete shall be determined as soon as the first 30 test results of each class become available.

The characteristic strength shall be calculated by the equation:

$$\bar{X}_0 = X - kS$$

Where :

\bar{X}_0 : characteristic strength

X : mean or average of the series of results

k : a factor depending upon the percentage of results that fall below the characteristic strength

S : standard deviation given by the equation :

$$S = \left[\frac{\sum (X - \bar{X})^2}{(N - 1)} \right]^{\frac{1}{2}}$$

Where :

X : the individual result

N : the total number of results

The values for the factor k are :

Percentage of results falling below the minimum	Value of k
0.1	3.09
0.6	2.50
1.0	2.33
2.5	1.96
5.0	1.64

If the characteristic strength so determined falls below the minimum site working strength the Contractor shall increase the cement content in the same manner as described in Item (b) above until such time as adjustments shall be made in the mix proportions or improvements made in the quality control measures to raise the average strength or reduce variation to the satisfaction of the Engineer.

(d) Failure to Comply with Compressive Strength Requirements

In the event of compressive strength results not complying with the strength requirements of this Clause or in the event of doubtful results, the Engineer will proceed to check the sample compressive strength by means of crushing tests performed on test specimens taken with a rotary core borer at suitable points indicated by the Engineer on the structure already constructed.

Such tests shall be carried out by an agreed authority having suitable test facilities. If such tests show strength in compliance with the requirements herein specified, the concrete will be considered satisfactory. If such tests do not comply with the requirements, the Engineer may direct the Contractor to cut out and make good the defective work at the Contractor's expense.

(e) Care of Specimens

The cost of taking specimens and performing the tests including the cost of providing stout, substantial packing cases and the cost of shipping or transporting the test specimens from the site to the laboratory shall be included as part of the price bid for Portland cement concrete. The Contractor shall take, on his own responsibility, every precaution to prevent injury to the test specimens during handling and transporting.

(f) Records

The original records of all tests shall be kept by the Engineer and a copy retained by the Contractor. The records of all tests shall be kept by the Engineer but results shall be available at all times to the Contractor. The Contractor shall be responsible for making such adjustments as may be necessary to produce specification concrete and the test results shall include whether or not the concrete is satisfactory.

4.2.2 Materials

4.2.2.1 General

All materials to be furnished and used that are not covered in this Clause shall conform to the requirements stipulated in other applicable sections.

4.2.2.2 Cement

Unless specified to the contrary or otherwise permitted by the Engineer the Contractor shall use only one brand of any one type of cement having uniform quality for the Works. All cement used in the Works shall be Ordinary Portland Cement (ASTM Type-I) conforming to the minimum requirements of JIS R 5210, AASHTO-M 85, BS 12: 1978 or TCVN 2682 - 1992 for PC-40 Cement.

4.2.2.3 Admixtures

Admixtures may only be used if consented to by the Engineer and then only in such quantities and manner as he may consent to in writing.

Such admixtures shall conform with the requirements of:

- AASHTO M 194 (ASTM C 494) "Specification for Chemical Admixtures for Concrete":
 - Type A - Water-reducing
 - Type B - Retarding
 - Type C - Accelerating
 - Type D - Water-reducing and retarding
 - Type E - Water-reducing and accelerating
 - Type F - Water-reducing (high range) and
 - Type G - Water-reducing(high range) and retarding
- AASHTO M 154 (ASTM C 260) "Specification for Air-entraining Admixtures for Concrete".

Admixtures shall not reduce the strength of concrete below that specified. Shrinkage and dosage sensitivity characteristics will be taken into account, if relevant.

Admixtures shall not contain chlorides, chlorine, sulphides or sulphites, or any other substance which may be detrimental to concrete or steel.

Use calcium chloride or admixtures containing calcium chloride will not be permitted.

4.2.2.4 Water

All water used in concrete shall be subject to the Engineer's approval. Water used in mixing, curing, or other designated applications shall as a general rule be potable, otherwise reasonably clean and free from oil, salt, acid, alkali, sugar, vegetable, or any other substance injurious to the finished product. If required by the Engineer, water shall be tested by comparison with distilled water. Comparison shall be made by means of standard cement test for soundness, time of setting and mortar strength. Indication of unsoundness, change in time of setting of plus or minus 30 minutes or more, or decrease of mortar strength more than 10 percent compared with distilled water shall be sufficient cause for rejection of the water that is being tested.

Where the source of water is relatively shallow, the intake shall be so enclosed as to exclude silt, mud, grass, or other foreign materials.

4.2.2.5 Fine Aggregate

- (a) The fine aggregate for concrete shall consist of natural sand or, subject to approval of the Engineer, other inert materials with similar characteristics, having clean, hard and durable particles, and it shall be free from objectionable quantities of dust, silt, clay, organic matter, and other impurities.
- (b) The fine aggregate shall be uniformly graded and shall meet the following grading requirements :

Grading of Fine Aggregate:

Sieve Size (mm)	Cumulative Passing Percentage by Weight
9.5	100
4.75	95 – 100
2.36	80 – 100
1.18	50 – 85
0.600	25 – 60
0.300	10 – 30
0.150	2 – 10

Sieve analysis of fine aggregate shall be made in accordance with JIS A 1102 (Method of Test for Sieve Analysis of Aggregate) or AASHTO - T 27.

The gradation requirements given above are the extreme limits to be used in determining the suitability of material from all possible sources of supply. The gradation of materials from any one source shall not vary in composition beyond the range of values that govern the selection of a source of supply. For the purpose of determining the degree of uniformity, a fineness modulus determination shall be made upon representative samples, submitted by the Contractor, from such sources as he proposes to use. If fineness modulus of fine aggregate varies more than 0.2 from the value used in selecting concrete proportions, the fine aggregate shall be rejected unless suitable adjustment of the mix proportions are made with the approval of the Engineer.

- (c) The amount of deleterious substances in fine aggregate shall not exceed the limits specified in [Table 4.2.2.5](#). Treatment of other deleterious substances which are not shown in the above table shall be determined by the direction of the Engineer.

Tests for material finer than 0.075 mm sieve shall be made in accordance with JIS A 1103 (Method of Test for Amount of Material Passing Standard Sieve 0.074 mm in Aggregates), or AASHTO - T 11.

Table 4.2.2.5
Limits for Deleterious Substances in Fine Aggregates

Item	Maximum % by Weight
* Clay lumps	1.0
* Material finer than 0.075 mm sieve:	
Concrete subject to abrasion	3.0 <u>1/</u>
All other concrete	5.0 <u>1/</u>
* Material coarser than 0.300 mm sieve floating on a liquid having a specific gravity of 1.95	0.5 <u>2/</u>

Note :

- 1/ In the case of crushed aggregate, if the material finer than 0.075 mm sieve consists of the dust of fracture essentially free from clay or shale, these percentages may be increased to 5 and 7 percent respectively.
- 2/ This requirement does not apply to manufactured sand produced from blast furnace slag.
- (d) All fine aggregate shall be free from injurious amounts of organic impurities. Approximate determination of the presence of injurious organic impurities in natural sand shall be in accordance with JIS A 1105 (Method of Test for Organic Impurities in Sands) or AASHTO T 21. Aggregate subjected to the colourimetric test for organic impurities, and producing a colour darker than the standard, shall be rejected.

However, any sand that fails to meet the above requirement may be used provided that the compressive strength of mortar specimens using such sand is more than 95% of that of mortar specimens using the same sand which is washed by 3% solution of sodium hydroxide and then by water, and approved by the Engineer. Testing age of mortar specimens shall be 7 and 28 days for normal Portland cement.

Compressive strength of mortar specimens shall be determined by AASHTO T 71, "Effect of Organic Impurities in Fine Aggregate on Strength of Mortar".

4.2.2.6 Coarse Aggregate

- (a) The coarse aggregate shall consist of one or more of the following: crushed stone, gravel, blast-furnace slag, or other approved inert materials of similar characteristics having clean, hard, durable pieces. It shall be free from objectionable quantities of flat or elongated particles, organic matter or other deleterious matter.

- (b) Sieve analysis of coarse aggregate shall be made in accordance with JIS A 1102 (Method of Test for Sieve Analysis of Aggregate) or AASHTO T 27 and material shall meet the following grading requirements:

Grading of Coarse Aggregate

SIZE	PERCENTAGE BY WEIGHT (JIS A 1102)											
	AMOUNTS FINER THAN EACH STANDARD SIEVE (mm)											
mm	100	80	60	50	40	25	20	15	10	5	2.5	
50 - 5	-	-	100	95-100	-	37-70	-	10-35	-	0-5	-	
40 - 5	-	-	-	100	95-100	-	35-70	-	10-30	0-5	-	
25 - 5	-	-	-	-	100	95-100	-	30-70	-	0-10	0-5	
20 - 5	-	-	-	-	-	100	90-100	-	20-55	0-10	0-5	
15 - 5	-	-	-	-	-	-	100	90-100	40-70	0-15	0-5	
80 - 40	100	90-100	45-75	-	0-15	-	0-5	-	-	-	-	
60 - 40	-	100	90-100	35-70	0-15	-	0-5	-	-	-	-	
50 - 25	-	-	100	90-100	35-70	0-15	-	0-5	-	-	-	
40 - 20	-	-	-	100	90-100	20-55	0-15	-	0-5	-	-	

The amount of deleterious substance in coarse aggregate shall not exceed the limits prescribed in [Table 4.2.2.6](#)

- (c) Treatment of the other deleterious substances which are not shown in the table shall be determined by the direction of the Engineer.

Table 4.2.2.6

Limits of Deleterious Substance (Percent by Weight) in Coarse Aggregate

Item	Maximum
Clay lumps	0.25
Soft particles	5.0
Material finer than 0.075 mm sieve	1.0 <u>1/</u>
Material floating on a liquid having a specific gravity of 1.95	1.0 <u>2/</u>

Note :

- 1/ In the case of crushed aggregate, if the material finer than 0.075 mm sieve consists of the dust of fracture essentially free from clay or shale, this percentage may be increased to 1.5.
- 2/ This requirement does not apply to manufactured sand produced from blast furnace slag.

- (d) Test for material finer than 0.075 mm sieve shall be made in accordance with JIS A 1103 (Method of Test for Amount of Material Passing Standard Sieve 0.075 mm in Aggregates), or AASHTO T11. Test for soft particles shall be made in accordance with JIS A 1126 (Method of Test for Soft Particles in Coarse Aggregate by Use of Scratch Tester), or AASHTO T 112.

4.2.2.7 Test of Aggregate

Before use, results of the foregoing tests of aggregate from each source shall be submitted to and approved by the Engineer. Coarse aggregate shall meet the requirements ASTM C39 for Compressive Strength and the percentage of wear of the Aggregate shall not be greater than 50 as determined by AASHTO T96 . Tests for aggregate in use shall be made when required by the Engineer.

4.2.2.8 Expansion Joint Materials

Jointing materials, joint filler, sealants etc. shall comply with ASTM D 2125, Class 1, Grade15, or BS 8007: 1987 and BS 6213, AASHTO M 33 or other equivalent standards

Expansion joint filler shall consist of formed polythene elastic material sheet material 20 mm thick and with asphaltic sealant on the external surfaces as shown on the Drawings.

Cut-off plate for water stops used for the expansion joints, where required, shall be flexible PVC to JIS K 6773

All expansion joint materials shall be subject to approval by the Engineer following submission of samples and technical specifications by the Contractor of proposed materials.

4.2.2.9 Storage of Materials

- (a) Storage of cement - Cement may be shipped from pre-tested and approved bins at the mill. Cement shall be stored in a damp-proof warehouse with a floor raised at least 300 mm from the ground so as to permit easy access for inspection and for use in the delivered order. Bagged cement shall not be piled more than 13 sacks high. Cement which has become damp, lumpy or otherwise not in proper condition shall not be used. Cement stored by the Contractor for a period longer than 60 (sixty) days shall require the Engineer's approval before being used on the work.
- (b) Storage of aggregate - Fine and coarse aggregates shall be stored separately to prevent contamination by foreign material. Aggregate shall be stored in such a manner as to keep the moisture content as uniform as possible, and shall be handled in such a manner as to prevent segregation. Aggregate shall be stored so as to protect it from the direct rays of the sun. Aggregate from different sources of supply shall not be stored in the same place without permission from the Engineer.

4.2.3 Equipment and Tools

Equipment and tools necessary for handling materials and performing the work, and satisfactory to the Engineer as to design, capacity, and mechanical condition, shall be at the site of the work before work is started.

If any equipment is not maintained in full working order or if the equipment as used by the Contractor proves inadequate to obtain the results prescribed, such equipment shall be improved or other satisfactory equipment substituted or added at the direction of the Engineer.

4.2.3.1 Batching Plant and Equipment

- (a) General - All material in the mix shall be proportioned wholly by weight. The batching plant shall include bins, weighing hoppers and scales for the fine aggregate and for each separated size of coarse aggregate. If cement is used in bulk, a bin, hopper and scales for the cement shall be included. The container shall be watertight. Provision satisfactory to the Engineer shall be made for batching other components of the mix at the batching plant, which may be either stationary or mobile type. It shall be always properly levelled within the accuracy required for the proper operation of weighing mechanisms.
- (b) Bins and hoppers - Bins with adequate separate compartments for fine aggregate and for each required size of coarse aggregate shall be provided in the batching plant. Each compartment shall discharge efficiently and freely into the weighing hopper. Means of control shall be provided so that as the quantity desired in the weighing hopper is being approached, the material may be added slowly and shut off with precision. A port or other opening for removing any overload of the several materials from the hopper shall be provided. Weighing hopper shall be constructed so as to discharge completely.
- (c) Scales - The scales for weighing aggregates and cement shall be of either the beam type or the spring-less dial type. They shall be accurate within one-half of 1% under operating conditions throughout the range of use. Ten weights of 25 kilograms each shall be available for checking accuracy. All exposed fulcrums, clevises and similar working parts of scales shall be kept clean. When beam-type scales are used, provision shall be made for indicating to the operator that the required load in the weighing hopper is being approached. The device shall indicate at least the last 100 kilograms of load and up to 25 kilograms overload.

All weighing and indicating devices shall be in full view of the operator while charging the hopper and he shall have convenient access to all controls.

Cement may be measured by weight, or in standard sacks considered to weigh 50 kilograms net. When measured by weight a separate, satisfactory scale and hopper shall be provided together with a boot or other approved device to transfer the cement from the weighing hopper. Satisfactory methods of handling shall be employed.

Batching shall be so conducted as to result in the weights of material required, within tolerances of 1% for cement and 2% for aggregates.

4.2.3.2 Mixers

- (a) General - All concrete shall be mixed in batch mixers. It may be mixed at the site of construction, at a central plant, or in transit.
- (b) Each mixer shall have attached to it in a prominent place a manufacturer's plate showing the capacity of the drum in terms of volume of mixed concrete and the speed of rotation of mixing drum.
- (c) Mixers at site of construction - Mixers at the site shall be approved drum-type capable of combining the aggregate, cement and water into a thoroughly mixed and uniform mass within the specified mixing period and of discharging the mixture without segregation. The mixer shall be equipped with a suitable charging hopper, water storage, and a water measuring device, accurate within 1%. Controls shall be so arranged that the water can be applied only while the mixer is being charged.

The discharge level shall lock automatically until the batch has been mixed the required time after all materials are in the mixer.

- (d) Suitable equipment for discharging the concrete on the roadbed shall be provided. The mixer shall be cleaned at suitable intervals. The pick-up and throw-over blades in the drum shall be replaced when they have lost 10% of their depth.
- (e) Central plant mixers - These mixers shall be of approved drum type capable of combining the aggregate, cement and water into the thoroughly mixed and uniform mass within the specified mixing period and of discharging the mixture without segregation. Central plant mixers shall be equipped with an acceptable timing device that will not permit the batch to be discharged until the specified mixing time has elapsed. The water system for a central mixer shall be either a calibrated measuring tank or a metre and shall not necessarily be an integral part of the mixer.

The mixers shall be cleaned at suitable intervals. They shall be examined daily for changes in interior condition. The pick-up and throw-over blades in the drum shall be replaced when they have lost 10% of their depth.

- (f) Truck or transit mixers - These shall be equipped with electrically actuated counters by which the number of revolutions of the drum or blades may readily be verified and the counters shall be actuated at the commencement of mixing operations at designated mixing speeds. The mixer when loaded shall not be filled to more than 60% of the drum gross volume. The mixer shall be capable of combining the ingredients of the concrete into a thoroughly mixed and uniform mass and of discharging the concrete with a satisfactory degree of uniformity. Except when intended for use exclusively as agitators, truck mixers shall be provided with a water measuring device to measure accurately the quantity of water for each batch. The delivered amount of water shall be within plus or minus 1% of the indicated amount.

4.2.3.3 Vibrators

Unless otherwise directed, the concrete shall be consolidated with approved mechanical vibrators operating within the concrete. When required, vibrating shall be supplemented by hand spading with suitable tools to assure proper and adequate compaction.

The vibrators shall be of a type approved by the Engineer, with a minimum frequency of 3500 impulses per minute and shall be capable of visibly affecting a properly designed concrete with a 20 mm slump over a circular area of 450 mm radius. The number of vibrators used shall be sufficient to consolidate the concrete properly within 10 minutes after it is deposited in the forms and in addition at least 3 spare vibrators shall be available on standby at the site of the pour to maintain immediate continuity in case of breakdown.

4.2.3.4 Forms

- (a) Forms shall be made of metal, timber or other approved material and shall conform to the shape, lines and dimensions of the members shown on the Drawings, and shall be so constructed as to prevent deformation due to load, vibration, and other causes.

- (b) Forms shall be properly equipped with braces, ties and other devices, so as to maintain them in the positions and the shape as shown on the Drawings.
- (c) Forms shall be so constructed that they can be removed easily and safely. Joints in linings or panels shall be either horizontal or vertical as far as possible, and shall be sufficiently tight to prevent any leakage of mortar.
- (d) Curved forms shall be of the radius called for on the Drawings and acceptable flexible forms shall be installed with that radius.
- (e) After forms have been set in the correct location, they shall be inspected and approved by the Engineer before concrete is placed.
- (f) Care shall be exercised to keep forms free from dust, grease or other foreign matter. No material or treatment that will adhere to concrete or discolour concrete shall be used. All forms shall be treated with an approved form-release-oil prior to placing reinforcement.
- (g) For narrow walls, columns, etc., where the bottom of the form is inaccessible, lower form boards or parts thereof shall be left loose so that they may be removed for cleaning out extraneous material immediately before placing concrete.
- (h) Forms for exposed surfaces shall be constructed with triangular fillets not less than 25 mm x 25 mm attached so as to prevent mortar runs and to produce smooth straight chamfers at all sharp external edges of the concrete.

4.2.3.5 Batching and Transporting Materials

For mixing at site of construction, aggregates shall be transported from the batching plant to the mixer in batch boxes, vehicle bodies, or other containers adequate in design and construction to properly carry the batch required. Partitions separating batches shall be adequate and effective to prevent spilling from one compartment to another while in transit or while being dumped.

Cement in original shipping containers may be transported on top of the aggregates. The number of sacks of cement required for each batch shall be placed on the aggregates for that batch. Sacked cement shall be emptied into the aggregates prior to dumping into mixer.

Batches shall be delivered to the mixer separately and intact. Each batch container shall be dumped cleanly into the mixer without loss of cement or mixing or spilling of material from one batch compartment into another.

4.2.3.6 Mixing Concrete

- (a) General - Concrete shall be mixed at the construction site, at a central mixing plant, in a truck mixer, or by a combination of central plant and truck mixing. Hand-mixing may be used only when approved by the Engineer. No concrete shall be mixed, placed, or finished when the natural light is insufficient, unless an adequate and approved artificial lighting system is operated.
- (b) Mixing at site of concrete construction - Concrete shall be mixed in a batch mixer of the type and capacity approved by the Engineer. Mixing time shall be determined by the Engineer in accordance with JIS A 1119 (Method of Test for Variation in Unit Weight of Air Free Mortar in Freshly Mixed Concrete). When results of the above tests are not available, the mixing time shall be longer than 1 1/2 minutes after all the materials have been introduced into the mixer, but in no case shall the

mixing time exceed three times the mixing time prescribed above. Charging of water into the mixer shall begin before the cement and aggregates enter the drum. During mixing, the drum shall be operated at speeds specified by manufacturers. Pick-up blades in the drum of the mixer which are worn down 20 mm or more at any part must be replaced.

The volume of a batch shall not exceed the manufacturer's rated capacity of the mixer without written permission of the Engineer. No mixer whose rated capacity is less than a one-bag batch shall be used.

Concrete shall be mixed only in such quantities as are required for immediate use, and concrete which is not of the required consistency at the time of placement shall not be used.

Re-tempering of concrete will not be permitted. Entire content of the mixer shall be removed from the drum before materials for the next batch are placed therein. Upon cessation of mixing for a considerable length of time, the mixer shall be cleaned thoroughly. Upon resumption of mixing, the first batch of concrete material placed in the mixer shall contain sufficient sand, cement, and water to coat the inside surface of the drum without diminishing the required mortar content of the mix.

- (c) Central plant mixing - When mixed at a central plant, the mixer and methods used shall be in accordance with the requirements of [Sub-Clause 4.2.3.6 \(b\)](#). Mixed concrete shall be transported from the central mixing plant to the site of work in agitator or non-agitator trucks approved by the Engineer.

Agitator trucks shall be equipped with a water-tight revolving drum, and shall be capable of transporting and discharging concrete without segregation. The agitation speed of the drum shall be between 2 and 6 revolutions per minute. The volume of mixed concrete permitted in the drum shall not exceed the manufacturer's rating nor exceed 70% of the gross volume of the drum. Upon approval of the Engineer, truck mixers may be used in lieu of agitator trucks for transportation of central plant mixed concrete. Gross volume of agitator bodies, expressed in cubic metres, shall be as determined by the mixer manufacturer. The interval between introduction of water into mixer drum and final discharge time shall be a maximum of 45 minutes unless the use of additives have been approved. Depending on the type and usage of the approved additives this interval may be extended up to a maximum of 2 hours. During this interval the mixture shall be agitated continuously.

Bodies of non-agitator trucks shall be smooth and water-tight. Covers shall be provided when needed for protection against rainfall. The non-agitator trucks shall deliver concrete to the work site in a thoroughly mixed and uniform mass. Uniformity shall be deemed satisfactory if samples from the one-quarter and three-quarter points of the load do not differ more than 25 mm in slump. Placing of concrete shall be completed within 30 minutes after introduction of mixing water into the cement and aggregates or if admixture is used at a time to be determined by the Engineer.

- (d) Truck mixing - Concrete may be mixed in truck mixers of approved design. Truck mixing shall be in accordance with the following provisions. The truck mixer shall be either a closed, water-tight, revolving drum or an open-top revolving-blade or paddle type. It shall combine all ingredients into a thoroughly mixed and uniform mass, and shall discharge the concrete with satisfactory uniformity. A maximum difference of 25 mm between slumps of samples from the one-quarter

and three-quarter points of the discharge load shall be deemed satisfactory.

Mixing speed for revolving drum type mixers shall not be less than 4 revolutions per minute of the drum nor greater than a speed resulting in a peripheral velocity of the drum of 1 metre per second. For the open-top type mixer, mixing speed shall be between 4 and 16 revolutions per minute of the mixing blades or paddles. Agitation speed for both the revolving-drum and revolving blade type mixers shall be between 2 and 6 revolutions per minute of the drum or mixing blades or paddles.

The capacities of truck mixer shall be in accordance with the manufacturer's ratings except that they shall not exceed the limitation herein. Standard for normal rated capacity, expressed as percentage of the gross volume of the drum, shall not be more than 50% for truck mixing and 70% for agitating.

The concrete shall be delivered to the site of the work and discharge shall be completed within 45 minutes after the introduction of the mixing water into cement and aggregates unless the use of additives have been approved by the Engineer. Depending on the type and usage of the approved additives this interval may be extended up to a maximum of 2 hours During this interval the mixture shall be agitated continuously.

When the concrete is mixed in a truck mixer, the mixing operation shall begin within 30 minutes after the cement has been mixed with the aggregates. Except when intended for use exclusively as agitators, truck mixers shall be provided with a water measuring device which will measure accurately the quantity of water for each batch. The delivered amount of water shall be within plus or minus 1% of the indicated amount when the tank, if mounted on the truck mixer, is satisfactorily and practically level.

- (e) Hand mixing - Hand mixing will not be permitted, except in case of emergency, without written permission from the Engineer. When permitted, it shall be performed only on water-tight mixing platforms made of metal, etc. Concrete shall be turned and returned on the platform at least six times and until all particles of the coarse aggregate are covered thoroughly with mortar and the mixture is uniform.

4.2.3.7 Retempering Concrete

Retempering concrete by adding water will not be permitted under any circumstances. Concrete that is not within the specified slump limits at the time of placement shall not be used. Admixtures for increasing the workability or for accelerating the set will be permitted only with the written approval of the Engineer.

4.2.3.8 Consistency

Slump will be measured in accordance with AASHTO T 119 or JIS A 1101 and shall be in accordance with [Table 4.2.1.3](#).

4.2.4 Construction

4.2.4.1 General

The Contractor shall maintain an adequate number of trained and experienced supervisors and foremen at the site to supervise and control the work. All construction, other than the concrete, shall conform to the

requirements prescribed in other sections or Clauses for the several items of work entering into the complete structure.

4.2.4.2 Foundation

Preparation of foundations shall conform to the details as shown on the Drawings in accordance with the requirements of [Section 3, Earthworks](#). The Engineer may order further excavation as necessary to obtain satisfactory foundations in the event that unsuitable foundations are encountered at the depths shown on the Drawings.

Pile foundations shall be constructed in accordance with the provisions set out in the other relevant Clauses and as shown on the Drawings.

4.2.4.3 Falsework

Falsework shall be built on foundations of sufficient strength to carry the loads without appreciable settlement. Falsework that cannot be founded on solid footings must be supported by ample falsework piling provided at the Contractor's expense.

Before constructing forms or falsework the Contractor, if required, shall submit detailed drawings of proposed forms or falsework for approval by the Engineer, but such approval shall not relieve the Contractor of any of his responsibilities under the Contract for the successful completion of the structure.

4.2.4.4 Formwork

Before concrete is placed the Engineer shall inspect all formwork and falsework and no concrete shall be placed until the Engineer has inspected and approved such formwork and falsework. Such approval shall not relieve the Contractor of any of his responsibilities under the Contract for the successful completion of the structure.

Internal formwork for hollow slab construction shall be made of plywood, thin metal plate or other materials. These materials shall have sufficient strength to resist the pressure and the buoyancy effects of fresh concrete.

Type and structure of joint and cover for the cylindrical form shall be tight to prevent any leakage of concrete, and shall be approved by the Engineer. Nominal diameter of cylindrical forms shall be the outer diameter, or the outer diameter of projecting portion in case of thin metal plate having projection. The height of the projection shall be less than 10 mm.

Internal forms shall be fixed in the correct position such that they will not displace or deform during placing concrete. Ushape bolts shall be used to fix the internal forms and the method of supporting and fixing the internal forms shall be approved by the Engineer. Care shall be taken to ensure that U-shape bolts and other items can resist the buoyancy forces on the formwork.

In falsework, bridge camber shall be considered in accordance with the Working Drawings prepared by the Contractor and approved by the Engineer.

4.2.4.5 Reinforcement

The Engineer shall inspect and approve all reinforcement in place in accordance with the requirements of [Clause 4.3](#), before concrete is placed.

An experienced steel fixer shall be present while all concrete is placed to ensure that no reinforcement becomes displaced during placing and if it does to reposition reinforcement before placing continues.

4.2.4.6 Placing Concrete

- (a) General - All concrete shall be placed within the time specified in [Sub-Clause 4.2.3.6](#). Concrete shall be placed in such a manner as to avoid segregation and the displacement of reinforcing bars and shall be spread in horizontal layers where practicable. Concrete shall be placed where necessary inside forms by hand shovels and in no instance shall vibrators be so manipulated to transport concrete inside formwork. Care shall be taken to prevent mortar from spattering forms and reinforcing steel and from drying ahead of the final covering with concrete. When spattering has occurred the forms and steel shall be cleaned with wire brushes or scrapers before concrete is placed around steel or in forms which have been spattered.

Troughs, pipes, or short chutes used as aids in placing concrete shall be positioned in such a manner that segregation of the concrete will not occur. All chutes, troughs, and pipes shall be kept clean and free from coating of hardened concrete or mortar. Concrete shall not be dropped freely over a vertical distance of more than 1.5 metres.

[Concrete shall generally be placed continuously throughout each section of the structure or between indicated joints if shown on the Drawings or as directed by the Engineer.](#)

If in an emergency it is necessary to stop placing concrete before a section is completed, bulkheads shall be placed as the Engineer may direct and the resulting joint shall be deemed a construction joint, and treated as specified herein below.

- (b) [Concrete columns - Concrete in columns, bents or walls shall be placed in one continuous operation subject to a maximum height of 4m unless shown on the Drawings or otherwise permitted by the Engineer.](#)
- (c) Concrete slab and girder spans - Slabs and girders having spans of 10 metres or less shall be placed in one continuous operation unless otherwise stated on the Drawings. Concrete preferably shall be deposited by beginning at the centre of the span working from the centre toward the ends.

Concrete in slab spans shall be placed in one continuous operation and in one layer for each span, unless otherwise stated on the Drawings.

Concrete in girders spanning more than 10 metres may be placed in two operations, the first operation being the placing of concrete in the girder stems to the bottom of the slab haunches or the bottom of the slab whichever is applicable. A period of at least 24 hours shall elapse between the completion of placing concrete in the girder and the commencement of placing concrete in slab.

The construction procedure for the concrete deck slab on steel box girders shall be so arranged as to eliminate excessive stress in new or recently placed concrete.

Immediately before placing concrete, the top surface of the previously placed concrete shall be hammered with a sharp hand tool (scrabbled) until the aggregate is exposed and cleaned. The Contractor shall check all falsework for shrinkage and settlement, and shall tighten all wedges to ensure minimum deflection of all formwork.

- (d) Walls, piers, etc. - Where walls, piers, columns, struts, posts and other such structural members allow horizontal construction joints, concrete shall not be placed on top of other concrete which has not been allowed to set for 12 hours or more.

Work shall not be discontinued within 450 mm of the top of any face, unless provision has been made for a coping less than 450 mm thick, in which case, if permitted by the Engineer, the construction joint may be made at the underside of the coping.

- (e) Culverts - The slabs of box culverts shall be placed for their full depth in one mass or layer and allowed to set not less than 12 hours before any additional work is done on them.

Before concrete is placed in sidewalls, bottom slabs shall be cleaned of all shavings, sticks, sawdust and other extraneous material.

The Contractor shall submit to the Engineer for approval his proposals for pouring culvert walls before commencing culvert construction. Concrete shall not be placed in layers more than one metre high relative to the concrete already placed. Deposition shall proceed in a systematic manner.

- (f) Depositing concrete underwater - Concrete shall not be deposited in water except with the approval of the Engineer and with his immediate supervision, and by the method described in this paragraph.

To prevent segregation, the concrete shall be carefully placed in a compact mass in its final position by means of a tremie tube or pipe, or a closed bottom-dump bucket, or by other means, and shall not be disturbed after being deposited. Special care must be exercised to maintain still water at the point of deposit. Concrete shall not be placed in running water. The method of depositing concrete shall be so regulated as to produce approximately horizontal surfaces. Concrete seals shall be placed in one continuous operation. When a tremie tube or pipe is used, it shall consist of a tube or pipe not less than 250 mm in diameter, constructed in sections having flanged couplings fitted with gaskets.

The means of supporting the tremie shall be such as to permit free movement of the discharge end over the entire top of the concrete and permit its being lowered rapidly when necessary to choke off or retard the flow. The tremie shall be filled by a method that will prevent washing of the concrete. The discharge end shall be completely submerged in concrete at all times and the tremie shall contain sufficient concrete to prevent any water entry.

When concrete is placed with a bottom-dump bucket, the bucket shall have a capacity of not less than 1.20 cubic metres and shall be equipped with loose-fitting top covers. The bottom door shall open freely downward and outward when tripped. The bucket shall be completely filled and be lowered gradually and carefully until it rests on the surface upon which the concrete is to be deposited. It shall then be raised very slowly during the discharge travel, the intent being to maintain, as nearly as possible, still water at the point of discharge and to avoid agitating the mixture.

Dewatering shall proceed only when the concrete seal is considered strong enough to withstand any pressures to be exerted upon it. This time will be decided by the Engineer. All laitance or other unsatisfactory material shall be removed from the exposed surface by scraping, jetting, chipping or other means which will not unduly injure the seal.

- (g) Construction joints - Construction joints shall be located where shown on the Drawings or permitted or instructed by the Engineer. Construction joints shall be perpendicular to the principal lines of stress and in general shall be located at points of minimum shear.

At horizontal construction joints, details shall be as approved by the Engineer. Before placing fresh concrete, the surfaces of construction joints shall be scabbled, sandblasted or washed and scrubbed with a wire brush to expose clean aggregate, drenched with water until saturated, and kept saturated until the new concrete is placed. Immediately prior to placing new concrete the forms shall be drawn tight against the concrete already in place and the old surface shall be coated thoroughly with a 1.5 mm thick coating of neat cement mortar. Concrete in substructures shall be placed in such a manner that all exposed horizontal construction joints will be truly horizontal.

Where vertical construction joints are necessary, reinforcing bars shall extend across the joint in such a manner as to make the structure monolithic. Special care shall be taken to avoid construction joints through panelled wing walls or other large surfaces which are to have an architectural finish. Necessary dowel, load-transfer devices, and bonding devices shall be placed as shown on the Drawings or directed by the Engineer.

- (h) Expansion joints – Expansion joints shall comprise formed polythene elastic material with asphaltic sealant, 20mm thick, and shall be located and formed as required on the Drawings. Cut-off plate for water stops used for the expansion joints shall be placed in accordance with the Drawings. The water stops shall be held firmly in place to prevent displacement during concreting. If after placing concrete water stops are materially out of position or shape, the surrounding concrete shall be removed, the water stop reset, and the concrete replaced, all at the Contractor's expense.

Water stop shall be furnished full length for each straight portion of the joint, without field splices. Water stop shall be cut and spliced at changes in direction as may be necessary to avoid buckling or distortion. All field splices shall be performed by heat sealing, hot-air welding or vulcanising the adjacent surfaces in accordance with the manufacturer's recommendations to form continuous watertight joints.

Dowel bars, where required, shall be complete with uPVC sleeves and shall be accurately installed in expansion joints in accordance with the Drawings or as directed by the Engineer. Particular care shall be taken to ensure that concrete cannot enter the uPVC sleeves during casting.

- (i) Open joints - Open joints shall be constructed where shown on the Drawings by insertion and subsequent removal of a wooden strip, metal plate, or other approved material. The insertion and removal of the template shall be accomplished without chipping or breaking the corners of the concrete. Reinforcement shall not extend across an open joint unless so specified on the Drawings.
- (j) Anchor bolts - All necessary anchor bolts in shall be accurately set in holes formed while the concrete is being placed. Holes may be formed

by inserting in the fresh concrete oiled wooden plugs, metal pipe sleeves, or other approved devices, and withdrawing them after the concrete has partially set. Holes so formed shall be at least 100 mm in diameter. Bolts shall be set accurately and fixed with grout completely filling the holes. The grout shall be non-shrink mortar of a type approved by the Engineer.

- (k) Shoes and bearing plates – [Not applicable to the Works in Package B](#)
- (l) Drainage holes and weep holes - Drainage holes and weep holes shall be constructed in the manner and at the locations indicated on the Drawings or required by the Engineer. Ports or vents for equalizing hydrostatic pressure shall be placed below low water.
- (m) Forms for weep holes through concrete shall be PVC pipe. Exposed surfaces of weep drain pipe shall be flush with the concrete.
- (n) Pipe, conduits, and ducts - Pipes, conduits, and ducts that are to be encased in concrete shall be installed by the Contractor before the concrete is placed. Unless otherwise indicated, pipe embedded in concrete shall be standard, light-weight, non-corrosive pipes. Pipes shall be held or braced rigidly during concrete placement in order to prevent their displacement.
- (o) Piers and abutments - [Not applicable to the Works in Package B](#)

4.2.4.7 Curing Concrete

Immediately after forms have been removed and finishing work completed, all concrete shall be cured by one of the following methods. The Engineer will specify the concrete surface which may be cured by either method.

- (a) Water method - The entire exposed surfaces other than slabs shall be protected from the sun and the whole structure shall be covered with wet burlap, cotton mats, or other suitable fabric for a period of at least seven days. These materials shall be kept thoroughly wet for the entire curing period. Curbs, walls, and other surfaces requiring a rubbed finish may have the covering temporarily removed for finishing, but the covering must be restored as soon as possible. All concrete slabs shall be covered as soon as possible with sand, earth or other suitable material and kept thoroughly wet for at least seven days. This covering material shall not be cleared from the surface of the concrete slabs for a period of twenty one days.

If wood forms are allowed to remain in place during the curing period, they shall be kept moist at all times to prevent them from shrinking.

- (b) Membrane forming curing compound - All surfaces shall be given the required surface finish prior to application of the curing compound. During the finishing period, the concrete shall be protected by the water method of curing.

Membrane curing compound shall be applied after the removal of forms, or after the disappearance of surface water. It can be sprayed or applied to the concrete surface by means of an applicator in one or more coats at the rate instructed by the manufacturer.

Should the membrane seal be broken or damaged before the expiration of the curing period, the damaged area shall be immediately repaired by the application of additional membrane material.

The Contractor's proposals for the use of liquid membrane curing compound and the locations shall be subject to the approval of the Engineer.

4.2.4.8 Removal of Formwork and Falsework

- (a) Time of removal - formwork and falsework shall not be removed without the approval of the Engineer. The Engineer's approval shall not relieve the Contractor of responsibility for the safety of the work. Blocks and bracing shall be removed at the same time as the forms and in no case shall any portion of wooden forms be left in the concrete.

Falsework removal for continuous or cantilevered structures shall be as approved and directed by the Engineer and shall be such that the structure is gradually subjected to its working stress.

When the time for removal of forms and supports is determined based on concrete strength tests, such removal shall not begin until the concrete has attained the percentage of the specified design strength shown in the table below.

If field operations are not controlled by compressive strength tests, the time shown below for removal of forms and supports shall be used as a minimum:

In continuous structures, falsework shall not be released in any span until the first and second adjoining spans on each side have reached the strength specified herein or in the special provisions. When cast-in-place post-tensioned bridges are constructed, falsework shall remain in place until all post-tensioning has been accomplished

Removal of Formwork and Falsework

Structure	Standard Concrete	Early Strength Concrete	Percentage of Design Strength
Centering under girders, beams, frames or arches	14 days	7 days	80%
Floor slabs	14 days	7 days	70%
Walls	1 day	12 hours	-
Columns	2 days	1 day	-
Sides of beams and all other vertical surfaces	1 day	12 hours	-

Falsework under all spans of continuous structures shall be completely released before concrete is placed in railings and bridge parapets [or other upper elements depending on the type of structure.](#)

Forms and falsework shall not be released from under concrete without first determining if the concrete has gained adequate strength without regard to the time element. In the absence of strength determinations, the forms and falsework are to remain in place until removal is permitted by the Engineer.

The forms for footings constructed within cofferdams or cribs may be left in place when, in the opinion of the Engineer, their removal would endanger the safety of the cofferdam or crib, and when the forms so left intact will not be exposed to view in the finished structure. All other forms shall be removed whether above or below the ground line or water level.

All formwork shall be removed from the cells of concrete box girders within which utilities are required, and all formwork except that necessary to support the deck slab shall be removed from the remaining cells of the box girder.

To facilitate finishing, forms used on ornamental work, railings, parapets, and exposed vertical surfaces shall be removed at least 12 but not more than 48 hours later depending upon weather conditions.

In order to determine the condition of concrete in columns, forms to columns shall always be removed before releasing supports from beneath beams and girders.

Falsework supporting the deck of rigid frame structures shall not be removed until fill has been placed behind the vertical legs.

- (b) Patching - Immediately following removal of the forms all projecting wires or metal devices that have been used for holding the forms in place shall be removed or cut back at least 25 mm beneath the surface of the concrete. Fins or runs of mortar and all irregularities caused by form joints shall be removed. Small holes, depressions, and voids that show on the concrete shall be filled with cement mortar mixed in the same proportions as that used in the body of the work, except without coarse aggregate.

The surface of this mortar shall be floated with a wooden float before initial set takes place. It shall be uniform in colour with the surrounding concrete and neat and workmanlike in appearance.

- (c) Cause for rejection - Excessive honeycombing shall be sufficient cause for rejection of portions of the structure containing this honeycombing. The Contractor, on receipt of written orders from the Engineer, shall remove and rebuild such portions of the structure at his own expense.

4.2.4.9 Finishing Concrete

All concrete surfaces exposed in the completed work shall comply with the requirements of [Item \(c\)](#) Ordinary finish herein except where otherwise shown or specified.

- (a) Concrete [bridge](#) decks - Immediately after placing concrete, concrete decks shall be struck off with templates to provide proper transverse sections and shall be hand finished smooth to the concrete levels. Finish shall be slightly but uniformly roughened by brooming. The finished surface shall not vary more than 10 millimetres from a 4 metre straightedge placed parallel to the centreline of the roadway and 10 millimetres from a transverse template cut to the true cross section of the roadway. (This Item is not applicable to this Package)
- (b) Curb, footpath and concrete paved surfaces - Exposed faces of curbs and footpath shall be finished true to lines and grades. The curb surface shall be wood floated to a smooth but non-slippery finish. Footpath surfaces shall be slightly but uniformly roughened by brooming across the direction of travel. [Concrete paved surfaces shall be wood float finished.](#)
- (c) Ordinary finish - An ordinary finish is defined as the finish left on a surface after the removal of the forms when all holes left by form ties have been filled, and any minor surface defects have been repaired. The surface shall be true and even, free from depressions or projections and of reasonably uniform colour.

Repaired surfaces, the appearance of which is not satisfactory, shall be "rubbed" as specified in [Item \(d\)](#) Rubbed finish.

The concrete in bridge seats, caps, and tops of walls shall be struck off with a straightedge and floated to true grade. Unless shown on the Drawings the use of mortar topping for concrete surfaces will not be permitted.

- (d) Rubbed finish - After the removal of forms the rubbing of concrete shall be started as soon as its condition will permit. Immediately before starting this work the concrete shall be kept thoroughly saturated with water. Sufficient time shall have elapsed before the wetting down to allow the mortar used in patching to set thoroughly. Surfaces to be finished shall be rubbed with a medium coarse carborundum stone, using a small amount of mortar on its face. The mortar shall be composed of cement and fine sand mixed in the same proportions as those used in the concrete being finished. Rubbing shall be continued until all form marks, projections and irregularities have been removed, all voids filled, and a uniform surface has been obtained. The paste produced by this rubbing shall be left in place. After all concrete above the surface being treated has been cast, the final finish shall be obtained by rubbing with a fine carborundum stone and water. This rubbing shall be continued until the entire surface is of a smooth texture and uniform colour.

After the final rubbing has been completed and the surface has dried, it shall be rubbed with burlap to remove loose particles and laitance. The final surface shall be free from all unsound patches, paste, powder and objectionable marks.

- (e) Backfill and road fills - All spaces which have been excavated and the volumes of which are not occupied by the concrete structure shall be backfilled and compacted with acceptable material in accordance with the provisions of [Section 3](#) of these Specifications.

If there is likelihood of water accumulating behind any wall, the backfill shall not be placed until after the retaining, diaphragm, or spandrel walls are 28 days old. No fill shall be placed over arches and slabs until the concrete is 28 days old or until test specimens indicate the concrete has attained the required 28-day strength.

- (f) Loading - Traffic or heavy construction equipment shall not be allowed on reinforced concrete structures until 28 days have elapsed from the last placing of concrete except as noted below. If it is proposed to use the structure at an earlier date, extra test specimens shall be cast. The structure may be used when tests of these specimens show that the concrete has attained its specified 28-day strength.

4.2.4.10 Cleaning Up

Upon completion of structure and before final acceptance, the Contractor shall remove all falsework, falsework piling, etc., down to 1.0 metre below the finished ground line. Excavated, or useless materials, rubbish, etc. shall be removed from the site and the site shall be left in a neat and presentable condition satisfactory to the Engineer.

4.3 REINFORCING STEEL BARS

4.3.1 Description

This work shall consist of furnishing, fabricating, and placing reinforcing steel bars of the type and size provided in accordance with these Specifications and in reasonably close conformity with the Drawings or as directed by the Engineer.

4.3.2 Materials

Reinforcing steel shall conform to the requirements of the following specifications except that the weights of the standard bar sizes will be taken as per [Table 4.4.2.a](#) and [Table 4.4.2.b](#), irrespective of the specification used in manufacture.

Round Bar :

A-I (CT-3) 22TCN 18-79; or
JIS G 3112 (Grade SR 235); or
ASTM A615

Deformed Bars :

A-II (CT-5) 22TCN 18-79; or
JIS G 3112 (Grade SD 295A); or
JIS G 3112 (Grade SD 345); or
ASTM A615

Reinforcing bars shall be kept off the ground and stored within a building or provided with suitable cover.

4.3.3 Construction

4.3.3.1 Fabrication

- (a) Reinforcing bars shall be accurately formed to the shapes and dimensions indicated in the design, and shall be fabricated in a manner that will not injure the material.
- (b) Unless otherwise permitted, all reinforcing bars requiring bending shall be bent cold. When reinforcing bars are bent by heating, the entire operation shall be approved by the Engineer. Should the Engineer approve the application of heat for field bending reinforcing bars, precautions shall be taken to ensure that the physical properties of the steel will not be materially altered.
- (c) Reinforcing bars that cannot be straightened by means of fabrication shall not be used. Bars partially embedded in concrete shall not be bent except as shown on the Drawings or otherwise permitted.
- (d) Qualified workers shall be employed for cutting and bending, and proper appliances shall be provided for such work.
- (e) If it is necessary for the Engineer to ascertain the quality of reinforcing bars, the Contractor shall test reinforcing bars, at his own expense, by means as directed by the Engineer.

4.3.3.2 Placing

- (a) Reinforcing bars before being positioned shall be cleaned and free from rust, dirt, mud and loose scale and from paint, oil, or any other foreign substance that destroys or reduces the bond.
- (b) Reinforcing bars shall be accurately placed in proper position so that they will be firmly held during placing concrete. Reinforcing bars for erecting shall be used when needed.
- (c) Bars shall be tied at all intersections by using annealed iron wire 0.9 mm or larger diameter or suitable clips. Welding will not be permitted for this requirement.

- (d) Distances from the forms shall be maintained correctly by means of metal hangers, mortar blocks, metal supports, or other supports approved by the Engineer.
- (e) Reinforcing bars shall be inspected by the Engineer after placing. When a long time has elapsed after placing reinforcing bars, they shall be cleaned and inspected again by the Engineer before placing concrete.

4.3.3.3 Splicing

- (a) When it is necessary to splice reinforcing bar at points other than shown on the designs, positions and methods of splicing shall be determined based on strength calculations approved by the Engineer.
- (b) In lapped splices, the bars shall be lapped the required length and wired together at several points by using annealed iron wire larger than 0.9 mm.
- (c) Exposed reinforcing bars intended for bonding with future extensions shall be effectively protected from injury and corrosion.
- (d) Welding of reinforcing steel shall be done only if detailed on the Drawings or if authorized by the Engineer in writing.
- (e) Substitution of different size bars shall be permitted only upon the specific authorization of the Engineer. If steel is substituted, it shall be of a size equivalent to the design size or larger.

4.4 MEASUREMENT AND PAYMENT

4.4.1 Concrete

(a) Measurement

Measurement shall be made of the volume of concrete of the various classes in place and approved by the Engineer.

In computing quantities the dimensions used shall be those shown on the Drawings or ordered in writing by the Engineer but the measurement shall not include any concrete used for the construction of temporary works. No deduction from the measured quantity shall be made for the volume occupied by pipes less than 200 mm in diameter nor for reinforcing steel, anchors, conduits, weep holes or piling.

No pay allowance shall be made for any increased cement content, for any admixtures nor for any finishing of any description of concrete or concrete floor.

Unless described otherwise, Concrete used for the works on other Pay Items in these Specifications (e.g. precast concrete culverts) will not be measured for payment under this Clause.

(b) Payment

Payment for the various classes of concrete shall be paid for at the respective unit rate per cubic metre entered in the Bill of Quantities. The payment shall be full compensation for furnishing and placing all materials, including all labour, tools, equipment, formwork, falsework (scaffolding and supporting; for mixing, placing, finishing and curing the concrete, etc., and all incidental work thereto.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.1.2.6 2.2.4.3 2.2.5.3 2.3.3.4 3.2.4.3 3.2.5.3 3.2.6.3 3.3.3.4 3.3.4.3 3.4.3.3 3.4.4.3 4.2.4.3 4.2.5.3 4.2.6.3	Concrete Type E: including supply, placement and formwork	m ³
2.2.4.4 2.3.3.5 3.2.3.2 3.2.4.4 3.2.6.4 3.3.3.5 3.3.4.4 3.4.3.4 3.4.4.4 4.2.4.4 4.2.6.4	Concrete Type F: including supply, placement and formwork	m ³
2.1.2.7 2.2.3.2 2.2.4.5 2.2.5.4 2.3.3.6 2.4.2.3 3.1.2.4 3.2.4.5 3.2.5.4 3.2.6.5 3.3.3.6 3.3.4.5 3.4.3.5 3.4.4.5 4.1.2.4 4.2.3.2 4.2.4.5 4.2.5.4 4.2.6.5	Concrete Type G: including supply, placement and formwork	m ³

4.4.2 Reinforcing Steel Bar

(a) Measurement

The quantity of reinforcing steel bar to be paid for shall be the mass (kg) of reinforcing bar erected as shown on the Drawings or ordered by the Engineer in writing. The mass calculated will be based upon the following tables :

Table 4.4.2.
Unit Mass of Reinforcing Steel Bars

Nom. Bar Size (diameter mm)	9	10	12	14	16	18	20
Mass per linear metre in kg	0.499	0.617	0.888	1.210	1.580	2.000	2.470

Nom. Bar Size (diameter mm)	22	28	30	32	36	40	-
Mass per linear metre in kg	2.98	4.83	5.55	6.31	7.99	9.89	-

The lengths to be taken in calculating the mass for the purpose of payment shall be shown on the Drawings or ordered in writing by the Engineer.

No measurement or payment will be made for splices added by the Contractor for his convenience or for splices which are not shown on the Drawings and are not approved by the Engineer.

Clips, ties or other material used for positioning and fastening the reinforcing bars in place shall not be measured for payment. Reinforcing steel bars used for precast concrete elements shall not be measured for payment under this Clause.

(b) Payment

Payment for reinforcing steel bar shall be made at the unit rate entered in the Bill of Quantities. This payment shall be full compensation for furnishing all labour, equipment, and materials, necessary for fabricating, bending, assembling and erecting reinforcing bar, for unloading at the specific location, storing and handling of reinforcing steel bar and any other associated costs.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.1.2.8 2.2.4.7 2.2.5.5 2.3.3.7 3.2.4.7 3.2.5.5 3.2.6.6 3.3.3.7 3.3.4.10 3.4.3.6 4.2.4.7 4.2.5.5 4.2.6.6	Deformed Reinforcing Bar: including supply, bending and placement	kg

4.4.3 Expansion Joints

Measurement shall be made of the length in metres of water stops constructed in accordance with the Drawings and the specification.

Payment shall be made at the rate entered in the Bill of Quantities which shall be full compensation for providing all materials (including water stop, formed elastic polythene material, PVC water stop and asphaltic sealant), equipment, labour and all incidentals required for completing the water stop to the Engineer's approval.

The following pay items shall be measured and paid under this Clause:

Pay Item No.	Description	Unit of Measurement
2.3.3.11 3.3.3.10	Expansion Joint (comprising asphalt joint filler, rubber water stop B=200, t=5, formed polythene elastic material, t=20): including supply and installation	m

SECTION 5. PILING WORKS

TABLE OF CONTENTS

	Page
5.1 GENERAL	5-1
5.2 PRECAST CONCRETE PILING.....	5-1
5.2.1 General.....	5-1
5.2.2 Materials.....	5-1
5.2.2.1 General.....	5-1
5.2.2.2 Formwork	5-1
5.2.2.3 Reinforcement	5-1
5.2.2.4 Casting	5-2
5.2.2.5 Finish	5-2
5.2.2.6 Curing.....	5-2
5.2.2.7 Handling	5-2
5.2.3 Construction	5-2
5.2.3.1 Preparation for Driving	5-2
5.2.3.2 Handling, Pitching and Driving	5-2
5.2.3.3 Test Piles	5-4
5.3 TIMBER PILING.....	5-5
5.3.1 General.....	5-5
5.3.2 Materials.....	5-5
5.3.3 Construction	5-5
5.4 MEASUREMENT AND PAYMENT	5-5
5.4.1 Reinforced Concrete Piles	5-5
5.4.2 Timber Piling	5-6

SECTION 5. PILING WORKS

5.1 GENERAL

This section covers the general and specific requirements for piling works including precast concrete piling and timber piling to be furnished and driven in the various parts of the Works as shown on the Drawings or directed by the Engineer.

5.2 PRECAST CONCRETE PILING

5.2.1 General

This work shall consist of precast reinforced concrete piling furnished and driven in accordance with these Specifications and in close conformity with the requirements, shown in the Drawings and the directions by the Engineer.

In this contract package precast concrete piling foundations shall be constructed in the following locations:

- Dike at Thanh Da
- Than Da Pumping Station
- Ben Me Coc Pumping Station

5.2.2 Materials

5.2.2.1 General

Pre-cast reinforced concrete piles shall be constructed in accordance with the details shown on the Drawings, of concrete [Class D](#), mixed and placed in accordance with the provisions of [Clause 4.2](#) of these Specifications. Reinforcement shall comply with the provisions of [Clause 4.3](#) of these Specifications. Main reinforcing bars shall be supplied in one complete length and should this prove impractical separate lengths shall be effectively spliced by a method approved by the Engineer. The pile shall be so straight that a line stretched from tip to butt on any face will not be more than 1/1000 of the length of the pile from the face of the pile at any point.

Bearing piles shall not be constructed or ordered until the Engineer instruct the required lengths.

5.2.2.2 Formwork

Forms for pre-cast piles shall conform to the general requirements for concrete formwork as described in [Clause 4.2](#) of these Specifications. Forms shall be accessible for compacting the concrete. Side forms may be removed at any time not less than 24 hours after completion of the placing of concrete but the entire pile shall remain supported for at least 7 days and shall not be subjected to any handling stress until the concrete has been in place for 21 days or such reduced time as the Engineer may decide as a result of tests.

5.2.2.3 Reinforcement

Reinforcement shall be in accordance with the provisions set out in [Clause 4.3](#) and positioned as shown on the Drawings.

5.2.2.4 Casting

The piles shall be cast in a horizontal position. Special care shall be taken to place the concrete so as to produce a pile free from any air pockets, honeycomb or other defect.

Concrete shall be placed continuously and shall be compacted by vibrating or by other means satisfactory to the Engineer. The forms shall be slightly overfilled, the surplus concrete screeded off, and the top surface finished to a uniform, even texture similar to that produced by the forms.

5.2.2.5 Finish

When removed from the forms piles shall present true, smooth, even surfaces free from any surface blemishes, and true to the dimensions shown on the Drawings.

5.2.2.6 Curing

Concrete piles shall be covered with wet burlap immediately after placing is complete and shall be kept continuously wet for at least 7 days.

5.2.2.7 Handling

When raising or transporting pre-cast concrete piles the Contractor shall provide slings and other equipment necessary to prevent any appreciable bending of the pile or cracking of the concrete. No concrete pile shall be lifted other than by slinging from the lifting holes, the positions of which shall be submitted to and approved by the Engineer. Piles damaged in handling or driving shall be replaced. Concrete piles shall be so handled at all times to prevent breaking or chipping the edges.

Piles shall not be driven until 28 days have elapsed from the time of casting or such reduced time as the Engineer may decide as a result of tests.

5.2.3 Construction

5.2.3.1 Preparation for Driving

- (a) Caps - The heads of all concrete piles, when the nature of the driving is such as to unduly injure them, shall be protected by caps of approved design having a suitable cushion next to the pile head and fitting into a casing which in turn supports a timber shock block. No pile head will be held so firmly that the slight rotation of the pile normally occurring while the pile is being driven will be prevented.
- (b) Splicing piles - Splicing of piles shall be made by means of fabricated steel sleeves as shown on the Drawings. The Contractor shall submit to the Engineer for his approval the proposed design of the sleeves and the method of attachment to the pile lengths to be spliced, in accordance with the procedures in Clause 1.3.5 of the Specification

5.2.3.2 Handling, Pitching and Driving

- (a) General - The main setting out for the piles is to be completed prior to commencement of driving. Secondary or individual pile setting out is to be completed and agreed not less than 8 hours prior to commencing work on the piles concerned. All main setting out points, lines and stations are to be maintained safe and undisturbed until the work is complete.

Piles shall be pitched accurately in the positions and driven to the lines shown on the Drawings or fixed by the Engineer. Piles deflected from the vertical or proper line shall, where ordered by the Engineer, be withdrawn and re-pitched until the correction of the position or line of any pile will be permitted. Any pile damaged by reason of improper driving or driven out of its proper location or driven below the elevation fixed by the Drawings or by the Engineer, shall be corrected at the Contractor's expense by one of the following methods approved by the Engineer for the pile in question :

- The pile shall be withdrawn and replaced by a new and, if necessary, longer pile. Any holes from which piles are withdrawn shall be packed with approved non-plastic material before re-driving takes place; or
- A second pile shall be driven adjacent to the defective or low pile.
All piles pushed up by the driving of adjacent piles or by any other cause shall be driven again.

- (b) Batter piles – Where batter piles are called for they shall be driven accurately to the batter shown on the Drawings. The pile frame employed for the driving of the batter piles shall have leads capable of adjustment to the required angle. When piles have to be driven below the level of the bottom of the leads extension leads shall be provided except where the use of a follower is specifically permitted by the Engineer. (Note: Batter Piles are not applicable to the Works for Package B)
- (c) Driving equipment - Before any piling work is commenced the Contractor shall submit to the Engineer full details of the pile driving equipment and the method of carrying out the work he intends to use. All piles shall be provided with caps for driving as specified in [Clause 5.2.3.1](#) above. For special types of piles, driving head mandrels, or other devices in accordance with these requirements shall be provided so that piles may be driven without damage.

Piles shall be driven with steam, air or diesel hammers, a combination of hammers with water jets or gravity hammers.

In general:

- where diesel hammers are used for driving pre-cast concrete piles, the energy of the hammer shall numerically approximate one half of the weight of pile plus 4000 kg.
- when gravity hammers are used for driving pre-cast concrete piles, the drop of the hammer shall not exceed 2.5 metres and the hammers shall have a weight of not less than half the weight of the pile. The fall shall be regulated so as to prevent injury to the pile.
- plant and equipment furnished for steam and air hammers shall have sufficient capacity to maintain, under working conditions, the pressure in the manner specified by the manufacturer. The boiler or tank shall be equipped with an accurate pressure gauge, and another gauge shall be supplied at the hammer intake.

- (d) Driving - Piles shall be supported in line and position with leads while being driven. Pile drive leads shall be constructed so as to afford freedom of movement of the hammer, and they shall be held firmly in position to ensure rigid lateral support to the pile during driving. Except where piles are driven through water, the leads shall be of sufficient length to make the use of a follower unnecessary, and shall be so designed as to permit the proper placing of batter piles. Once started driving shall be continuous.

When water jets are considered by the Engineer to be necessary, the number of jets and the nozzle volume and pressure shall be sufficient to freely erode the material adjacent to the piling. The plant shall have at all times a pressure of at least 7 kPa (7kg/cm²) at two 20 mm dia jet nozzles. Before the required penetration is reached, the jets shall be shut off and the piles driven by hammer to final penetration.

A detailed accurate record of the driving of all piles shall be kept by the Engineer. The Contractor shall give every assistance to the Engineer to help him keep this record which will include the following : pile numbers, positions, types, sizes, actual lengths, dates driven, lengths in footings, penetration under final blows of the hammer, striking energy of the hammer, length cut off, and final pay lengths. No pile shall be driven near freshly placed concrete.

- (e) Bearing values - Piles shall be driven to a bearing value of not less than that shown on the Drawings. The Engineer will specify the penetration and the Contractor shall drive the piles to the penetration specified, but if the Engineer is not satisfied that the desired bearing value has been attained, he may instruct action as for a defective pile as detailed in Clause 5.2.3.2. of this section. Provided that the pile is not defective because of the failure of the Contractor to fulfil his obligations under this Contract, both the first pile and its replacement will be measured for payment under this Clause.
- (f) Non-Bearing Piles – Piles for dike construction shall be driven to the depths shown on the drawing.
- (g) Cut off - Concrete piles shall be cut off as indicated on the Drawings or as directed by the Engineer at such elevation that the pile reinforcement will extend into and connect with the cap or footing.

Unless otherwise specified, pile cut-off length shall become the property of the Contractor and shall be removed from the Site.

Reinforced concrete piles may be cast the full length of the reinforcing bars, provided that the concrete is cut off to expose the steel as shown on the Drawings after the piles have been driven.

5.2.3.3 Test Piles

The Engineer may order the execution of test piles as he may consider necessary to ascertain the type of the foundation for the project. The Contractor shall furnish and execute test piling at the locations designated by the Engineer.

The lengths of the piles shown on the Drawings are based on information obtained from previous site investigations. However, piles of different lengths may be required as directed by the Engineer. Before final pile lengths are settled, the Contractor shall construct to the lengths shown on the Drawings such pilot piles as may be found necessary. These piles shall be driven in the positions specified by the Engineer and the Contractor shall

assist the engineer in making a full, detailed record of the driving of all test piles throughout the full depth of driving.

After attaining the approved set, driving shall be continued until the Engineer directs that it shall cease. Driving of test piles beyond the point at which the approved set is obtained will be called for to demonstrate that driving resistance continues to increase. The Contractor shall then furnish the remainder of the piles in the structure. In determining the lengths of piles the Contractor shall base his list on the lengths assumed to remain in the completed structure.

Note that test piles are not applicable to Package B.

5.3 TIMBER PILING

5.3.1 General

Timber piles shall be driven to the depths and at the spacing (or density) as shown on the Drawings including, but not limited to, foundations for sewers, sluiceways, manholes, inlet pits or as directed by the Engineer.

5.3.2 Materials

Timber Piles (Wooden Piles) shall be cut from Paper Bark or other locally available timber which, subject to the Engineer's approval, is suitable for the intended application. Piles shall be of single length, not shorter than 4500 mm and with diameter not less than 80 mm at any point in the length and not greater than 150 mm and shall be straight to a tolerance of 50 mm over their full length, stripped of any branches and of sound condition. Piles which do not conform to the foregoing requirements shall be removed from the Site. Splicing shall not be permitted.

5.3.3 Construction

Timber piles shall be driven at the density (piles per square metre) shown on the drawing to depths such the pile heads correspond to the lines and levels of the subsequent structure or layer, or to the natural surface level as the case may be.

Piles shall be driven true and plumb and spacings shall be regular. Any pile which split, broken, or is more than 300 mm out of position shall be replaced at the Contractor's expense.

5.4 MEASUREMENT AND PAYMENT

5.4.1 Reinforced Concrete Piles

Measurement shall be made of the length of pre-cast reinforced concrete piles actually driven and accepted. The pay lengths of the satisfactorily driven piles shall be measured from the tip to the cut-off. Lengths cut off will not be measured for payment.

No allowance will be made for the length of piles furnished by the Contractor to replace piles previously accepted by the Engineer that are subsequently lost or those that are damaged prior to completion of the Contract while in stockpile, or during handling or driving, and are ordered by the Engineer to be removed from the Site or disposed of otherwise. Where the Contractor elects to cast reinforced concrete piles the full length of the reinforcing bars as permitted in Clause 5.2.3.2. the length to be cut off due to such casting will not be measured for payment

Payment for shall be paid for at the rate per linear metre entered in the Bill of Quantities. The rate shall constitute full compensation for supply of piles, hardware, splicing collars and all other materials, labour, equipment, transportation including driving, jetting, cutting-off, welding, splicing and all related tools, rigs, cranes, hammers, jets, and other incidental equipment and work.

The following pay items shall be measured and paid under this clause:

Pay Item No.	Description	Unit of Measurement
2.1.2.2	Reinforced Concrete Pile 250 x 250 x 12,000: including supply driving breaking back pile head for connection to pile cap	nos.
2.3.3.1	Reinforced Concrete Pile (300 x 300 x 24,000): including supply driving breaking back pile head for connection to pile cap	nos.
3.3.3.1	Reinforced Concrete Pile (300 x 300 x 44,000): including supply driving breaking back pile head for connection to pile cap	

5.4.2 Timber Piling

Measurement shall be made of the length of timber piling driven and approved by the Engineer. The length determined shall be calculated by the multiplying the number of piles by the nominal length of 4500 mm. Piles shorter than 4500 mm shall not be counted for payment unless the Engineer consents to shorter lengths, in which case actual driven lengths shall be measured. .

Payment shall be made at the rate per metre entered in the Bill of Quantities which shall include full payment for providing all labour, materials, tools, equipment and any other works incidental to the completion of the timber piling.

The following pay items shall be measured and paid under this clause:

Pay Item No.	Description	Unit of Measurement
2.2.3.1	Timber Piling 80 – 100 dia. X 4500	m
2.2.4.1		
2.2.5.1		
2.3.3.2		
2.4.2.2		
3.2.3.1		
3.2.4.1		
3.2.5.1		
3.2.6.1		
3.3.3.2		
3.3.4.1		
3.4.3.1		
3.4.4.1		
4.2.3.1		
4.2.4.1		
4.2.5.1		
4.2.6.1		

SECTION 6. DIKES AND REVETMENTS TABLE OF CONTENTS

	Page
6.1 GENERAL	6-1
6.2 REINFORCED CONCRETE DIKE AT THANH DA.....	6-1
6.2.1 General.....	6-1
6.2.2 Submittal.....	6-1
6.2.3 Materials.....	6-1
6.2.3.1 Earthworks Materials	6-1
6.2.3.2 Concrete Materials	6-1
6.2.3.3 Expansion Joint Material	6-2
6.2.4 Construction	6-2
6.2.4.1 Preparatory Works.....	6-2
6.2.4.2 Earthworks	6-2
6.2.4.3 Concrete Works	6-2
6.2.4.4 Piling Works.....	6-2
6.2.4.5 Gravel	6-2
6.2.4.6 Expansion Joints	6-3
6.2.4.7 Rip Rap	6-3
6.3 TEMPORARY STONE MASONRY DIKES	6-3
6.3.1 General.....	6-3
6.3.2 Materials.....	6-3
6.3.2.1 Stone	6-3
6.3.2.2 Sand Bedding	6-3
6.3.2.3 Levelling Concrete.....	6-4
6.3.2.4 Mortar.....	6-4
6.3.3 Construction	6-4
6.3.3.1 Preparation of Surface of Existing Masonry	6-4
6.3.3.2 Preparations for New Stone Masonry Construction	6-4
6.3.3.3 Wet Stone Masonry Walls.....	6-4
6.4 WET STONE MASONRY REVETMENTS.....	6-6
6.4.1 General.....	6-6
6.4.2 Preparatory Works	6-6
6.4.3 Earthworks.....	6-6
6.4.4 Construction	6-6
6.4.4.1 General	6-6
6.4.4.2 Timber Piling.....	6-6

6.4.4.3	Gravel	6-6
6.4.4.4	Levelling Concrete.....	6-6
6.4.4.5	Concrete Toe	6-6
6.4.4.6	Weep Holes	6-7
6.4.4.7	Geotextile Cloth	6-7
6.4.4.8	Concrete Works	6-7
6.4.4.9	Stone Masonry	6-8
6.4.4.10	Rip Rap	6-10
6.5	SLOPE PROTECTION FOR RETARDING POND.....	6-10
6.5.1	General	6-10
6.5.2	Materials.....	6-10
6.5.3	Construction	6-10
6.6	MEASUREMENT AND PAYMENT	6-10
6.6.1	Earthworks.....	6-10
6.6.2	Concrete.....	6-10
6.6.3	Reinforced Concrete Pile	6-11
6.6.4	Timber Piling	6-11
6.6.5	Geotextile Cloth.....	6-11
6.6.6	Wet Stone Masonry	6-11
6.6.7	Joint Filler	6-12
6.6.8	Weep Holes.....	6-12

SECTION 6. DIKES AND REVETMENTS

6.1 GENERAL

This section covers the requirements for the construction of dikes, revetments and wet masonry slope protection to be constructed by the Contractor in Package B.

6.2 REINFORCED CONCRETE DIKE AT THANH DA

6.2.1 General

The work comprises the construction of a reinforced concrete dike wall supported on concrete piles together with revetments along the bank of the Saigon River in the region between sections of existing dike and joined into the existing dike.

The work shall include excavation of unsuitable material, filling, furnishing and driving reinforced concrete piling, placement of free draining gravel, rip rap, concrete work all to the lines and levels as shown on the Drawings, this specification and the directions of the Engineer.

6.2.2 Submittal

The Contractor shall submit his proposal for construction of the dike, in accordance with the Drawings, for approval by the Engineer. The proposal shall clearly indicate the sequence of work, the method of dewatering, the materials and equipment to be deployed. Construction shall be made in the dry using coffering and dewatering except that rip rap may be placed under water with the approval of the Engineer. The sequence of activities shall generally be such that the lower piles and coupling are completed before work on the bank protection commences.

6.2.3 Materials

6.2.3.1 Earthworks Materials

Sandy Soil Fill shall comply with the requirements of Clause 3.3.2.(b)

Free draining gravel shall comply with the requirements of Clause 3.3.2.(d)

Rip Rap shall comply with the requirements of Clause 3.4.

6.2.3.2 Concrete Materials

All concrete materials shall comply with the requirements of Section 4, Concrete.

Reinforced Concrete shall be Class E

Plain Concrete shall be Class F

Levelling Concrete shall be Class G

Reinforcement shall be deformed bars in accordance with Clause 4.3

6.2.3.3 Expansion Joint Material

The Contractor shall submit samples and technical data of his proposal for joint filler not less than 3 months before its intended use.

Joint filler shall be pre-formed, highly resilient-type sponge or cellular rubber conforming to ASTM D 1056, of 10 mm thickness and of density not less than 30 kg/m³.

Joint filler shall have, but not be limited to, the following minimum properties:

- It shall exhibit sustained adhesion to concrete under wet conditions and not become brittle after prolonged hot dry conditions
- It shall not rupture as a result of a shear movement of 30 mm
- It shall be non-toxic and non-injurious to concrete or mortar.

6.2.4 Construction

6.2.4.1 Preparatory Works

The Contractor shall complete all necessary preparatory works in accordance with the requirements of Section 2, Preparatory Works.

Payment for preparatory works in connection with the construction of dikes and revetments will be paid under Section 2, Preparatory Works.

6.2.4.2 Earthworks

The contractor shall carry out all earthworks required for the construction of dikes and revetments in accordance with the requirements of Section 3, Earthworks. This work shall include, but not be limited to, excavation, placing sandy soil fill and trimming the bank to the required slope.

Payment for earthworks in connection with the construction of revetments will be made under Section 3, Earthworks.

6.2.4.3 Concrete Works

All concrete construction relating to revetment construction shall be in accordance with Section 4, Concrete and shall consist of the construction of the upper and lower couplings (pile caps), RC beams, levelling concrete and 150 mm plain concrete slab facing.

6.2.4.4 Piling Works

Reinforced concrete piles shall be furnished and driven in accordance with Section 5, Piling Works and as specified hereunder. Piles shall be driven to the depths shown on the Drawings. There is no requirement for test piles nor for driving piles to refusal for this item of work.

Heads of the piles shall be cut off and exposed reinforcement bars shall be bent into the couplings as shown on the Drawings.

6.2.4.5 Gravel

Gravel bedding and free draining gravel shall comply with Clause 3.3.2 and shall be placed in accordance with Clause 3.3.9 of Section 3, Earthworks.

6.2.4.6 Expansion Joints

Expansion Joints shall be constructed in the revetment as shown in the Drawings or as directed by the Engineer.

The openings for expansion joints shall be constructed during the placing of concrete beams.

Joint filler shall be held in place against the completed side of an expansion joint by a waterproof cement or other approved means in accordance with the supplier's recommendations.

The outer edge of the joint shall be sealed with an asphaltic joint filler.

6.2.4.7 Rip Rap

The Contractor shall construct rip rap at the toe of the revetments to the lines and levels as shown in the Drawings or as directed by the Engineer

The bed of the canal shall be excavated to the lines and levels and grades as shown in the Drawings to accept the rip rap.

The rip rap shall be placed in accordance with the requirements of Clause 3.4 of Section 3.

6.3 TEMPORARY STONE MASONRY DIKES

6.3.1 General

In the Ben Me Coc areas, stone masonry additions to existing stone masonry dikes shall be constructed. In regions where existing dikes are non-existent or beyond repair, new dikes shall be constructed.

Note that the term "temporary dike" refers to the required life of the dike. Temporary dikes comprise part of the Permanent Works to be constructed under the Contract.

All temporary stone masonry dikes shall be constructed to the lines and levels as shown on the Drawings or as directed by the Engineer.

6.3.2 Materials

6.3.2.1 Stone

Stone for all masonry shall be clean, hard, and durable.

Samples of stone proposed for use in masonry construction shall be submitted to the Engineer for his approval.

Stones shall be of the sizes shown on the Drawings or appropriate for the particular application. Unless otherwise shown on the Drawings, stones shall have thickness of not less than 150 mm, widths of not less than one and a half times their respective thicknesses, and lengths of not less than one and a half times their respective widths. Each stone shall be free of depressions and projections that would prevent it from being properly bedded.

6.3.2.2 Sand Bedding

Sand bedding material shall comply with the requirements of Clause 3.3.2.(c).

6.3.2.3 Levelling Concrete

Levelling concrete shall be concrete class G in accordance with Section 4.

6.3.2.4 Mortar

Sand, cement and water for mortar shall comply with the requirements of Section 4.

6.3.3 Construction

6.3.3.1 Preparation of Surface of Existing Masonry

The surfaces of all existing masonry on which new stone masonry is to be constructed shall be wire brushed and chipped to remove all loose material and shall be thoroughly wetted prior to placing new work.

6.3.3.2 Preparations for New Stone Masonry Construction

Excavation of existing soil shall be made and the bottom trimmed and tamped with a mechanical tamper to the Engineer's approval.

Bedding sand or lean concrete, as the case may be, shall be placed to the lines and levels as shown on the Drawings.

Bedding sand shall be tamped with at least 3 passes of a mechanical tamper or vibrating plate.

6.3.3.3 Wet Stone Masonry Walls

(a) General

This Clause refers to the construction of wet stone masonry dikes.

(b) Selection and Placing

When the masonry is to be placed on a prepared foundation bed, the bed shall be firm and horizontal and shall have been approved by the Engineer before any stone is placed.

Stone shall be dressed to remove any thin or weak portions. Face stone shall be dressed to provide bed and joints lines that do not vary more than 20 mm from true lines and to ensure the meeting of bed and joints lines without the rounding of the corners of the stones in excess of 30 mm in radius. Bed surfaces of face stones shall be normal to the faces of the stones for 80 mm and from this point may depart from a normal plane by an angle which is not to exceed 50 mm in 300 mm.

Face stones shall be pitched to line along all beds and joints. The maximum projections of rock faces beyond the pitch lines shall not be more than 10 mm.

Care shall be taken to prevent the bunching of small stones or stones of the same size large stones shall be used for the bottom courses and large, selected stones shall be used in the corners.

All stones shall be cleaned thoroughly and wetted immediately before being set, and the bed which is to receive them shall be cleaned and moistened before the mortar is spread. They shall be laid with their longest faces horizontal in full beds of mortar, and the joint shall be flushed with mortar.

The exposed faces of individual stones shall be parallel to the faces of the walls in which the stones are set.

The stones shall be so handled as not to jar or displace the stones already set. Suitable equipment shall be provided for setting stones larger than those that can be handled by two men. Rolling or turning stones on the walls will not be permitted. If a stone is loosened after the mortar has taken initial set, it shall be removed, the mortar cleaned off, and the stone relaid with fresh mortar.

(c) Beds and Joints

Beds for face stones may vary from 20 mm and to 50 mm in thickness. They shall not extend in an unbroken line through more than five stones. Joints may vary from 20 mm to 50 mm in thickness. They shall not extend in unbroken line through than two stones. They may be at angles with the vertical from 0 to 45 degrees. Face stone shall bond at least 150 mm longitudinally and 50 mm vertically. At no place shall corners of four stones be adjacent to each other.

Beds for vertical faced walls shall be level, and battered walls may vary from level to normal to the batter line of the face of the wall.

(d) Headers

Headers shall be distributed uniformly throughout the walls of structures so as to form at least one fifth of the exposed faces. They shall be of such lengths as to extend from the front face of the wall into the backing at least 300 mm. When a wall is 450 mm or less in thickness, the headers shall extend entirely from front to back face.

(e) Pointing

Joints not pointed at the time the stone is laid shall be thoroughly wet with clean water and filled with mortar. The mortar shall be well driven into the joints and finished with an approved pointing tool. The wall shall be kept wet while pointing is being done and in hot or dry weather the pointed masonry shall be protected from the sun and kept wet for a period of at least 3 days after completion.

After the pointing is completed and the mortar set, the wall shall be thoroughly cleaned and left in a neat and workmanlike condition.

(f) Coping

Copings, if called for, shall be as shown on the Drawings. Where copings are not called for, the top of the wall shall be finished with stones wide enough to cover the top of the wall from 450 mm to 1 metre in length, and of random heights, with a minimum height of 150 mm. Stone shall be laid in such a manner that the top course is an integral part of the wall. The tops of the top courses of stone shall be pitched to line in both vertical and horizontal planes.

(g) Weep Holes

Weep holes are not required.

(h) Cleaning Exposed Faces

Immediately after being laid, and while the mortar is fresh, all faces stones shall be thoroughly deaned of mortar stains and shall be kept clean until the work is completed.

(i) Curing

The masonry shall be satisfactorily protected from the sun and shall be kept wet for a period of at least three days after completion.

6.4 WET STONE MASONRY REVETMENTS

6.4.1 General

This section specifies the requirements for the construction of wet stone masonry-lined revetments for the Ben Me Coc (1) Pumping Station and Control Gate.

6.4.2 Preparatory Works

The Contractor shall complete all necessary preparatory works in accordance with the requirements of Section 2, Preparatory Works.

Coffer dams shall be in place and an effective dewatering system in place and operating before construction of revetments commences.

Payment for preparatory works in connection with the construction of revetments will be paid under Section 2, Preparatory Works.

6.4.3 Earthworks

The Contractor shall carry out all earthworks required for the construction of revetments in accordance with the requirements of Section 3, Earthworks. This work shall include, but not be limited to, excavating and trimming the bank to the required slope, compacting subgrade and placing and compacting sandy soil fill.

Payment for earthworks in connection with the construction of revetments will be paid under Section 3, Earthworks.

6.4.4 Construction

6.4.4.1 General

The Contractor shall submit his proposal for construction of revetments, in accordance with the Drawings, for approval by the Engineer. The proposal shall clearly indicate the sequence of work, the method of dewatering, the materials and equipment to be deployed. Construction shall be made in the dry using coffering and dewatering. The work sequence shall be from timber piling, concrete toe footing construction then proceeding upwards.

6.4.4.2 Timber Piling

Timber piling shall be constructed as shown on the Drawings in accordance with Section 5.

6.4.4.3 Gravel

Gravel bedding and free draining gravel shall comply with Clause 3.3.2 and shall be placed in accordance with Clause 3.3.8 of Section 3, Earthworks.

6.4.4.4 Levelling Concrete

Levelling concrete shall be placed on the bed of prepared gravel as shown on the Drawings. Concrete shall be in accordance with the requirements of Section 4.

6.4.4.5 Concrete Toe

Concrete toe consisting of concrete Class F shall be placed to the lines and levels shown on the Drawings.

6.4.4.6 Weep Holes

Weep holes shall be constructed at the locations shown on the Drawings.

Material for weep holes shall be 100 mm nominal diameter, black, Unplasticised Poly-Vinyl-Chloride (uPVC) conforming to the requirements of JIS K 6741. Pipe for weep holes shall be approved in writing by the Engineer before any purchase orders are placed.

Filter cloth shall be a polyester, staple fibre, needle punched felt with a minimum mass of 250 g/m² and shall comply with ASTM M 288 'Geotextiles used for Subsurface Drainage Purposes'.

Pipes for weep holes shall be cut to the required lengths as shown on the Drawings. Filter cloth shall be tied firmly to the pipe with nylon twine so as to ensure that all water which will enter the pipes must pass through the filter cloth.

Assembled units shall be placed in the work at the levels, positions shown on the Drawings taking care to ensure that filter constructed as described above remains intact and that the exposed ends on the face of the work are flush with the face of the structure through which the weep hole passes. Gravel backfill shall be carefully hand placed around inner ends of the filters ensuring that the filter remains intact.

6.4.4.7 Geotextile Cloth

Geotextile cloth complying with the requirement stated in Clause 6.4.4.6, shall be placed on the prepared, trimmed, batter surface of the bank prior to placing the free draining gravel layer. Materials and workmanship shall be in accordance with Section 3, Clause 3.5. Laps shall be not less than 250 mm.

6.4.4.8 Concrete Works

(a) General

Concrete works for revetment construction shall consist of levelling concrete, 100 mm plain concrete screed and plain concrete bedding for the wet stone masonry and for toe

(b) Materials

All materials shall comply with the requirements of Section 4, Concrete.

Reinforced Concrete shall be Class E

Plain Concrete shall be Class F

Levelling Concrete shall be Class G

Reinforcement shall be deformed bars in accordance with Sub-[Clause 4.3.2](#), Section 4.

(c) Construction

All concrete construction relating to revetment construction shall be in accordance with Section 4, Concrete.

When placing concrete care shall be taken to ensure that weep holes are not blocked or dislodged from position.

The 100 mm thick concrete screed for the wet stone masonry shall not be placed until the underlying free-draining gravel bed has been placed and approved by the Engineer.

6.4.4.9 Stone Masonry

(a) General

Stone masonry to be constructed as part of revetments comprise wet stone masonry revetment facing.

(b) Materials

Stone for all classes of masonry shall be clean, hard, and durable.

Samples of stone proposed for use in masonry construction shall be submitted to the Engineer for his approval.

Stones shall be of the sizes shown on the Drawings or appropriate for the particular application. Unless otherwise shown on the Drawings, stones shall have thickness of not less than 150 mm, widths of not less than one and a half times their respective thicknesses, and lengths of not less than one and a half times their respective widths. Each stone shall be free of depressions and projections that would prevent it from being properly bedded.

Stone to be used in wet stone masonry revetments shall be regular in size and their thickness shall be approximately 280 mm.

Stone shall be dressed to remove any thin or weak portions. Face stone shall be dressed to provide bed and joints lines that do not vary more than 20 mm from true lines and to ensure the meeting of bed and joints lines without the rounding of the corners of the stones in excess of 30 mm in radius. Bed surfaces of face stones shall be normal to the faces of the stones for 80 mm and from this point may depart from a normal plane by an angle which is not to exceed 50 mm in 300 mm.

Face stones shall be pitched to line along all beds and joints. The maximum projections of rock faces beyond the pitch lines shall not be more than 10 mm.

Concrete into which stones are bedded shall be concrete Class F

(c) Construction of Wet Stone Masonry Revetment Facing

(i) Preparation

The gravel bed, the 100 mm concrete screed, the concrete toe block and edge forms shall be completed to the approval of the Engineer prior to placing wet stone masonry.

(ii) Selection and Placing

All stones shall be cleaned thoroughly and wetted immediately before being set, and the concrete bed which is to receive them shall be cleaned and moistened before the bedding concrete is spread. Stones shall be laid with their longest faces horizontal in full beds of concrete, and the joint shall be flushed with concrete.

The exposed faces of individual stones shall be parallel to the revetment face in which the stones are set and the pattern shall be regular.

The stones shall be so handled as not to jar or displace the stones already set.

(iii) Beds and Joints

Beds for stones may vary from 20 mm and to 50 mm in thickness. At no place shall corners of four stones be adjacent to each other.

(iv) Pointing

Joints not pointed at the time the stone is laid shall be thoroughly wet with clean water and filled with mortar. The mortar shall be well driven into gaps between stones with a pointing tool. Stones shall be proud of the pointed mortar by approximately 20 mm. The wall shall be kept wet while pointing is being done.

(v) Weep Holes

Weep holes shall be constructed at the locations as shown on the Drawings or as directed by the Engineer in accordance with the requirements of [Sub-Clause 6.4.4.6](#), Weep Holes.

(vi) Cleaning Exposed Faces

Immediately after being laid, and while the mortar is fresh, all faces stones shall be thoroughly cleaned of mortar stains and shall be kept clean until the work is completed.

(vii) Curing

The masonry shall be satisfactorily protected from the sun and shall be kept wet for a period of at least three days after completion.

(d) Expansion Joints

(i) General

Expansion Joints shall be constructed in the revetment as shown in the Drawings or as directed by the Engineer.

(ii) Materials

The Contractor shall submit samples and technical data of his proposal for joint filler not less than 3 months before its intended use.

Joint filler shall be pre-formed, highly resilient-type sponge or cellular rubber conforming to ASTM D 1056, of 10 mm thickness and of density not less than 30 kg/m³.

Joint filler shall have, but not be limited to, the following minimum properties:

- It shall exhibit sustained adhesion to concrete under wet conditions and not become brittle after prolonged hot dry conditions
- It shall not rupture as a result of a shear movement of 30 mm
- It shall be non-toxic and non-injurious to concrete.

All joint surfaces to be filled shall be clean, dry and fully cured.

(iii) Construction

The openings for expansion joints shall be constructed during the placing of wet stone masonry. Faces of joints shall be vertical and perpendicular to the centreline of the canal.

Joint filler shall be held in place against the completed side of an expansion joint by a waterproof cement or other approved means in accordance with the supplier's recommendations.

The outer edge of the joint shall be sealed with an asphaltic joint filler.

6.4.4.10 Rip Rap

(a) General

The Contractor shall construct rip rap at the toes of the revetments to the lines and levels as shown in the Drawings or as directed by the Engineer

(b) Materials

Rip rap shall conform to the requirements of Clause 3.4 in Section 3.

(c) Construction

The bed of the canal shall be excavated to the lines and levels and grades as shown in the Drawings to accept the rip rap.

The rip rap shall be placed in accordance with the requirements of Clause 3.4.4 of Section 3.

6.5 SLOPE PROTECTION FOR RETARDING POND

6.5.1 General

This Clause covers the requirements for the construction of wet stone masonry in the retarding pond at Tanh Da and shall be read in conjunction with Section 11.

6.5.2 Materials

Timber Piles shall be in accordance with Section 5

Concrete shall be class G

Stone masonry shall be as specified in [Clause 6.4.4.9](#).

Mortar for wet stone masonry shall be 1:3 cement : sand mix

6.5.3 Construction

Prior to the commencement of wet masonry construction all preliminary work including piling and earthworks shall be completed and approved by the Engineer or his representative.

Levelling concrete bedding (Concrete Class G) shall be placed to the lines and levels shown on the Drawings.

Wet stone masonry shall be constructed as specified in [Clause 6.4.4.9](#) except that stones shall be bedded in mortar as specified in [Clause 6.5.2](#)

6.6 MEASUREMENT AND PAYMENT

6.6.1 Earthworks

Common excavation, sandy soil fill, gravel bedding free draining gravel, , and rip rap shall be measured and paid in accordance with the respective Clauses in Section 3, Earthworks.

6.6.2 Concrete

All concrete work shall be measured and paid in accordance with the applicable Clause in Section 4, Concrete.

6.6.3 Reinforced Concrete Pile

Reinforced concrete piles shall be measured and paid in accordance with the applicable Clause in Section 5, Piling Works.

6.6.4 Timber Piling

Timber piling shall be measured and paid in accordance with the applicable Clause in Section 5, Piling Works.

6.6.5 Geotextile Cloth

Measurement shall be made of the area of geotextile cloth as specified in [Clause 6.4.4.7](#). to the lines and levels as shown on the Drawings. Measurement shall not be made of the area of laps or waste.

Payment will be made at the rate entered in the Bill of Quantities and shall include the entire cost of completing the work including material, labour, equipment, transportation and any other associated costs.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
3.2.6.8 3.3.4.7 3.4.4.7 4.2.6.8	Geotextile Cloth: including supply and placement	m ²

6.6.6 Wet Stone Masonry

Measurement will be made of the volume of wet stone masonry complete in place and accepted. Projections extending beyond the faces of the walls will not be included. In computing the quantity for payment, the dimensions used shall be those shown on the Drawings or ordered in writing by the Engineer.

Payment will be made at the unit rate entered in the Bill of Quantities which shall include full payment for providing all labour, materials including the concrete bedding (or mortar bedding as the case may be) and mortar, tools, equipment and any other works incidental to the completion of wet stone masonry.

The following pay items shall be measured and paid under this Clause:

Pay Item No.	Description	Unit of Measurement
2.3.3.14 3.3.3.13	Wet Stone Masonry Restoration: including supply and installation	m ³
3.1.2.5 3.2.6.9 4.1.2.5	Wet Stone Masonry	m ³
2.4.2.4	Wet Stone Masonry slope protection	m ³
3.3.4.8 3.4.4.8 4.2.6.9	Wet Stone Masonry (250 dia., t=350): including supply and installation	m ³

6.6.7 Joint Filler

Measurement will be made of the area in square metres of joint filler completed in accordance with the Drawings, the Specification and to the approval of the Engineer.

Payment will be made at the rate entered in the Bill of Quantities and shall include the entire cost of completing the work including materials, labour, equipment, transportation and any other associated costs.

The following pay items shall be measured and paid under this Clause:

Pay Item No.	Description	Unit of Measurement
2.1.2.10 3.1.2.6 4.1.2.6	Joint Filler, 10 mm thick	m ²

6.6.8 Weep Holes

Measurement will be made of the number of weep holes completed in accordance with the Drawings, the Specification and to the approval of the Engineer.

Payment will be made at the rate entered in the Bill of Quantities and shall include the entire cost of completing the work including materials (including pipe and filter cloth), labour, equipment, transportation and any other associated costs.

The following pay items shall be measured and paid under this Clause:

Pay Item No.	Description	Unit of Measurement
3.3.4.9 3.4.4.9	Weep Holes, PVC 100 dia x 1000 with filter cloth	No

SECTION 7. SEWERS AND DRAINAGE STRUCTURES

TABLE OF CONTENTS

	Page
7.1 GENERAL	7-1
7.2 SCOPE OF WORK	7-1
7.3 WORKS SPECIFIED ELSEWHERE	7-1
7.4 MATERIALS	7-1
7.4.1 Timber Piles	7-1
7.4.2 Concrete.....	7-1
7.4.3 Reinforcement	7-1
7.4.4 Earthworks Materials.....	7-2
7.4.5 Reinforced Concrete Pipes	7-2
7.4.6 Manhole Covers	7-3
7.4.7 PVC Pipes	7-4
7.5 CONSTRUCTION	7-4
7.5.1 Reinforced Concrete Sewer Pipes.....	7-4
7.5.2 Manholes and Inlet Pits.....	7-4
7.5.3 Outlet Structures	7-5
7.6 INSPECTION, TESTING AND CLEANING OF SEWERS.....	7-5
7.6.1 General.....	7-5
7.6.2 Scope of Inspection and Testing	7-6
7.6.3 Visual Inspection	7-6
7.6.4 Leakage Test.....	7-6
7.6.5 Cleaning and Inspection of Sewers	7-6
7.7 MEASUREMENT AND PAYMENT	7-6
7.7.1 Preparatory Works	7-6
7.7.2 Earthworks.....	7-6
7.7.3 Concrete.....	7-6
7.7.4 Timber Piling	7-7
7.7.5 Precast Reinforced Concrete Pipes.....	7-7
7.7.6 Manhole and Inlet Pit Covers.....	7-9
7.7.7 Granolithic Topping	7-10

SECTION 7. SEWERS AND DRAINAGE STRUCTURES

7.1 GENERAL

This section covers the general and specific requirement for the construction of sewers and related works.

7.2 SCOPE OF WORK

The sewer work to be completed by the Contractor shall consist of the following:

- (a) Construction of complete sewer systems for the areas of Thanh Da, Ben Me Coc (1) and Ben Me Coc (2).

The work for each of the above independent areas shall consist of the furnishing and construction of reinforced concrete sewer pipelines, reinforced concrete manholes, reinforced concrete inlet pits, reinforced concrete outlet structures, flap gates and the connection of existing sewer lines to the new systems. All work shall be furnished and installed to the lines, levels and grades as shown on the Drawings or directed by the Engineer.

- (b) Construction of sewer lines within the Thanh Da and Ben Me Coc pumping stations consisting of the furnishing and construction of reinforced concrete sewer pipelines and reinforced concrete manholes with covers. All work shall be furnished and installed to the lines, levels and grades as shown on the Drawings or directed by the Engineer.

7.3 WORKS SPECIFIED ELSEWHERE

Care of Water shall be in accordance with Section 2

Demolition shall be in accordance with Section 2

Earthworks shall be in accordance with Section 3

Concrete work shall be in accordance with Section 4

Timber Piling shall be in accordance with Clause 5.3 of Section 5

Fabricated steel manhole covers are specified in Section 13

Flap gates are specified in Section 12

7.4 MATERIALS

7.4.1 Timber Piles

Timber piles shall be in accordance with Clause 5.3.2 of Section 5

7.4.2 Concrete

Cast in situ reinforced concrete shall be concrete class E as specified in Section 4.

Plain concrete base and all other plain concrete shall be concrete class E as specified in Section 4.

7.4.3 Reinforcement

Reinforcement shall be deformed bars of the sizes shown on the Drawings.

7.4.4 Earthworks Materials

Earth fill, sandy soil fill and sand bedding shall be in accordance with Clause 3.3.2 of Section 3, Earthworks.

7.4.5 Reinforced Concrete Pipes

Reinforced concrete pipes shall be of spigot and socket type Class 1 or Class 2 as shown on the Drawings complying with the requirements of JIS A 5372.

Concrete and reinforcement shall comply with the requirements of Section 4.

Dimensional tolerances shall be in accordance with Annex 2, Table 6 of JIS A 5372.

Permeability shall be in accordance with Clause 5.1 of JIS A 5372.

Strength (cracking and crushing loads) shall meet the requirements of Annex 2, Table 3 of JIS A 5372.

Testing for compliance with the requirements for dimensional tolerance, permeability and strength shall be in accordance with the methods and limits stated in Annex 2 of JIS A 5372. Prior to the procurement of pipes the Contractor shall submit for the Engineer's approval, a quality assurance programme for pipe quality which will include testing of pipes (including destructive testing). The cost of the quality assurance programme including the cost of testing shall be borne by the Contractor. Pipes which have not been manufactured under a quality assurance programme approved by the Engineer shall be subject to rejection.

Pipes in a batch shall be considered as meeting the strength test requirements when all test specimens conform to the test requirements. Should any of the test specimens fail to meet the test requirement the Contractor shall be allowed a retest on two additional specimens for each specimen that failed and the pipes shall be acceptable only when all of the retest specimens meet the strength requirements.

The following information shall be clearly marked on each section of pipe.

- Pipe class and standard of manufacture
- Date of manufacture
- Name or trade mark of the manufacture
- Where tests have been successfully carried out on representative samples from the batch in which the unit was made

The quality of materials, the process of manufacture and the finished pipe shall be subject to inspection by and approval of the Engineer or his representative. Pipes shall be subject to rejection on account of failure to conform to any of the specified requirements. Pipes may be rejected because of any of the following:

- Fractures or cracks passing through the wall, except for a single end crack that do not exceed the depth of the joint.
- Defects that indicate imperfect proportioning mixture and moulding.
- Surface defects indicating honeycombed or open texture.
- Damaged ends where such damage would prevent the making of a satisfactory joint.

Pipes may be repaired, if necessary, because of occasional imperfections in manufacture or accidental damage during handling and will be acceptable if, in the opinion of the Engineer, the repairs are sound and properly finished and cured and the repaired pipes conform to the requirements of the specification.

Joint rings for spigot and socket pipes shall be manufactured from ethylene propylene rubber (EPM or EPDM) or styrene butadiene rubber (SBR) or natural rubber (NR) and shall comply with the requirements of BS 2494. They shall be suitable for use in sewerage pipelines at an ambient temperature of 30° C and shall be of size and shape that, when joined, they will provide a watertight seal.

7.4.6 Manhole Covers

Manhole covers shall be of the following types:

TYPE	DESCRIPTION	DIMENSIONS Lid Dimensions (Opening Dimensions)	APPLICATION
Type A	1 No. cast iron, 30-ton design load cover comprising a cast iron inner frame and circular removable lid and an outer frame consisting of precast concrete and fabricated, galvanized steel	900 x 900 (800 x 800)	Manholes in roadway
Type C	1 No. 30-ton design load fabricated, galvanized steel grid cover and an outer frame consisting of precast concrete and fabricated, galvanized steel	900 x 900 (800 x 800)	Manholes in roadway at designated locations in Thanh Da Area
Type D	1 No. 30-ton design load precast concrete cover with fabricated, galvanized steel surround and an outer frame consisting of precast concrete and fabricated, galvanized steel. A precast concrete water trap unit and an inlet grid shall be included with the cover.	900 x 900 (800 x 800)	Inlet Pits

All manhole covers and their respective frames shall be made in accordance with the Drawings, the directions of the Engineer and the Specification.

Cast iron components shall comply with the requirement of the Ho Chi Minh City Urban Drainage Company.

Fabricated steel components shall be galvanized and shall comply with the requirements of Section 13, Minor Metalwork

Precast concrete elements, including precast concrete inlet pit covers and water trap components shall comply with the requirements of Section 4.

Galvanized steel inlet grids shall comply with the requirements of Section 13, Minor Metalwork.

7.4.7 PVC Pipes

PVC pipes and fittings shall comply with the requirements of the following standards:

JIS K 6739 Unplasticized Polyvinyl Chloride pipe fittings for drain

JIS K 6741 Unplasticized Polyvinyl Chloride (uPVC) pipes.

7.5 CONSTRUCTION

7.5.1 Reinforced Concrete Sewer Pipes

Preparatory works, excavation, timber piling, bed preparation and backfilling shall be carried out in accordance with the referenced specifications in Clause 7.3.

Following completion and approval of timber piling, sewer pipes shall be accurately set in place to the required lines, grades and levels on timber or metal supports, jointing of pipes made followed by the placement of levelling concrete (Class G) to the profile shown on the Drawings.

Following sufficient curing of the lean concrete, sand backfill material shall be carefully placed and compacted in layers not exceeding 150 mm thickness.

The sand bedding material shall preferably be compacted by means of a vibrating plate type compactor using at least one pass per layer. Should hand tamping be allowed by the Engineer the Contractor shall demonstrate by means of in site test to the approval of the Engineer that his proposed method of compaction will achieve a minimum of 90% of the maximum dry density as determined by the Density Test (AASHTO T 99) or equivalent.

Care should be taken that the backfill material is well rammed into the cavities under the two lower quadrants of the pipe and that it is brought up simultaneously and evenly on both sides of the pipe. Sand backfill shall be placed and compacted up to a minimum of 200 mm above the crown of the pipe as shown on the Drawings.

All reinforced concrete sewer pipes shall be laid to the lines and levels as shown on the Drawings or as directed by the Engineer. Laying of pipes shall start from the downstream end unless otherwise agreed to by the Engineer. Pipes shall be laid to a tolerance of + or - 15 mm from the given grade line of the invert and without low points.

7.5.2 Manholes and Inlet Pits

Preparatory works, excavation, timber piling, bed preparation and backfilling shall be carried out in accordance with the referenced specifications in Clause 7.3.

The connecting pipe between inlet pit and manhole shall be constructed in the manner described in Clause 7.5.1.

Manholes and inlet pits shall be constructed in the locations and to the lines and levels shown on the Drawings or as directed by the Engineer. Care shall be taken to ensure a complete seal of the cast-in-situ concrete of the manhole and inlet pit with the precast concrete pipe.

Benching consisting of plain concrete (Concrete Class F) shall be placed in the bottom of manhole structures as shown on the Drawings. A 20 mm thick granolithic topping shall be provided to the surface of the concrete benching. Granolithic coating shall consist of cement : granite mix approximately 1: 2 by weight. The granite chips shall be hard, non-weathered granite, free of clay or other deleterious matter of maximum size 6 mm. Prior to application the benching surface shall be wire brushed to remove all laitance and loose material and the surface thoroughly wetted. The granolithic topping shall be steel trowel finished to produce a smooth surface and shall provide a uniformly graded channel through the manhole from inlet to outlet.

All manholes and inlet pits shall be constructed such that they are watertight.

Frames for covers for manholes and inlet pits shall be solidly bedded in 1:3 sand cement mortar so that the covers, when in position, are fair and even with the adjacent finished surfaces.

Water traps and inlet grids in inlet pits shall be constructed as shown on the Drawings. Care shall be taken to ensure that the weir is horizontal and higher than the underside of the baffle to ensure gas from the sewer cannot escape from the inlet pit. Separate payment shall not be made for water traps and inlet grids and the cost of supplying and installing these items shall be included in the price for manhole covers.

7.5.3 Outlet Structures

Preparatory works, excavation, timber piling, bed preparation and backfilling shall be carried out in accordance with the referenced specifications in Clause 6.3.

Outlet structures shall be constructed in the locations and to the lines and levels shown on the Drawings or as directed by the Engineer.

Flap gates shall be fabricated and installed in accordance with the requirements of [Clause 13.10 of Section 13](#), Mechanical Works.

7.6 INSPECTION, TESTING AND CLEANING OF SEWERS

7.6.1 General

All sewers, including manholes shall be tested, inspected and cleaned in accordance with this [Clause 7.6](#).

Should the visual inspection or tests fail, the Contractor shall, at his own cost, replace defective pipes, make good any leaking joint, or otherwise re-execute defective work, after which cleaning, inspection and testing shall be repeated.

Only sewers which have undergone inspection and testing and have received the Engineer's approval shall be approved for payment.

The Contractor shall provide all equipment and personnel for carrying out tests and assisting the Engineer or his Representative in performing inspections.

All costs incurred by the Contractor in complying with the requirements of this [Clause 7.6](#) shall be deemed to be included in the unit rates for the respective sewer elements.

7.6.2 Scope of Inspection and Testing

Testing and inspection shall be performed in accordance with the following schedule:

Sewer Type Or Element	Size	Test(s) and Inspections to be carried out
RC Pipe	All	Visual Inspection Leakage Test
Manholes	All	Visual Inspection Leakage Test

7.6.3 Visual Inspection

All joints, including joints between pipes and manholes, shall be subject to inspection by the Engineer or his Representative.

7.6.4 Leakage Test

After completion of backfilling and restoration of normal sub-soil conditions, all sewers and manholes shall be inspected for infiltration. Acceptance criterion for this test is infiltration not exceeding 0.5 litre per linear metre per metre of nominal bore (for circular sections) or 0.5 litre per linear metre per metre width (for manholes).

7.6.5 Cleaning and Inspection of Sewers

The Contractor shall at all times take reasonable measures to prevent the ingress of solid matter into sewers. Such steps shall include, but not be limited to the provision of temporary plugs where appropriate.

Following completion of sewers and manholes, the interior of pipelines shall be cleaned of all silt and debris and inspected by the Engineer.

Pipelines of 600 mm diameter or smaller shall be demonstrated to be clear or all obstructions by drawing a sphere 25 mm smaller than the internal diameter of the pipe throughout the length of the section under inspection.

Should the Contractor fail to keep an inspected sewer satisfactorily isolated after it has been inspected and shown to be free of obstruction, he shall repeat cleaning and demonstrate to the Engineer's satisfaction that it is clear of obstruction, all at his expense, shortly before taking over.

7.7 MEASUREMENT AND PAYMENT

7.7.1 Preparatory Works

The cost of all preparatory works is included in payment items in Section 2.

7.7.2 Earthworks

Common excavation, sandy soil fill, shall be measured and paid in accordance with the respective Clauses in Section 3, Earthworks.

7.7.3 Concrete

Concrete shall be measured and paid in accordance with the applicable Clause in Section 4, Concrete.

7.7.4 Timber Piling

Timber piling shall be measured and paid in accordance with Clause 5.4.4 of Section 5.

7.7.5 Precast Reinforced Concrete Pipes

Measurement shall be made of the length of the various diameters of precast reinforced pipes completed, in place and approved by the Engineer.

Payment shall be made at the respective rates per metre entered in the Bill of Quantities which shall include full payment for providing all labour, materials, tools, equipment and any other works incidental to the completion of precast reinforced concrete drainage pipes.

The following pay items shall be measured and paid under this Clause:

Pay Item No.	Description	Unit of Measurement
2.2.3.3	Precast Reinforced Concrete Pipe (800 dia): including supply and laying	m
2.2.3.4	Precast Reinforced Concrete Pipe (1000 dia): including supply and laying	m
2.2.3.5	Precast Reinforced Concrete Pipe (1200 dia): including supply and laying	m
2.2.5.9	Connection Pipe (Ø 400): including supply and installation	m
2.2.5.10	Connection Pipe (Ø 600): including supply and installation	m
2.2.5.11	Precast Reinforced Concrete Pipe (800 dia): including supply and laying	m
2.2.5.12	Precast Reinforced Concrete Pipe (1000 dia): including supply and laying	m
2.3.3.8	Precast Reinforced Concrete Pipe (1000 dia): including supply and laying	m
2.3.3.9	Precast Reinforced Concrete Pipe (1200 dia): including supply and laying	m
3.2.3.3	Precast Reinforced Concrete Pipe (400 dia): including supply and laying	m
3.2.3.4	Precast Reinforced Concrete Pipe (600 dia): including supply and laying	m
3.2.3.5	Precast Reinforced Concrete Pipe (900 dia): including supply and laying	m
3.2.3.6	Precast Reinforced Concrete Pipe (1000 dia): including supply and laying	m

3.2.3.7	Precast Reinforced Concrete Pipe (1200 dia): including supply and laying	m
3.2.3.8	Precast Reinforced Concrete Pipe (1500 dia): including supply and laying	m
3.2.3.9	Precast Reinforced Concrete Pipe (1800 dia): including supply and laying	m
3.2.5.8	Connection Pipe (Ø 400): including supply and installation	m
3.2.5.9	Connection Pipe (Ø 600): including supply and installation	m
3.2.5.10	Connection Pipe (Ø 1000): including supply and installation	m
3.3.3.8	Precast Reinforced Concrete Pipe (1200 dia): including supply and laying	m
3.4.3.7	Precast Reinforced Concrete Pipe (1200 dia): including supply and laying	m
3.4.3.8	Precast Reinforced Concrete Pipe (1500 dia): including supply and laying	m
4.2.3.3	Precast Reinforced Concrete Pipe (400 dia): including supply and laying	m
4.2.3.4	Precast Reinforced Concrete Pipe (800 dia): including supply and laying	m
4.2.3.5	Precast Reinforced Concrete Pipe (900 dia): including supply and laying	m
4.2.3.6	Precast Reinforced Concrete Pipe (1000 dia): including supply and laying	m
4.2.3.7	Precast Reinforced Concrete Pipe (1200 dia): including supply and laying	m
4.2.3.8	Precast Reinforced Concrete Pipe (1500 dia): including supply and laying	m
4.2.3.9	Precast Reinforced Concrete Pipe (1800 dia): including supply and laying	m
4.2.5.8	Connection Pipe (Ø 400): including supply and installation	m
4.2.5.9	Connection Pipe (Ø 600): including supply and installation	m

7.7.6 Manhole and Inlet Pit Covers

Measurement shall be made of the number manhole or inlet pit covers completed, installed and approved by the Engineer.

Payment shall be made at the rate entered in the Bill of Quantities which shall be full compensation for the cost of all materials, labour, equipment and incidental costs (including the cost of the frame and its bedding), for completing the manhole covers in accordance with the Drawings and the Specification.

Separate payment shall not be made for the supply and installation of precast concrete water trap elements and inlet grid in inlet pits and their cost shall be deemed to be included in the cost of manhole covers for inlet pits.

The following pay item shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.2.4.8	Cast Iron Manhole Cover (Type A): including supply and installation	set
2.2.4.9	Grid-Type Manhole Cover (Type C): including supply and installation	set
2.2.5.7	Reinforced Concrete Cover (Type D): supply and installation	set
2.2.5.8	Reinforced Concrete Cover (Type E): supply and installation	set
2.3.3.10	Cast Iron Manhole Cover (Type A): including supply and installation.	set
3.2.4.8	Cast Iron Manhole Cover (Type A): supply and installation	set
3.2.4.9	Cast Iron Manhole Cover (Type C): supply and installation	set
3.2.5.7	Precast Reinforced Concrete Cover (Type D): including supply and placement	set
3.3.3.9	Cast Iron Manhole Cover (Type A): including supply and installation.	set
4.2.4.8	Cast Iron Manhole Cover (Type C): including supply and installation	Set
4.2.4.9	Cast Iron Manhole Cover (Type A): including supply and installation	Set
4.2.5.7	Precast Reinforced Concrete Cover (Type D): including supply and installation	Set

7.7.7 Granolithic Topping

Measurement shall be made of the plan area of granolithic topping in manholes completed and approved by the Engineer.

Payment shall be made at the rate entered in the Bill of Quantities which shall be full compensation for the cost of all materials, labour, equipment and incidental costs, for completing the granolithic topping in accordance with the Drawings and the Specification.

The following pay items shall be measured and paid under this Clause:

Pay Item No.	Description	Unit of Measurement
2.2.4.6 3.2.4.6 4.2.4.6	Granolithic Topping: including supply and placement.	m ²

SECTION 8. ROADS AND PAVEMENTS

TABLE OF CONTENTS

	Page
8.1 GENERAL	8-1
8.2 EARTHWORKS FOR ROADS	8-1
8.3 PREPARATION OF SUBGRADE	8-1
8.3.1 General	8-1
8.3.2 Testing and Preparation	8-1
8.4 SUB-BASE COURSE	8-2
8.4.1 Materials.....	8-2
8.4.2 Placing and Spreading	8-3
8.4.3 Compacting the Sub-base	8-3
8.4.4 Tolerances	8-3
8.5 BASE COURSE.....	8-4
8.5.1 Materials.....	8-4
8.5.2 Spreading and Compacting	8-5
8.5.3 Tolerances	8-5
8.6 BITUMINOUS PRIME COAT.....	8-6
8.6.1 General	8-6
8.6.2 Material	8-6
8.6.3 Surface Preparation before Prime Coating	8-6
8.6.4 Application of Prime Coat	8-6
8.7 TACK COAT	8-7
8.7.1 General	8-7
8.7.2 Materials.....	8-7
8.7.3 Construction Method	8-7
8.7.3.1 Equipment.....	8-7
8.7.3.2 Surface Preparation	8-7
8.7.3.3 Application of Tack Coat	8-7
8.8 ASPHALT BINDER AND WEARING COURSES.....	8-8
8.8.1 General	8-8
8.8.2 Materials for Asphaltic Mixtures.....	8-8
8.8.2.1 Composition of mixtures.....	8-8
8.8.2.2 Coarse aggregate	8-9
8.8.2.3 Fine aggregate	8-9
8.8.2.4 Filler	8-10

8.8.2.5 Asphalt cement	8-10
8.8.3 Preparation of Sub-base	8-10
8.8.4 Preparation of the Bituminous Mixture	8-10
8.8.5 Transportation and Delivery of the Mixture	8-11
8.8.6 Spreading	8-11
8.8.7 Compaction of the Mixture.....	8-12
8.8.8 Trimming and Clean-up	8-13
8.8.9 Application of Asphalt Wearing Course.....	8-13
8.8.10 Completion Test.....	8-14
8.9 CONCRETE PAVEMENT	8-14
8.9.1 General.....	8-14
8.9.2 Materials.....	8-14
8.9.3 Construction	8-14
8.10 MEASUREMENT AND PAYMENT	8-15
8.10.1 Subgrade Preparation	8-15
8.10.2 Sub-Base Course	8-15
8.10.3 Base Course	8-16
8.10.4 Asphalt Binder Course	8-16
8.10.5 Asphalt Wearing Course.....	8-16
8.10.6 Bituminous Prime Coat	8-17
8.10.7 Tack Coat	8-17
8.10.8 Concrete Pavement	8-18

SECTION 8. ROADS AND PAVEMENTS

8.1 GENERAL

This section covers the requirements for the construction of roadworks in Package B. Roadworks to be completed include the complete reconstruction of pavements in roadways in which sewers have been constructed in the Than Da, Ben Me Coc (1) and Ben Me Coc (2) areas, new road construction in the vicinity of pumping stations at Thanh Da and Ben Me Coc (1) and concrete paving all in the locations shown on the Drawings or directed by the Engineer.

All roadworks shall be constructed to the lines, grades and levels shown in the Drawings and in accordance with the directions of the Engineer.

8.2 EARTHWORKS FOR ROADS

All earthworks for road construction shall be carried out in accordance with the requirements of Section 3.

8.3 PREPARATION OF SUBGRADE

8.3.1 General

This Clause specifies the requirements for the preparation of the surface on which the sub-base for road construction or the base course for concrete paving is to be constructed.

8.3.2 Testing and Preparation

Before placing any sub-base or base course the sub-grade shall be prepared as follows.

- (a) All surfaces below carriageway, footways and hard shoulders shall, after reinstatement of any soft areas, be well cleaned and free from mud and slurry.
- (b) The surface if dry shall be watered and compacted by 4 passes of a smooth wheeled roller having load of 45 kN/m (45 kg/cm) width or 8/10 tonne tire roller.
- (c) The formation shall be regulated and trimmed to the road width as shown on the Drawings by using a motor grader.
- (d) The trimmed formation shall be rolled by 1 pass of a smooth wheeled roller having and load of 22kN/m (22 kg/cm) width or a vibratory roller having a static load of 8kN/m (8 kg per cm) width or vibratory plate compactor having a static pressure under base plate of not less than 14kPa

The sub-grade shall be in such a condition that it will carry 8 to 10 ton smooth wheel roller without any deformation and/or visible springing effect.

Any portion of the subgrade which shown deformation under the above loading shall be replaced with sub-base course material and re-rolled until no deformation occurs under rolling.

In confined areas, such as in trenches where road pavement is to be constructed, the Contractor may propose alternative, smaller, compaction or trimming equipment for the Engineer's approval provided that such equipment shall achieve the same degree of preparation.

8.4 SUB-BASE COURSE

This item comprises the supply and placement of granular sub-base material in accordance with the following:

8.4.1 Materials

Aggregates for sub-base shall consist of hard, durable particles or fragments of crushed stone, crushed slag, or crushed or natural gravel and filler of natural or crushed sand or other finely divided mineral matters. The composite material shall be free from organic matters and lumps or balls of clay, and shall be of such nature that can be compacted readily to form a firm, stable sub-base.

Materials for sub-base shall conform to the requirements for sub-base as specified below or directed by the Engineer.

Grading Requirements of Sub-Base Course

AASHTO Designation No.	Percentage Passing by Weight
2 inch	100
1 1/2 inch	70 - 100
1 inch	55 - 85
3/4 inch	50 - 80
3/8 inch	40 - 70
No. 4 (5 mm)	30 - 60
No. 10 (2 mm)	20 - 50
No. 40 (0.4 mm)	10 - 30
No. 200 (0.074 mm)	5 - 15

The percentages passing the various sieves are subject to appropriate correction by the Engineer when aggregates of varying specific gravities are used.

Other Requirements of Sub-Base Course

Liquid Limit (AASHTO T89)	25 max
Plasticity Index (AASHTO T91)	6 max.
Sand Equivalent (AASHTO T176) :	25 min.
Loss by Abrasion of particles retained on ASTM No. 12 sieve (AASHTO T96) :	40% max.
Soaked CBR at the required density (100% of the maximum dry density according to AASHTO T180) :	60% max.

8.4.2 Placing and Spreading

- (a) Sub-base material shall be placed as a uniform mixture on the prepared subgrade in a quantity which will provide the required compacted thickness. When more than one layer of sub-base material is required, each layer shall be shaped and compacted before the succeeding layer is placed. When uniformly mixed, the sub-base material shall be spread to the required thickness as shown on the Drawings or as directed by the Engineer.
- (b) Sub-base material shall be distributed in a continuous uniform layer or windrow of such size that, when spread and compacted, the finished layer shall be equal to or slightly greater than the nominal thickness of sub-base shown on the Drawings.
- (c) When hauling is done over previously placed sub-base material, hauling equipment shall be dispersed uniformly over the entire surface of the previously constructed layer to minimise rutting or uneven compaction.
- (d) Where the required thickness is 150 mm or less, the material may be spread and compacted in one layer. Where the required thickness is more than 150 mm, sub-base material shall be spread and compacted in two or more layers of approximately equal thickness, and the maximum compacted thickness of any one layer shall not exceed 150 mm. All subsequent layers shall be spread and compacted in a similar manner.
- (e) The moisture content of sub-base material shall be adjusted before compaction by watering with approved sprinklers mounted on trucks or by drying out, as required, in order to obtain the required compaction.

8.4.3 Compacting the Sub-base

- (a) Immediately after each layer of the sub-base has been spread, the full width shall be compacted by approved compaction equipment. Compaction shall progress gradually from the sides to the centre, parallel to the centreline of the road, and shall continue until the whole surface has been compacted. All irregularities or depressions that develop shall be corrected by loosening material at these places and adding or removing material until the surface is smooth and uniform. At all places not accessible to the compaction equipment, the sub-base material shall be compacted thoroughly with approved tampers or compactors.
- (b) Each layer of the sub-base shall be compacted to a density of at least one hundred percent (100%) of the maximum dry density determined in accordance with AASHTO T180, Method D. In-situ density of the compacted sub-base shall be measured in accordance with AASHTO T191 at the location directed by the Engineer.

8.4.4 Tolerances

Tolerances for the sub-base course shall be as specified in the following table:

Tolerances for Sub-Base Course:

Feature	Tolerance
Permitted variation from thickness of layer	± 20 mm
Permitted variation from design level of surface	+ 10 mm - 20 mm
Permitted surface irregularity measured by 3-m straightedge	20 mm
Permitted variation from design crossfall or camber	± 0.3%
Permitted variation from design longitudinal grade over 25 m in length	± 0.1%

8.5 BASE COURSE

This item comprises the supply and placement of granular base course material in accordance with the following:

8.5.1 Materials

Aggregate for base course shall consist of hard, durable particles or fragments of stone or gravel crushed to the size and of the quality requirements of this Clause. It shall be clean and free from organic matters, lumps or balls of clay and other deleterious substances. The material shall be of such nature that it can be compacted readily to form a firm, stable base.

All base course aggregate shall conform to the following physical requirements:

Physical Requirements of Base Course Material

(i) Toughness (ASTM D3)	6 min.
(ii) Loss by Sodium Sulphate Soundness Test (AASHTO T104)	10% max.
(iii) Loss by Magnesium Sulphate Soundness Test (AASHTO T104)	12% max.
(iv) Loss by Abrasion after 100 revolutions (AASHTO T96)	10% max.
(v) Loss by Abrasion after 500 revolutions (AASHTO T96)	40% max.
(vi) Thin and elongated pieces, by weight (pieces larger 1 inch., with thickness less than 1/5 of length)	5% max.
(vii) Soft fragments (AASHTO T189)	5% max.
(viii) Clay lumps (AASHTO T112)	0.25% max.

Aggregate for base course shall conform to the requirements as specified herein. Crushed gravel or rock fragments for base course shall consist of the product obtained by crushing gravel or rock, which, if directed by the Engineer, has first been screened in such a manner that when the aggregate is produced from gravel, not less than eighty percent (80%) by weight of the coarse aggregate shall be of particles having at least one fractured face.

Base course material shall be crushed rock or crushed gravel conforming to the following grading requirements:

Grading Requirements for Base Course

AASHTO Designation No.	Percentage Passing by Weight
2 1/2 inch	100
2 inch	90 - 100
1 1/2 inch	35 - 70
1 inch	0 - 15
1/2 inch	0 - 5

Blending material shall be quarry screenings or natural sand of suitable binding quality as approved by the Engineer. Blending material shall be free from foreign or organic matter, dirt, shale and clay lumps or other deleterious matter and shall conform to the following requirements:

Grading Requirements of Blending Materials for Base Course

AASHTO Designation No.	Percentage Passing by Weight
3/8 inch	100
No. 4 (5 mm)	85 - 100
No. 100 (0.15 mm)	10 - 30
Plasticity Index (AASHTO T90)	6 max.
Sand Equivalent (AASHTO T176)	30 min.

The percentage of crushed aggregate composed of elements having at least one fractured face shall be at least eighty percent (80%) by weight of the material retained on sieve No. 4.

8.5.2 Spreading and Compacting

The course and fine components of the base course material shall be mixed in proportions as directed by the Engineer

Base course material shall be spread and compacted in the same manner as specified above for Sub-base Course.

8.5.3 Tolerances

Tolerance for the base course shall be as specified in the following table.

Tolerances for Base Course

Feature	Tolerance
Permitted variation from thickness of layer	± 10 mm
Permitted variation from design level of surface	+ 5 mm -10 mm
Permitted surface irregularity measured by 3-m straightedge	5 mm
Permitted variation from design crossfall or camber	± 0.2%
Permitted variation from design longitudinal grade over 25 m in length	± 0.1%

8.6 BITUMINOUS PRIME COAT

8.6.1 General

This work shall consist of furnishing and applying bituminous material to the completed and approved base course or to other areas shown on the Drawings, in accordance with this Clause and/or as directed by the Engineer.

8.6.2 Material

Asphalt for the prime coat shall be either AC-20 grade asphalt cement (which is approximately equivalent to 60/70 Pen.) diluted with kerosene or cutback asphalt MC-70 conforming to the requirements of AASHTO M82 or equivalent.

8.6.3 Surface Preparation before Prime Coating

Immediately before applying the asphalt material all loose dirt and other objectionable material shall be removed from the surface with a power broom and blower as required. Such cleaning shall continue until the entire surface shows a pattern of exposed large particles well wedged together and free from dust. When so ordered by the Engineer a light application of water shall be made just before the application of asphaltic material. No application shall be made during wet weather.

8.6.4 Application of Prime Coat

- (a) Asphaltic materials shall be applied by means of a pressure distributor or other equipment approved by the Engineer, at a temperature between 40.5°C and 85°C. in accordance with the following table:

Spraying Temperatures of Prime Coat

Type of Material	Temperature Range
Cutback, 50 pph kerosene (MC-70 grade cutback)	70 ± 10 deg. C
Cutback, 75 pph kerosene (MC-30 grade cutback)	45 ± 10 deg. C
Cutback, 100 pph kerosene	30 ± 10 deg. C
Cutback, more than 100 pph kerosene	Not Heated

- (b) The rate of application of the liquid asphalt shall be from 0.8 to 2.5 litre per square meter, but the exact rate shall be as directed by the Engineer.
- (c) The prime coat shall be left undisturbed for at least 24 hours and shall not be opened to traffic until the prime coat has penetrated and cured sufficiently so that it will not be picked up by the wheels of passing vehicles. The primed area shall be maintained until the next course is applied. Care shall be taken that the application of bituminous material is not in excess of the specified amount; any excess shall be blotted with sand or removed as directed.
- (d) All areas inaccessible to the distributor shall be sprayed manually using the device for hand spraying from the distributor.
- (e) Structures and trees adjacent to the area being treated shall be protected to prevent their being spattered or marred.

8.7 TACK COAT

8.7.1 General

This work shall consist of furnishing and applying asphaltic material to an existing pavement, in accordance with the specification and to the width and area required by the Engineer prior to construction of so surfacing, so as to provide a bond between the binder course and the surface course or other layers as directed by the Engineer.

8.7.2 Materials

Material for tack coat shall be either AC-20 grade asphalt cement (which is approximately equivalent to 60/70 Pen.) diluted with between 25 and 30 parts per hundred of kerosene per hundred parts of asphalt cement by volume, or slow setting emulsified asphalt conforming to the requirements of AASHTO M 140 or M 208. The Engineer may permit or require dilution of the emulsion with 1 part clean water per 1 part of emulsion.

8.7.3 Construction Method

8.7.3.1 Equipment

The equipment shall be as for bituminous prime coat.

8.7.3.2 Surface Preparation

When, in the opinion of the Engineer, it is necessary, the full width of surface to be treated shall be cleaned with a power broom or power blower to remove loose dirt and other objectionable material. The surface to be treated shall be dry.

8.7.3.3 Application of Tack Coat

Immediately after cleaning the surface, asphaltic material shall be applied by means of a distributor at the rates directed by the Engineer, but not to exceed 0.45 litre per square meter and at the temperature within the range specified in the following table:

Spraying Temperatures of Tack Coat

Type of Material	Temperature Range
Cutback, 50 pph kerosene	110 ± 10 deg. C
Emulsified Asphalt or Diluted Emulsified Asphalt	20 to 70 deg. C

The tack coat shall be applied only when the surface is dry except with the permission of the Engineer.

The surfaces of structures and trees adjacent to the areas being treated shall be protected in such a manner as to prevent their being spattered or marred. No asphaltic material shall be discharged into a borrow pit or gutter. The Engineer may direct that emulsions shall be diluted with clean water in order to control the rate of spread. This shall be done at the Contractor's expense.

The surface course shall not be placed over the tack coat until it is in a proper condition of tackiness to receive it. Tack coat shall be applied only so far in advance of surface course placement as is necessary to obtain this proper condition of tackiness. Until the surface course is placed, the Contractor shall protect the tack coat from damage.

8.8 ASPHALT BINDER AND WEARING COURSES

8.8.1 General

The work shall consist of providing dense durable binder course and wearing course hot asphaltic mixtures composed of aggregate and bituminous materials mixed in a central plant, and of spreading and compacting the mixtures in accordance with this Specification and in conformity with the lines, grades and cross sections shown on the Drawings or as required by the Engineer.

8.8.2 Materials for Asphaltic Mixtures

8.8.2.1 Composition of mixtures

The bituminous material shall be composed of a mixture of aggregate, filler and hydrated lime-if required, and asphalt cement. The several aggregate fractions shall be size, uniformly graded and combined in such proportions that the resulting composite blend meets the job-mix formula and the following index of retained strength as determined in accordance with AASHTO T 245

Requirements for Binder and Wearing Courses

Stability (kg)	900
Flow (mm)	2.5 – 4.0
Void in total mix (%)	3 - 5
Void Filled with Asphalt (%)	75 - 85

In calculating the void characteristics of the mixture the Contractor shall allow for the asphalt absorbed by the aggregate and use the effective specific gravity of aggregate and the maximum specific gravity of the loose paving mixture (AASHTO T 209)

The several aggregate and filler fractions for the mixture shall be sized, graded, and combined in such proportions that the resulting composite blend meets one of the grading requirements in the following table:

Aggregate Grading Requirements

Sieve Designation (mm)	Percentage Passing by Weight	
	For Asphalt Binder Course	For Asphalt Wearing Course
50	-	-
37.5	-	-
25	100	-
19	95-100	100
12.5	68-86	95-100
9.5	56-78	74-92
4.75	38-60	48-70
2.36	27-47	33-53
1.16	18-37	22-40
0.600	11-28	15-30
0.300	6-20	10-20
0.075	0-8	4-9

The Contractor shall submit a proposed job-mix formula in writing, for use by the Engineer in setting the job-mix to be used with the proposed materials. The formula submitted shall propose definite single values for:

- The percentage of aggregate passing each specified sieve.
- The percentage of bituminous material to be added, on the total aggregate basis.
- The temperature of the mixture leaving the mixer.
- The temperature of the mixture delivered on the road.
- The grade of bituminous material.

Values shall be proposed within the limits specified for the particular type of bituminous concrete called for. The Engineer will determine a job-mix formula with single values for the above- mentioned and so notify the Contractor in writing.

The mixture furnished by the Contractor shall conform to this job- mix formula, within the following range of tolerances and within the grading ranges shown in the following table:

Tolerances for Mixture

Aggregate passing the 4.75 mm and large sieve	± 7 percent
Aggregate passing the 2.36 mm through the 0.150 mm sieve	± 4 percent
Aggregate passing the 0.075 mm sieve	± 2 percent
Bituminous material	± 0.4 percent
Temperature leaving the mixer	± 6 deg. C
Temperature delivered on the road	± 6 deg. C

When unsatisfactory results make it necessary, the Engineer may establish a new job-mix formula and notify the Contractor in writing. Should a change in sources of material be proposed, a new job-mix formula will be established before the new material is used.

The plant mixed material will be tested after blending or mixing at the plant or prior to final incorporation in the work.

8.8.2.2 Coarse aggregate

The coarse aggregate (retained on the 2.36 mm sieve) shall consist of clean tough, durable fragments free from an excess of flat, elongated, soft or disintegrated pieces and free from stone coated with dirt or other objectionable material. The percentage of wear when tested according to AASHTO T 96 , shall be as follows:

For use in asphalt binder and wearing course – not more than 40

The sodium sulphate soundness loss shall not exceed 9 percent and the magnesium sulphate soundness loss shall not exceed 12 percent. When crushed gravel is used, not less than 50 percent of the particles by weight retained on the 4.75 mm sieve shall have at least one fractured face.

8.8.2.3 Fine aggregate

The fine aggregate (passing a 2.36 mm sieve), shall have General Characteristics and Soundness in accordance with AASHTO M 29.

8.8.2.4 Filler

Mineral filler, when required, shall consist of limestone dust, Portland cement or other non plastic mineral matter from sources approved by the Engineer. Mineral filler shall be dry, free flowing, free from lumps and other objectionable material and when tested by means of laboratory sieve, shall meet the following gradation requirement:

<i>Sieve Designation (mm)</i>	<i>Percentage Passing by Weight</i>
0.600	100
0.180	95 – 100
0.075	65 – 100

8.8.2.5 Asphalt cement

Asphalt cement shall be of penetration grade 60 – 80, and shall conform with the requirements of AASHTO M 20.

8.8.3 Preparation of Sub-base

The prime coat shall be applied in accordance with the Clause 8.6.

Twenty-four (24) to forty-eight (48) hours after application of the prime coat, when it has sufficiently dried, it shall be broomed. A limited amount of sand, as directed by the Engineer, may be sprinkled on the prime coat to make further work possible if it is necessary to perform further work without waiting for the prime coat to dry sufficiently. Excess sand shall be removed by brooming before spreading the binder course

8.8.4 Preparation of the Bituminous Mixture

- (a) Aggregates shall be dried and heated at the paving plant so that, when introduced into the mixer, the moisture content does not exceed 0.5%.
- (b) Water in aggregates shall be removed by heating to the extent that there is no subsequent foaming in the mixture before placing and spreading. Aggregates shall be heated to the temperature designated by the job formula with the specified job tolerance, with a maximum temperature and a rate of heating that will not cause permanent damage to the mixture.
- (c) Particular care shall be taken so that aggregates high in calcium or magnesium content are not damaged by overheating. The quantity of bituminous material for each batch or the calibrated amount for continuous mixer, as determined by the Engineer, shall be measured by weight and introduced into the mixer, at the specified temperature, using the lowest rate possible for adequate mixing and spreading.
- (d) For batch mixers, all mineral aggregates shall be placed in the mixer before the bituminous material is added. The exact temperature within the specified range shall be as directed by the Engineer.
- (e) Mixing shall continue for the time necessary to coat all particles uniformly, as directed by the Engineer. This time is dependent upon the mix design and type of mixing equipment used.

8.8.5 Transportation and Delivery of the Mixture

- (a) Trucks used for hauling bituminous mixtures shall have tight, clean and smooth metal beds. To prevent mixtures from adhering, beds shall be lightly coated with a minimum amount of paraffin oil, lime solution, or other approved material. Each truck shall have a suitable cover to protect the mixture from adverse weather and an insulated bed to maintain the mixture at the specified temperature.
- (b) The mixture shall generally be placed at a temperature of between 120°C to 150°C when asphalt cement is used. When the mixture is placed during warm weather and the Engineer has determined that satisfactory results can be obtained at a lower temperature, he may direct that the mixture be mixed and delivered at the lower temperature.
- (c) Loads shall not be dispatched from the mixer if it is expected that spreading and compaction of the mixture cannot be completed under conditions of adequate lighting.
- (d) Mixtures shall be delivered to the point of placement at a temperature within the tolerances required by the Job Mix Formula.

8.8.6 Spreading

- (a) Immediately before placing the bituminous mixture, the prime coat shall be cleaned using a power sweeper equipped with a blower, supplemented with hand brooms if necessary, or by other approved means.
- (b) The mixture shall be laid upon an approved surface which is thoroughly dry and in suitable condition, and only when weather conditions are fair unless otherwise directed by the Engineer.
- (c) Placing shall commence at points farthest from the mixing plant and progress continuously toward the plant, unless otherwise directed by the Engineer. Traffic shall not pass over the base course until it has been thoroughly compacted as specified, and allowed to cool to atmospheric temperature.
- (d) Upon arrival the mixture shall be dumped into an approved bituminous paver, immediately spread to the full width required, and struck off in a uniform layer at such thickness that, when work is completed, the layer will have the required thickness conforming to the specified grade and surface profile.
- (e) The bituminous paver shall be a self-contained, power propelled unit with an activated screed or strike-off assembly heated as necessary. The paver shall be capable of spreading and finishing courses of bituminous plant mix material of the specified thickness, smoothness and grade, and shall also be equipped with an automatic line and grade controlling device.
 - (i) The paver shall have a receiving hopper of sufficient capacity to permit a uniform spreading operation, and the hopper shall be equipped with a distribution system to place the mixture uniformly in front of the screed.
 - (ii) The screed or strike-off assembly shall effectively produce a finished surface of the required evenness and texture without tearing, shoving, or gouging.

- (iii) The paver shall be capable of operating at forward speeds consistent with the satisfactory laying of the mixture and the paver speed shall be regulated to eliminate pulling and tearing of bituminous material.
- (f) The mixture shall be placed in strips not less than 3 meters wide. To ensure proper drainage, spreading shall begin along the pavement centreline on a crowned section, or on the high side of a pavement with a one-way slope.
 - (i) After the first strips has been compacted, the second strip shall be placed, finished, and compacted in the same manner as the first strip. After the second strip has been placed and rolled, a 5-meter straightedge shall be placed across the longitudinal joint to determine if the surface conforms to the grade and contour requirement.
- (g) In areas where use of mechanical spreading and finishing equipment is impractical because of irregularities or unavoidable obstacles, the mixture may be hand-spread.

8.8.7 Compaction of the Mixture

- (a) After spreading, the mixture shall be thoroughly and uniformly compacted with power rollers. Sufficient rollers shall be furnished and operated to handle plant output.
- (b) Rolling shall begin as soon as the mixture can bear the roller without undue displacement or hair cracking, and shall start from the centre of the first strip and continue toward either edge. On subsequent strips, rolling shall start from the edge adjacent to the previously laid material and continue toward the opposite edge.
- (c) The speed of roller shall, at all times, be slow enough so as to avoid displacement of the hot mixture. Any displacement occurring as a result of reversing the direction of the roller, or from any other cause, shall be corrected at once by rakes and by applying fresh mixture where needed.
- (d) Rolling shall continue until all roller marks are eliminated, the surface is of uniform texture and true to grade and cross section, and the in-situ density is not less than ninety-eight percent (98%) of the specified laboratory density as obtained from laboratory compacted specimens of the same materials and same proportions used in the asphalt mixture as determined by AASHTO T166. The method of sampling the mixture and the compaction of specimens shall be in accordance with AASHTO T168 and AASTHO T245, respectively. Field density tests shall be made at least twice daily.
- (e) In areas not accessible to the roller the mixture shall be thoroughly compacted with hot mechanical tampers.
- (f) Any mixture which becomes loose and broken, contaminated with dirt, or in any way defective shall be removed and replaced with fresh hot mixture and immediately compacted to conform to the surrounding areas, all at Contractor's expense. Skin patching will not be permitted.

8.8.8 Trimming and Clean-up

- (a) Placing of the bituminous mixture shall be as continuous as possible. Rollers shall not pass over the unprotected and freshly laid mixture unless authorized by the Engineer.
- (b) Transverse joints shall be formed by cutting back on the previous run to expose the full depth of the course. When so directed by the Engineer, a brush coat of bituminous material shall be used on contact surfaces of transverse joints just before additional mixture is placed against the previously rolled material.
- (c) The exposed edges of the completed pavement shall be cut true to the required lines. Material trimmed from the edges and any other discarded or rejected bituminous mixture shall be removed from the roadway and disposed of in an approved manner.

8.8.9 Application of Asphalt Wearing Course

Prior to placing the asphalt wearing course a tack coat shall be applied in accordance with Clause 8.6.

- (a) The mixture shall be spread at a temperature of not less than 107°C and all initial rolling shall be done immediately after spreading. The mixture shall not be placed on any wet surface or when weather conditions will otherwise prevent its proper handling and finishing.
- (b) Asphalt pavers shall be self-propelled, mechanical, spreading and finishing equipment, provided with a screed or strike-off assembly capable of distributing the material to not less than the full width of a traffic lane.
- (c) Screed action shall include any cutting, crowning or other practical action which is effective on the mixture without tearing, shoving or gouging, and which produces a surface texture of uniform appearance. The screed shall be adjustable to the required section and thickness. The paver shall be provided with either a full width roller or tamper or other suitable compacting device. Pavers that leave ridges, indentations or other marks in the surface that cannot be eliminated by rolling or prevented by adjustment in operation shall not be used.
- (d) Where a course previously laid is joined to a course to be laid later, the first course shall be cut back and painted with asphalt as directed.
- (e) The mix shall be compacted immediately after placing. Initial rolling with a tandem steel roller or a three-wheeled steel roller shall follow the paver as closely as possible. Immediately following the sealing of the longitudinal joints, rolling shall commence at the outside edges and progress towards the centerline. Rolling with a pneumatic-tired roller shall be done immediately behind the initial rolling. In areas too small for the roller, a vibrating plate compactor or hand tamper shall be used to achieve thorough compaction.
- (f) Rolling shall continue as long as required to attain a minimum compaction of ninety-seven percent (97%) of the Marshall density of the approved Job Mix.

8.8.10 Completion Test

- (a) Surface Test : Tests for conformity with the specified crown, grade and width shall be made by the Contractor immediately after initial compaction. Any deviation shall be corrected by removal or addition of materials and continuous rolling.
- (b) After completion of final rolling, the smoothness of the course shall again be tested along the whole distance. Humps or depressions that exceed the specified tolerances or that retain water on the surface shall be immediately corrected by removing defective work and replacing it with new material at the Contractor's expense.
- (c) Finished surfaces shall not vary from the design elevations by more than 5 mm when tested with a crown template and a 3m straightedge furnished by the Contractor. Tests shall be performed at 10 m intervals along the road centreline.
- (d) The width shall not be less than 25 mm of the design section measured at 20 m intervals.
- (e) Thickness Tests : The total thickness of each completed course of asphalt treated base shall be determined by cores taken by the Contractor for each completed layer at places designated by the Engineer. One core test shall be performed for every 200 m² of paved area. The thickness shall not be 5 mm less than the design depth for any one test, and not less than 2.5 mm for an average of 10 tests.
- (f) When deficiencies in either elevation or thickness exceed the specified tolerance, the Contractor shall remove and replace the asphalt treated base with new material.

8.9 CONCRETE PAVEMENT

8.9.1 General

The work shall consist of the construction of concrete pavement in the vicinity of the pumping stations, for walkways and other areas as shown on the Drawings or directed by the Engineer.

8.9.2 Materials

Concrete shall be class E in accordance with Section 4.

Sand bedding shall be in accordance with [Clause 3.3.2](#) of Section 3.

8.9.3 Construction

Subgrade preparation shall be prepared in accordance with [Clause 8.2](#).

A base course consisting of sand bedding material as specified in [Clause 3.3.2](#) shall be placed and compacted to the lines and levels shown on the Drawings.

Where concrete curbs or other edge structures are shown on the Drawings, these shall be constructed prior to placing the sand bedding base course and constructing concrete pavement.

Edge forms and jointing timbers shall be accurately placed to ensure accurate levels or cross fall as shown on the Drawings.

Concrete shall be placed in accordance with the requirements of Section 4. The surface shall be wood float finished.

Expansion joints shall be placed at intervals not greater than 15 m and contraction joints shall be placed at intervals not exceeding 3 m. The layout and design of expansion and contraction joints shall be subject to the approval of the Engineer.

8.10 MEASUREMENT AND PAYMENT

8.10.1 Subgrade Preparation

Measurement shall be made of the area in m² of subgrade preparation made on original ground on which the sub base was constructed. No measurement for payment shall be made of areas of subgrade comprising fill or backfill (as in the case of road restoration after sewer construction).

Payment shall be made at the rate entered in the Bill of Quantities which shall be full compensation for the cost of all labour, materials and incidental items necessary to complete the subgrade preparation in accordance with the Specification and the instructions of the Engineer.

The cost of subgrade preparation for sub base constructed on fill is deemed to be included in the cost of fill, specified elsewhere.

Items to be paid under this Clause are as follows :

Pay Item No.	Description	Unit of Measurement
2.2.6.1 2.3.6.1 3.2.7.1 3.3.7.1 3.5.3.1 4.2.7.1	Subgrade Preparation	m ²

8.10.2 Sub-Base Course

Measurement shall be made of the volume of sub base course material placed and compacted to the lines grades and dimensions shown on the drawing or as directed by the Engineer and approved by the Engineer.

Payment shall be made at the rate entered in the priced Bill of Quantities which shall be full compensation for the cost of materials labour, tools, equipment and incidental items necessary to complete the Works in accordance with the Specifications and instructions by the Engineer.

Items to be paid under this Clause are as follows :

Pay Item No.	Description	Unit of Measurement
2.2.6.2 2.3.6.2 3.2.7.2 3.3.7.2 4.2.7.2	Sub Base Course : including supply and placement	m ³

8.10.3 Base Course

Measurement shall be made of the volume of Base Course material placed and compacted to the lines grades and dimensions shown on the drawing or as directed by the Engineer and approved by the Engineer.

Payment shall be made at the rate entered in the priced Bill of Quantities which shall be full compensation for the cost of materials labour, tools, equipment and incidental items necessary to complete the Works in accordance with the Specifications and instructions by the Engineer.

Items to be paid under this Clause are as follows:

Pay Item No.	Description	Unit of Measurement
2.2.6.3 2.3.6.3 3.2.7.3 3.3.7.3 4.2.7.3	Base Course (Crushed Aggregate): including supply and placement	m ³

8.10.4 Asphalt Binder Course

Measurement will be made of the mass in tonne (1 tonne = 1000 kg mass) of asphalt binder course, based on certified delivery notes from the supplier, placed to the lines, grades and dimensions as shown on the Drawings or directed by the Engineer and approved by the Engineer. Materials placed outside the limits shown on the Drawings shall not be measured for payment.

Payment shall be made at the rate entered in the priced Bill of Quantities which shall be full compensation for the cost of materials labour, tools, equipment and incidental items necessary to complete the asphalt binder course in accordance with the Specifications and instructions by the Engineer.

Items to be paid under this Clause are as follows :

Pay Item No.	Description	Unit of Measurement
2.2.6.4 2.3.6.4 3.2.7.4 3.3.7.4 4.2.7.4	Asphalt Binder Course : including supply and placement	tonne

8.10.5 Asphalt Wearing Course

Measurement will be made of the mass in tonne (1 tonne = 1000 kg mass) of asphalt wearing course, based on certified delivery notes from the supplier, placed to the lines, grades and dimensions as shown on the Drawings or directed by the Engineer and approved by the Engineer. Materials placed outside the limits shown on the Drawings shall not be measured for payment.

Payment shall be made at the rate entered in the priced Bill of Quantities which shall be full compensation for the cost of materials labour, tools, equipment and incidental items necessary to complete the asphalt wearing course in accordance with the Specifications and instructions by the Engineer.

Items to be paid under this Clause are as follows :

Pay Item No.	Description	Unit of Measurement
2.2.6.5 2.3.6.5 3.2.7.5 3.3.7.5 4.2.7.5	Asphalt Surface Course : including supply and placement	tonne

8.10.6 Bituminous Prime Coat

Measurement shall be made of the actual volume in litres of bituminous prime coat material placed on the prepared subgrade at the rate of application directed by the Engineer.

Payment shall be made at the rate entered in the Bill of Quantities which shall be full compensation for all labour, materials, equipment and all incidentals necessary for the completion of bituminous prime coat in accordance with the Specification and the instructions of the Engineer.

Items to be paid under this Clause are as follows :

Pay Item No.	Description	Unit of Measurement
2.2.6.6 2.3.6.6 3.2.7.6 3.3.7.6 4.2.7.6	Prime Coat: including supply and application	litre

8.10.7 Tack Coat

Measurement shall be made of the actual volume in litres of tack coat material placed on the prepared subgrade at the rate of application directed by the Engineer.

Payment shall be made at the rate entered in the Bill of Quantities which shall be full compensation for all labour, materials, equipment and all incidentals necessary for the completion of tack coat in accordance with the Specification and the instructions of the Engineer.

Items to be paid under this Clause are as follows :

Pay Item No.	Description	Unit of Measurement
2.2.6.7 2.3.6.7 3.2.7.7 3.3.7.7 4.2.7.7	Tack Coat: including supply and application	litre

8.10.8 Concrete Pavement

(a) Concrete Pavement 150 mm thick

Measurement shall be made of the completed plan area of concrete paving approved by the Engineer.

Payment shall include full compensation for providing all materials, equipment and labour for completing the concrete paving and shall include the cost of preparatory works, sand bedding, constructing expansion and contraction joints and all incidental items for completing the work in accordance with the Drawings, the specification and the directions of the Engineer.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.3.5.4 3.3.6.3 3.4.6.4	Concrete Pavement including Sand Bedding supply and placement	m ²

(b) Concrete Paving 100 mm thick

Measurement shall be made of the volume of concrete paving approved by the Engineer.

Payment shall include full compensation for providing all materials, equipment and labour for completing the concrete paving and shall include the cost of preparatory works, constructing expansion and contraction joints and all incidental items for completing the work in accordance with the Drawings, the specification and the directions of the Engineer.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
3.5.3.3	Concrete Pavement 100 mm thick: including supply and placement	m ³

SECTION 9. MISCELLANEOUS WORKS

TABLE OF CONTENTS

	Page
9.1 GENERAL	9-1
9.2 PREPARATORY WORKS.....	9-1
9.3 CONCRETE CURBS	9-1
9.3.1 Excavation	9-1
9.3.2 Gravel Bedding.....	9-1
9.3.3 Levelling Concrete	9-1
9.3.4 Concrete Curbs	9-1
9.4 PRECAST CONCRETE PAVING BLOCKS	9-2
9.4.1 General.....	9-2
9.4.2 Materials.....	9-2
9.4.3 Construction	9-2
9.4.3.1 Sand Bedding.....	9-2
9.4.3.2 Paving Blocks.....	9-2
9.5 CONCRETE PAVING	9-3
9.5.1 General.....	9-3
9.5.2 Requirements	9-3
9.6 TREES AND SHRUBS	9-3
9.6.1 General.....	9-3
9.6.2 Materials.....	9-3
9.6.3 Planting of Trees, Shrubs and Ground Cover	9-3
9.6.4 Maintenance	9-4
9.7 GRASSING	9-4
9.7.1 General.....	9-4
9.7.2 Sodding	9-4
9.7.2.1 General	9-4
9.7.2.2 Material Requirements	9-4
9.7.2.3 Method of Construction	9-4
9.7.3 Sprigging	9-5
9.7.3.1 General	9-5
9.7.3.2 Material Requirements	9-5
9.7.3.3 Method of Construction	9-5
9.7.4 Maintenance	9-5

9.8	GATES AND FENCING.....	9-6
9.8.1	General.....	9-6
9.8.2	Materials.....	9-6
9.8.3	Fabrication and Construction.....	9-6
9.9	MEASUREMENT AND PAYMENT.....	9-6
9.9.1	Gates and Fences.....	9-6
9.9.2	Concrete Curbs.....	9-7
9.9.3	Concrete Block Paving.....	9-7
9.9.4	Concrete Pavement.....	9-8
9.9.5	Planting.....	9-8
9.9.6	Sodding.....	9-8

SECTION 9. MISCELLANEOUS WORKS

9.1 GENERAL

This section covers the general and specific requirements for landscaping and external works for the Thanh Da and Ben Me Coc (1) pumping stations, for the control gate works at Ben Me Coc (1) and at other locations shown on the Drawings or directed by the Engineer.

The miscellaneous works described herein are as follows:

- Fences and Gates
- Concrete Curbing
- Concrete Block Paving
- Concrete Paving
- Planting comprising planting of trees and shrubs, and grassing

9.2 PREPARATORY WORKS

Prior to the commencement of landscaping and external works the earthworks, specified elsewhere shall be completed to the lines and grades shown on the Drawings. Particular attention shall be given to the earth fill which shall form the subgrade of the paving which shall be compacted to the relative density specified in section 3, Earthworks.

Electrical cable and any other buried services shall be installed prior to the commencement of landscaping works.

No separate payment shall be made for preparatory works and all costs shall be considered to be included in other rates included in the Bill of Quantities.

9.3 CONCRETE CURBS

9.3.1 Excavation

Trenches for curbs shall be excavated to the depths and dimensions shown on the Drawings in accordance with the requirements of Section 3. The bottom width of trenches shall not exceed the widths shown on the Drawings.

9.3.2 Gravel Bedding

The bottom of the trench shall be tamped with hand operated equipment following which gravel bedding for curbs shall be placed and spread over the full width of the prepared trench and compacted in accordance with Section 3.

9.3.3 Levelling Concrete

Levelling concrete (Concrete Class G) shall be placed to the lines and dimension shown on the Drawings in accordance with the requirements of Section 4, Concrete.

9.3.4 Concrete Curbs

Concrete Curbs of Concrete Class E shall be cast in situ to the lines and dimensions shown on the Drawings. The concrete, workmanship and finish shall all be in accordance with the requirements of Section 4, Concrete.

9.4 PRECAST CONCRETE PAVING BLOCKS

9.4.1 General

Precast concrete paving blocks shall be laid in the areas shown on the drawing in accordance with this Specification and the directions of the Engineer.

9.4.2 Materials

(a) Sand Bedding

Sand bedding shall comply with the requirements specified in Section 3.

(b) Concrete Paving Blocks

Paving block shall be made from concrete Class E, shall be plain or coloured and shall have dimensions 198 x 98 x 65 thickness and shall be subject to the approval of the Engineer.

(c) Filler Material

Filler material shall consist of natural sand, having clean, hard and durable particles, and it shall be free from clay, organic matter, and other deleterious materials. It shall be uniformly graded and shall meet the following grading requirements :

Sieve Size	Percentage Passing by Weight
9.52 mm	-
4.75 mm	-
2.36 mm	100
1.18 mm	90 – 100
0.600 mm	60 – 90
0.300 mm	30 – 60
0.150 mm	15 – 30
0.075 mm	5 – 10

9.4.3 Construction

9.4.3.1 Sand Bedding

Sand bedding shall be placed to the lines and grades shown on the Drawings. The sand shall be placed in accordance with the requirements specified in Section 3. Particular care shall be taken to ensure that the sand is properly compacted against curbs and all surrounding concrete edging of the area to be paved. The upper surface (approx 20 mm thickness) of the sand bed shall be uncompacted.

9.4.3.2 Paving Blocks

Paving blocks shall be laid manually on the prepared sand bed which shall be screeded to the required profile just prior to laying paving blocks.

Paving blocks shall be cut at edges using a mechanical saw so that the completed paving precisely matches the area to be paved.

After laying, the paved area shall be compacted with not less than 3 passes of a vibrating plate compactor to ensure uniformity the upper surface.

Dry fine sand filler material shall be spread over the pavement and brushed so as to fill the joints between paving blocks. All excess sand shall then be removed.

9.5 CONCRETE PAVING

9.5.1 General

The Contractor shall construct concrete paving in the vicinity of the Thanh Da and Ben Me Coc pumping stations in accordance with the Drawings and the directions of the Engineer.

9.5.2 Requirements

All materials and workmanship shall be in accordance with the requirements of Section 8, Roadworks.

9.6 TREES AND SHRUBS

9.6.1 General

The work to be performed by the Contractor consist of the supply, planting and maintenance of trees, shrubs, ground cover in the areas shown on the Drawings.

The supply, planting and maintenance of trees and shrubs shall be by a specialist subcontract with extensive experience in similar work and shall be subject to the approval of the Engineer.

9.6.2 Materials

(a) Plants

Trees, shrubs, ground cover and grass shall be of the types shown in the planting list in the Drawings. Each plant or shrub shall meet the acceptable size range indicated in the planting list for height, diameter of trunk and diameter of root ball.

All plants shall be healthy living plants, free from disease, insects and fungi and shall not be broken or torn.

(b) Fertilizers

Well rotted animal manure, shall be free of grass and weeds shall be used for improving the soil in which plants are to grown.

Chemical fertiliser containing N,P and K elements such as shall be used to develop the growth of root,.

Chemical fertilisers containing Urea shall be used for grass.

(c) Planting Medium

A planting medium (shown as "agricultural soil" on the Drawings) consisting a 1:1 mixture of clean soil, free of stones, building rubble or other deleterious matter and animal manure as noted in (b) shall be used.

9.6.3 Planting of Trees, Shrubs and Ground Cover

All planting shall be done in late afternoon or at night to prevent plants drying out.

Holes shall be excavated to the sizes and depths shown on the Drawings and backfilled with the planting medium (Agricultural Soil) specified above.

Subsequently, holes shall be dug of sufficient size and depth to accept the root balls of trees or plants to be planted. Trees or shrubs shall be removed from their containers and carefully placed in their respective holes and planting medium carefully placed around the roots ensuring all air voids are filled. Water shall be applied and tamping applied.

Hardwood staking, as shown on the Drawings shall be applied to all trees.

9.6.4 Maintenance

The Contractor shall regularly water and maintain all trees, shrubs and ground cover plants in satisfactory condition for the duration of the Contract and until final acceptance of the Works. Any unhealthy or dead plant shall be promptly replaced.

9.7 GRASSING

9.7.1 General

The Contractor shall plant and maintain grass in the areas shown on the Drawings or directed by the Engineer. All grass shall be *Axonopus Compressus*.

The method of planting grass shall be as shown on the Drawings and shall be either sodding or sprigging as specified herein.

9.7.2 Sodding

9.7.2.1 General

This work shall consist of furnishing, placing and compacting topsoil and laying grass sods in accordance with the Specification where shown on the Drawings or ordered by the Engineer.

9.7.2.2 Material Requirements

(d) Topsoil

Topsoil shall be clean friable soil free of stones larger than 20 mm and free of weed or other deleterious matter.

(e) Grass Sod

The sod shall consist of a healthy, dense and well rooted growth of living grass with roots surrounded by topsoil and shall not contain weeds or other undesirable plants.

The grass sod shall be cut into uniform squares approximately 300 mm and shall have a minimum thickness of 50 mm (excluding grass blades). The type of grass to be used shall be subject to the approval of the Engineer.

9.7.2.3 Method of Construction

The surface of the area to be sodded shall be trimmed to the profile as shown on the Drawings to the approval of the Engineer.

Units of grass sod shall be placed in uniform rows with the sides of adjacent sods in close contact to each other.

The areas to be sodded shall be as shown on the Drawings or as specified by the Engineer. The surface of the areas to be sodded shall be loosened and brought to a reasonably fine texture to a depth of approximately 20 mm. The bed upon which the sod is to be placed shall be moistened to the loosened depth, if not naturally sufficiently moist, and the sod shall be placed thereon within 24 hours after having been cut.

After the placement has been completed, the surface shall be cleared of loose sod, excess soil, or other foreign material, whereupon a thin layer of topsoil shall be scattered over the sod as a top dressing and the areas shall then be thoroughly moistened by sprinkling with water.

The Contractor shall regularly water and maintain sodded areas in satisfactory condition for the duration of the Contract and until final acceptance of the Works.

9.7.3 Sprigging

9.7.3.1 General

This work shall consist of furnishing, placing and compacting topsoil and planting grass sprigs in accordance with the Specification where shown on the Drawings or ordered by the Engineer.

9.7.3.2 Material Requirements

(a) Topsoil

Topsoil shall be clean friable soil free of stones larger than 20 mm and free of weed or other deleterious matter.

(b) Grass Sprigs

These shall be healthy living stems (stolons or rhizomes) with attached roots.

9.7.3.3 Method of Construction

The surface of the area to be grassed by sprigging shall be trimmed to the profile as shown on the Drawings to the approval of the Engineer.

Before harvesting of the sprigs, the grass shall be mowed to a height of 50 to 75 mm and all clippings and waste materials removed. Sprigs shall then be loosened by cross disking, shallow ploughing or other acceptable methods. After loosening the sprigs from the soil they shall be promptly gathered into small piles or windrows, watered and kept moist until they are planted. The time between harvesting and planting shall not exceed 24 hours. Sprigs that have been heaped in stockpiles, permitted to dry out or otherwise damaged shall be rejected.

Sprigging shall not be done during windy weather, or when the ground is dry, excessively wet, or otherwise untillable.

Sprigs shall be broadcast by hand or by suitable equipment in a uniform layer with spacing between sprigs not to exceed 150 mm. The sprigs shall then be forced into the soil to a depth of 50 to 100 mm with a straight spade or similar tool, or with a disk harrow or other equipment set to cover the sprigs to the required depth.

9.7.4 Maintenance

The Contractor shall protect the newly grassed areas by means of barriers or warning signs. The Contractor shall maintain watering and other incidental operations and all treated areas will be subject to special inspections at 2 and 12 months after they have been laid. Any areas in which grass is not maintaining a healthy growth shall be repaired or re-furnished by the Contractor at his own expense. The Contractor will be responsible for cutting and keeping clean any grassed areas until Completion of the whole of the Works.

9.8 GATES AND FENCING

9.8.1 General

The Contractor shall construct gates and fencing at the locations shown in the Drawings or as directed by the Engineer.

9.8.2 Materials

Concrete materials shall be in accordance with Section 4, Concrete Works
Metalwork items shall be in accordance with Clause 13.2.

9.8.3 Fabrication and Construction

The gates, fence posts, panels, related steel items and other required steel materials shall be fabricated and constructed in accordance with Clause 13.2 and as specified hereunder..

The gates and fences shall be accurately set out in accordance with the layout shown in the Drawings and approved by the Engineer prior to installation.

Posts shall be installed vertically as shown on the Drawings. The posts shall be installed in holes excavated to the dimensions shown on the Drawings or as directed. The holes shall be backfilled with approved material which shall be compacted by tamping until the post is firmly held in the vertical position. Otherwise, posts shall be embedded in concrete foundations as shown in the Drawings.

Gate rails shall be placed accurately in their concrete footings to an accuracy of + or -15mm in elevation or horizontal alignment. Sliding gates shall be installed such that they run smoothly.

Entrance gates shall be furnished complete with rollers, rails, padbolt catches as shown on the Drawings or as directed.

9.9 MEASUREMENT AND PAYMENT

9.9.1 Gates and Fences

Payment of Steel Fence and Gate with Concrete Post shall made at the appropriate lump sum price entered in the Bill of Quantities following approval of the respective completed fence and gates for each of the pumping stations.

The payment shall be full compensation for all materials, transport, labour and all incidental costs for fabricating and galvanizing all of the steel components, for the construction of all concrete elements and erecting the fences and gates all in accordance with the Drawings, the specification and the instructions of the Engineer.

Measurement shall be made of the length of Steel Fence Type B complete in accordance with the Drawings, the specifications and to the approval of the Engineer.

Payment shall made at the unit rate entered in the Bill of Quantities which shall be full compensation for all materials, transport, labour and all incidental costs for fabricating and galvanizing all of the steel components, for the construction of all concrete elements and erecting the fences all in accordance with the Drawings, the specification and the instructions of the Engineer.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.1.3.3	Steel Fence (Type B) with Concrete Pole: including supply and installation	m
2.3.5.1	Steel Fence (Type A) and Gate with Concrete Post: including supply and installation	L.S.
3.3.6.1	Steel Fence (Type A) and Gate with Concrete Post: including supply and installation	L.S.
3.4.6.1	Steel Fence (Type A) and Gate with Concrete Post: including supply and installation	L.S.
3.4.6.2	Steel Fence (Type B) with Concrete Pole: including supply and installation	m
3.5.3.4	Steel Fence (Type B) with Concrete Pole: including supply and installation	m

9.9.2 Concrete Curbs

Measurement shall be made of the completed length of concrete curb approved by the Engineer.

Payment shall include full compensation for providing all materials, equipment and labour for completing the concrete curbs and shall include the cost of excavation, bedding, levelling concrete and all incidental items for completing the work in accordance with the Drawings, the specification and the directions of the Engineer.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.1.3.1 2.2.6.8 2.3.5.2 2.3.6.8 3.2.7.8 3.3.6.2 3.3.7.8 3.4.6.3 4.2.7.8	Concrete Curb including gravel bedding, levelling concrete, supply and construction	m

9.9.3 Concrete Block Paving

Measurement shall be made of the completed plan area of concrete block paving approved by the Engineer.

Payment shall include full compensation for providing all materials, equipment and labour for completing the concrete block paving and shall include the cost of preparatory works, sand bedding, filler sand and all incidental items for completing the work in accordance with the Drawings, the specification and the directions of the Engineer.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.1.3.2 2.3.5.3 2.3.6.9 3.3.6.3 3.3.7.9 3.4.6.4	Concrete Block Paving including bedding, supply and placement	m ²

9.9.4 Concrete Pavement

Refer to Section 8, Roadworks for measurement and payment Clause.

9.9.5 Planting

Payment for planting shall be made at the respective lump sum prices entered in the Bill of Quantities which shall be full compensation for providing all of the planting works including planting of trees and shrubs and grassing all in accordance with the Drawings, the Specification and to the approval of the Engineer. Also included shall be the obligation for maintenance of the planting works as specified.

Interim payments shall be made as follows:

60 % of the respective lump sums on completion of planting.

40 % of the respective lump sums will be paid progressively for the remainder of construction period up to the date of final completion.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.3.5.5	Planting work including trees, shrubs and grassing	L.S.
3.3.6.4	Planting work including trees, shrubs and grassing	L.S.
3.4.6.5	Planting work including trees, shrubs and grassing	L.S.

9.9.6 Sodding

Measurement shall be made of the area of solid sodding completed in accordance with Clause [9.7.2](#).

Payment will be made at the rate entered in the priced Bill of Quantities and shall include the entire cost of completing the work including materials, labour, equipment, transportation, maintenance and any other associated costs:

Payment will be made as follows:

- On completion of planting 60% of the rate in the Bill of Quantities.
- After satisfactory establishment of the sodding a further 20 % of the rate in the Bill of Quantities

- The remaining 20% shall be paid on satisfactory maintenance of the sodding on completion of the whole of the Works.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
3.5.2.3	Sodding : including supply, planting and maintenance	m ²

**SECTION 10. PUMP STATIONS AND SLUICE WAYS
TABLE OF CONTENTS**

	Page
10.1 GENERAL	10-1
10.2 WORKS SPECIFIED ELSEWHERE	10-1
10.3 PARTICULAR REQUIREMENTS	10-1
10.3.1 Thanh Da Pumping Station Area	10-1
10.3.1.1 Existing Sewers	10-1
10.3.1.2 Restoration of Wet Stone Masonry	10-1
10.3.1.3 Restoration of Concrete Dike	10-2
10.3.2 Ben Me Coc (1) Area	10-2
10.3.2.1 Restoration of Wet Stone Masonry	10-2
10.4 MEASUREMENT AND PAYMENT	10-2

SECTION 10. PUMP STATIONS AND SLUICEWAYS

10.1 GENERAL

This section covers the particular requirements for the civil works to be carried out with respect to pump station stations at Thanh Da, Ben Me Coc (1) and the control gate works at Ben Me Coc (1).

The Contractor shall carry out the works in accordance with the Drawings, the Specification and the directions of the Engineer.

10.2 WORKS SPECIFIED ELSEWHERE

Care of Water shall be in accordance with Section 2

Clearing and Grubbing shall be in accordance with Section 2

Demolition shall be in accordance with Section 2

Earthworks shall be in accordance with Section 3

Concrete work shall be in accordance with Section 4

Timber Piling shall be in accordance with Clause 5.3 of Section 5

Wet Stone Masonry shall be in accordance with Clause 6.4 of Section 6

Sewer pipes and manhole covers shall be in accordance with Section 7 and Section 13

Fencing shall be in accordance with Clause 9.8 of Section 9

Sodding shall be in accordance with Clause 9.7 of Section 9

10.3 PARTICULAR REQUIREMENTS

The following are particular requirements for work to be carried out by the Contractor which are not covered by the above Specifications.

10.3.1 Thanh Da Pumping Station Area

10.3.1.1 Existing Sewers

Prior to the commencement of works for the Thanh Da pumping station and sluiceway the Contractor shall search and determine the routes of two existing sewer lines which discharge to the Saigon River near the site and shall report his findings by means of scale Drawings to the Engineer.

Following consideration by the Engineer of the findings, the Engineer may direct that the outlets be closed.

In such a case the Contractor shall block off the outlet(s) with mass concrete (Concrete Class F) in accordance with the Engineer's directions.

10.3.1.2 Restoration of Wet Stone Masonry

Existing stone masonry will be damaged during the construction of the inlet pit.

The Contractor shall restore the wet stone masonry in accordance with the requirements of Section 6 and the specific directions of Engineer. Payment for this work shall be under payment Clause 6.6.6, payment item 2.3.3.14.

10.3.1.3 Restoration of Concrete Dike

The existing reinforced concrete dike in the vicinity of the outlet works shall be restored in accordance with the directions of the Engineer.

Payment for this work will be made under payment items 2.3.3.4 and 2.3.3.7

10.3.2 Ben Me Coc (1) Area

10.3.2.1 Restoration of Wet Stone Masonry

Existing stone masonry revetment along the Doi Canal will be damaged during the construction the Works and will require restoration.

The Contractor shall restore the wet stone masonry in accordance with the requirements of Section 6 and the specific directions of Engineer. Payment for this work shall be under payment Clause 6.6.6, payment item 3.3.3.13.

10.4 MEASUREMENT AND PAYMENT

Measurement and payment for items described above shall be made in accordance with the referenced payment Clauses.

**SECTION 11. RETARDING PONDS
TABLE OF CONTENTS**

	Page
11.1 GENERAL	11-1
11.2 SCOPE OF WORK.....	11-1
11.3 WORKS SPECIFIED ELSEWHERE.....	11-1
11.4 CONSTRUCTION	11-1
11.5 MEASUREMENT AND PAYMENT.....	11-2

SECTION 11. RETARDING PONDS

11.1 GENERAL

This section covers the particular requirements for the works to be carried out with respect to retarding ponds.

11.2 SCOPE OF WORK

The works to be completed are generally described below:

(a) Thanh Da Retarding Pond

The work consists of increasing the capacity of an existing ornamental pond by deepening the bed level by approximately 500 mm and providing slope protection to the existing masonry-lined banks.

(b) Ben Me Coc (1) Retarding Pond

The work consists of deepening an existing pond and placing fill to form a perimeter embankment on which is constructed an operations and maintenance path and a fence.

Specific works to be completed are shown in the Drawings, listed in the Bill of Quantities or shall be directed by the Engineer.

11.3 WORKS SPECIFIED ELSEWHERE

Care of Water shall be in accordance with Section 2

Clearing and Grubbing shall be in accordance with Section 2

Earthworks shall be in accordance with Section 3

Concrete work shall be in accordance with Section 4

Timber Piling shall be in accordance with Clause 5.3 of Section 5

Wet Stone Masonry shall be in accordance with Clause 6.5 of Section 6

Roadworks shall be in accordance with Section 8

Fencing shall be in accordance with Clause 9.8 of Section 9

Sodding shall be in accordance with Clause 9.7 of Section 9

11.4 CONSTRUCTION

Construction shall be carried out in accordance with the above referenced specifications and as specified hereunder or directed by the Engineer.

(a) Thanh Da

Excavation in the vicinity of the toe of the existing stone masonry bank protection shall be done carefully without causing damage to it. Any damage caused shall be repaired to the satisfaction of the Engineer at the Contractor's cost.

The Contractor shall take particular care to limit damage to the existing landscaped area around the pond. Any damage done shall be completely repaired and, after the completion of the work, the Contractor shall reinstate the area to its original condition to the satisfaction of the Engineer. The cost of such reinstatement shall be deemed to be included in the unit rates in the work.

The excavated elevation of the bed of the retarding pond shall be completed to an accuracy +0, -200 mm.

(b) Be Me Coc (1)

The excavated elevation of the bed of the retarding pond shall be completed to an accuracy +0, -200 mm.

11.5 MEASUREMENT AND PAYMENT

All items shall be measured and paid in accordance with their respective payment Clauses elsewhere in the specification.

SECTION 12. MECHANICAL WORKS

TABLE OF CONTENTS

	Page
12.1 GENERAL	12-1
12.2 GENERAL REQUIREMENTS	12-1
12.2.1 Applicable Codes and Standards	12-1
12.2.2 Materials and Workmanship	12-1
12.2.3 Castings	12-2
12.2.3.1 Iron Castings	12-2
12.2.3.2 Steel Castings.....	12-2
12.2.3.3 Bronze castings	12-2
12.2.4 Machine work.....	12-2
12.2.4.1 General	12-2
12.2.4.2 Finished Surfaces	12-2
12.2.4.3 Unfinished Surfaces	12-3
12.2.4.4 Keys and Keyways.....	12-3
12.2.4.5 Pins and Pin Holes.....	12-3
12.2.4.6 Lubrication	12-3
12.2.4.7 Balancing.....	12-3
12.2.5 Welding	12-3
12.2.5.1 General	12-3
12.2.5.2 Qualification of Welding procedure.....	12-4
12.2.5.3 Qualification of Welders and Welding operators	12-4
12.2.5.4 Welding Electrodes	12-4
12.2.6 Piping works	12-4
12.2.6.1 General	12-4
12.2.6.2 Hangers and Supports	12-5
12.2.6.3 Embedded Insert for Supporting Pipe and Electrical Conduit.....	12-5
12.2.6.4 Installation and Workmanship.....	12-5
12.2.6.5 Test of piping system	12-5
12.2.6.6 Pressure Tests	12-6
12.2.7 Design	12-6
12.2.8 Test and Inspection	12-7
12.2.8.1 Test at the Manufacturer's Factory.....	12-7
12.2.8.2 Tests in Vietnam	12-8

12.2.9	Coating and Painting	12-9
12.2.9.1	General	12-9
12.2.9.2	Machined Parts or Bearing Surfaces:	12-10
12.2.9.3	Site Touching-Up:	12-10
12.2.9.4	Surfaces not to be Painted:	12-10
12.2.9.5	Colours:	12-10
12.2.9.6	Surface Preparation:	12-10
12.2.9.7	Application of Coating:	12-10
12.2.9.8	Painting Systems:	12-10
12.2.10	Spare parts	12-11
12.2.11	Tools	12-11
12.2.12	Packing and marking	12-11
12.2.13	Delivery	12-12
12.2.14	Storage	12-12
12.2.15	Training	12-12
12.2.16	Operation and Maintenance Manual	12-13
12.3	MAIN DRAINAGE PUMPS	12-13
12.3.1	General	12-13
12.3.2	Type and Requirements	12-14
12.3.3	Pump Construction	12-14
12.3.3.1	Pump casing	12-14
12.3.3.2	Impeller	12-15
12.3.3.3	Shaft	12-15
12.3.3.4	Mechanical seals	12-15
12.3.3.5	Pump column pipe	12-15
12.3.3.6	Motor	12-15
12.3.3.7	Leakage.....	12-16
12.3.3.8	Accessories.....	12-16
12.3.3.9	Spare parts.....	12-16
12.3.4	Test at the Shop	12-16
12.4	PIPE WORK	12-17
12.4.1	General	12-17
12.4.2	Type and requirement	12-17
12.4.3	Pipe Construction	12-17
12.5	FLAP VALVE.....	12-17
12.5.1	General	12-17
12.5.2	Type and Requirement	12-17

12.5.3	Flap Valve Construction	12-18
12.6	GATES	12-18
12.6.1	General	12-18
12.6.2	Type and Requirements	12-18
12.6.3	Sluice Gate Construction	12-20
12.6.3.1	Gate frame and seal plate	12-20
12.6.3.2	Gate Leaf and Skin Plate	12-20
12.6.3.3	Seal	12-20
12.6.3.4	Wedge.....	12-20
12.6.3.5	Shaft	12-20
12.6.3.6	Headstock	12-20
12.6.4	Flap Gate Construction	12-20
12.7	STOP LOGS	12-21
12.7.1	General	12-21
12.7.2	Type and requirements.....	12-21
12.8	SCREENS	12-21
12.8.1	General	12-21
12.8.2	Type and requirements.....	12-21
12.8.3	Screen construction	12-22
12.9	PUMP LIFTING DEVICE.....	12-22
12.9.1	General	12-22
12.9.2	Type and requirement	12-22
12.9.3	Crane Construction	12-22
12.10	FLAP GATES FOR SEWER OUTLETS.....	12-23
12.10.1	General	12-23
12.10.2	Type and Requirements	12-23
12.10.3	Flap Gate Construction	12-24
12.11	PAYMENT	12-24
12.11.1	Supply of Mechanical Equipment	12-24
12.11.2	Installation Works	12-26
12.11.3	Testing and Commissioning	12-27

SECTION 12. MECHANICAL WORKS

12.1 GENERAL

This section covers the requirements for workmanship, design, supply, delivery, installation, testing and commissioning of mechanical works at Thanh Da and Ben Me Coc (1) pumping stations comprising pumps, pipes, gates, screens, stop logs and other accessories.

Also covered by this section are the requirements for the design, supply, delivery and installation of flap gates at sewer outlets.

All mechanical plant shall be manufactured and tested in accordance with the Specification and applicable Vietnamese standards.

12.2 GENERAL REQUIREMENTS

The general requirements herein shall be read in conjunction with Section 1, General Specification.

12.2.1 Applicable Codes and Standards

All materials and tests to be furnished under the Contract shall conform to the following standards as applicable.

- (a) Japanese Industrial Standard (JIS)
- (b) International Standard Organization (ISO)
- (c) American National Standards Institute (ANSI)
- (d) British Standards Institution (BS)

Other international standards may be accepted, provided that the requirements therein are equivalent to the latest issue of the relevant Japanese Industrial Standard (JIS). If the Contractor proposes an equivalent standard the Contractor shall state the exact nature of the differences between the proposed standard and the Japanese Industrial Standard and shall submit the complete standard, and the information and data on the materials in English language for the Engineer's approval.

If no standard is indicated, then the relevant Japanese Industrial Standard shall apply.

All electrical equipment shall comply with the requirements and latest revisions of the following codes and standard where applicable:

- (a) Japanese Electro - Technical Committee's Standard (JEC)
- (b) Japanese Electric Machine Industry Association's Standard (JEM)
- (c) Japanese Cable - makers Association Standard (JCS)
- (d) International Electrical Committee (IEC)

12.2.2 Materials and Workmanship

All materials shall be new, the best of their respective kinds and of such as are usual and suitable for work of similar character. All materials shall comply with the latest Japanese Industrial Standards (JIS) or equivalent.

All workmanship shall be of the highest class throughout to ensure smooth and vibration free operation under all possible operating conditions, and the design, dimensions and materials of all parts shall be such that the stresses to which they may be subjected shall not render them liable to distortion, undue wear, or damage under the most severe conditions encountered in service.

Materials and equipment furnished under the Contract shall be subject to inspection, examination and tests at any time and in any condition both off-site and on-site. The contractor shall furnish promptly all facilities, labour and materials needed for such inspection, examination and tests, which may be required by the Engineer. Acceptance of materials and equipment or waiving of inspection shall in no way relieve the Contractor of the responsibility for furnishing materials and equipment meeting the requirement of the Contract.

All parts shall conform to the dimensions shown on and shall be built in accordance with the approved Drawings. All joints, datum surfaces, and mating components shall be machined.

12.2.3 Castings

All castings shall be dense, sound and true to pattern, of workmanlike finish and of uniform quality and condition, free from blowholes, porosity, hard spots, shrinkage defects, cracks or other injurious defects, and shall be satisfactorily cleaned for their intended purpose.

Castings shall not be repaired, plugged, or welded without permission of the Engineer. Such permission will be given only when the defects are small and do not adversely affect the strength, use, or function of the castings. Excessive segregation of impurities or alloys at critical points in a casting will be cause for its rejection.

Surfaces, which do not undergo machining and are exposed in the final installation shall be dressed to provide a satisfactory appearance so that they will not require surface smoothing at the Site prior to painting.

12.2.3.1 Iron Castings

Iron castings shall be in accordance with JIS G 5501, FC 250 or equivalent.

12.2.3.2 Steel Castings

Steel castings shall be fully annealed and shall be in accordance with JIS G 5101, SC 46 or equivalent.

12.2.3.3 Bronze castings

Bronze castings shall be in accordance with JIS H 5113, BC 2 or equivalent.

12.2.4 Machine work

12.2.4.1 General

All tolerance, allowances and gauges for metal fits between plain cylindrical parts shall conform to Japanese Industrial Standards or other approved equivalent standards for the class of fit as shown or otherwise required. Bearing surfaces shall be true and exact to secure full contact. Journal and sliding surfaces shall be polished and all surfaces shall be finished with sufficient smoothness and accuracy to ensure proper operation when assembled. Parts entering any machine shall be carefully and accurately machined. All drilled holes for bolts shall be accurately located and drilled from templates.

12.2.4.2 Finished Surfaces

Surface finish shall be indicated on the Contractor's Shop Drawings and shall be in accordance with Japanese Industrial Standards or equivalent. Compliance with specified surface will be determined by sense or feel and by visual inspection of the Work and compared to standard toughness specimens in accordance with the provisions of the above stated standards.

12.2.4.3 Unfinished Surfaces

As far as is practicable, all work shall be arranged to obtain proper matching of adjoining unfinished surfaces. When there is a large discrepancy between adjoining unfinished surfaces, they shall be chipped and ground smooth, or machined, to secure proper alignment. Unfinished surfaces shall be true to the lines and dimensions shown on the Drawings and shall be chipped or ground free of all projections and rough spots. Depressions or holes not affecting the strength or usefulness of the parts may be filled in an approved manner.

12.2.4.4 Keys and Keyways

Keys and keyways shall conform to the requirements of Japanese Industrial Standards or other approved equivalent standards, unless otherwise specified or required.

12.2.4.5 Pins and Pin Holes

Pin holes shall be bored to gauge, smooth and straight, and at right angles to the axis of the member. The boring shall be done after the member is securely fastened in position. Pins shall be of hardened and ground steel and positively held in position. Wheels or rollers for use in gates shall be mounted on removable pins and have self-lubricating bushings and bass washers.

12.2.4.6 Lubrication

Before assembly, all bearing and journal surface's grease and oil grooves shall be carefully cleaned and lubricated with an approved oil or grease. After assembly, each lubricating system shall be filled with an approved lubricant. Self-lubricating bearings shall be cleaned with clean rags, and greased with an approved lubricant before assembly. Solvent shall not be used on the self-lubricating bearings. The specification of all approved lubricants shall be mentioned in the operating and maintenance instructions.

12.2.4.7 Balancing

All revolving parts shall be truly balanced both statically and dynamically so that when running at normal speeds and at any load up to the maximum, there shall be no vibration due to lack of such balance and the Plant shall operate with the least possible amount of noise.

12.2.5 Welding

12.2.5.1 General

All welding shall be done either manually by the shielded metallic arc process or automatically by the shielded arc or submerged arc method.

The Contractor shall submit a welding procedure for the approval of the Engineer in the same manner as the Drawings. After the welding procedure has been approved, the Contractor shall record it in the operation and maintenance instructions. Welding sizes and types shall be shown on all Contractor's Drawings where welding is required.

Plates to be joined by welding shall be accurately cut to size and rolled by pressure to the proper curvature, which shall be continuous from the edge. Plattering in the curvature along the edges with correction by blows will not be allowed. The dimensions and shape of the edges to be joined shall be such as to allow thorough fusion and complete penetration and the edges of plates shall be properly formed to accommodate the various welding conditions. The surfaces of the plates for a distance of 25 mm from the edge to be welded shall be thoroughly cleaned of all rust, grease and scale, to bright metal.

12.2.5.2 Qualification of Welding procedure

The technique of welding employed, the appearance and quality of the welds made and the methods used in correcting defective work, shall conform to the American Welding Society (AWS) standard D.I.I, or other approved equivalent standard.

12.2.5.3 Qualification of Welders and Welding operators

All welders and welding operators assigned to the works shall have passed a qualification test, within the preceding six months, for welders and welding operators, in accordance with JIS Z 3801 or equivalent. The Contractor shall furnish the Engineer with three (3) certified copied of report of the results of physical tests to the Engineer. If the work of any welder at any time appears questionable, he shall be required to pass the appropriate re-qualification test. All costs of qualification tests shall be borne by the Contractor.

12.2.5.4 Welding Electrodes

The welding electrodes shall conform to JIS Z 3211 or 3212, low hydrogen type covering or equivalent.

Stainless type weld metal, where used in the water passages for protection against pitting, shall be of chromium nickel steel. The type, chemical composition and JIS or approved standard number of welding rods used for this purpose shall be subject to the approval of the Engineer.

12.2.6 Piping works

12.2.6.1 General

The pipe to be used shall be in accordance with the following table unless otherwise specified.

TYPE	CAST IRON PIPE	STEEL PIPE	STEEL PIPE	STEEL PIPE WITH LINING	STAINLESS PIPE	COPPER PIPE	VINYL PIPE	VINYL PIPE	VINYL PIPE
JIS symbol	DCIP	SGPW	STPY	SGP-FVA	SUS304	Cut	HIVP	VP	VU
Delivery pipe			o		*				

Note) *---Recommended, ^o--- Subject to the Engineer's approval

All necessary studs, bolts, screws, nuts, washers, gaskets, packing, supports, etc., required in connection with the field assembly of the piping system shall be supplied by the Contractor. All gaskets and packing shall be of approved material and of a type that has proved satisfactory for the service to which they will be subjected. Where pipe is embedded in concrete, it shall be carefully set to the required lines and grades and securely braced and held so that no movement shall occur during concrete placement. Pipe supports to be embedded in concrete shall be made of material, which will not deteriorate, weaken or cause damage to the pipe.

12.2.6.2 Hangers and Supports

The Contractor shall supply and install all the pipe hangers, brackets and supports required for the support of the piping, including the drilling and caulking for expansion anchors and any work incidental to the setting of such embedded anchors or inserts in concrete.

Unless otherwise specified, pipe supports shall be spaced at 2100 mm maximum. Vertical runs shall be supported by means of pipe clamps or collars. Hangers and supports shall be painted.

12.2.6.3 Embedded Insert for Supporting Pipe and Electrical Conduit

The Contractor shall design the support system for the equipment and shall supply and install all required embedded inserts. The Contractor shall design the support system to distribute concentrated loads to the concrete and shall supply the clamping bar used for distributing the load, with the support. The insert will be left clean and ready for use.

12.2.6.4 Installation and Workmanship

Piping shall be installed in the locations, elevation and to lines in accordance with the approved Drawings. All lines shall be sloped to allow drainage to the low point. Where a branch cannot be drained through fixtures, a drain valve shall be provided in an accessible location. All piping shall be fitted and assembled to introduce the minimum of stressing to the pipe and fittings, and the assembly shall conform to the best piping practice. The Engineer shall be the sole judge of the standard of workmanship. All pipes shall be supported and installed to avoid pockets that will not drain completely. All piping to be embedded shall be tested and approved by the Engineer prior to being embedded.

Sleeves will be provided where pipe passes through a wall, floor or beam. The space around the sleeves shall be filled with concrete.

All surfaces of the pipe, which come in contact with the concrete shall be cleaned prior to placing the concrete in order to secure a satisfactory bond. Pipe unions shall be fitted where necessary to facilitate installation or maintenance of equipment.

12.2.6.5 Test of piping system

The Contractor shall test all pipe lines as directed by the Engineer and shall supply all labour, material, pumps, plugs, gauges, etc., required to make the complete test. Lines shall be tested in convenient sections. In the case of failure due to faulty workmanship on the part of the Contractor, material failure or leaks, he shall repair all damage and leaks, replace the faulty material, and retest the piping at his own cost until the results become satisfactory. Results of all such tests shall be submitted to the Engineer.

Before testing, all anchor blocks, thrust supports, and hangers shall be in place. If piping is tested in sections, temporary end caps shall be fitted to the approval of the Engineer. Each section shall be slowly filled with the test medium, care being taken to expel all air from the piping if liquid is used. For acceptance, the test pressure shall remain constant for the period without pumping additional water into the section under test. If a drop in pressure occurs, leaks shall be repaired and the pipeline shall be retested until acceptable.

12.2.6.6 Pressure Tests

All pressure vessels, cooling coils and piping shall be pressure tested, and shall meet the following requirements:

- (a) Parts subject to water pressure:
 - 1.5 times the maximum design pressure for 10 minutes
- (b) Parts subject to air pressure:
 - 1.5 times the maximum design pressure for 10 minutes
- (c) All other parts:
 - Twice the maximum working pressure but not less than 3.1 MPa for 10 minutes.

All pressure is gauge pressure. All leaks and evidence of excessive or permanent deflection shall be repaired to the Engineer's satisfaction and the test repeated until the test results are satisfactory. Results of all such tests shall be submitted to the Engineer.

12.2.7 Design

The design, dimension and materials of all parts shall be such that they will not suffer damage under the most adverse conditions nor result in deflections and vibrations, which might adversely affect the operation of the equipment. Mechanisms shall be so constructed to avoid sticking due to rust or corrosion.

The Contractor shall design the equipment in careful consideration of the tropical climate and shall also pay attention both to the optimum material selection and to the construction in order to ensure their long reliable service life and efficient operation.

All parts which will have to be dismantled or which might have to be dismantled, for purposes of servicing or replacement shall be fastened with non-corrosive fasteners. The type, material and size of all fasteners shall be selected to safely withstand the maximum superimposed direct, alternating, kinetic and thermal loads and all load induced by workmen when installing or removing the fasteners during the life of the equipment.

The design shall be such that the installation, replacement and general maintenance may be undertaken with the minimum of time and expense. The tolerances used for dimensions and finishes shall be selected with due consideration to the particular properties and functions of the parts and the corresponding accuracy to obtain proper operation and tight sealing.

Wherever possible, all similar parts including spare parts shall be made to gauge and interchangeable. Such parts shall be of the same materials and workmanship and shall be constructed to such tolerances as to enable substitutions or replacement of spare parts to be made easily and quickly.

Suitable structural steel bases or frames shall be provided where necessary to transmit to the concrete foundations all loads imposed by the various parts of the Plant. Such bases or frames shall be supplied complete with suitable anchor bolts and shall be so proportioned that the bearing loads imposed in the concrete foundations shall not exceed **5MPa (50 kg/cm²)**

All Plant shall be designed to minimize the risk of fire and consequential damage, to prevent ingress of vermin, dust and dirt, and accidental contact with electrically energized or moving parts. The Plant shall be capable of continuous operation with minimum attention and maintenance in the exceptionally severe conditions likely to occur in the Site.

12.2.8 Test and Inspection

12.2.8.1 Test at the Manufacturer's Factory

Within two (2) months after the date of the Letter of Acceptance and prior to the manufacture of the Plant, the Contractor shall submit five (5) copies of Inspection and/or testing schedule to the Engineer for his approval. Tests and/or inspection shall include, but not limited to the items listed in the Table below.

	Item	Required Test/Inspection	Witness by Engineer or his Representative	Submission of Test records
1	Main pump	- Performance test - Dimension - Hydrostatic pressure - Material	Yes Yes No No	Yes Yes Yes Yes
2	Motor for Item 1	- Temperature rise - Winding resistance - Efficiency - Withstand voltage - Dimension	No No No No No	Yes Yes Yes Yes Yes
3	Pipe	- Hydrostatic pressure - Dimension - Material	No No No	Yes Yes Yes
4	Valve	- Hydrostatic pressure - Dimension - Material - Operation	No No No No	Yes Yes Yes Yes
5	Screen	-Dimension -Assembly - Function	No No No	Yes Yes Yes
6	Gate	- Dimension - Material - Assembly	No No No	Yes Yes Yes

Upon completion of the manufacture of the Plant and at the time indicated on the work schedule, the Contractor shall conduct an operational test at the factory under [simulated](#) field operating conditions.

Pumps shall be operated to cover the full range of the operating condition. Testing of pumps shall be in accordance with the requirements of JIS B 8301 and 8302 or other internationally accepted standards subject to the approval of the Engineer.

The results of all tests shall verify the technical particulars given in the approved documents and Drawings.

Mill sheets shall be submitted for the major parts of the [Plant](#). Before inspection, the parts, which require the material inspection shall be approved by the Engineer.

[The Contractor shall invite two \(2\) mechanical inspectors, nominated by the Engineer, for a total of eight \(8\) man-days for the purpose of witnessing the tests in the suppliers' workshops.](#)

All necessary expenses for the said inspectors [including](#) round-trip air tickets, per-diem living allowance and land transportation charges shall be borne by the Contractor.

12.2.8.2 Tests in Vietnam

12.2.8.2.1 Tests During Construction

During and/or after installation and as the items of Plant are mechanically completed, the Contractor shall perform the following preliminary tests step by step to ensure the accuracy of the assembly, the condition to operate under no-load and to prove the adequacy of the materials and workmanship.

The Contractor shall submit all test procedures for the Engineer's review and approval before carrying out the tests.

- Insulation tests and drying out of equipment, if required
- Ground continuity tests
- Circuit continuity tests
- Testing and setting up of all relays and other protective equipment
- Hydrostatic tests on the piping
- Running tests of auxiliary equipment
- Running tests of the pump and motor, to check bearing operation, running clearances
- High voltage test
- Other tests required by the Engineer, if any.

12.2.8.2.2 Test at Mechanical Completion

After the above-mentioned tests have been performed, the equipment and auxiliaries adjusted and successfully completed for the mechanical run, and the Contractor and Engineer agree that the equipment, facilities and/or the Plant are able to start up, the Contractor shall perform the operation tests with assistance of Operators and Maintenance staff of Employer.

The Contractor shall make all final adjustment to the control and detection devices. The Contractor shall be responsible for the operation of the Plant during the test. All the tests shall be carried out by the instructions of the Contractor under the supervision of the Engineer.

The Contractor shall perform the test operation shown below and confirm the functions of each of the Thanh Da and Ben Me Coc (1) pumping stations.


The test operation shall be carried out after completion of tests of units and assemblies by operating the series of facilities for a definite period (time) in an overall way to confirm the working condition of interlocked operation of equipment and facilities and the function as an overall plant.

- (1) The test operation shall be carried out for the following items.
 - a) Break-in operation and initial troubleshooting by continuous operation of equipment.
 - b) Confirmation of plant functions by interlocked operation of equipment and facilities.
 - c) Guidance for the operation and maintenance services to the operation and maintenance staff designated by the Employer.

(2) The test operation of the Thanh Da and Ben Me Coc (1) pumping stations shall be carried out using river water.

(3) Time of implementation

The test operation shall be implemented with the commercial power supply after completion of all installation work and completion of tests of units and assemblies, as shown in the following time line.

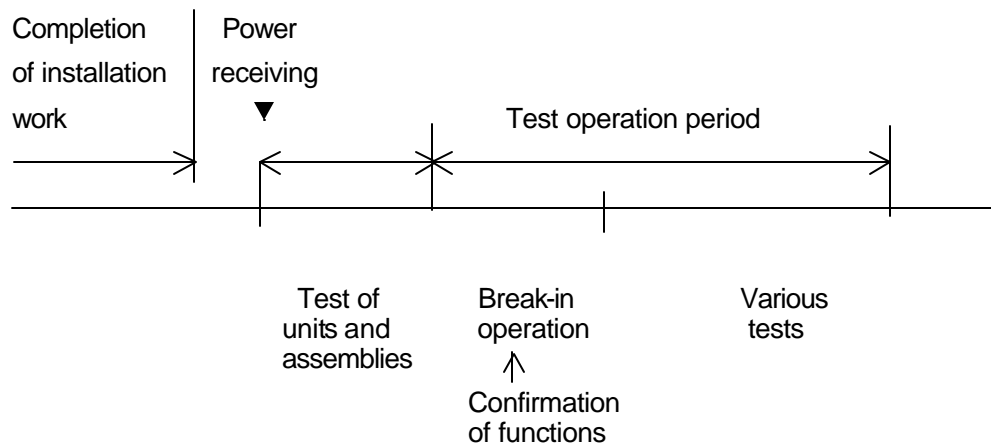

(4) The time of test operation shall be at least three (3) hours per pump
The period of test operation including pump test run shall be three (3) days per station.

(5) Test operation report

After completion of the test operation, the Contractor shall submit the report of the test operation results to the Engineer for his approval.

12.2.9 Coating and Painting

12.2.9.1 General

All metal parts shall be protected from corrosion and painted in accordance with the following requirements.

All parts, other than machined parts, which will be exposed after erection shall be thoroughly cleaned and given at least one coat of best quality approved primer and at least two coats of best quality approved finish paint. The system of surface preparation and painting shall be as specified herein.

12.2.9.2 Machined Parts or Bearing Surfaces:

All machined parts or bearings surfaces shall be cleaned and protected from corrosion before leaving the manufacturer's shop by the application of an approved rust preventive compound or a peelable plastic film. Where the latter is impracticable such parts shall be heavily covered with high melting point grease or other approved materials. Before commencement of erection such parts shall be cleaned with solvent and lapped or polished bright. The Contractor shall supply the materials necessary for each cleaning.

12.2.9.3 Site Touching-Up:

The Contractor will perform the equipment touching up on the site after erection, except such apparatus as panels and instruments, which will be finish painted under approved procedures before shipment. The Contractor shall supply paint materials and necessary tools, which are used at the Site, with [all items of Plant](#).

12.2.9.4 Surfaces not to be Painted:

The following surfaces shall not be painted:

- Surface with will be buried in concrete
- Parts made of stainless steel, bronze or brass
- Surfaces in rolling or sliding contact
- Surfaces such as gear teeth
- Wire ropes

12.2.9.5 Colours:

The final colour of all the equipment shall be approved by the Engineer but the Contractor shall propose a colour scheme for all items of Plant and shall submit colour chips or paint samples. A colour chip shall be included with the approved colour schedule, for each type of finish to be applied at the Site.

12.2.9.6 Surface Preparation:

All oil, paraffin, grease and dirt shall be removed from the surfaces to be painted by using solvents. All weld splatter, slag, burrs, loose rusted mill scale and other foreign substances shall be removed by shot or sand blasting. If rust forms or the surfaces become contaminated in the interval between cleaning and painting, re-cleaning to the same degree shall be required. All surface preparation shall be subject to approval by the Engineer before any paint is applied.

12.2.9.7 Application of Coating:

Primer shall be applied to surfaces prepared in accordance with the paint manufacturer's instructions. The surface shall be wiped clean immediately prior to applying the paint. The primer and finish coat of paint shall be applied using the methods and equipment recommended by the manufacturer. The paint system selected shall have a proven life expectancy of not less than five (5) years in the atmosphere prevailing at this Project.

12.2.9.8 Painting Systems:

The painting systems proposed by the Contractor for the various items of Plant to be furnished shall comply with the minimum requirements shown in the following table.

**Painting Systems for Plant in the Thanh Da and Ben Me Coc (1)
Pumping Stations**

Area	Equipment to be applied	Coating and painting schedule
Outdoor	Actuator, pump lifting device, etc.	One coat of anti-corrosive primer Two coats of lead sub-oxide paint Two coats of phenolic resin type paint
Submerged	Gate, stop log, screen, main pump, pipe, inlet and outlet gate, etc.	One coat of anti-corrosive primer Three coats of epoxy or tar epoxy paint

12.2.10 Spare parts

The Contractor shall furnish the spare parts specified. Further, the Contractor may be directed to furnish additional spare parts resulting from selection from lists of additional spare parts recommended by the suppliers of each item of Plant, submitted with the Contractor's bid.

Any spare parts supplied shall be packed or treated in such a manner as to be suitably stored in the climate at the Site for a period of not less than two years, and each part shall be clearly marked with its description and purpose on the outside of the packing.

Spare parts so provided must be delivered into such stores as may be nominated by the Employer and delivery will not be deemed to be complete until the packages have been opened by the Contractor, their contents checked by the Engineer in the presence of a representative of the Employer and the articles re-protected and repacked by the Contractor to the satisfaction of the Engineer, or assembled into units at the Employer's option.

12.2.11 Tools

A complete set of all necessary tools **other** than the Contractor's Equipment shall be supplied by the Contractor to enable dismantling, reassembling or testing to be carried out on any part of **all items of Plant**, whether of an electrical, mechanical or any other nature during the life of the equipment and shall be subject to approval by the Engineer. The cost for supply tools shall be quoted in the Bill of Quantities.

12.2.12 Packing and marking

Except as may be otherwise approved by the Engineer all items of Plant shall be packed or bundled properly so that no damage shall be sustained during transportation to the Site and by rough handling.

Waterproof papers and **felt** linings shall overlap at seams secured together in an adequate manner, but the enclosure shall be provided with a screened opening to allow ventilation.

The method of protection and packing must be suitable to withstand any climate conditions which may be experienced in transit or at site. The packing shall be suitable for withstanding rough handling and long period of storage out of doors in a tropical climate.

Each crate, package or bundle shall mark on the outside to indicate name of consignee, and contain a packing list in a waterproof envelope and copies in triplicate shall be forwarded to the Engineer prior to dispatch. All items of material shall be clearly marked for easy identification against the packing list.

All crates, packages or bundles shall be clearly marked on the outside to indicate the total weight, to show where the weight is bearing and the correct position of the slings and shall bear an identification mark relating them to the appropriate shipping documents.

The Engineer shall reserve the right to inspect and approved the equipment and the packing before the items are dispatched. The Contractor shall be entirely responsible for ensuring that the packing is [suitable for purpose and shall be liable](#) for any loss or damage due to faulty packing.

All packing materials shall remain the property of the Contractor and shall be removed from the delivery Site at the earliest opportunity and disposed of to the satisfaction of the Engineer.

12.2.13 Delivery

No part of the Plant shall be delivered to the delivery Site until approval in writing has been obtained from the Engineer for such delivery. Upon shipment of each package or crate, three (3) copies of the shipping list shall be attached to the Bill of Lading and an additional copy shall be attached to the package or crate shipped.

Each item of Plant shall be delivered with [the assembly completed as](#) far as possible to ensure that the installation or erection may be easily undertaken with the minimum of time and expense.

12.2.14 Storage

Should the equipment be available for early delivery, the equipment shall be stored in an approved store to be provided by the Contractor. If the delivery or erection of an item of Plant has to be delayed due to the non-availability or operational constraints of the Works, the Contractor shall be required to provide storage of the equipment. Any additional handling or transport costs shall be born by the Contractor.

The equipment whenever stored shall be securely guarded in a warehouse with adequate protection from the climate, pests, fire, etc.

No item of Plant or Contractor's Equipment shall be delivered to site until permission in writing has been applied for and obtained by the Contractor from the Engineer. The Contractor shall be responsible for the reception on the Site of all Plant and Contractor's Equipment delivered for the purpose of the Contract.

12.2.15 Training

The Contractor shall provide and carry out the technical guidance and training in the operation and maintenance services to the operation and maintenance staff designated by the Employer. The Contractor shall submit to the Engineer for approval the training program. The technical guidance and training program recommended by the Contractor shall include, but not necessarily be limited to, the following basic requirements.

- (a) The period: One (1) month in total for operation staff and maintenance staff.
- (b) Commencement time: Suitable time during the installation period.
- (c) Subject: The Contractor shall propose training categories, for the approval of the Engineer, covering at least the following work sections:
 - Technology principles in pumping system,
 - Construction & function of the pumping equipment,
 - Operation and maintenance of the above-mentioned system
- (d) Method: Lecture and on the job training in the Site
- (e) Trainer(s): Contractor's Training expert/operation Engineer
- (f) Trainees: Employer's staff shall include Mechanical Engineers, Electrical Engineers, operators and maintenance staffs.
- (g) Place of training: Thanh Da and Ben Me Coc (1) pumping stations.
- (h) Program: Detailed training program shall be submitted by the Contractor for the Engineer's approval, three (3) months prior to the commencement of guidance and training.
- (i) The Contractor shall submit operation and maintenance manuals and training texts to the Engineer, two (2) months prior to the commencement of training.

12.2.16 Operation and Maintenance Manual

At least three (3) months prior to the date of site testing and commissioning of the pumping stations, the Contractor shall submit three (3) copies of the Operation and Maintenance Manual which shall contain comprehensive data for the operation and maintenance of the entire pumping stations in addition to comprehensive information for the operation and maintenance of each individual item of Plant, for the Engineer's review and comments. Following approval by the Engineer, and within the time requirements stated in the foregoing Clause, ten (10) copies of the final Operation and Maintenance Manual shall be submitted by the Contractor for the Employers reference.

12.3 MAIN DRAINAGE PUMPS

12.3.1 General

The pumps shall be designed and manufactured in accordance with the requirement of the Specification. However, any details not specified in the Specification shall be subject to the approval of the Engineer. The pumps shall be suitable for complete installation and satisfactory for operation in the location specified in the plans and elevations, as shown in the Drawings.

The pumps shall be high quality products manufactured in a shop where the quality control system conforms to ISO 9001 standard certified by an authorized third party. The pump manufacturer shall guarantee, in writing, that each of the pumps have been tested in accordance with good engineering practices and certify that they meet the specified performance criteria . Supporting documentary verifying the above shall be provided by the Contractor.

The Contractor shall prepare certified guaranteed performance curves based on shop tests of pumps in accordance with JIS 8301 or equivalent standard subject to the Engineer's approval.

The pumps shall be designed to perform satisfactory with a service life of not less than fifteen (15) years when operated either continuously or intermittently pumping rainwater containing silt and sand.

12.3.2 Type and Requirements

The pumps to be installed at Thanh Da and Ben Me Coc (1) pumping stations shall be of the submersible motor, vertical shaft, axial flow type.

The pump and motor shall be assembled as a single unit. Units with a gearbox shall not be acceptable. The pump unit shall be installed in a pump column, which supports the both static and dynamic weight of the pump unit. The pumps shall be easily removable for inspection or service without need to disconnect any form of mechanical fastenings. The pumps will be lifted/lowered by using a movable type pump lifting device.

The pumps shall be designed to operate satisfactorily throughout the expected range of static heads. Each pump shall be driven by fixed speed submersible motor. The design and construction of the pumps shall be such that a solid spherical object of not more than 50mm in diameter can pass through the impeller and that fibrous or other materials in the water can also pass through the impeller without clogging.

Type and requirements for the pumps at Thanh Da and Ben Me Coc (1) pumping stations shall be as follows:

Station Name	: Thanh Da	: Ben Me Coc (1)
Type	: Submersible motor, vertical shaft, axial flow pump	: SUBMERSIBLE MOTOR, VERTICAL SHAFT, AXIAL FLOW PUMP
Pump discharge	: 400mm dia.	: 400mm dia.
Number of units	: 2 units	: 2 units
Total capacity	: 0.70 m3/sec	: 0.70 m3/sec
Unit capacity	: 0.35 m3/sec	: 0.35 m3/sec
Expected range of static head	: 0 m to 2.32 m	: 0 m to 2.50 m
Rated static head	: 2.32 m	: 2.50 m
Total dynamic head	: 3.52 m	: 3.70 m
Pump speed	: Not more than 970 min-1	: Not more than 970 min-1
Motor output	: Not less than 18.5kw	: Not less than 18.5kw
Pump rated efficiency	: Not less than 79.0%	: Not less than 79.0%
Drive method	: Driven by dry type motor	: Driven by dry type motor

12.3.3 Pump Construction

12.3.3.1 Pump casing

Pump casing shall be made of cast iron conforming to the requirements of JIS FC250 or equivalent material. These parts shall be free from blow holes, porosity, shrinkage cracks or other defects.

Suction bell-mouth shall be designed to minimize entrance losses and shall keep the suction water surface as stable as possible so that harmful vortices are not formed. Diffuser casing shall have enough water passage to minimize friction losses and efficiently reduce the flow velocity. Casing liner

shall be removable and renewable, and made of stainless steel conforming to the requirements of JIS SUS304 or equivalent special steel alloy.

12.3.3.2 Impeller

Impeller shall be of axial flow type and shall be made of JIS designation stainless steel casting (SCS5) or equivalent special steel alloy to resist abrasive and corrosive effect of silt, sludge and sand. The impeller shall be designed to operate satisfactorily through the expected range of static head without any noise, cavitation and vibration. The impeller shall be of smooth finished all over and shall be locked securely to the shaft and be capable of being easily removed. An optimum clearance shall be provided between the impeller and casing liner so as to maximize the efficiency of the pump. The casing liner shall be fitted and locked with flush fitting screw and shall be made of stainless steel.

12.3.3.3 Shaft

The shaft shall be made of JIS designation stainless steel (SUS403) or equivalent stainless steel. The shaft shall be a one-piece construction, accurately machined throughout the entire length, properly finished at the bearing surfaces and stepped for ease of assembly of bearings, mechanical seals, etc. The shaft shall be supported by two (2) sets of ball or roller bearings and the bearing life shall have a minimum design life of 50,000 hours.

12.3.3.4 Mechanical seals

The pump shall be provided with a cartridge type double mechanical rotating shaft seal system running in an oil reservoir having separate, constant hydro-dynamically lapped seal faces of silicon carbide. The lower seal separating the pumping liquid media and the oil reservoir shall be made of silicon carbide/silicon carbide. The upper seal shall be made of carbon/ceramics and it shall seal the electric motor from the oil reservoir. The mechanical seals shall comprise of one positively driven rotating ring and one stationary ring, with the interface held in contact by its own spring system supplemented by external liquid pressures. The seals shall require neither maintenance nor adjustment but shall be easily inspected and replaced if necessary. The shaft sealing system shall be capable of operating at a minimum pressure equivalent to twice the shut off pressure produced by the impeller and no damage shall result from operating the pumping unit out of its liquid environment.

12.3.3.5 Pump column pipe

The pump column pipe shall be of JIS designation rolled steel (SS400) or equivalent special steel and shall be suitably fitted to the pump unit. The pump column pipe shall have a sole plate at the bottom of the column pipe complete with rotation stopper to prevent twisting of electric cables and rotation of the pump. Flange shall conform to JIS 10 kgf/cm² class or equivalent higher class flange. The minimum diameter of the pump column pipe is shown in the Bid Drawing.

12.3.3.6 Motor

The motor shall be 3 phase, 380V, 50Hz air-filled type squirrel cage induction motor. Winding temperature detectors for each phase shall be furnished in the motor. The motor shall be designed for continuous duty at a

maximum sump temperature of 40⁰ and be capable of up to 10 starts per hour. Motor insulation shall be Class F. Voltage and frequency tolerances shall be a maximum 10/5% respectively.

The cable entry system shall comprise primary, secondary, and tertiary sealing methods. The primary seal shall be achieved by a cylindrical elastomeric grommet compressed between the cable housing and cable gland. Secondary sealing shall be accomplished with a compressed o-ring made of NBR material. Compression and subsequent sealing shall preclude specific torque requirements. The system shall also include tertiary sealing to prevent leakage into the motor housing due to capillary action through the insulation if the cable is damaged or cut. The cable entry system shall be the same for both the power and control cables. Ten (10) metres of power and control cable shall be connected to the motor.

12.3.3.7 Leakage

Leak detection chamber shall be provided between the shaft seal and the motor body so that, even in the unlikely event that the water leaked to the chamber because of worn-out double mechanical seal, leakage is collected in the chamber and an alarm is triggered by the float-type detector provided inside the chamber.

Leakage detector for mechanical seals shall be both float type switches, detecting for water penetration and for oil leakage. Moisture switch shall not be acceptable. The leakage detector shall be installed in a chamber separated from motor coil chamber and a thermal detector shall be installed in the motor.

12.3.3.8 Accessories

Pump accessories to be furnished shall be as follows:

- (a) One set of compound gauge for each pump
- (b) One set of automatic air vent valve for each pump
- (c) One set of base plate with anchor bolts for each pump
- (d) One set of sole plate with stopper for each pump
- (e) One set of tools for maintenance for all pumps
- (f) All other necessary accessories such as lifting slings, chains, etc. for installation and maintenance of pumps

12.3.3.9 Spare parts

Pump spare parts to be furnished shall be as follows:

One set of mechanical seals for each pump

12.3.4 Test at the Shop

Before delivery, all pumps shall be assembled and tested to prove the satisfactory functions. The performance testing of all pumps shall be carried out by the manufacturer and at least one unit shall be witnessed by the Engineer or his representative. Testing shall be carried out in accordance with the applicable standard of JIS B 8301 "Testing Methods for Centrifugal Pumps, Mixed Flow Pumps and Axial Flow Pumps" or equivalent standard approved by the Engineer. Measurements shall be taken with not less than four different discharge capacities.

12.4 PIPE WORK

12.4.1 General

The pipes shall be designed and manufactured in accordance with the requirement of an internationally accepted standard which had had the prior approval of the Engineer. The arrangement of pipes is shown in the Bid Drawings.

12.4.2 Type and requirement

Requirements for the discharge pipe are as follows:

Station name	: Thanh Da	: Ben Me Coc (1)
Nominal bore	: 400 mm dia.	: 400 mm dia.
Number of pipe	: 2 sets	: 2 sets
Type of flange	: JIS B 2220 PN10 or higher class flange	: JIS B 2220 PN10 or higher class flange
Thickness of pipe	: Not less than 6.0 mm	: Not less than 6.0 mm
Hydrostatic test pressure	: Not less than 100 kPa (1.0 kgf/cm ²)	: Not less than 100 kPa (1.0 kgf/cm ²)

12.4.3 Pipe Construction

The pipe for the main discharge pump shall be made of JIS designation rolled steel (SS400) or equivalent steel. The flange of pipe shall be of the full-face type and suitable nos. of bolts, nuts and gaskets shall be provided for each flange connection. The bolts and nuts shall be made of carbon steel and the gaskets shall be made of natural rubber (NBR).

12.5 FLAP VALVE

12.5.1 General

The flap valve shall be provided at the discharge end of the pipe to prevent reverse flow while the pump is stopped.

12.5.2 Type and Requirement

Requirements for the flap valve shall be as follows:

Station name	: Thanh Da	: Ben Me Coc (1)
Nominal bore	: 600 mm dia.	: 600 mm dia.
Number of pipe	: 2 sets	: 2 sets
Type of flange	: JIS B 2220 PN10 or higher class flange	: JIS B 2220 PN10 or higher class flange
Maximum designed differential head	: Not less than 2.53m	: Not less than 2.70m

12.5.3 Flap Valve Construction

The flap valve shall be of the single door, swing type and shall consist of body, flap, valve spindle and other necessary parts. The body and flap shall be made of JIS designation rolled steel (SS400) or equivalent special steel. The flap shall be assembled to the body with an angle of 15 degree to have a smooth closing when the pump is stopped. The valve spindle shall be made of carbon steel (JIS S35C) or equivalent material. The flap valve shall be designed to minimize a friction loss.

12.6 GATES

12.6.1 General

A total seven (7) nos. of sluice gates and three (3) nos. of flap gates shall be provided at Thanh Da and Ben Me Coc (1) pumping stations. Unless otherwise specified, the gates shall be designed in accordance with the requirements of the Japanese Technical Standards for Gates or other internationally accepted standard which ensure an equal and higher quality and has had the prior approval of the Engineer.

The gate shall consist of gate leaf and gate frame complete with hand wheel and all other necessary components, and shall be of steel fabricated construction. The details of construction, not specified herein, shall be made and installed by the Contractor upon approval of the Engineer.

12.6.2 Type and Requirements

The inlet gates at Thanh Da pumping station (P.S.) of dimensions 1000mm W x 1000mm H and 1200mm W x 1200mm H shall be opened when the pumping is required. During pumping, storm water flows into Thanh Da P.S. through these inlet gates. The by-pass gate at Thanh Da P.S. of dimensions 1400mm W x 1400mm H shall be closed before the pump operation starts to prevent the river water from flowing back to the reservoir of the Thanh Da P.S. The outlet gate of dimensions 1400mm W x 1400mm H shall be installed at the dike of the Saigon River. The flap gates of 1000mm dia. and 1200mm dia. shall be installed at the end of concrete pipe culverts as shown in the Bid Drawings.

The by-pass gates at Ben Me Coc (1) P.S. of dimensions 1500mm W x 1500mm H and 2000mm W x 2000mm H shall be closed before the pump operation starts to prevent the river water from flowing back to the reservoir. The outlet gate of dimensions 2000mm W x 2000mm H and the flap gate of 1500mm dia. shall be installed at the dike of the Doi canal.

The inlet, by-pass and outlet gates to be installed at Thanh Da and Ben Me Coc (1) P.S. shall be of the steel fabricated, rectangular shape, sluice type gate. The gates shall be designed to open/close smoothly and shall be of robust design. The flap gates shall be of the steel fabricated, round shape, swing type gate.

Gates for the Thanh Da Pumping Station

Gate name	: Inlet gate	: By-pass gate	: Outlet gate	: Flap gate
Type	: Steel fabricated, rectangular shape, sluice	: Do.	: Do.	: Steel fabricated, round shape,

	gate			swing type gate
Quantity	: 1 / 1	: 1	: 1	: 1 / 1
Effective width	: 1000mm / 1200mm	: 1400mm	: 1400mm	: 1000mm dia./ 1200mm dia.
Effective height	: 1000mm / 1200mm	: 1400mm	: 1400mm	: 1000mm dia./ 1200mm dia.
Design water level	: +0.900 (P) -1.100 (A)	: +1.320 (P) -1.000 (A)	: +1.320 (P) -1.000 (A)	: +1.320 (P) -1.000 (A)
Operation water level	: +0.900 (P) -1.100 (A)	: +1.320 (P) -1.000 (A)	: +1.320 (P) -1.000 (A)	: +1.320 (P) -1.000 (A)
Gate sill level	: -1.300 / -1.200	: -1.500	: -1.500	: -0.700 / -0.700 (gate centre level)
Operating floor level	: +1.600 / +1.600	: +2.200	: +2.200	: N.A.
Operation	: Electrical	: Electrical	: Manual	: N.A.
Operation force	: Not more than 150N	: Not more than 150N	: Not more than 150N	: N.A.
Corrosion allowance	: Not less than 0.5mm	: Not less than 0.5mm	: Not less than 0.5mm	: Not less than 0.5mm

Note: (P) – Pressure side, (A) – Anti-pressure side

Gates for the Ben Me Coc Pumping Station

Gate name	: By-pass gate	: Outlet gate	: Flap gate
Type	: Steel fabricated, rectangular shape, sluice gate	: Do.	: Steel fabricated, round shape, swing type gate
Quantity	: 1 / 1	: 1	: 1
Effective width	: 1400mm / 2000mm	: 2000mm	: 1500mm dia.
Effective height	: 1400mm / 2000mm	: 2000mm	: 1500mm dia.
Design water level	: +1.500 (P) 1.000 (A)	- : +1.500 (P) -1.000 (A)	: +1.500 (P) -1.000 (A)
Operation water level	: +1.500 (P) 1.100 (A)	- : +1.500 (P) -1.000 (A)	: +1.500 (P) -1.000 (A)
Gate sill level	: -2.000	: -2.000	: -1.250 (gate centre level)
Operating floor level	: +1.600 / +2.000	: +2.000	: N.A.
Operation	: Electrical	: Manual	: N.A.
Operation force	: Not more than 150N	: Not more than 150N	: N.A.
Corrosion allowance	: Not less than 0.5mm	: Not less than 0.5mm	: Not less than 0.5mm

Note: (P) – Pressure side, (A) – Anti-pressure side

12.6.3 Sluice Gate Construction

12.6.3.1 Gate frame and seal plate

The guide frame and seal plate shall be made of corrosion resistant steel conforming to the requirements of JIS SS400 or equivalent material and shall be smooth and plane, free from twists, wraps and kinks.

12.6.3.2 Gate Leaf and Skin Plate

The gate leaf and skin plate shall be designed to maintain rigidity and stiffness under the required operating conditions. The gate leaf and skin plate shall be made from structural steel conforming to the requirements of JIS SS400, welded to form a continuous plate. The gate leaf shall be designed to have a corrosion allowance with not less than 0.5 mm at each side. Drain holes at the bottom plate of main girder and top eyebolts for installation purpose shall be provided. Allowable deflection of the gate leaf shall be not more than 1/800.

12.6.3.3 Seal

The seals shall be <P> or <L> type and rectangular type rubber seals and shall be fixed on the gate with corrosion resistant supporting plates. The seal shall be designed to permit easy replacement and adjustment. The seals shall not be attached to the gates assembly during fabrication except when necessary.

12.6.3.4 Wedge

The wedge shall be made of JIS designation rolled steel (SS400) or equivalent material. The wedge shall be fitted with wedge liners. The wedge liner and leaf liner shall be made of JIS designation stainless steel (SUS304) or equivalent stainless steel.

12.6.3.5 Shaft

The shaft shall be made of JIS designation carbon steel (S35C) or equivalent stainless steel. The shaft shall be machined true to size of bearing and gearing fit and shall be amply supported to prevent bending.

12.6.3.6 Headstock

The headstock shall be equipped with a gate opening indicator. Force required to open or close by hand driving operation shall be not more than 150 N. All operating stems, gears and headstocks shall be provided with adequate points for lubrication. Floor plates or gratings shall be provided at the openings of headstock, if required.

12.6.4 Flap Gate Construction

Flap gate shall be of the multi door, swing type and shall be made of JIS designation rolled steel (SS400) or equivalent steel. The flap gate spindle shall be made of carbon steel (JIS S35C) or equivalent material. The flap gate shall be of such construction that will minimize friction losses and can close quickly against reverse flow.

12.7 STOP LOGS

12.7.1 General

Stop logs shall be provided at each of the Thanh Da and Ben Me Coc (1) pumping stations.

The stop logs are intended for use when the pump equipment including screens are required to be repaired or maintained.

12.7.2 Type and requirements

The stop logs shall be timber stop logs of the cross-sectional shape and dimensions as shown on the Drawings.

The timber species shall be one which is hard, durable with high strength in bending and shall be subject to the Engineer's approval prior to procurement.

Guide channels shall be formed in the surrounding concrete to accommodate the stop logs. The insides of the concrete guide channels shall be accurately formed in accordance with the Drawings and shall have smooth surfaces so as to readily permit the placement or withdrawal of the stop logs.

12.8 SCREENS

12.8.1 General

A total of three (3) sets of screens shall be provided at Thanh Da and Ben Me Coc (1) pumping station. The screen shall consist of bar screen and supporting beam complete with all other necessary components, and shall be of steel fabricated construction. The details of construction, not specified herein, shall be made and installed by the Contractor upon approval of the Engineer.

12.8.2 Type and requirements

The screen shall be installed to prevent rubbish, trash and other materials from flowing into the pump suction sump. The rubbish, trash and other materials collected by the screen shall be raked up manually to the ground.

Station name	: Thanh Da	: Ben Me Coc (1)
Type	: Steel fabricated, rectangular shape bar screen	: Do.
Quantity	: 2	: 1
Effective width	: 1500mm	: 2600mm
Effective height	: 3100mm	: 3800mm
Net opening	: Not more than 25mm	: Not more than 25mm
Degree of inclination of screen	: 60 degree	: 60 degree
Design water level difference	: Not less than 0.6m	: Not less than 0.6m
Suction water	: HWL +0.900	: HWL +0.900

level	LWL -1.300	LWL -1.100
Channel bottom level	: -1.500	: -2.000
Operating floor level	: +1.600	: +1.800
Operation	: Manual by hand rake	: Manual by hand rake
Corrosion allowance	: Not less than 0.5mm	: Not less than 0.5mm

12.8.3 Screen construction

The screen shall be of rectangular shape bar type and shall be made of JIS designation rolled steel (SS400) or equivalent steel. The bar screen shall be designed to keep a fixed distance between each bar and shall be fastened by extension bolts. The spacers, bolts and nuts shall be made of mild steel (JIS SS400) or equivalent material. The screens shall be bolted to the supporting beams, which are to be fixed to the side walls.

12.9 PUMP LIFTING DEVICE

12.9.1 General

The pump lifting device shall be used to lift/lower and remove the submersible pumps in the pump sump for installation, maintenance, disassembly and assembly works. The pump lifting device shall be a geared trolley type and shall be complete with trolley, girder, supporting legs, wheels and other necessary components.

12.9.2 Type and requirement

The type and requirement of the pump lifting device shall be as follows:

Type	: Geared trolley type
Driving method	: Manual
Lifting capacity	: 1ton
Span	: Approx. 3.5m
Lifting height	: Approx. 6m
Traveling method	: 4 wheels movable type
Quantity	: 1 set for each station

12.9.3 Crane Construction

The main girder shall be made from structural steel of I beam welded to supporting legs. Deflection of the main girder at 125% design load condition shall be not more than 1/800. The supporting legs shall be fitted with 4 wheels, which allow transportation of the pumps to the designated place in the station. The pump lifting device shall be designed such that it can be moved by one man when loaded with a pump.

12.10 FLAP GATES FOR SEWER OUTLETS

12.10.1 General

The number and size of flap gates as set out below shall be provided at the sewer outlets of the Thanh Da, Ben Me Coc and Ben Me Coc (2) drainage areas.

The gates shall be designed in accordance with the requirements of the Japanese Technical Standards for Gates or other internationally accepted standard which ensure an equal and higher quality and has had the prior approval of the Engineer.

The Contractor shall install flap gates in the locations shown on the Drawings. The work shall also include removal and disposal of existing, ineffectual flap gates in the Thanh Da area where the new gates are to replace existing gates.

12.10.2 Type and Requirements

The flap gates shall be of the steel fabricated, circular shape, swing type gate.

The purpose of the flap gates is to prevent backflow to the sewerage system when the level of water in the canal or river is higher than inside the dike-protected area.

The size and quantities of flap gates for sewer outlets are summarized in the following tables.

Flap Gates in Ben Me Coc (1) Area

Section	Location	Diameter (mm)	Invert Level (m)
E1	0+003	1200	-1,588
	0+221	1000	-0,624
	0+318	1500	-1,903
E3	0+320,15	900	-1,285
	0+623	1500	-1,910
W1	0+229,5	900	-0,475
	0+879	1200	-1,702
	1+289	1800	-1,902
W2	0+420,5	1000	-1,200
	0+851,8	1200	-1,915

Flap Gates in the Ben Me Coc (2) Area

Section	Location	Diameter (mm)	Invert Level (m)
S1	0+282	1000	-0,595
	0+589	1500	-1,240

	0+921	1800	-1,707
S2	0+319	1000	-0,750
N1	0+427,5	1000	-0,964
	0+876	1500	-1,960
N2	0+205	900	-0,582
	0+720	1200	-1,762
	0+900	1500	-1,960

Flap Gates in Thanh Da Area

Section	Location	Diameter (mm)	Invert Level (m)
TD-1-1	0.00	1000	0.126
TD-1-2	0.00	1000	0.083
TD-3-1	0.00	1000	-0.140
TD-3-1	0.00	1000	-0.250
TD-8	0.00	1000	-0.250

All flap gates for sewer outlets shall be designed for the following conditions:

High water level outside gate :	1.500
Water level inside gate:	At invert level of sewer
Corrosion allowance:	: Not less than 0.5mm

12.10.3 Flap Gate Construction

Flap gate shall be, swing type and shall be made of JIS designation rolled steel (SS400) or equivalent steel. The flap gate spindle shall be made of carbon steel (JIS S35C) or equivalent material. The flap gate shall be of such construction that will minimize friction losses and can close quickly against reverse flow.

Fixing to the concrete headwall shall be by a method approved by the Engineer and shall be by means of steel bolts grouted into the concrete, masonry anchors or epoxy resin. The use of wooden plugs shall not be approved.

12.11 PAYMENT

12.11.1 Supply of Mechanical Equipment

Payment for the supply of mechanical equipment will be made on the basis of equipment delivered, installed, tested, commissioned and approved by the Engineer.

Payment shall include the cost of engineering, design, supply, shop testing, witnessing by Engineer's or Employer's representative, shipping, insurance, inland transport, storage, fees and any other incidental costs related to the supply of mechanical equipment.

All equipment shall be delivered to the Site complete with spare part as specified, its respective documentation including manufacturer's certificates and shop test records. Upon certification by the Engineer that the equipment complies with specified requirements seventy-five percent (75%) of the respective prices per unit, lot, set or lump sum, as the case may be, entered in the Bill of Quantities, shall be authorised for payment.

The remaining twenty-five percent (25%) shall be authorized for payment following the completion, testing and commissioning of the facility in which mechanical item is installed.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.5.1.1	Submersible Motor Axial Flow Pump with 400mm dia. Capacity of 0.35m ³ /s, Total Dynamic Head of 3.52m	set
2.5.1.2	Discharge Pipe with 400mm dia. to 600mm dia.	set
2.5.1.3	Flap Valve with 600mm dia	set
2.5.1.4	Inlet Gate No.1 of 1,200mm W x 1,200mm H	set
2.5.1.5	Inlet Gate No.2 of 1,000mm W x 1,000mmH	set
2.5.1.6	By-pass Gate of 1,400mm W x 1,400mm H	set
2.5.1.7	Outlet Gate with 1,400mm W x 1,400mm H	set
2.5.1.8	Flap Gate No.1 of 1,000mm dia.	set
2.5.1.9	Flap Gate No.2 of 1,200mm dia.	set
2.5.1.10	Fabricated Wooden Stop Log with 100mm W x 250mm H x 1,500mm L	No.
2.5.1.11	Bar Screen with 1,500mm W x 3,100mm H	set
2.5.1.12	Pump Lifting Device of 1 tonne safe working load	set
2.5.1.13	Flap Gate of 1,000mm dia. for Sewer Outlet	set
2.5.1.14	Spare parts as Listed in the Specifications	L.S.
3.6.1.1	Submersible Motor Axial Flow Pump with 400mm dia. Capacity of 0.35m ³ /s, Total Dynamic Head of 3.70m	set
3.6.1.2	Discharge Pipe with 400mm dia. to 600mm dia.	set
3.6.1.3	Flap Valve with 600mm dia	set

3.6.1.4	Inlet Gate of 1,400mm W x 1,400mm H	set
3.6.1.5	By-pass Gate of 2,000mm W x 2,000mm H	set
3.6.1.6	Outlet Gate with 2,000mm W x 2,000mm H	set
3.6.1.7	Flap Gate of 1,500mm dia.	set
3.6.1.8	Control Gate of 1,500mm W x 1,800mm H	set
3.6.1.9	Inlet Gate No.1 of 1,400mmW x 1,400mm H	set
3.6.1.10	Fabricated Wooden Stop Log with 160mm W x 250mm H x 2,600mm L	No.
3.6.1.11	Bar Screen with 2,600mm W x 3,800mm H	set
3.6.1.12	Pump Lifting Device of 1 tonne safe working load	set
3.6.1.13	Flap Gate of 900mm dia. for Sewer Outlet	set
3.6.1.14	1,000mm dia. for Sewer Outlet	set
3.6.1.15	Flap Gate of 1,200mm dia. for Sewer Outlet	set
3.6.1.16	Flap Gate of 1,500mm dia. for Sewer Outlet	set
3.6.1.17	Flap Gate of 1,800mm dia. for Sewer Outlet	set
3.6.1.18	Spare parts as Listed in the Specifications	L.S.
4.3.1.1	Supply of Flap Gate of 900mm dia. for Sewer Outlet	set
4.3.1.2	Supply of Flap Gate of 1,000mm dia. for Sewer Outlet	set
4.3.1.3	Supply of Flap Gate of 1,200mm dia. for Sewer Outlet	set
4.3.1.4	Supply of Flap Gate of 1,500mm dia. for Sewer Outlet	set

12.11.2 Installation Works

Payment will be made at the lump sum price entered in the Bill of Quantities for the installation of all mechanical equipment which shall be full compensation for completing the installation in accordance with the Drawings, the specification and to the approval of the Engineer and shall include the cost of all labour, tools, equipment and all other related costs.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.5.2.1	Installation of Mechanical Equipment	L.S.
3.6.2.1	Installation of Mechanical Equipment	L.S.
4.3.1.1	Installation of Flap Gate	L.S.

12.11.3 Testing and Commissioning

Payment will be made at the lump sum price entered in the Bill of Quantities upon completion of the testing and commissioning of all mechanical equipment which shall be full compensation for the cost of all testing and commissioning of all items of mechanical equipment and the respective systems in which they are installed all in accordance with the specification and to the approval of the Engineer and shall include the cost of all labour, tools, equipment and all other related costs.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.5.3.1	Completion Testing and Commissioning	L.S.
3.6.3.1	Completion Testing and Commissioning	L.S.
4.3.3.1	Testing and Commissioning of Flap Gate	L.S.

SECTION 13. MINOR METALWORKS
TABLE OF CONTENTS

	Page
13.1 GENERAL	13-1
13.1.1 Scope	13-1
13.1.2 Submittals.....	13-1
13.1.3 Standards	13-1
13.2 FABRICATION AND CONSTRUCTION.....	13-2
13.2.1 General.....	13-2
13.2.2 Welding.....	13-2
13.2.3 Protective Treatment of Metalwork	13-2
13.2.4 Check Sheets	13-3
13.2.5 Installation	13-3
13.3 LADDER RUNGS	13-3
13.4 FABRICATED MANHOLE COVERS.....	13-3
13.5 MEASUREMENT AND PAYMENT	13-4
13.5.1 Ladder Rungs.....	13-4
13.5.2 Fabricated Manhole Covers	13-4

SECTION 13. MINOR METALWORKS

13.1 GENERAL

13.1.1 Scope

This Section covers the general requirements for designing, manufacturing, transporting, installing, coating and other common requirements incidental to all metal works to be furnished under the Contract.

The metal works herein specified shall mean steel works such steel fences, steel gates, ladder rungs, fabricated steel manhole covers, handrails, etc. as shown on the Drawings or as directed by the Engineer.

13.1.2 Submittals

The Contractor shall prepare Shop Drawings showing complete details, sections and plans of all parts, assemblies, materials lists, components, connections and supports, and relations to the structures based on the Drawings. The Shop Drawings are subject to approval by the Engineer in accordance with Clause 1.3.5 of Section 1.

13.1.3 Standards

Unless otherwise specifically provided in this Specification, the metal works shall be manufactured, fabricated and installed in accordance with the latest provisions of JIS, or other equivalent standards approved by the Engineer.

All materials to be furnished by the Contractor shall be new and shall have the best quality of their respective kinds.

Unless otherwise specified in this Specification, all materials and methods of fabrication shall conform to the standards listed in the following table.

Standards for Metalwork

Item	Standard
Structural Steel	ASTM A36, JIS G3101 or JIS G3106
Structural Steel Pipe	ASTM 120 or JIS G3444
Steel Pipe	JIS G3452
Bolt and Nut	ASTM A307 Grade A or JIS B1180
Arc Welding Electrode	AWS, JIS Z3211
Square Hollow Steel Section	JIS 3466

13.2 FABRICATION AND CONSTRUCTION

13.2.1 General

The Contractor shall be responsible for the correctness and completeness of the Shop Drawings and for shop fit and field connections. The work shall be shop-fitted and shop-assembled as practicable as possible, conforming to the details on the approved Shop Drawings.

Where necessary, metals shall be insulated to prevent electrolysis due to contact between dissimilar metals and to prevent corrosion due to contact between metals and masonry or concrete. Insulation shall be by means of bituminous paint or other approved means.

All fastening, anchors and accessories required for fabrication and erection shall be provided by the Contractor. Exposed fastenings shall be kept to an absolute minimum, evenly spaced and neatly set out. Wood plugs will not be permitted.

Workmanship in fabrication shall conform to the best modern shop and field practice. All joints and intersecting members shall be accurately fitted and all works shall be fabricated on true planes with adequate fastenings.

13.2.2 Welding

All welding shall be in accordance with the requirements of Clause 12.2.5 of Section 12, Mechanical Works, General and as specified below.

All welds shall be visually inspected by the Engineer and shall be subject to his approval.

When so directed by the Engineer, welds shall be tested by radiographic tests specified in JIS 3104 or other testing method approved by the Engineer.

Field welding shall not normally be permitted. However, when expressly authorised by the Engineer it shall not be performed under adverse weather conditions of rain, temperature, moisture and wind unless the welding work is protected in a manner approved by the Engineer.

Welds disapproved by the Engineer shall be chipped out to sound metal, tested and repair-welded and subject to the Engineer's approval using a procedure approved by the Engineer prior to carrying out the repair.

13.2.3 Protective Treatment of Metalwork

All minor metalwork shall be galvanised in accordance with the requirements of this Clause.

- (a) Galvanizing of structural steel, where required, shall be at a rate of 0.6 kilograms per square meter and shall be performed in accordance with ASTM A123, JIS H8641, or equivalent.
- (b) In metal work which is to be galvanized:
 - (i) after fabrication, all joints which are not already welded shall be seal-welded; and
 - (ii) tapped holes shall be tapped slightly oversize and tapped again to the correct size after galvanizing.

- (c) For galvanized metal for handrails, ladders and fence, red lead prime painting will not be required except for weld joints, and one coat of approved paint shall be applied.
- (d) Where painting is called for, galvanized metal surfaces shall be acid-etched prior to the application of the finishing surface coats.
- (e) If painting is required, the Contractor shall submit a proposal of a painting system for the Engineer's approval.

13.2.4 Check Sheets

At least seven (7) days before placing concrete in any structure or installing any metal work, the Contractor shall submit, for approval, three (3) copies of an approved checkout sheet detailing all items of metalwork to be installed including unit masses and dimensions for materials to be furnished and installed and receipted invoices or other approved documentary evidence detailing the mass of any item which has been furnished and installed.

13.2.5 Installation

Metal works to be embedded in concrete shall be embedded when the concrete is being placed or, if shown on the Drawings or directed by the Engineer, recesses or blockouts shall be made in the concrete and the metalwork shall be grouted in place using cement or embedded in second-stage concrete.

The surfaces of all metal works to be in contact with concrete shall be thoroughly cleaned immediately before the grout or concrete is placed.

Metal works shall be accurately positioned and aligned in the locations as shown on the Drawings, and shall be held securely in the correct position during placing and setting of the concrete.

Where it is impracticable to place anchors or anchor bolts required for the installation of metal work when the concrete is placed, holes shall be drilled into the concrete after the concrete has set for 28 days and expansion bolts, adhesive anchor bolts, or other approved anchors shall be installed.

Field welding, cutting or drilling of prefabricated galvanised metalwork items shall not be permitted without the written approval of the Engineer.

13.3 LADDER RUNGS

Ladder rungs shall be fabricated to the size and dimensions as shown on the Drawings and galvanized.

Ladder rungs shall be installed accurately to the lines and spacings shown on the Drawings in the walls of manholes or other structures as shown on the Drawings.

All materials, workmanship, coating and installation shall be in accordance with the requirements specified in Clauses 12.1 and 12.2.

13.4 FABRICATED MANHOLE COVERS

Manhole covers for use in the pumping stations shall be fabricated to the size and dimensions as shown on the Drawings and shall be galvanized.

Manhole frames shall be accurately installed in the locations as shown on the Drawings taking care to ensure that the finished cover shall be flush with the adjacent finished floor level.

All materials, workmanship, coating and installation shall be in accordance with the requirements specified in Clauses 13.1 and 13.2.

13.5 MEASUREMENT AND PAYMENT

13.5.1 Ladder Rungs

Measurement shall be made of the number of ladder rungs completed and installed and approved by the Engineer.

Payment shall be made at the rate entered in the priced Bill of Quantities which shall be full compensation for the cost of all materials, labour, equipment and incidental costs for completing ladder rungs in accordance with the Drawings and the Specification.

The following pay item shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.2.4.10	Ladder Rungs	No.
2.2.5.6		
3.2.4.10		
3.2.5.6		
3.3.3.11		
3.4.3.10		
4.2.4.10		
4.2.5.6		

13.5.2 Fabricated Manhole Covers

Measurement shall be made of the number fabricated manhole covers completed and installed and approved by the Engineer.

Payment shall be made at the rate entered in the priced Bill of Quantities which shall be full compensation for the cost of all materials, labour, equipment and incidental costs for completing the fabricated manhole covers in accordance with the Drawings and the Specification. The rate shall specifically include the cost of installation including the cost mortar bedding.

The following pay item shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.3.3.13 3.3.3.14 3.4.3.9	Fabricated Manhole cover	No.

SECTION 14. ELECTRICAL WORKS

TABLE OF CONTENTS

	Page
14.1 GENERAL	14-1
14.2 GENERAL REQUIREMENTS.....	14-1
14.2.1 Scope of Works	14-1
14.2.2 Applicable codes and Standards	14-2
14.2.3 Materials	14-2
14.2.4 Site Conditions (Design base)	14-2
14.2.5 Design Criteria.....	14-3
14.2.5.1 Electrical system.....	14-3
14.2.5.2 Allowable Voltage Drop	14-3
14.2.5.3 Transformer sizing	14-3
14.2.5.4 Cable sizing.....	14-4
14.2.5.5 Lighting Arrangement.....	14-4
14.2.6 Test and Inspection.....	14-4
14.2.6.1 Test at the Manufacturer's Factory.....	14-5
14.2.6.2 Witness Inspection.....	14-5
14.2.7 Spare Parts.....	14-6
14.2.8 Training	14-6
14.2.9 Test on Electrical Completion	14-6
14.2.10 Operation and Maintenance Manual.....	14-7
14.3 DETAILED SPECIFICATIONS FOR ELECTRICAL EQUIPMENT.....	14-7
14.3.1 Design Conditions	14-7
14.3.2 Receiving transformer	14-7
14.3.3 Electrical Equipment	14-7
14.3.3.1 Distribution Panel	14-7
14.3.3.2 Pump and Gate Control Panel.....	14-8
14.3.3.3 Local Control Switch Box.....	14-9
14.4 DETAIL SPECIFICATIONS FOR INSTRUMENTATION.....	14-9
14.4.1 Level Meter.....	14-9
14.4.1.1 Submerged Diaphragm Type Level Meter	14-10
14.4.2 Level Control Switch	14-10
14.4.2.1 Electrode Type Level Control Switch.....	14-11
14.5 DETAIL SPECIFICATIONS FOR ELECTRICAL INSTALLATION WORKS....	14-11
14.5.1 Materials	14-11

14.5.1.1	Power Cables, Control Cables and Instrument Cables	14-11
14.5.1.2	Steel conduits and flexible conduits	14-12
14.5.1.3	Boxes and Fittings	14-12
14.5.1.4	Supporting Steel Materials	14-12
14.5.1.5	Outdoor Lighting	14-12
14.5.1.6	Miscellaneous Materials.....	14-13
14.5.2	Installation Works	14-13
14.5.2.1	General	14-13
14.5.2.2	Installation of electrical equipment.....	14-14
14.5.2.3	Laying and Termination of Cables	14-14
14.5.2.4	Piping work	14-15
14.5.2.5	Underground cable laying work.....	14-15
14.5.3	Earthing Works	14-15
14.5.4	Other Miscellaneous Works	14-16
14.6	SPECIAL REQUIREMENTS FOR EQUIPMENT	14-16
14.6.1	Transformer Substation Equipment.....	14-16
14.6.2	Pump/motor operation	14-19
14.7	POWER SUPPLY	14-19
14.8	PAYMENT	14-20
14.8.1	Supply of Electrical Equipment.....	14-20
14.8.2	Installation Works	14-21
14.8.3	Testing and Commissioning	14-21
14.8.4	Power Connection	14-22

SECTION 14. ELECTRICAL WORKS

14.1 GENERAL

This section covers the requirements for the design, furnishing, installation, testing and commissioning of the electrical works for the Thanh Da and Ben Me Coc (1) Pumping Stations.

In this section of the specification the term "Equipment" shall have the same meaning as "Plant" as defined in the General Conditions of Contract.

14.2 GENERAL REQUIREMENTS

This Clause 14.2 specifies the scope of works and general requirements which apply to the electrical works for the Thanh Da and Ben Me Coc (1) Pumping Stations.

14.2.1 Scope of Works

The work covers the construction of the complete electrical systems for Thanh Da and Ben Me Coc (1) Pumping Stations and supply of spare parts for electrical equipment comprising the following items;

- (a) Receiving transformers at Thanh Da and Ben Me Coc (1) Pumping Stations
- (b) Electrical equipment for Thanh Da and Ben Me Coc (1) Pumping Stations
- (c) Spare parts for 2 years operation

The outline of the major items are described hereinafter.

- (1) Receiving transformer to be installed:
 - 22 kV Distribution line materials
 - Transformer
 - Metering and LV distribution cubicle
- (2) Electrical equipment to be installed:
 - Distribution panel
 - Pump and gate control panel
 - Installation materials
 - Cables, terminals and fittings
 - Earthing materials
 - Outdoor lighting
 - Miscellaneous materials

- (3) Civil and foundation works:

The Contractor shall design and prepare all necessary calculations and Drawings for civil and foundation works and complete such civil works in accordance with the relevant specifications for civil works specified in this specification.

- (4) Installation and erection works:

The Contractor shall complete the following works:

- Necessary design and calculation
- Installation and erection of the equipment
- Laying and connection of all necessary power, control and instrumentation cables
- Connection works for earthing wires to the equipment
- Installation and erection of outdoor lighting facilities

- Adjustment of the each equipment
- Miscellaneous works relating to the installation and erection of equipment including safety protection

(5) Tests:

The tests shall include, but not be limited to, the following tests.

- Shop tests (Factory tests)

Electrical equipment shall be tested in accordance with manufacturer's standard test procedure.

- Tests on completion (Field tests)

After completion of individual adjustment and tests of each equipment during installation and erection and upon all equipment being ready for operation, the Contractor shall carry out the field tests of the items to be required in the Specifications in the presence of the Employer and the Engineer.

In the event of the tests do not satisfy the requirements of the Specifications or any defects attributable to the Contractor are found in the test, the Contractor shall promptly repair, replace, adjust or make good, and retest equipment at his own expenses to an extent satisfactory to the Specification.

14.2.2 Applicable codes and Standards

The equipment, materials, design and test and installation of the electrical facilities shall conform to the local law and regulation and the applicable portions of the latest edition of the standard and codes.

- International Electrotechnical Commission (IEC)
- Japanese Industrial Standards (JIS)
- Standards of Japanese Electrotechnical Committee (JEC)
- Standards of the Japanese Electrical Manufactures Associations(JEM)
- Vietnam Standards (TCVN)

14.2.3 Materials

The materials used in all works shall be new, unused and as hereinafter specified. All materials shall be of the very best of their respective kinds. Samples of materials or manufacture's specifications shall be submitted for approval when required by the Engineer prior to the installation.

Electrical equipment shall be at all times during construction be adequately protected against mechanical injury or damage. If any equipment has been damaged, such damage shall be repaired by the Contractor at his own cost and expense.

14.2.4 Site Conditions (Design base)

- | | | |
|-------------------------|---|-----------------------------------|
| (a) Altitude | : | Less than 1,000m above sea level. |
| (b) Ambient temperature | : | |
| - Maximum | : | 45°C |
| - Minimum | : | 5°C |
| - Design temperature | : | 40°C |
| (c) Relative humidity | : | |
| - Maximum | : | 95% |
| (d) Climatic atmosphere | : | Tropical |
| (e) Wind pressure | : | 45m/s |

- (f) Salt contamination :
 Unless otherwise specified, under the contract, design for salt contamination of the insulators and bushings shall be applied the following conditions: 0.03 mg/sq.cm.

14.2.5 Design Criteria

The design of the electrical system shall be carried out with the following clarifications.

14.2.5.1 Electrical system

- (a) Power distribution throughout the plants shall be 50Hz, at the following voltage levels with earthing system. :

Power Distribution System

<u>Service</u>	<u>Rated voltage</u>	<u>Phase/Wire</u>	<u>Earthing</u>	<u>Remarks</u>
Power receiving (Transmission line)	15(22) kV	3/3	Solid	with earthing wire
Low voltage distribution				
- Power	380 V	3/4	Solid	
- Lighting & Miscellaneous	380/220 V	3/4	Solid	

- (b) Equipment and load voltage rating shall be as follows:

Equipment and Load Voltage

<u>Service</u>	<u>Rated voltage</u>	<u>Phase/Wire</u>	<u>Remarks</u>
Motor	380 V	3/3	
Lighting fixtures & Convenient sockets	220 V	1/2 + E	E: Earthing

14.2.5.2 Allowable Voltage Drop

The maximum allowable voltage drops in cables, as a percentage of system nominal line to line voltage, a full load shall be as follows:

- (a) Main power distribution :
- 380 volt motor : 5%
- (b) Total voltage drop at the terminal of low voltage motor shall not exceed 20% during starting period.
- (c) Voltage drop between lighting board and the furthest fixture shall not exceed 3%.
- (d) Voltage drop between main distribution board in substation and local lighting board shall not exceed 2%.

14.2.5.3 Transformer sizing

The transformer shall be sized for the maximum demand of load connected to the associated switchgear plus 10 to 15% spare capacity for design allowance and/or future expansion.

The maximum demand of load shall be calculated by summing up the following loads.

- The normally running loads.
- 30% of the intermittent loads (i.e. pumps, etc.).

14.2.5.4 Cable sizing

The cable shall be sized based on the thermal limits in normal service conditions, and the maximum allowable voltage drops in the circuit.

The current carrying capacity (thermal limit) of cables in normal service condition shall take account of the de-rating due to the laying conditions or grouping.

The cables for main power distribution system shall be sized also to withstand without damage the maximum short circuit thermal stress for the full clearance time of the protective devices (i.e. fuses, or circuit breakers with protection relays).

The current rating of the circuit for cable sizing shall be as follows:

- The transformer primary and secondary cables shall be covered on the rated current of the transformer.
- For switchgear/panel feeder circuit without a transformer, cables shall have a current carrying capacity equal to the maximum demand of loads connected to the switchgear/panel with 10% surplus.
- The motor feeder cables shall be sized based on the 110% of motor name-plated rated current.
- Other cables not mentioned above shall be covered to the maximum current demand.

14.2.5.5 Lighting Arrangement

The lighting fixture shall be designed and arranged for required areas so as to meet the following illumination level:

Illumination Level

Installation Location	* Illumination Level (Lux)	Elevation	Remarks
Office	300	Floor	Architecture Works
Meeting Room	250	Floor	Architecture Works
Worker Room	100	Floor	Architecture Works
Tea Room	100	Floor	Architecture Works
Toilet	50	Floor	Architecture Works
Substation (Outdoor)	20	Floor	Electrical Works
Guard Room	250	Floor	Architecture Works
Outdoor Area	10	Floor	Electrical Works

*: Averaged illumination levels

14.2.6 Test and Inspection

(a) Shop Tests

Electrical equipment shall be tested [in accordance with](#) manufacturer's standard test procedure based on requirement of applicable standard.

The type test for electrical equipment shall not be required at shop test.

(b) Field Tests

The following tests shall be executed by the Contractor in the presence of the Engineer after completion of the installation of electrical equipment and instrumentation equipment.

Prior to the commencement of the test, the Contractor shall submit the test schedule in a suitable stage.

The test result shall be submitted to the Engineer for approval.

(1) Individual tests

Individual tests shall include following items;

- Visual inspection
- Measuring of insulation resistance for all equipment
- Withstand voltage test of insulation oil
- Circuit continuity test
- Checking of relays
- Polarity test
- Phase rotation test

(2) Test on completion

The completion tests shall include following items;

- Visual inspection
- Measuring of insulation resistance for all equipment
- Checking of relays
- Phase rotation test
- Total sequential test

Operation test for each equipment

Interlock sequence test

Indication test

Fault alarm test

14.2.6.1 Test at the Manufacturer's Factory

After completion of the equipment at the shop, the Contractor shall submit [five \(5\) copies of Inspection and/or testing schedule to the Engineer for his approval](#). Tests and/or inspection shall include, but not limited to the items listed in the Table below

Equipment	Test/Inspection	Witness	Record
Transformer	Apply to standard	Yes	Yes
Distribution Panel	Apply to standard	Yes	Yes
Local Panel	Apply to standard	No	Yes
Instrument equipment	Apply to standard	No	Yes

During the shop test and inspection, the Contractor shall perform an operational test at the factory under simulated field operating conditions, if required.

Equipment and materials for the pumping stations shall be inspected and tested in accordance with the Manufacturer's Standards.

14.2.6.2 Witness Inspection

The Contractor shall invite one (1) electrical inspectors, nominated by the Engineer, for a total of five (5) man-days for the purpose of witnessing the tests in the suppliers' workshops.

All necessary expenses for the said inspectors including round-trip air tickets, per-diem living allowance and land transportation charges shall be borne by the Contractor.

14.2.7 Spare Parts

The Contractor shall furnish the spare parts for 2 years operation to be required for pumping station maintenance as listed below.

	Thanh Da	Ben Me Coc (1)
(1) Pump and gate control panel		
Meter for each type	1 pc	1 pc
Fault indicator for each type	1 pc	1 pc
Control switch for each type	1 pc	1 pc
Selector switch for each type	1 pc	1 pc
Test terminal for each type	1 pc	1 pc
Time relay for each type	1 pc	1 pc
Auxiliary relay for each type	1 pc	1 pc
MCCB for each capacity	1 pc	1 pc
Magnetic contactor for each type	1 pc	1 pc
Lamp (LED) for each indication	100 %	100 %
Fuse for each type	300 %	300 %
Fluorescent lamp	100 %	100 %
(2) Outdoor Lighting		
Lamp	100 %	100 %
Ballast	100 %	100 %
(3) Others		
The Contractor's recommended spare parts for 2 years operation for each pumping station.		

14.2.8 Training

Training in the use, operation and maintenance of electrical equipment shall be included in the training programmed to be conducted by the Contractor in accordance with Clause 12.2.15 of Section 10, Mechanical Works.

14.2.9 Test on Electrical Completion

After the electrical equipment has been installed, tested, approved and each mechanical unit is fully installed, adjusted and successfully completed its mechanical run, the Contractor shall conduct operation tests in the Engineer's presence to demonstrate that the entire work is properly installed, correctly adjusted to operate as specified.

The Contractor shall make all final adjustment to the control and detection devices. The Contractor shall be responsible for the operation of the plant during the test on completion. All the tests shall be carried out by the Contractor at his responsibility and costs including necessary testing equipment and instruments.

The final results of all tests including tests run by the Contractor shall be subject to acceptance by the Engineer.

Unless otherwise specified, the Contractor shall submit to the Engineer five (5) copies of test or inspection reports.

Testing of all electrical equipment shall be incorporated into the Contractor's programme of testing as described in Clause 12.2.8.2

14.2.10 Operation and Maintenance Manual

At least three (3) months prior to the date of site testing and commissioning of the pumping stations, the Contractor shall submit three (3) copies of the Operation and Maintenance Manual which shall contain comprehensive data for the operation and maintenance of the entire pumping stations in addition to comprehensive information for the operation and maintenance of each individual item of Plant, for the Engineer's review and comments. Following approval by the Engineer, and within the time requirements stated in the Clause 12.2.15, ten (10) copies of the final Operation and Maintenance Manual shall be submitted by the Contractor for the Employer's reference.

The operation and maintenance manual for electrical plant shall be incorporated into the operation and maintenance manuals referred to in Clause 12.2.16.

14.3 DETAILED SPECIFICATIONS FOR ELECTRICAL EQUIPMENT

The Contractor shall furnish and install all equipment and devices as hereinafter specified and shown on the Drawings.

14.3.1 Design Conditions

- (a) Frequency : 50 Hz
- (b) Phases : 3 phase
- (c) Rated highest system voltage
 - High tension 15 (22) kV : 17.5 (24) kV
 - Low tension : 600 V
- (d) Nominal voltage
 - High tension : 15 (22) kV
 - Low tension : 380 V (Three (3) phases)
220 V (Single phase)
- (e) Rated lightning impulse withstand voltage
 - 22 kV equipment : 125 kV
- (f) Neutral grounding system
 - 22 kV : Solidly grounded
- (g) AC operating voltage
 - Three phase : AC 380 V
 - Single phase : AC 220 V
- (h) Rated CT secondary current : 5 A

14.3.2 Receiving transformer

- Capacity : 160 kVA at Thanh Da; 250 kVA at Ben Me Coc (1)
- Type : Three phases
- Voltage rate : 15(22)+2x2.5%/0.38(0.22)kV

14.3.3 Electrical Equipment

14.3.3.1 Distribution Panel

The distribution panel installed in the pumping stations shall be outdoor use, metal enclosed and self-standing type, and shall include necessary protection devices, circuit breakers and accessories.

- (a) Ratings
 Rated voltage : 600 V
 Rated normal current : 400A
 Rated short-circuit breaking current : 25kA
 AC power frequency withstand voltage : 2,200 V
 Bus bar rating : 3 phase 4 wire, 400A
- (b) Quantity
 : Thanh Da : 1 set
 Ben Me Coc (1) : 1 set
- (c) Ratings for Circuit breaker
 Type : Moulded case circuit breaker, 3 phase, with alarm contact
 Ampere frame : 400A
 Rating : 600V, 250A, 25kA
 Operation : Manual
 Control voltage : AC 110V
- (d) Accessories for Distribution Panel
- | Components | Quantity |
|--------------------------------|----------|
| Current transformer | 2 sets |
| Voltage transformer | 2 sets |
| Under voltage relay | 1 set |
| Ammeter with selector switch | 1 set |
| Voltmeter with selector switch | 1 set |
| Watt hour meter | 1 set |
| Moulded case circuit breaker | 1 lot |
| Over current grounding relay | 1 lot |
| Other necessary items | 1 lot |

14.3.3.2 Pump and Gate Control Panel

The pump and gate control panel installed in the pump station shall be outdoor use, metal enclosed and self-standing type, and shall include necessary pump and gate control equipment with protection device, accessories and control relay(s).

- (a) Quantity
 Pump and gate control panel : Thanh Da : 2 sets
 Ben Me Coc (1) : 2 sets
 Gate control panel : Ben Me Coc (1) : 1 set
- (b) Type and ratings of power supply equipment
 (1) Incoming circuit breaker
 Rating : 3 phase, 400 A, 25kA
 Current rating : According to the load
 Operation : Local manual operation
- (2) Feeder circuit breaker
 Type of pump start circuit
 Motor capacity less than 30kW : Direct start circuit (Reversible / Non-reversible)
 Motor capacity over 30kW : Star – Delta start circuit (Reversible / Non-reversible)
 Motor voltage : 380 V
 Rated current : According to the load
 Rated frequency : 50 Hz
 Contactor : Electromagnetic type contactor

- Operation : Local manual and remote operation
- (3) Accessories : 380V/110V single phase transformer
Thermal relay
Overcurrent grounding relay
Other necessary accessories

(c) Supervisory equipment

(1) Facilities and Quantity

The following components shall be mounted on the panel(s).

Ammeter with selector switch	1 lot
Voltmeter with selector switch	1 lot
Start stop switch	1 lot
Pump operation Indicator	1 lot
Process variable indicator	1 lot
Fault indicator	1 lot
Other necessary items	1 lot

(2) Meters and Wiring

Indicating meters for ammeter and voltmeter shall be of flush mounted and back connected type, dust-proof, and wide scale type.

Each meter shall have a removal transparent cover or a cover with a transparent window.

Wiring for secondary of voltage and current transformers to be installed in cubicles shall be coloured respectively according to appropriate standards and terminated with terminals and marked corresponding to the wiring diagrams. Each meter and wiring shall be suitable for operation with the voltage and current transformers under both normal and short circuit conditions.

Process variable indicator:

Process variable indicating meters for sluice gate water level shall be mounted on the supervisory panel.

Type	:	Moving coil type, Single point indicator
Indication range	:	0 to 100%
Accuracy	:	+/- 1% of span
Input signal	:	DC 1 to 5 V or DC 4 to 20mA
Others	:	Zero adjustment and span adjustment
Accessories	:	Scale plate

14.3.3.3 Local Control Switch Box

The local control switch box shall be weatherproof outdoor stand type, corrosion resistant, vermin-proof and shall include necessary motor control equipment and accessories.

All motor control devices such as control push button switches and indication lamps shall be mounted on switch box.

14.4 DETAIL SPECIFICATIONS FOR INSTRUMENTATION

The Contractor shall furnish and install all equipment and devices as specified hereinafter and shown on the Drawings.

14.4.1 Level Meter

The level meter installed in the pump station area shall be as following quantity and type;

No	Location	Quantity	Type
<u>Thanh Da</u>			
LIA-TH-101	Inlet Gate No.1 (Inside)	1 set	Submerged diaphragm type
LIA-TH-102	Bypass Gate (Outside)	1 set	Submerged diaphragm type
<u>Ben Me Coc (1)</u>			
LIA-BE-101	No. 2 Sluice Gate	1 set	Submerged diaphragm type
LIA-BE-102	Bypass Gate (Outside)	1 set	Submerged diaphragm type

14.4.1.1 Submerged Diaphragm Type Level Meter

The submerged diaphragm type level meter shall be measured the water level by detecting water pressure with detection element installed in the water.

Ratings

Accuracy	:	Not less than +/- 0.5% of full scale
Output signal	:	DC 4 to 20 mA and DC 1 to 5 V
Measurement Range	:	0 to 10 m by water level
Ambient temperature	:	- 5 to 50 degrees
Power supply	:	AC 100 V, 50Hz or DC 24 V

Material

Detection parts	:	Stainless steel SUS 304/316 Polyethylene resin
Pressure detecting parts	:	Stainless steel SUS 304/316 Chloroprene rubber and silicon rubber
Unfilled tube (External sheath)	:	Polyvinylchloride
Installation method	:	Throw into the water with guide pipe
Accessory	:	Signal converter Interface Box Wave protection pipe

14.4.2 Level Control Switch

The level control switch installed in the plant area shall be as following quantity and type;

No	Location	Quantity	Type
<u>Thanh Da</u>			
LC-TH-101,2	Main pump well	2 sets	Electrode type
<u>Ben Me Coc (1)</u>			
LC-BE-101,2	Main pump well	2 sets	Electrode type

14.4.2.1 Electrode Type Level Control Switch

The electrode type level control switch shall be measure the water level by the difference between energizing of the electrode and interruption of electrode.

Ratings

Output signal	: No voltage contact (4 contacts)
Ambient temperature	: - 20 to 50 degree
Material	: Stainless steel SUS 316 or Hastelloy B, C or Titanium and Polyethylene sheath
Installation method	: With flange installation, (Flange size JIS 10 K)
Accessory	: Alarm setter

14.5 DETAIL SPECIFICATIONS FOR ELECTRICAL INSTALLATION WORKS

14.5.1 Materials

This section covers cables, conduits, pull boxes, cable ducts and trays which will be used for the main circuit and secondary circuit of power, control, instrumentation and other requirement.

In designing the length of cables, some allowance thereof shall be taken into consideration by the Contractor.

14.5.1.1 Power Cables, Control Cables and Instrument Cables

Conductor size for cables shall be adequate for the load requirements, voltage drop, short circuit current, and diversity factor for individual circuit application.

(a) Power cables

600V power cables for motor circuit, heater circuit and other power circuits shall be of jacket type, 600 V cross-linked polyethylene insulated PVC sheathed type (CV).

600 V cross-linked polyethylene insulated PVC sheathed, welded and corrugated steel armoured PVC sheathed power cable (CVMAZV) shall be used for burred portion in the ground of outdoor lighting power cables.

Section area of cores for 600 V power cables shall not be less than 3.5sq.mm.

(b) Control and instrumentation cables

Except for small wiring of equipment, control cables shall be of jacket type, 600 V polyvinyl chloride insulated and sheathed control cable with copper tape shielding (CVV-S).

The Contractor shall design the number of cores and the size and length of cable based on the proper drawings or diagrams prepared by the Contractor.

The individual cores shall be identified by following different colour scheme and numbers of figure.

4 cores or less		
2-cores	:	Black and white
3-cores	:	Black, white and red
4-cores	:	Black, white, red and green
5 cores or more	:	Individual cores shall be identified by surface printing of numbers in figure on the black insulation.

Section area of cores for control and instrumentation cables shall not be less than 2.5sq. mm. In case of important circuits, such as section areas of CT and VT circuits shall be 3.5sq. mm or more. In consideration of cables, the Contractor shall, if possible, design in such a manner that the size of cores or cables shall be unified.

14.5.1.2 Steel conduits and flexible conduits

Steel conduits shall be steel, hot-dipped galvanized and equipped with couplings and thread protector caps. All surfaces and threads shall be coated with zinc. The sectional areas of a steel conduit shall be, at least, 2.5 times the total cross sectional area of cables to be pulled in.

- Rigid steel conduits shall be installed for all exposed cable route.
- PVC coated conduits shall be installed for corrosive area cable route.
- Couplings and elbows shall be of the same materials as conduit pipes.

Flexible metal conduits shall be used for flexible cable connection route. Flexible metal conduits shall have a interlocked flexible galvanized steel core with a permanently bonded outer polyvinyl chloride jacket.

14.5.1.3 Boxes and Fittings

The pull boxes, outlet boxes, fittings and covers shall be of mild steel and/or cast iron alloy with adequate strength and have sufficient size to provide free space for all conductors enclosed.

- Pull boxes shall be sufficient size to accommodate the connected conduits and enclosed conductors.
- Boxes and fittings shall be plated by melting zinc or coated with rust-preventive paint and tow or more finish coatings.
- Outlet boxes shall be of galvanized steel, square and of sufficient size to accommodate all the required conductors enclosed in the box.

14.5.1.4 Supporting Steel Materials

The supporting steel materials shall be of hot-dipped galvanized steel with adequate strength for support conduits, cable tray and/or wiring duct.

14.5.1.5 Outdoor Lighting

The pumping station shall be equipped with outdoor lightings apparatuses at appropriate areas. The Contractor shall provide all necessary materials and furnish complete lighting systems .

In the selection of lamps and fittings consideration should be given to ensure the maximum lamp life, the minimum likelihood of internal moisture accumulation, and also effects of vibration, operating temperature, and breathing.

Types of outdoor lighting fixture shall be of straight pole with pole head type lighting fixture and equipped with screwed base lamp holders, and shall be of high power factor suitable for stable operation in tropical climate and weatherproof type. The lamp shall be of high pressure sodium type and approximately 360 W rating.

Lighting supports for outdoor lighting shall be of base plate type steel poles painted with suitable colour. Ballast, cut out switch and terminals shall be equipped in the pole and other attachments necessary for wiring and fixing of the lighting fixtures shall also be provided with the pole.

The Contractor shall provide suitable outdoor lighting switch box for lighting systems. The lighting switch box shall be indoor use, metal enclosed wall mounted type and switching operated by manual at control room. The Contractor shall be provided enough capacity of branch circuit breakers for high pressure sodium lights to avoid tripped by increase of starting current.

600 volt PVC insulated wires of 3.5sq.mm in size shall be laid in the lighting pole for connection from the lighting switch box to the lighting fixtures.

14.5.1.6 Miscellaneous Materials

All other miscellaneous materials necessary for completion of the work shall be supplied and installed by the Contractor's responsibility.

14.5.2 Installation Works

14.5.2.1 General

Installation and erection works for electrical equipment shall be carried out in compliance with the related laws and regulations of the Vietnam, as in addition to the specifications.

(a) Work Schedule

The Contractor shall prepare the work schedule and submit to the Engineer for information. The said work schedule shall be carefully worked-out for each system, in such detail that the timetable for design, manufacture, transportation, testing, number of people arrangement and so on can be easily understood.

(b) Materials and workmanship

All materials to be used for the work should be new and free from defects and imperfections. The materials to be used shall be accurately furnished, and in accordance with the highest current technical standards. All parts as well as spare parts shall be perfectly interchangeable.

(c) Storage of Equipment and Materials

The Contractor shall provide a waterproof space for storage of all necessary cases, boxes, etc., containing delicate components, small items as bolts, screws, etc. All materials, intended for outdoor installation such as cables, earth-wires, outdoor equipment, etc., may be stored in a protected uncovered storage space.

(d) Erection and Testing Equipment

All necessary equipment and tools shall be provided for unloading, storing, unpacking, moving, erecting, setting, securing and connecting all materials to be used for the construction by the Contractor.

Measuring and testing instruments shall also be provided for the construction by the Contractor.

(e) Accident Prevention

All personnel engaged in the construction works shall be provided with appropriate protective clothes, helmets, rubber boots, welding glasses and masks, etc.

Persons working at heights exceeding 2 m above the ground level shall be equipped with approved safety belts.

(f) Necessary Design and Calculation

The Contractor shall furnish a complete design of electrical equipment, equipment positioning and wiring route etc. The design works shall include, but not be limited to, technical calculations, preparation of Drawings and specifying materials and/or equipment not specified in the Specifications but necessary for the completion of the Works.

The Contractor shall calculate and examine the electrical system conditions and shall design the protective relaying system, relay settings and cable size.

14.5.2.2 Installation of electrical equipment

The assembly of equipment, shall be carried out under the supervision of the Contractor's erection supervisor in accordance with the approved Contractor's Drawings and erection manuals..

The equipment and panels to be installed on a concrete foundation shall be securely set after completion of hardening of concrete, and the surface of the concrete foundation shall be finished by mortar.

The equipment and panels to be installed on the outdoor ground, the surface of the foundation shall be not less than 200 mm above the ground level.

If the equipment base-plates would show errors which would result in verticality errors for the equipment, the Contractor shall place suitable spaces between base-plates and supporting structures to restore verticality.

To fasten the equipment to its supporting structure, galvanized steel bolts or other equivalent materials shall be used.

The Contractor shall check that all the equipment shall operate without any vibration.

At the end of erection works and after the final checking of connections, the Contractor shall clean all porcelains, conducting parts, moving parts, inside and outside of equipment in order to remove all dirt.

14.5.2.3 Laying and Termination of Cables

Cables pulled through conduits or trenches shall be supported in an acceptable manner to the Engineer so as to avoid damage to the insulation. Grease or oily substances shall not be used to facilitate the passage of the cables in conduits.

The cables shall be laid in an orderly and neat manner in cable ducts or trenches.

Cable splices in the trench, conduits or elsewhere between equipment terminals or connection terminals shall be not permitted.

The cable insulating jackets shall be cut and removed at the ends to allow neat and secure terminations. The insulation of each core shall be cut back to allow terminating without leaving any exposed bare cables. Before terminating, each core wire of control and instrument cables shall be identified with core mark number tube.

The shield tape of 600 V CVV-S cables shall be grounded at both ends.

Connection of each terminals shall be done with solderless terminals.

The 600V power cables section area over 38 sq.mm shall be use cable termination.

Each core wire of power cables shall be identified with colour index.

Incoming cables to the panels shall be firmly secured with proper support to avoid excess stress and load on the termination.

The gaps in the cable hole of the panel bases, walls, etc., shall be filled with putty or other materials to prevent entry of moisture, insects and others. High voltage cables shall be kept away from other cables such as low voltage cables, control cables and instrumentation cables more than 30cm or more.

Special considerations for flexibility shall be taken for conduit pipes and cable trays which pass through the expansion joints of structure.

14.5.2.4 Piping work

Radius of curvature of conduits shall be over 6 times of inside diameter and bending angle shall not exceed 90 degrees. Bending in one section shall not exceed 4 points and total of bending angle shall not exceed 270 degrees.

Messenger wire of 1.2 mm or more shall be inserted into spare pipes.

When one section of conduit length exceed 30 m, pull box(es) shall be provided each 30 m span.

Conduits and boxes shall be fitted securely to structures. Fittings of conduits to a place without access for inspection shall not be permitted.

The conduit connectors and couplings shall be screwed type.

All conduits and boxes shall be connected to earthing conductor and all connection point of each conduits shall also be connected with earthing bonded wire or earthing clamp each other.

14.5.2.5 Underground cable laying work

The Contractor shall responsible for identifying the underground structures and obstacles prior to excavation and shall take necessary measures to avoid damage.

The Contractor shall provide cable buried marker on the ground and underground hazard tape on the buried cable to indicate the buried conduits or cables.

14.5.3 Earthing Works

(a) General

The Contractor shall furnish and install a complete earthing systems as shown on the Drawings and specified hereinafter.

The exposed metal frames of all electrical apparatus and machinery not forming parts of the electric circuits, neutral of transformers, etc., shall be grounded.

(b) Earthing conductor, plate and rods

The following materials shall be used for earthing systems;

(1) Earthing conductor

Annealed copper stranded conductor.

The Contractor shall be calculated and selected the adequate size of conductors for main mesh, arrester, transformer neutral connection and each equipment earthing conductors.

(2) Earthing plate

90 cm square, 1.5 mm thickness copper plate or equivalent

(3) Earthing rods

16 mm diameter, 3 m length copper clad steel rod with coupling

(4) Connectors

Compression type connectors which shall be able to connect the annealed copper stranded conductors each other, earthing plate and rod.

(c) Earthing works

The necessary soil excavation and backfiring works for earthing conductors and rods shall be executed by the Contractor.

The Contractor shall submit full details and Drawings for earthing system to the Engineer for approval.

Earthing rods, plate and conductors shall be buried deeper than 0.6 m or more from the ground surface.

The connection between earthing conductor and ground rod, plate and equipment connection conductor shall be electrically and mechanically rigid.

Earthing systems of the instruments equipment shall be done by separately from common ground.

The earthing for transformer neutrals and lightning arresters, earthing rod shall be installed in additionally for interconnections with earthing mesh.

Boundary fences shall be earthed by means of earthing rods, separately from the main earthing mesh.

14.5.4 Other Miscellaneous Works

Other miscellaneous works including installation of identification plates for completion of Works shall be carried out by the Contractor.

14.6 SPECIAL REQUIREMENTS FOR EQUIPMENT

Quantities of electrical and instrumentation equipment are listed in the Bill of Quantity. Various dimensions of electrical and instrumentation equipment shown on the drawings are approximate only. The Contractor shall refer to these dimensions, and propose, for approval, the exact size in their design and manufacturing works.

14.6.1 Transformer Substation Equipment

(a) For Thanh DA transformer substation

(1) Transformer

Type	:	3 phases
Capacity	:	160 kVA.
Rated voltage	:	15(22)+2x2.5%/0.38(0.22)kV
No load loss	:	550 (W) (design value)
Load loss at 750C	:	2800 (W) (design value)
Current no load	:	6.2A (15kV) – 4.2A(22kV)
Short circuit voltage	:	4.5%

(2) Over-voltage protection at medium voltage using valve surge arrester with parameter :

Rated voltage	:	15 kV
Frequency	:	50 Hz
Nominal discharge voltage	:	12.7kV
BIL (1,2/50 μ S standard impulse wave)	:	110 kV
Nominal discharge current	:	10 kA
Maximum residual voltage	:	
with current wave 0,5 μ S - 10 kA	:	35 kV
Maximum starting impulse voltage level	:	23.5 kV
(for 500 A impulse 45 μ S wave terminal slope)	:	

* The lightning withstand sheath :

Power frequency withstand voltage	:	
-----------------------------------	---	--

- | | | | |
|--|--------------------------------------|---|----------|
| | + Dry for one minute | : | 50 kV |
| | + Wet for one second | : | 40 kV |
| | Electric discharge Creepage distance | : | 20 mm/kV |
| | Insulation material of cover | : | Polymer |
- (3) Protection at MV side by fuse cut out (LBFCO) :
- | | | |
|--|--|------------|
| Type | : | 3 phase |
| Frequency | : | 50 Hz |
| Rated voltage | : | 24 kV |
| BIL (1.2/50 μ S standard impulse wave) | : | 125 kV |
| Rated power frequency withstand voltage | : | |
| + Dry for one minute | : | 75 kV |
| + Wet for one second | : | 50 kV |
| Electric discharge Creepage distance | : | 20 mm/kV |
| Operating temperature | : | 0°C - 50°C |
| Short circuit breaking capacity | : | 12.5 kA |
| Nominal current | : | 200 A |
| Shape, size : | Similar with LBFCO of ABChance or equivalent | |
- (4) Protection at LV by aptomat :
- | | | |
|--|---|---|
| Rated voltage | : | 500V (insulation level 1000 V) |
| Rated current | : | 300 A |
| Insulation resistance | : | Rcd \geq 10 M-ohm |
| Contact impedance | : | Rtx \leq 100 μ -ohm |
| Temperature at rated current | : | \leq 80OC |
| Mechanical strength | : | after 5000 tripping and closing times, specification mentioned above is unchanged |
| Tripping time at 1.5 Idm | : | 2 min |
| Instantaneous tripping time with short circuit current | : | 0.1 sec |
| Short circuit switching capacity | : | 45 kA |
- (5) Support insulator :
- | | | |
|---|---|-------------|
| Rated voltage | : | 24 kV |
| Rated power frequency withstand voltage | : | |
| + Dry for one minute | : | 95 kV |
| + Dry for one minute | : | 75 kV |
| BIL (wave 1.2/50 μ S) | : | |
| + Positive | : | 130 kV |
| + Negative | : | 160 kV |
| Bending load | : | min 12.5 kN |
- Transistorized layer coats on top.
Insulator post is hot dip zinc coated.
- (6) Suspension insulator :
- | | | |
|---|---|-----------|
| Rated voltage | : | 24 kV |
| Mechanical strength | : | 15000 Lbs |
| Rated power frequency withstand voltage | : | |
| + Dry for one minute | : | 130 kV |
| + Wet for minute | : | 110 kV |
| BIL (wave 1.50 μ S) | : | |
| + Positive | : | 215 kV |
| + Negative | : | 225 kV |
| Insulation material | : | Polymer |
| Electric discharge Creepage distance | : | 20 mm/kV |

(b) For Ben Me Coc (1) transformer substation

- (1) Transformer
- | | | |
|-----------------------|---|----------------------------|
| Type | : | 3 phases |
| Capacity | : | 250 kVA. |
| Rated voltage | : | 15(22)+2x2.5%/0.38(0.22)kV |
| No load loss | : | 750 (W) (design value) |
| Load loss at 75°C | : | 4000 (W) (design value) |
| Current no load | : | 9.6A (15kV) – 6.6A(22kV) |
| Short circuit voltage | : | 5% |
- (2) Over-voltage protection at medium voltage using valve surge arrester with parameter :
- | | | |
|--|---|---------|
| Rated voltage | : | 15 kV |
| Frequency | : | 50 Hz |
| Nominal discharge voltage | : | 12.7kV |
| BIL (1,2/50 μS standard impulse wave) | : | 110 kV |
| Nominal discharge current | : | 10 kA |
| Maximum residual voltage with current wave 0,5 μS - 10 kA | : | 35 kV |
| Maximum starting impulse voltage level (for 500 A impulse 45 μS wave terminal slope) | : | 23.5 kV |
- * The lightning withstand sheath :
- | | | |
|--------------------------------------|---|----------|
| Power frequency withstand voltage : | | |
| + Dry for one minute | : | 50 kV |
| + Wet for one second | : | 40 kV |
| Electric discharge Creepage distance | : | 20 mm/kV |
| Insulation material of cover | : | Polymer |
- (3) Protection at MV side by fuse cut out (LBFCO) :
- | | | |
|--|---|------------|
| Type | : | 3 phase |
| Frequency | : | 50 Hz |
| Rated voltage | : | 24 kV |
| BIL (1.2/50 μS standard impulse wave) | : | 125 kV |
| Rated power frequency withstand voltage: | | |
| + Dry for one minute | : | 75 kV |
| + Wet for one second | : | 50 kV |
| Electric discharge Creepage distance | : | 20 mm/kV |
| Operating temperature | : | 0°C - 50°C |
| Short circuit breaking capacity | : | 12.5 kA |
| Nominal current | : | 200 A |
| Shape, size : | Similar with LBFCO of ABCChance or equivalent | |
- (4) Protection at LV by aptomat :
- | | | |
|--|---|---|
| Rated voltage | : | 500V (insulation level 1000 V) |
| Rated current | : | 400 A |
| Insulation resistance | : | Rcd ≥ 10 M-ohm |
| Contact impedance | : | Rtx ≤ 100 μ-ohm |
| Temperature at rated current | : | ≤ 80OC |
| Mechanical strength | : | after 5000 tripping and closing times, specification mentioned above is unchanged |
| Tripping time at 1.5 Idm | : | 2 min |
| Instantaneous tripping time with short circuit current | : | 0.1 sec |
| Short circuit switching capacity | : | 45 kA |

(5) Support insulator :

Rated voltage	:	24 kV
Rated power frequency withstand voltage		
+ Dry for one minute	:	95 kV
+ Dry for one minute	:	75 kV
BIL (wave 1.2/50 μ S)		
+ Positive	:	130 kV
+ Negative	:	160 kV
Bending load	:	min 12.5 kN
Transistorized layer coats on top.		
Insulator post is hot dip zinc coated.		

(6) Suspension insulator :

Rated voltage	:	24 kV
Mechanical strength	:	15000 Lbs
Rated power frequency withstand voltage		
+ Dry for one minute	:	130 kV
+ Wet for minute	:	110 kV
BIL (wave 1.50 μ S)		
+ Positive	:	215 kV
+ Negative	:	225 kV
Insulation material	:	Polymer
Electric discharge Creepage distance	:	20 mm/kV

14.6.2 Pump/motor operation

(a) Inlet Gate and By-Pass Gate

The operation of the sluice gate shall be controlled by the local control panel at the gate.

Local control panel for the sluice gate shall be provided "Open – Close" push button switch and position indicator.

(b) Main pump

Two (2) sets of main pumps (including one (1) stand-by) shall be installed under the mechanical works.

The operation of the main pumps shall be controlled by the local control panels near the pump.

Local control panel for the main pumps shall be provided "Start – Stop" push button switch, position indicator and fault indicator.

14.7 POWER SUPPLY

Power supply to the Thanh Da and Ben Me Coc (1) pumping stations shall be connected by the local power company.

This work shall be paid for the Contractor who shall, in turn, be paid from the provisional sums under the Contract.

14.8 PAYMENT

14.8.1 Supply of Electrical Equipment

Payment for the supply of electrical equipment will be made on the basis of equipment delivered, installed, tested, commissioned and approved by the Engineer.

Payment shall include the cost of supply, shop testing, witnessing by Engineer's or Employer's representative, shipping, insurance, inland transport, storage, fees and any other incidental costs related to the supply of electrical equipment.

All equipment shall be delivered to the Site complete with spare part as specified, its respective documentation including manufacturer's certificates and shop test records. Upon certification by the Engineer that the equipment complies with specified requirements seventy-five percent (75%) of the respective prices per unit, lot, set or lump sum, as the case may be, entered in the Bill of Quantities, shall be authorised for payment.

The remaining twenty-five percent (25%) shall be authorized for payment following the completion, testing and commissioning of each respective item of electrical equipment.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
3.7.1.1.1	Receiving Transformer and Meter Cubicle	set
3.7.1.1.2	Distribution Panel	set
3.7.1.1.3	Pump and Gate Local Panel	set
3.7.1.1.4	Local Control Switch Box	set
3.7.1.2.1	Submerged Diaphragm Type Water Level Gauge	set
3.7.1.2.2	Electrode Type Water Level Control Switch	set
3.7.1.3.1	Lighting Panel and Fixture	set
2.6.1.1.1	Receiving Transformer and Meter Cubicle	set
2.6.1.1.2	Distribution Panel	set
2.6.1.1.3	Pump and Gate Local Panel	set
2.6.1.1.4	Local Control Switch Box	set
2.6.1.2.1	Submerged Diaphragm Type Water Level Gauge	set
2.6.1.2.2	Electrode Type Water Level Control Switch	set
2.6.1.3.1	Lighting Panel and Fixture	set

14.8.2 Installation Works

(a) Cables and Bulk Materials

Payment for the supply of cables and bulk materials shall be made at the lump sum price entered in the Bill of Quantities entered in the Bill of Quantities which shall be full compensation for the provision of all items required for the installation of the electrical works including, but not limited to wiring, cables, cable trays, supports delivered to the Site and certified by the Engineer that such cables and bulk materials comply with specified requirements.

(b) Installation Works

Payment will be made at the lump sum price entered in the Bill of Quantities for the installation of all equipment and bulk materials which shall be full compensation for completing the installation in accordance with the Drawings, the specification and to the approval of the Engineer and shall include the cost of all labour, tools, equipment and all other related costs.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.6.2.1 3.7.2.1	Supply of Cable and Bulk Materials	L.S.
2.6.2.2 3.7.2.2	Installation of Electrical Equipment, Cable and Bulk Materials	L.S.

14.8.3 Testing and Commissioning

Payment will be made at the lump sum price entered in the Bill of Quantities for the completion of testing and commissioning of the complete electrical system of each pumping station which shall be full compensation for the cost of completing the work in accordance with the specification and to the approval of the Engineer and shall include the cost of all labour, tools, equipment and all other related costs.

Owing to the integration of electrical and mechanical works payment for this item shall only be made when the complete mechanical and electrical systems for the respective pumping stations have been tested, commissioned and approved by the Engineer.

The following pay items shall be measured and paid for under this Clause:

Pay Item No.	Description	Unit of Measurement
2.6.3.1 3.7.3.1	Completion Testing and Commissioning	L.S.

14.8.4 Power Connection

Payment for the electric power connections to pumping stations shall be paid from the provisional sums following completion of the work in accordance with the directions , and to the approval, of the Engineer.

The Contractor shall submit documentary evidence of all

Payment made to the power company with his payment claim.

**SECTION 15. BUILDING WORKS
TABLE OF CONTENTS**

	Page
15.1 GENERAL	15-1
15.2 SCOPE OF WORK.....	15-1
15.3 DETAILED SPECIFICATION FOR BUILDING WORKS	15-1
15.4 MEASUREMENT AND PAYMENT	15-1
15.4.1 Architectural and Structural Works.....	15-1
15.4.2 Mechanical and Plumbing Works	15-2
15.4.3 Electrical Works	15-2

APPENDIX TO SECTION 15: SPECIFICATION FOR BUILDING WORKS

SECTION 15. BUILDING WORKS

15.1 GENERAL

This section covers the requirements for the construction of buildings for Package B.

General requirements specified in [Section 1](#) apply to all building works.

15.2 SCOPE OF WORK

The Contractor shall construct the following building :

At Thanh Da:

An Operations/Maintenance Office

At Ben Me Coc (1) Pumping Station:

An Operations/Maintenance Office

A Guard House

At Ben Me Coc (1) [Control](#) Gate:

A Guard House

The Contractor shall be responsible for completion each of the above mentioned building which include architectural, structural, mechanical, plumbing and electrical works. All work shall be in accordance with the drawings, the specifications and the directions of the Engineer.

The Contractor shall also be responsible for the rectification of all defects in accordance with the Conditions of Contract.

15.3 DETAILED SPECIFICATION FOR BUILDING WORKS

All building works shall be in accordance with the Specifications for Building Works appended hereto and comprising the following documents:

- Technical Specification Concrete Works
- Technical Specification for Architectural Work
- General Specification of the Plumbing and Drainage System
- Technical Specification for Electrical Works
- General Specification of the Mechanical Ventilation Air-Conditioning System

It is noted that the above specifications are general specifications and that only clauses applicable to the Works shall apply.

15.4 MEASUREMENT AND PAYMENT

15.4.1 Architectural and Structural Works

Payment shall be made at the lump sum entered in the Bill of Quantities which shall be full compensation for providing all materials, labour, transport and equipment for completing the architectural and structural works in

accordance with the drawings, the specification and to the approval of the Engineer.

Interim payments shall be in proportion to the progress of the work.

The following pay item shall be measured and paid under this clause:

Pay Item No.	Description	Unit of Measurement
2.3.4.1 3.3.5.1 3.4.5.1	Architectural and Structural Works	L.S.

15.4.2 Mechanical and Plumbing Works

Payment shall be made at the lump sum entered in the Bill of Quantities which shall be full compensation for providing all materials, labour, transport and equipment for completing the mechanical and plumbing (including testing specified) works in accordance with the drawings, the specification and to the approval of the Engineer.

Interim payments shall be in proportion to the progress of the work.

The following pay item shall be measured and paid under this clause:

Pay Item No.	Description	Unit of Measurement
2.3.4.2 3.3.5.2 3.4.5.2	Mechanical and Plumbing Works	L.S.

15.4.3 Electrical Works

Payment shall be made at the lump sum entered in the Bill of Quantities which shall be full compensation for providing all materials, labour, transport and equipment for completing the electrical works (including testing specified) in accordance with the drawings, the specification and to the approval of the Engineer.

Interim payments shall be in proportion to the progress of the work.

The following pay items shall be measured and paid under this clause:

Pay Item No.	Description	Unit of Measurement
2.3.4.3 3.3.5.3 3.4.5.3	Electrical Works	L.S.

**APPENDIX TO SECTION 15
GENERAL SPECIFICATIONS FOR BUILDING WORKS**

TABLE OF CONTENTS

SECTION 1	ARCHITECTURAL WORKS
SECTION 2	ELECTRICAL WORKS
SECTION 3	PLUMBING WORKS
SECTION 4	MECHANICAL VENTILATION AND AIR-CONDITIONING

SECTION 1. ARCHITECTURAL WORKS

TABLE OF CONTENTS

	Page
1.1 BLOCKWORK.....	1-1
1.1.1 GENERAL	1-1
1.1.1.1 Scope - Blockwork	1-1
1.1.2 MORTARS	1-1
1.1.2.1 Mortar Materials - Blockwork	1-1
1.1.2.2 Mortar - Blockwork :	1-1
1.1.2.3 Grout - Blockwork :	1-1
1.1.3 BLOCKS.....	1-1
1.1.3.1 Concrete Blocks - Blockwork.....	1-1
1.1.3.2 Fire Rated Blocks - Blockwork.....	1-1
1.1.4 WORKMANSHIP	1-2
1.1.4.1 Workmanship Generally - Blockwork.....	1-2
1.1.4.2 Cleaning - Blockwork	1-2
1.1.4.3 Setting out - Blockwork	1-2
1.1.4.4 Bonding - Blockwork	1-2
1.1.4.5 Building in - Blockwork.....	1-2
1.1.4.6 Jointing - Blockwork	1-2
1.1.4.7 Facework - Blockwork.....	1-3
1.1.5 STRUCTURAL ELEMENTS.....	1-3
1.1.5.1 Wall Ties - Blockwork.....	1-3
1.1.5.2 Flexible Ties - Blockwork	1-3
1.1.5.3 Reinforced Blockwork - Blockwork	1-3
1.1.6 ENVELOPE ELEMENTS.....	1-4
1.1.7 JOINT INSERTIONS.....	1-4
1.1.7.1 Damp-Proof Course - Blockwork	1-4
1.1.7.2 Control Joints - Blockwork.....	1-4
1.1.7.3 Slip Joints - Blockwork	1-4
1.1.8 BLOCKWORK SCHEDULES	1-5
1.1.8.1 Mortar Mix Schedule - Blockwork	1-5
1.1.8.2 Concrete Blocks Schedule - Blockwork.....	1-5
1.1.8.3 Concrete Block Ties Schedule - Blockwork	1-5
1.2 ROOFING.....	1-5
1.2.1 GENERAL	1-5
1.2.1.1 Scope - Roofing	1-5
1.2.1.2 Samples - Roofing.....	1-5
1.2.1.3 Inspection - Roofing	1-6
1.2.1.4 Guarantees - Roofing	1-6
1.2.1.5 Roof Structure - Roofing	1-6

1.2.1.6	Maintenance Manual - Roofing	1-6
1.2.2	MATERIALS AND WORKMANSHIP	1-6
1.2.2.1	Protection - Roofing	1-6
1.2.2.2	Metal Separation - Roofing	1-6
1.2.2.3	Fastenings - Roofing	1-6
1.2.2.4	Thermal Movement - Roofing	1-7
1.2.3	SARKING	1-7
1.2.3.1	Sarking - Roofing	1-7
1.2.3.2	Membrane Support - Roofing	1-7
1.2.4	INSULATION	1-7
1.2.4.1	Bulk thermal insulation - Roofing	1-7
1.2.4.2	Mineral Wool Blanket - Roofing	1-7
1.2.5	METAL ROOFING	1-7
1.2.5.1	Metal Roofing (self supporting) - Roofing	1-7
1.2.5.2	Metal Roofing Installation - Roofing	1-8
1.2.6	RAINWATER GOODS - ROOFING	1-8
1.2.6.1	Jointing Sheet Metals - Roofing	1-8
1.2.6.2	Flashings, Cappings - Roofing	1-8
1.2.6.3	Gutters Generally - Roofing	1-9
1.2.6.4	Downpipes - Roofing	1-9
1.2.7	ROOFING SCHEDULES	1-9
1.2.7.1	Sarking and Insulation Schedule - Roofing	1-9
1.2.7.2	Roof Plumbing Schedules - Roofing	1-9
1.3	WATERPROOFING	1-10
1.3.1	GENERAL	1-10
1.3.1.1	Scope - Waterproofing	1-10
1.3.1.2	Standards - Waterproofing	1-10
1.3.2	WORKMANSHIP	1-10
1.3.2.1	Installation - Waterproofing	1-10
1.3.3	APPROVED MEMBRANE SYSTEMS	1-10
1.3.4	EXTERNAL MEMBRANES - WATERPROOFING AND TANKING	1-10
1.4	METALWORK	1-10
1.4.1	GENERAL	1-10
1.4.1.1	Scope - Metalwork	1-10
1.4.1.2	Samples - Metalwork	1-10
1.4.1.3	Shop Drawings - Metalwork	1-11
1.4.2	MATERIALS AND WORKMANSHIP	1-11
1.4.2.1	Materials - Metalwork	1-11
1.4.2.2	Workmanship - Metalwork	1-11
1.4.2.3	Welding, Brazing, Soldering - Metalwork	1-11
1.4.3	STRUCTURAL MEMBERS	1-11
1.4.3.1	Fastenings - Metalwork	1-11
1.4.3.2	Screws - Metalwork	1-11

	1.4.3.3	Masonry Anchors - Metalwork	1-12
1.4.4		FINISHES	1-12
	1.4.4.1	Protection - Metalwork	1-12
	1.4.4.2	Hot Dip Coatings - Metalwork	1-12
	1.4.4.3	Anodizing - Metalwork.....	1-12
1.4.5		FIRE PROTECTION SYSTEMS.....	1-12
	1.4.5.1	Portable Fire Extinguishers - Metalwork.....	1-12
1.5		TILING.....	1-13
1.5.1		GENERAL	1-13
	1.5.1.1	Scope - Tiling	1-13
	1.5.1.2	Sample Panels - Tiling	1-13
	1.5.1.3	Guarantees - Tiling.....	1-13
	1.5.1.4	Ordering - Tiling	1-13
1.5.2		MATERIALS.....	1-13
	1.5.2.1	Materials Generally - Tiling	1-13
	1.5.2.2	Adhesives - Tiling	1-13
	1.5.2.3	Bedding Mortar - Tiling	1-14
	1.5.2.4	Grout -Tiling	1-14
	1.5.2.5	Sealants - Tiling	1-14
1.5.3		TILES	1-14
	1.5.3.1	Tiles Generally - Tiling	1-14
	1.5.3.2	Ceramic Tiles - Tiling	1-14
	1.5.3.3	Accessories - Tiling	1-14
1.5.4		WORKMANSHIP	1-15
	1.5.4.1	Workmanship Generally - Tiling.....	1-15
	1.5.4.2	Falls and Levels - Tiling	1-15
	1.5.4.3	Setting out - Tiling	1-15
	1.5.4.4	Preparation of Tiles- Tiling	1-15
	1.5.4.5	Bedding Generally - Tiling	1-15
	1.5.4.6	Bedding Thickness - Tiling	1-16
	1.5.4.7	Bedding Floor Tiles - Tiling	1-16
	1.5.4.8	Tile Joints - Tiling	1-16
	1.5.4.9	Grouting - Tiling	1-16
	1.5.4.10	Grouting Methods - Tiling	1-16
	1.5.4.11	Cleaning and Protection - Tiling.....	1-16
1.5.5		SUBSTRATE PREPARATION.....	1-16
	1.5.5.1	Substrates Generally - Tiling	1-16
1.5.6		JUNCTIONS	1-17
	1.5.6.1	Movement Joints - Tiling	1-17
	1.5.6.2	Movement Joint Materials - Tiling	1-17
	1.5.6.3	Caulked Joints - Tiling	1-17
1.5.7		TILING SCHEDULES	1-18
	1.5.7.1	Tiling Schedule - Tiling	1-18

1.6	PAINTING	1-18
1.6.1	GENERAL	1-18
1.6.1.1	Scope - Painting	1-18
1.6.1.2	Definitions - Painting	1-18
1.6.1.3	Samples - Painting	1-18
1.6.2	MATERIALS	1-19
1.6.2.1	Materials Generally - Painting	1-19
1.6.2.2	Colour Selection - Painting	1-19
1.6.2.3	Gloss Level - Painting	1-19
1.6.2.4	Primers, Sealers, Undercoats - Painting	1-19
1.6.3	WORKMANSHIP	1-19
1.6.3.1	Workmanship Generally - Painting	1-19
1.6.3.2	Equipment - Painting	1-20
1.6.3.3	Application - Painting	1-20
1.6.4	SUBSTRATES	1-21
1.6.4.1	Substrate preparation - painting	1-21
1.6.4.2	Metal Surfaces Generally - Painting	1-21
1.6.4.3	Iron and Steel Surfaces - Painting	1-21
1.6.4.4	Masonry, Plaster and Cementitious Surfaces - Painting	1-21
1.6.4.5	Timber Surfaces - Painting	1-22
1.6.5	PAINT SYSTEMS	1-22
1.6.5.1	Paint Systems Generally - Painting	1-22
1.6.6	PAINTING SCHEDULES	1-22
1.6.6.1	Protective Coatings Schedule- Painting	1-22
1.6.6.2	Exclusions Schedule - Painting	1-22
1.7	PLASTERING	1-23
1.7.1	GENERAL	1-23
1.7.1.1	Scope - Plastering	1-23
1.7.1.2	Definitions - Plastering	1-23
1.7.1.3	Sample Panels - Plastering	1-23
1.7.1.4	Extent - Plastering	1-23
1.7.2	MATERIALS	1-23
1.7.2.1	Materials Generally - Plastering	1-23
1.7.3	WORKMANSHIP	1-24
1.7.3.1	Workmanship Generally - Plastering	1-24
1.7.3.2	Proportioning and Mixing - Plastering	1-24
1.7.3.3	Application - Plastering	1-24
1.7.3.4	Tolerances - Plastering	1-24
1.7.3.5	Surface Finishes - Plastering	1-24
1.7.3.6	Protection and Curing - Plastering	1-24
1.7.4	BACKGROUND PREPARATION	1-24
1.7.4.1	Background Defects - Plastering	1-24
1.7.4.2	Preparing Backgrounds - Plastering	1-25

1.7.5	JUNCTION DETAILS.....	1-25
1.7.5.1	Vee Joints - Plastering	1-25
1.7.5.2	Edge Terminations - Plastering	1-25
1.7.6	TRIM.....	1-25
1.7.6.1	Corners and Angles - Plastering	1-25
1.7.6.2	Edge Trim - Plastering	1-26
1.7.6.3	Finish without Cornice - Plastering	1-26
1.7.7	PLASTER AND RENDER FINISHES.....	1-26
1.7.7.1	Cement Render - Plastering	1-26
1.7.7.2	White Set Plaster - Plastering.....	1-26
1.7.8	PLASTERBOARD AND FIBROUS PLASTER LININGS	1-26
1.7.8.1	Sheet Linings - Plastering	1-26
1.7.8.2	Installing Sheet Linings - Plastering	1-26
1.7.9	PLASTERING SCHEDULES.....	1-26
1.7.9.1	Render Finishes Schedule - Plastering	1-26
1.7.9.2	Sheet Linings Schedule - Plastering	1-27
1.8	DOORS.....	1-27
1.8.1	GENERAL	1-27
1.8.1.1	Scope - Doors	1-27
1.8.1.2	Approved Sub-Contractors - Doors	1-27
1.8.1.3	Samples - Doors.....	1-27
1.8.1.4	Guarantees - Doors.....	1-27
1.8.2	TESTS.....	1-28
1.8.2.1	Testing - Doors.....	1-28
1.8.3	MATERIALS AND WORKMANSHIP	1-28
1.8.4	DOORFRAMES	1-28
1.8.4.1	Steel Door Frames - Doors	1-28
1.8.5	DOORS.....	1-28
1.8.5.1	Timber Doors - Doors.....	1-28
1.8.5.2	Timber Door Testing - Doors	1-28
1.8.5.3	Flush Doors - Doors	1-29
1.8.5.4	Roller Shutters - Doors.....	1-29
1.8.6	DOOR SCHEDULES	1-29
1.8.6.1	Door Type Schedule - Doors	1-29
1.9	HARDWARE.....	1-29
1.9.1	GENERAL	1-29
1.9.1.1	Scope - Hardware	1-29
1.9.1.2	Definitions - Hardware	1-30
1.9.2	MATERIALS AND WORKMANSHIP	1-30
1.9.2.1	Installation - Hardware	1-30
1.9.3	LOCKS, LATCHES	1-30
1.9.3.1	Locks Generally - Hardware	1-30
1.9.3.2	Locks : Definitions - Hardware	1-30
1.9.4	KEYING	1-31

1.9.4.1	Keys - Hardware.....	1-31
1.9.5	DOOR FURNITURE	1-32
1.9.5.1	Door Furniture Sets - Hardware.....	1-32
1.9.5.2	Lock and Latch Furniture - Hardware	1-32
1.9.5.3	Door Stops - Hardware	1-32
1.9.6	HARDWARE SCHEDULES	1-32
1.10	WINDOW.....	1-32
1.10.1	GENERAL	1-32
1.10.1.1	Scope - Window	1-32
1.10.1.2	Approved Sub-Contractors - Windows	1-32
1.10.1.3	Shop Drawings - Windows.....	1-32
1.10.1.4	Samples - Windows	1-33
1.10.1.5	Prototypes - Windows	1-33
1.10.1.6	Guarantees - Windows.....	1-33
1.10.2	TESTS	1-33
1.10.2.1	Testing - Windows	1-33
1.10.3	MATERIALS AND WORKMANSHIP	1-33
1.10.3.1	Fabrication - Windows.....	1-33
1.10.3.2	Installation - Windows	1-34
1.10.3.3	Glazing - Windows	1-34
1.10.3.4	Finishes - Windows	1-34
1.10.4	HARDWARE	1-34
1.10.4.1	Hardware Generally - Windows	1-34
1.10.5	WINDOW ASSEMBLIES.....	1-34
1.10.5.1	Openings - Windows	1-34
1.10.5.2	Aluminium Assemblies -Windows	1-34
1.10.6	JUNCTIONS	1-35
1.10.6.1	Junctions with Building - Windows.....	1-35
1.10.6.2	Flashings and Weatherings- Windows	1-35
1.10.6.3	Jointing Materials - Windows	1-35
1.10.6.4	Weather Seals- Windows	1-35
1.10.7	WINDOW SCHEDULES	1-35
1.10.7.1	Generally - Windows	1-35
1.11	GLAZING WORK	1-35
1.11.1	GENERAL	1-35
1.11.1.1	Scope - Glazing	1-35
1.11.1.2	Guarantees - Glazing	1-35
1.11.2	DESIGN	1-36
1.11.2.1	Glass Thickness Design - Glazing	1-36
1.11.3	MATERIALS	1-36
1.11.3.1	Glass - Glazing	1-36
1.11.3.2	Mirrors - Glazing.....	1-36
1.11.3.3	Glazing Materials - Glazing.....	1-36
1.11.4	WORKMANSHIP.....	1-36

1.11.4.1	Workmanship - Glazing	1-36
1.11.4.2	Marking - Glazing	1-37
1.11.4.3	Safety Marking of Glass - Glazing	1-37
1.11.4.4	Cleaning and Replacement - Glazing	1-37
1.11.4.5	Glass Installation Methods - Glazing	1-37
1.11.4.6	Fixing Mirrors - Glazing	1-37
1.12	SUSPENDED CEILING.....	1-37
1.12.1	GENERAL	1-37
1.12.1.1	Scope - Suspended Ceilings	1-37
1.12.1.2	Definitions - Suspended Ceiling.....	1-38
1.12.1.3	Maintenance Manual - Suspended Ceiling.....	1-38
1.12.2	PERFORMANCE	1-38
1.12.2.1	Dimensional Tolerances - Suspended Ceilings under Dead Load	1-38
1.12.2.2	Strength - Suspended Ceilings	1-38
1.12.2.3	Fire Resistance - Suspended Ceilings	1-38
1.12.3	PANELS, TILES, SHEETS AND STRIPS	1-38
1.12.3.1	Sheet Plasterboard - Suspended Ceilings.....	1-38
1.12.3.2	Fire Resistant Plasterboard - Suspended Ceilings	1-39
1.12.4	WORKMANSHIP.....	1-39
1.12.4.1	Installation - Suspended Ceilings	1-39
1.12.5	STRUCTURE	1-39
1.12.5.1	Materials - Suspended Ceiling.....	1-39
1.12.5.2	Support - Suspended Ceiling.....	1-39
1.12.5.3	Access Panels - Suspended Ceilings.....	1-39
1.12.6	TRIM	1-39
1.12.6.1	Trim Generally - Suspended Ceilings.....	1-39
1.12.6.2	Trim to Plasterboard - Suspended Ceilings	1-40
1.12.6.3	Service Penetrations - Suspended Ceilings	1-40

SECTION 1. ARCHITECTURAL WORKS

1.1 BLOCKWORK

1.1.1 GENERAL

1.1.1.1 Scope - Blockwork

The work in this section covers blockwork and associated items and generally comprises, but is not limited to, the blockwork to the perimeter landscaping walls, and basement screen walls.

1.1.2 MORTARS

1.1.2.1 Mortar Materials - Blockwork

Cement : To TCVN 4314 : 1986, part 2.1.2.,and JIS, JASS standard

Lime : To TCVN 4314 : 1986, part 2.0.3. ,and JIS, JASS standard

Sand : To TCVN 1770 : 1986,and JIS, JASS standard

Water : To TCVN 4506 : 1987, part 1,and JIS, JASS standard

Admixtures : (Including colouring pigments, plasticisers, workability agents, water thickeners, waterproofing agents, retarders and the like) : To TCVN 4314 : 1986, part 2.1.5. Do not use unless specified or unless prior approval has been obtained.

Water Thickener: To TCVN 4314: 1986, part 2.1.4 and JIS, JASS standard

1.1.2.2 Mortar - Blockwork :

To TCVN 4314 : 1986, part 2.2. and 2.3. ,and JIS, JASS standard

Mortar Mix : As recommended by the block manufacturer as suitable for the purpose and location of the blockwork and approval by the structural engineer.

Premixed Mortar : Do not use unless prior approval has been obtained.

1.1.2.3 Grout - Blockwork :

Core Filling Grout : To TCVN 4314 : 1986, part 2.2. and 2.3. ,and JIS, JASS standard

1.1.3 BLOCKS

1.1.3.1 Concrete Blocks - Blockwork

To TCVN 2733. ,and JIS, JASS standard

Obtain blocks from an approved source of supply. Provide blocks selected from the manufacturer's range which are purpose-made for their respective uses and locations

Grade 15 total water absorption - less than 210 kg/m³

1.1.3.2 Fire Rated Blocks - Blockwork

To part 1, TCVN 1475 - appendix C. ,and JIS, JASS standard

1.1.4 WORKMANSHIP

1.1.4.1 Workmanship Generally - Blockwork

To TCVN 1475. ,and JIS, JASS standard

Blockwork and blockwork materials shall be liable to rejection if damaged or disfigures during the course of the work under the contract.

Construct blockwork within the tolerances prescribed in part 1, TCVN 1475,and JIS, JASS standard. If cutting is unavoidable, use a masonry saw. Do not chase blockwork without prior approval. Do not chase hollow blocks. If blocks are moved after the initial placement re-lay in fresh mortar.

1.1.4.2 Cleaning - Blockwork

To part 1, item 5.11, TCVN 1475. ,and JIS, JASS standard

Remove mortar smears progressively from the work as it proceeds

1.1.4.3 Setting out - Blockwork

Set out blockwork so as to maintain the block rod of 3 courses to 600 mm and bond with bed joints and vertical joints of equal and uniform width and with the minimum cutting of blocks.

1.1.4.4 Bonding - Blockwork

To part 1, item 3.10, TCVN 1475. ,and JIS, JASS standard

Stretcher bond, unless otherwise shown on the drawings. Bond walls to intersecting walls either by masonry bonding or by tie bonding, as follows : at least every fourth courses shall be engaged for a minimum distance of 90 mm or with block ties to part 1, item 3.10.4.3, TCVN 1475. ,and JIS, JASS standard

1.1.4.5 Building in - Blockwork

Make provision as the work proceeds for the incorporation of items to be build in or keyed to the blockwork wherever practicable run services in the core holes of blockwork, or otherwise provide holes, sleeves, and the like during the erection of blockwork to avoid cutting away and making good. Fill voids at the back of steel door frames solid with mortar as the work proceeds.

Provide suitable corrosion protection for metal items build into or in contact with brickwork. Galvanize ferrous metal items to AS 1650 ,and JIS, JASS standard, coating mass appropriate to the article, and type A for wire, unless otherwise specified.

1.1.4.6 Jointing - Blockwork

To AS 1475, part 1, clause 5.5.2. ,and JIS, JASS standard, shell or full bedding as applicable.

Cut joints flush in blockwork not exposed to view and not be finished by rendering, tiling or the like where a background key is necessary.

Otherwise joints to be pointed up as necessary.

1.1.4.7 Facework - Blockwork

Commence facework not less than 200 mm below adjacent finished ground level. Keep perpends in alternate courses vertically aligned.

Distribute the approved colour range of face blocks evenly throughout the work. If colour concentrations and banding occur, the facework is liable to rejection.

Select blocks from uniform width and double-face qualities in single leaf blockwork with facework both sides. Before commencement, obtain a ruling as to which is the preferred face, and favour that face should a compromise be unavoidable.

1.1.5 STRUCTURAL ELEMENTS

1.1.5.1 Wall Ties - Blockwork

To TCVN 2699 , and part 1, item 3.8, 3.9, and 3.10, TCVN 1475. ,and JIS, JASS standard

Cavity coated or masonry veneer ties as appropriate to the service conditions.

Zinc coated steel for highly corrosive environments as follows

Ties for normal cavity construction	:	Medium duty
Ties for wide cavities (over 80 mm)	:	Heavy duty
Ties at abutments	:	Medium duty

Minimum embedment of a tie in the mortar joint of a wall : 50 mm generally; 75 mm in cavity walls where the cavity width exceeds 80 mm. Install so that water cannot cross the cavity via the tie.

At engaged piers within the cavity: 400 mm. Locate ties at the piers only, at uniform spacing such that the total number of ties per unit area is not less than that specified in Table 3.3. of AS 1475 Part 1. ,and JIS, JASS standard

Provide an extra row of ties spaced 600 mm maximum in a course not more than 300 mm below the horizontal control joints. Treat vertical control joints as openings.

Tie blockwork to unbounded intersecting walls. Buttresses, structural frames, supports and the like with masonry veneer ties at 250 mm maximum centres fixed as follow :

To timber frames	:	Galvanized clouts or integral spikes.
To concrete	:	Non-corrosive masonry anchors.
To steel frames	:	As shown on the drawings.

1.1.5.2 Flexible Ties - Blockwork

Ties or anchors required to extend across control joints shall transfer the forces necessary to maintain the stability of the blockwork without impairing the effectiveness of the joint.

1.1.5.3 Reinforced Blockwork - Blockwork

To part 2, TCVN 1475, ,and JIS, JASS standard. Reinforce blockwork as shown on the drawings.

Machine cut a hole at the base of each reinforce core, located on the side of the wall which is to be rendered or otherwise concealed. After cleaning out has been inspected and approval, cover the hole with formwork and grout the core.

1.1.6 ENVELOPE ELEMENTS

Fire Rating : In accordance with Building Code of Australia for this class of building, TCVN ,and JIS, JASS standard

Noise Transmission : In accordance with building Code of Australia for this class of building. TCVN, ,and JIS, JASS standard

Weight : Maximum 140 kg/m² including plaster finish.

1.1.7 JOINT INSERTIONS

1.1.7.1 Damp-Proof Course - Blockwork

To AS 1475. Part 1, section 2.5. Installation to AS 1475, Part 1 Clause 5.8. ,and JIS, JASS standard

0.5 mm annealed aluminium faced both side with embossed block polyethylene in bitumen (suitable for salt damp conditions). Unless otherwise specified or shown on the drawings, build damp-proof course into the first course above floor level.

Lay in long lengths to full width of wall and piers. Lap full width at angles and intersections and 150 mm at joints. Step as necessary, but not exceeding 200 mm per step. Preserve continuity of damp proofing at junctions of damp-proof course and waterproof membranes.

1.1.7.2 Control Joints - Blockwork

- Location : As shown on the drawings.
- Depth : The full thickness of the blockwork leaf.
- Joint Filler : Sealant and bond breaking back up material of types shown on the drawings, as recommended by the material manufacturers for the location and service conditions, compatible when used together and non-staining to Blockwork. Do not use bituminous materials on absorbent blocks.
- Priming : Unless priming is not recommended by the jointing material manufacturer, apply the appropriate primer to blockwork surfaces in contact with jointing materials.
- Foamed materials (in compressible fillers, backing rods and the like) : Closed-cell or impregnated types which do not absorb water.
- Bond Breaking : Back up materials for sealants, including backing rods and the like, shall not adhere to the sealant, or shall be faced with a non-adhering material.
- Sealant proportions : Depth shall be not greater than the joint width, nor less than two thirds the joint width.

1.1.7.3 Slip Joints - Blockwork

Above all load bearing blockwork for the full thickness of the blockwork leaf.

Provide two layers of 1.6 mm thick galvanized steel sheets separated with graphite grease laid on a 10 mm thick mortar bed.

1.1.8 BLOCKWORK SCHEDULES

1.1.8.1 Mortar Mix Schedule - Blockwork

Mortar mix :

Cement : Lime : Sand

2 : 1 : 9

1 : 1 : 4

Location

Generally.

Concrete blockwork

Generally.

Glass blockwork

1.1.8.2 Concrete Blocks Schedule - Blockwork

Block type

Class C Standard aggregate : 200 mm
Nominal thickness

Class A Lightweight aggregate : 150
mm Nominal thickness, 2 hour fire rated

100 mm Nominal thickness

One and half hour fire rated

Location

Refer to drawings for
locations

Refer to drawings for
locations

Refer to drawings for
locations

1.1.8.3 Concrete Block Ties Schedule - Blockwork

Tie Type

Galvanized steel flexible masonry
anchor ties *equal to* Brunswick Sales
Pty. Ltd. distributed by Techpro Pty.
Ltd. as follows

MFA 5/1

MFA 4/M/CB

Location

Junction of concrete wall
or column and blockwork
walls

Junction of concrete slab
soffits and blockwork walls.

1.2 ROOFING

1.2.1 GENERAL

1.2.1.1 Scope - Roofing

This Section generally covers coloured metal roofing, associated flashings, accessories, insulation to the roof of both buildings including penetrations, openings and box gutters. All fixings for Category 2 wind loading.

1.2.1.2 Samples - Roofing

Submit samples of each of the following :

- Stainless steel eaves gutter
- Roofing membrane

1.2.1.3 Inspection - Roofing

Give minimum 7 days notice so that the following may be inspected:

Sub-structure, safety mesh, sarking, insulation, box gutters and concealed gutters, downpipes to be concealed, membrane prior to surface protection finish.

1.2.1.4 Guarantees - Roofing

The Contractor shall provide the Employer with a written 10-year guarantee against any defect or failing in the roofing systems specified hereinafter. The guarantees shall apply to materials and workmanship of the system as installed.

1.2.1.5 Roof Structure - Roofing

Prepare the roof structure so that it is satisfactory for acceptance of specified roofing before commencing fixing or laying.

1.2.1.6 Maintenance Manual - Roofing

On completion, supply two copies of a manual, suitably bound, of recommendations from the roofing manufacturer or supplier for the maintenance of the roofing system, including but not limited to recommendations on restriction of access, where to work or stand (e.g. on ribs, pans, or line of fixings), footwear to be used, methods of repair and replacement, and the like.

1.2.2 MATERIALS AND WORKMANSHIP

1.2.2.1 Protection - Roofing

Protect the roofing materials and roofing system from damage throughout the work and under the contract. Keep the roof surface clear of debris and loose material throughout the work under the contract and leave it clean on completion. Keep the rainwater systems free of foreign matter and leave them unobstructed on completion.

1.2.2.2 Metal Separation - Roofing

Prevent direct contact between incompatible metals and between green hardwood or chemically treated timber and aluminium or coated steel, by either:

Apply a suitably anti-corrosion low moisture transmission coating to contact surfaces. Separate contact surfaces with a suitable separation layer such as Polyethylene film or adhesive tape.

Guide : use table 3.2 of AS 1562, and JIS, JASS and TCVN as a guide to compatibility of metals.

1.2.2.3 Fastenings - Roofing

To AS 1562, Rule 2.2, , and JIS, JASS and TCVN. Do not use incompatible metals in fastenings to metal roofing and accessories.

1.2.2.4 Thermal Movement - Roofing

Provide for thermal movement in the roof installation, including movement in joints and fastenings. Make the provision sufficient to prevent harmful effects from stress and fatigue, such as openings of joints, tearing and buckling of sheet metals and thin sections, and the like.

1.2.3 SARKING

1.2.3.1 Sarking - Roofing

Double sided fire resistant sarking to AS 1903, and JIS, JASS and TCVN installed to AS 1904, and JIS, JASS and TCVN, unless otherwise specified.

Sag between supports : 25 - 65 mm

1.2.3.2 Membrane Support - Roofing

Co-extensive with the extent of the sarking or vapour barrier, as applicable.

Galvanized wire netting 50 mm Mesh size, 1 mm diameter to AS 2423, Section 4, and JIS, JASS and TCVN.

1.2.4 INSULATION

1.2.4.1 Bulk thermal insulation - Roofing

Material in the form of batts, blankets, slabs, loose fill, or foamed in situ. (From AS 2352, , and JIS, JASS and TCVN)

1.2.4.2 Mineral Wool Blanket - Roofing

Mineral wool to AS 2461, and JIS, JASS and TCVN, processed into non-rigid fibrous blankets of approximately rectangular cross-section.

Glass wool 100 mm R : 2.0.

Acoustic Rockwool insulation to AS 2461, and JIS, JASS and TCVN, Glass Wool, 50 mm.

1.2.5 METAL ROOFING

1.2.5.1 Metal Roofing (self supporting) - Roofing

Pre-formed sheet and purpose made accessories, forming part of an approved proprietary metal roofing system to AS 1562 , and JIS, JASS and TCVN .

Material	:	Pre-coated XSE Steel
Finish	:	Colorbond selected colour
Thickness	:	0.53 mm TCT
Profile	:	Klip-Lok Hi Ten
Fixing method	:	Screw fixed KL65 Brackets

Finish visible accessories to match sheet finish.

1.2.5.2 Metal Roofing Installation - Roofing

Laying And Fixing : To AS 1562.

fastenings: To manufacturer's recommendations, unless otherwise specified:

Screws generally : Water head self drilling tapping screw No.10 x 22 mm.

Fixing pierced roofing sheets : Bear heads of fasteners on purpose-made washers to form a weatherproof seal.

1.2.6 RAINWATER GOODS - ROOFING

Provide the flashings, cappings, gutters, outlets, downpipes, and the like necessary to complete the roof system. To AS 2179 and AS 2180, and JIS, JASS and TCVN.

1.2.6.1 Jointing Sheet Metals - Roofing

Standard : To AS 2180, Section 3, and JIS, JASS and TCVN.

Make over a backing strip of the same material.

Seal fasteners and mechanically fastened joints. Fill the holes of blind rivets with sealant of Neutral-cured silicone rubber.

1.2.6.2 Flashings, Cappings - Roofing

Flash roof junctions, upstands, abutments, and projections through the roof with 0.6 mm XSE steel with colorbond finish. Pre-fabricate where possible. Form to required shapes. Notch, scribe, flute or dress down as necessary to follow profiles of adjacent surfaces. Mitre angles neatly. Lap joints in running lengths 300 mm.

Fold the flashing back 40 mm each side of the expansion joints leaving a 10 mm gap. Interleave an expansion cap of the same material with the folds, and welt the whole to the profile of the flashing. Set the joint in a mastic sealant. Do not use fastenings, or fasten one side of the joint only. Expansion joint spacing : 6 mm maximum.

Flash projections above or through the roof with two-part flashings, consisting of a base flashing (apron, baffle, soaker, ...) and a cover flashing (skirt, over flashing, sleeve and the like). Provide for independent movement between the roof and the projection

Base Flashing shall have not less than 150 mm horizontal cover and 150 mm vertical cover. On the upstream side extend the horizontal cover under the next overlap of the roofing material, or seal and fasten to the roof sheeting. Elsewhere fix to the tops of the sheeting corrugations where applicable, with fastenings and washers as recommended for the roofing system. Cover Flashing shall overlap the vertical upstand of the base flashing by not less than 100 mm.

Turn flashing 25 mm into joints or grooves in masonry or concrete, wedge at 200 mm centres with compatible material, and point up. Step in courses to the roof slope. Interleave with damp-proof course, if any.

Fixing to pipes shall be: soldered, or sealed with neutral-cured silicone rubber and secured with a clamp ring.

1.2.6.3 Gutters Generally - Roofing

Form gutters to the required shape. Mechanically pre-form, mould or fabricate where possible. Form stop ends, bends and returns. Turn down into outlets. Provide accessories as necessary, including joints, bends, returns, outlets (thimbles, spigots and the like) for downpipes and overflows, stop ends, stiffening gussets at corners, supporting brackets, overstraps, and the like, purpose-made if supplied as part of the gutter system. Make provision for overflows where necessary to prevent back flooding into the building.

From expansion joints by stop ending the gutter and saddle flashing over the two stop ends. Spacing to AS 2180, Clause 1.5.2 and Table 1.2, and JIS, JASS and TCVN.

1.2.6.4 Downpipes - Roofing

Refer "Hydraulic Services" for downpipes.

1.2.7 ROOFING SCHEDULES

1.2.7.1 Sarking and Insulation Schedule - Roofing

Sarking	Extent :	All metal deck roofs
	Location :	Lay over purlins
Membrane Support :	Type :	Wire mesh laid over purlin and wired thereto
Bulk Thermal Insulation :	Type:	Mineral wool blanket
	Extent :	All metal deck roofs
	Location :	Laid over sarking
Acoustic Insulation :	Type :	Mineral wool blanket
	Extent :	Under box gutters in false ceilings under wet areas.
	Location :	Laid over plasterboard ceiling

1.2.7.2 Roof Plumbing Schedules - Roofing

Flashings, Cappings :

Material : Colorbond XSE Steel. 0.6 mm cover flashings and base flashings, pre-coated to match preformed roofing sheet

Jointing method : Fasteners

Fixing to masonry or concrete (wedge material) : Zinc rolls

Box Gutters :

Material : Grade 316 stainless steel

Profile : As shown on Drawings

Thickness : 1.2 mm

Overflows: 50mm diameter stainless steel pipe

Rainwater Sumps :

Material : Stainless Steel

Thickness : 0.45 mm

Finish : Paint

Profile : As shown on Drawings

Size : 400 x 400 x 100 mm deep

Leaf Guard : Netting ball guard

1.3 WATERPROOFING

1.3.1 GENERAL

1.3.1.1 Scope - Waterproofing

The work contained in this Section includes the supply, delivery and fixing of all waterproofing materials including all fixings, component parts and masking necessary to make the trade complete.

1.3.1.2 Standards - Waterproofing

ASTM E96, and TCVN, JISS standard Test Methods for water vapour transmission of materials.

1.3.2 WORKMANSHIP

1.3.2.1 Installation - Waterproofing

Install waterproof membrane systems to manufacturer's recommendations. On completion leave waterproof membranes systems undamaged and in full working order. Provide a written guarantee for the whole of the Waterproofing Works as specified herein for a period of 10 years commencing from the date of practical completion.

1.3.3 APPROVED MEMBRANE SYSTEMS

Apply to concrete and masonry walls in shower cubicles and concrete floors in bathrooms, W.C.s and laundries a high performance elastomeric liquid polyurethane based waterproofing membrane.

1.3.4 EXTERNAL MEMBRANES - WATERPROOFING AND TANKING

Apply to concrete slabs, balconies, and areas to receive tiling and paving on first floor level a high performance elastomeric liquid polyurethane based waterproofing membrane.

1.4 METALWORK

1.4.1 GENERAL

1.4.1.1 Scope - Metalwork

This Section comprises the supply, fabrication and installation of metalwork items as shown on the Drawings and including handrails, stair and balcony balustrades, letter box bank, mat and frame, gates and grilles, car park bollard, sunscreens and fire extinguishers, and other sundry items.

1.4.1.2 Samples - Metalwork

Submit samples of the following :

- (a) Butt joints and mitre joints, made by the proposed techniques in flats, tubes and sections.
- (b) Protective coating finishes such as chrome plating, stainless steel, galvanising, anodizing, powder coating, baked finishes.
- (c) Mechanical finishes including polishing, sand blasting and the like.
- (d) Sections for use in fabricated work.

1.4.1.3 Shop Drawings - Metalwork

Supply shop drawings where so specified and any additional drawings prepared by fabricators.

1.4.2 MATERIALS AND WORKMANSHIP

1.4.2.1 Materials - Metalwork

Use metals suited to their required function, finish and method of fabrication, in sections of adequate strength and stiffness for their purpose.

1.4.2.2 Workmanship - Metalwork

Fabricate and pre-assemble items in the workshop wherever practicable. Keep edges and surfaces clean, neat and free from burrs and indentations. Remove sharp edges without excessive radiusing. Fit joints accurately to a fine hairline. Form bends in tube without unduly deforming the true cross section. Match colours of sheets, extrusions and heads of fastenings in colour finished work.

Separate incompatible metals by suitable means, including but not necessarily limited to separation layers, sleeves, or gaskets of plastic film bituminous felt, mastic, paint coatings, and the like. Separation materials shall not be visible on exposed surfaces.

Provide for thermal movement in joints and fastenings, and in the installation of assemblies such as frames. Make the provision sufficient to prevent harmful effects from stress and fatigue, such as opening of joints, tearing and buckling of sheet metals and thin sections, and the like.

1.4.2.3 Welding, Brazing, Soldering - Metalwork

Finish visible joints made by welding, brazing or soldering by grinding, buffing or the like methods appropriate to the class of work before painting, galvanising, or the like further treatment. Aluminium after jointing shall be without visible surface colour variations.

1.4.3 STRUCTURAL MEMBERS

1.4.3.1 Fastenings - Metalwork

Fastenings, including anchors, lugs, screws, rivets and the like, shall be of approved type, appropriate to the work, capable of transmitting the loads and stresses imposed, and sufficient to ensure the rigidity of the assembly.

Fastenings To Aluminium : (including aluminium alloys) : Aluminium alloy or non-magnetic stainless steel unless otherwise specified. Use cadmium-plated steel fastenings only in protected situations subject to approval.

Self-tapping screws :	Stainless steel.
Nails :	Aluminium or stainless steel.
Rivets :	Blind rivets.

1.4.3.2 Screws - Metalwork

Tapping And Drive Screws : To AS B 194, and JIS, JASS and TCVN.

Machine Screws : To AS 1427, and JIS, JASS and TCVN

Socket Head Cap Screws : To AS 1420, and JIS, JASS and TCVN

Socket Head Set Screws : To AS 1421, and JIS, JASS and TCVN.

Exposed Screw Heads : Countersunk Philips or socket head unless otherwise specified, finishing flush in counter-sinkings.

1.4.3.3 Masonry Anchors - Metalwork

Patent expansion type of approved manufacture unless otherwise specified.

1.4.4 FINISHES

1.4.4.1 Protection - Metalwork

Protect metalwork during the work under the Contract as necessary to prevent damage or defacement.

Iron and Steel (ungalvanized): Prime as specified for the relevant coating system specified in painting.

Metal Building Sheets : Surface discolouration or other damage resulting from neglect of protective measures shall be cause for rejection.

Temporary Coatings: Provide finished surfaces of aluminium and its alloys, stainless steel, chromium plating and the like decorative surfaces with a temporary coating before installation, and remove all trades upon completion of the Works.

1.4.4.2 Hot Dip Coatings - Metalwork

Complete welding, cutting, drilling and other fabrication before coating. Unless otherwise specified, zinc coatings shall be by the hot dip method as follows :

Ferrous articles generally : To AS 1650, and JIS, JASS and TCVN

Ferrous wire : To AS 1650, Section 4, Type A, and JIS, JASS and TCVN

Steel sheet : To AS 1397, coating lass as specified for the particular item, and JIS, JASS and TCVN

Threaded fasteners : To AS 1214, and JIS, JASS and TCVN

1.4.4.3 Anodizing - Metalwork

Anodized coatings on aluminium : To AS 123 1, and JIS, JASS and TCVN

1.4.5 FIRE PROTECTION SYSTEMS

1.4.5.1 Portable Fire Extinguishers - Metalwork

5.5 kg. Carbon Dioxide type in accordance with AS 1847, and JIS, JASS and TCVN and fixing on approved brackets complete with signs indicating directions for use.

1.5 TILING

1.5.1 GENERAL

1.5.1.1 Scope - Tiling

This Section generally comprises the supply and laying of terracotta, marble, granite and ceramic tiles on floors and supply and fixing to walls of ceramic and marble tiles, as shown on Drawings and "Finishes schedule".

1.5.1.2 Sample Panels - Tiling

Prepare in suitable positions, or where directed, sample panels of sufficient area (not less than 2m²) of each type of finish specified. Include samples of specified junction details and trim. Preserve each panel when approved until all work of its type is complete. An approved panel, if suitably located, may be permitted to be incorporated into the Works. Otherwise remove all traces on completion of the Works.

1.5.1.3 Guarantees - Tiling

Provide guarantee against defective material and workmanship for 2 years for the materials specified.

1.5.1.4 Ordering - Tiling

Order tiles in time to avoid delay to the construction programme. Allow sufficient time for importation of tiles required to be ordered from overseas.

1.5.2 MATERIALS

1.5.2.1 Materials Generally - Tiling

Sand	:	To AS CA27, and JIS, JASS and TCVN
Cement	:	To AS 1315, Type A - normal cement, and JIS, JASS and TCVN.
White Cement	:	Free of iron salts, otherwise to AS 1315, Type A, and JIS, JASS and TCVN.
Lime	:	To AS 1672, and JIS, JASS and TCVN
Water	:	To AS CA2, and JIS, JASS and TCVN.

1.5.2.2 Adhesives - Tiling

Use adhesives compatible with the materials and surfaces to be adhered, and in accordance with the adhesive manufacturer's recommendations for the conditions of use.

Organic - Based Adhesives : To AS 2358, Part 1, and JIS, JASS and TCVN

Cement - Based Adhesives : To AS 2358, Part 2, and JIS, JASS and TCVN.

Prohibited uses : Unless otherwise specified, do not use the following combinations :

- (a) Cement-based adhesives on wood, metal, painted or glazed surfaces, gypsum-based plaster
- (b) Organic solvent-based adhesives on painted surfaces
- (c) Organic PVA-based adhesives and organic natural rubber latex adhesives in damp or wet conditions.

1.5.2.3 Bedding Mortar - Tiling

To AS CA27, and JIS, JASS and TCVN, from cement and sand with minimum water.

Do not use mortar after the initial set has occurred. Do not retemper mixes. Select proportions from the range 1:3 to 1:4 cement : sand to obtain satisfactory adhesion. Wet the background as necessary to achieve suitable suction. Alternatively apply a bonding agent to the background to improve adhesion.

1.5.2.4 Grout - Tiling

Cement based proprietary grout : Mix with water. Fine sand may be added as a filler in wider joints.

Portland cement based grout : Mix with fine sand. Use minimum water consistent with workability.

Proportioning : For narrow joints (up to 3 mm) : 1: 2 cement : sand

For wide joints (over 3 mm) : 1: 3 cement : sand.

Pigments for coloured grout : Colour fast fillers compatible with the grout material. For cement-based grouts, lime proof natural or synthetic metallic oxides compatible with cement

1.5.2.5 Sealants - Tiling

Approved silicone sealant.

1.5.3 TILES

1.5.3.1 Tiles Generally - Tiling

To BS 1281, and JIS, JASS and TCVN. Tiles shall be even and regular in size, true to plane, free of warps, cracks, crazing, discolouration or defects and shall have undamaged arises.

1.5.3.2 Ceramic Tiles - Tiling

Tile size	:	300 x 300, 150 x 150, 200 x 100, 100 x 100
Thickness	:	6 mm
Edge type	:	Cushion
Surface	:	Glazed
colour	:	To be selected

1.5.3.3 Accessories - Tiling

Tile accessories, fittings, and fixtures, including but not limited to round edge tiles, cove tiles, step treads, nosings, skirtings, sills, copings, tile vents, tile rebated edgings to drainage channels, and the like, shall generally match the surrounding tiles as to composition, colour and finish, unless otherwise specified or scheduled. Where necessary include matching stop ends, internal and external angle tiles, and the like, moulded for that purpose.

1.5.4 WORKMANSHIP

1.5.4.1 Workmanship Generally - Tiling

Use manufactured items including tiles, adhesives, grout, sealant, caulking compound and the like in accordance with the manufacturers' recommendations. Cut tiles neatly to fit around fixtures and fittings, and at margins where necessary Drill holes without damaging tile faces. Rub edges smooth without chipping. Return tiles into sills, reveals and openings. Butt up to returns, frames, fittings, and other finishes. Strike and point up beds where exposed. Cut recesses where necessary for soap holders and the like. Distribute variations in hue, colour area, or pattern uniformly, by selecting of mixing tiles or tile batches before laying.

1.5.4.2 Falls and Levels - Tiling

Grade floor tiling to even and correct falls where required (e.g. to floor wastes). Make level junctions with walls. Where falls are not required, lay level. Unless otherwise specified, maintain finished floor levels without step or break at changes of floor finish, including carpet. Maximum deviation of the finished floor from its true form (plane, warped plane, camber, and the like) : 1:300.

1.5.4.3 Setting out - Tiling

Set out tiling to the bond or pattern shown on the Drawings or specified, with joints accurately aligned in both directions, level and plumb.

Use only whole tiles at margins where practicable, otherwise set out to give equal margins of cut tiles unless otherwise specified or shown. If margins less than half tile width are unavoidable, locate the cut tiles where they are least conspicuous. If it appears that minor variations in joint widths or overall dimensions will avoid cut tiles, submit proposal for approval. Do not vary unless approved.

Before tiling ensure that fixtures interrupting the tile surface, such as plumbing and electrical items, boxes, access panels, and the like are accurately positioned in their designed or optimum locations relative to the tile layout. Where possible position tiles so that holes for fixtures and the like occur at the intersection of horizontal and vertical joints or on the centre lines of tiles.

On horizontal surfaces make a trial set-out for each area and obtain approval before fixing

1.5.4.4 Preparation of Tiles- Tiling

Adhesive bedding : Fix tiles dry; do not soak.

Mortar bedding : Soak porous tiles in water for not less than half an hour and not more than one hour and then drain until the surface water has disappeared. It is not necessary to soak non-porous (e.g. fully vitrified) tiles.

1.5.4.5 Bedding Generally - Tiling

Bedding methods and materials shall be appropriate to the tile, the background, the conditions of service, and such as to leave the tile firmly and solidly bedded in the bedding material and adhered to the background.

1.5.4.6 Bedding Thickness - Tiling

Thin bed: Minimum thickness 1.5 mm, maximum 3 mm. May be used when the background deviation does not exceed 3 mm when tested with a 2 m straight edge. The entire tile back shall be covered with adhesive when the tile is bedded.

Thick bed: Minimum thickness 3 mm, maximum 12 mm, except that mortar beds for floor tiles may be up to 20 mm thick. Use on backgrounds with deviations up to 6 mm when tested with a 2 m straight edge, and with tiles having deep keys or frogs.

1.5.4.7 Bedding Floor Tiles - Tiling

Floor tiles bedded in cement mortar : Lightly dust the screeded bed surface with dry cement and trowel level until the cement is damp. Alternatively spread a thin slurry of neat cement, or cement based thin bed adhesive, on to the tile back.

1.5.4.8 Tile Joints - Tiling

Joint widths : Set out tiles to give uniform joint widths within the following limits :

Ceramic Tiles : minimum 1 mm maximum 3.0 mm

1.5.4.9 Grouting - Tiling

Before grouting, obtain approval for the proposed grouting methods and materials. Commence grouting as soon as practicable after bedding has set. Clean out joints as necessary before grouting. Protect vulnerable tile faces (e.g. soft glazes) from abrasive grouts, where necessary by masking. Grout exposed edge joints as specified for the face joints.

1.5.4.10 Grouting Methods - Tiling

Fill the joints solid and tool flush. Clean off surplus grout. Wash down when grout has set. When grout is dry, polish the tile surface with a clean cloth.

1.5.4.11 Cleaning and Protection - Tiling

Keep the work clean as it proceeds. Protect finished work from damage. Keep traffic off floors until the bedding has set and attained its working - strength. Remove and replace damaged or defective work. Clean the tiled surface with an appropriate tile-cleaning agent, and polish. Leave the whole of the work clean and free from blemishes.

1.5.5 SUBSTRATE PREPARATION

1.5.5.1 Substrates Generally - Tiling

Preparation : Suitably prepare substrates to receive the bedded finish, including but not necessarily limited to the following:

- (a) Remove oils, greases, retarders, loose material and the like and leave the surface dust free and clean;
- (b) Allow sufficient time for initial drying out and shrinkage to take place in cementitious substrates and underlays before tiling.

1.5.6 JUNCTIONS

1.5.6.1 Movement Joints - Tiling

Joints shall go right through the tile and bed to the background. Joints to be not less than 6 mm or more than 10 mm, or as shown on the Drawings.

Form joints other than metal edged joints against temporary battens of rectangular section the full width and depth of the joint. Leave the batten in place until ready to fill and seal the joint, and in any case until the tiles are firmly set. Clear extraneous matter such as grout and dust from the joint and leave the joint clear of movement-restricting material. Fill the joint and finish neatly flush with tile surface.

Depth shall be not greater than twice the joint width, nor less than the joint width.

1.5.6.2 Movement Joint Materials- Tiling

Foamed materials : (In compressible fillers, backing rods and the like) : Closed-cell or impregnated types which do not absorb water.

Bond breaking : Back-up materials for sealants, including backing rods and the like, shall not adhere to the sealant, or shall be faced with a non-adhering material.

Priming : Unless priming is not recommended by the jointing material manufacturer, apply the appropriate primer to the cleaned joint edges in contact with jointing materials.

Sealants: Use sealants of approved manufacture, compatible with the application and service conditions, and of the types specified.

One-part polysulphide sealants : To AS 1526, and JIS, JASS and TCVN

Two-part polysulphide sealants : To AS 1527, and JIS, JASS and TCVN

One-part silicone sealant : To 19/GP-18M, and JIS, JASS and TCVN.

1.5.6.3 Caulked Joints - Tiling

Provide caulked joints as follows :

- (a) Where tiling is specified to be cut around sanitary fixtures
- (b) Around fixtures interrupting the tile surface, for example pipes, brackets, bolts, nibs and the like.
- (c) At junctions with window and door frames, built-in cupboards and the like.
- (d) At perimeters of floors of all terraces, and external tiled areas.
- (e) At maximum 1 0 m centres in large areas.

Size : Width 5 mm. Depth : equal to tile thickness.

Sealant : Walls : Silicone rubber
Floors : Two-part polysulphide

Fill the joint with sealant and finish neatly flush with tile surface.

1.5.7 TILING SCHEDULES

1.5.7.1 Tiling Schedule - Tiling

Location : surface to be tiled : Bathrooms, ensuites, laundries and kitchens

Tile type : Ceramic Tile or as selected

Bond : Stack bond

Bedding : Type : Adhesive
Thickness : 1.5 mm to 3 mm thin bed adhesive

Grout : Type : Cement based proprietary
Colour : To be selected.

Location : surface to be tiled : Entries, foyers, lobbies

Tile type : Polished granite

Bond : Stack bond

Bedding : Type : Adhesive
Thickness : 1.5 mm to 3 mm thin bed adhesive

Grout : Type : Cement based proprietary
Colour : To be selected

Location : surface to be tiled : External balconies, terraces, stairs, paths

Tile type : Unglazed and scaled Terracotta floor tiles or as selected

Bedding : Type : Cement mortar
Thickness : 20 mm

Grout : Type : Cement based proprietary
Colour : To be selected

1.6 PAINTING

1.6.1 GENERAL

1.6.1.1 Scope - Painting

This Section covers the internal and external painting of the various building elements including but not limited to external exposed cement render and concrete surfaces, internal walls and ceilings, doors and frames, metalwork other than self-finished metalwork, general woodwork, pipework and the like.

1.6.1.2 Definitions - Painting

To AS 2310 , and JIS, JASS and TCVN unless otherwise specified.

1.6.1.3 Samples - Painting

Before commencing painting, provide, on a representative portion of substrate(s), 1m² samples of the total coating system which meets the specified requirements for colour, gloss and texture. Coating system physical properties shall also be examined in accordance with AS 1580 at this stage.

1.6.2 MATERIALS

1.6.2.1 Materials Generally - Painting

Paint Materials : Use only premium quality lines from approved manufacturers. The containers of materials shall be labelled as such by the manufacturer.

Notify the proposed brand of paint and paint line prior to placing orders. Change neither the brand nor the paint line without approval. Do not combine paints from different manufacturers in a paint system. Deliver paints to the site in the manufacturers labelled and unopened containers.

Use only the type and quantity of thinners recommended by the paint manufacturer. Colour tinting shall be by the manufacturer unless otherwise approved.

Add tinters or stainers only if approved, and only if in accordance with the manufacturer's recommendations as to type, quality and tinting formula, and provided the tinting produces the required colour without detriment to the durability or aesthetic performance of the product.

Putty : To AS 1263, Type 1 or 2, and JIS, JASS and TCVN, or an equivalent polymeric based putty. Putty may be stained to match the colour of the substrate.

1.6.2.2 Colour Selection - Painting

Provide the paint manufacturer's name and paint lines intended for use so that the Superintendent can make colour selections.

1.6.2.3 Gloss Level - Painting

Definitions : "Flat", "low-gloss", "semi-gloss" , "full-gloss": To AS 2310, 2311, Clause 4.1, and JIS, JASS and TCVN.

1.6.2.4 Primers, Sealers, Undercoats - Painting

Ensure that primers, sealers and undercoats are suitable for the substrate and compatible with the finish coat and each other. Except for stains and other clear or translucent finishes each coating shall be of a noticeably different tint from the preceding coat.

1.6.3 WORKMANSHIP

1.6.3.1 Workmanship Generally - Painting

Unless otherwise specified, before commencing to paint, complete the work of all other trades as far as is practicable within the area to be painted, except for installation of fittings, floor sanding and laying flooring materials.

Do not paint in dusty conditions, or otherwise unsuitable weather. Do not paint when the relative humidity exceeds 85%, or when the surface temperature of the substrate is less than 10°C or more than 50°C, unless the paint is suitable and recommended for such conditions.

Before painting in any section of the Works, clean the area out and protect it against dust entry. Use drop sheets and masking wherever necessary to protect finished work or other surfaces liable to damage during painting. Repair or replace any accessories or surfaces that are damaged directly or indirectly as a result of painting. Remove door furniture, switch plates, light fittings and the like and replace on completion of painting.

During preparation of surfaces, painting, and inspection, maintain light levels such that the luminance (photometric brightness) of the surface is at least equal to that produced under daylight and/or maximum permanent artificial illumination conditions. Adequately ventilate the areas in which painting is being carried out.

Store and prepare paint and related materials in the area assigned by the Superintendent. Take necessary precautions to prevent fire and accumulation of solvent fumes. Remove paint-soiled rags, waste, and the like at the end of each day's work or store in airtight metal containers under water. Remove empty cans and other debris arising out of the painting work from the site upon completion of work.

Mix and apply paint in accordance with the manufacturer's recommendations. Do not mix paint in areas or on surfaces liable to damage from spillage. Clean off marks, paint spots and stains throughout, restoring damaged surfaces to their original condition. Where necessary for aesthetic reasons, touch up damaged paint work or misses only with the paint batch used in the original application.

1.6.3.2 Equipment - Painting

To AS 2311 Section 6 and AS 2312 Section 8 , and JIS, JASS and TCVN as applicable.

Use appropriate and properly maintained conventional or airless spray equipment of such capacity as to satisfactorily atomise the paint before applied when fitted with the correct nozzle/tip assembly, without having to thin beyond the maximum amount recommended by the manufacturer. The air supply shall be free from oil, water and other contaminants.

Use drop sheets of adequate size and thickness to prevent marking of areas requiring protection.

Place notices conspicuously and do not remove until paint is dry, unless approval is given and precautions are taken to deny access to all but painting staff.

1.6.3.3 Application - Painting

To AS 2311 Section 6 and AS 2312 Section 8 , and JIS, JASS and TCVN as applicable.

Apply paint and related materials in accordance with the manufacturer's recommendations. Cut in between different finishing coats neatly in straight lines unless otherwise specified. Allow each coat to harden for the drying time (or time between coats) recommended by the manufacturer.

Where recommended by the manufacturer, sand between coats from top to bottom and dust down before recoating.

The application of thinned prime or seal coats, consistent with the paint manufacturer's recommendations, and which may be necessary on porous surfaces,

or of any additional finishing coats necessary to achieve the required colour, opacity, texture or film thickness and/or use of tinted undercoats shall be at the Contractor's expense.

Ensure each coat of paint is uniform in colour, gloss, thickness and texture and free of runs, sags, blisters, or other discontinuities. The standard of workmanship with regard to final colour, gloss and texture shall match the sample area specified in SAMPLES PAINTING.

1.6.4 SUBSTRATES

1.6.4.1 Substrate preparation - painting

To AS 231 1 Sections 2 and 3, and AS 23 12 Section 5, and JIS, JASS and TCVN, as applicable.

Prepare substrates to receive the systems specified. Procedures shall include, but not necessarily be limited to, the following :

- Cleaning : Clean down and remove oil, grease and loose foreign matter, including laitance, efflorescence, moss, lichen, mould, mildew, dirt and corrosion products, in a manner which causes neither undue damage to the substrate nor damage to, or contamination of, the surroundings.
- Glossy surfaces : Adequately scuff and / or solvent or chemically etch as appropriate to provide satisfactory adhesion for subsequent paint coats.
- Filling : Fill cracks and holes with fillers, sealants or grouting cements as appropriate for the finishing system and substrate, and sand smooth.
- Drying : Unless otherwise specified, ensure that surfaces are cured and dry before painting commence.
- Recontamination : Apply the first coat of paint immediately after cleaning and before contamination of the substrate can occur. Where contamination of intermediate coats occurs, clean in accordance with the coating manufacturer's recommendations and to the Superintendent's approval immediately prior to over-coating.

1.6.4.2 Metal Surfaces Generally - Painting

To AS 162, and JIS, JASS and TCVN as appropriate to the requirements of this Specification.

1.6.4.3 Iron and Steel Surfaces - Painting

- Generally : Remove weld spatter, slag, burrs, or any other objectionable surface irregularities.
- Degreasing : To AS 1627 Part 1, and JIS, JASS and TCVN, by solvent or alkaline cleaning.
- Hand or power tool cleaning : To AS 1627 Part 2 or Part 7, and JIS, JASS and TCVN Provide a final surface at least equal to preparation grade "St2" of AS 1627 Part 9, and JIS, JASS and TCVN.
- Blast Cleaning : To AS 1627 Part 4, and JIS, JASS and TCVN, to the class specified in the specified protective treatment. Provide a surface roughness appropriate for the specified treatment.

1.6.4.4 Masonry, Plaster and Cementitious Surfaces - Painting

Concrete and masonry : Before application to very smooth concrete, brick or masonry, acid etch, grind, or abrasive blast the surface as appropriate to provide a suitable key for the subsequently applied coating and to remove laitance. Remove loose friable matter before filling surface discontinuities.

Set plaster and fibrous plaster surfaces : Do not apply solvent-borne paint or other impervious coatings if the moisture content at the surface, tested with a moisture meter, exceeds 12%.

1.6.4.5 Timber Surfaces - Painting

Cut out large resinous knots and decayed areas, and replace with sound timber. Remove any defective putty and punch nails. Spot prime small knots, cracks, open joints, holes and bare timber with specified wood primer.

Fill as necessary with polymeric fillers or oil based putty to AS 1263 Type 1, and JIS, JASS and TCVN,

which in the case of clear or lightly pigmented finishes shall match the substrate. Use appropriate inert filler if the finish is a two-pack epoxy or polyurethane. Lightly sand dressed surfaces in the direction of the wood grain with appropriate grade "free cut paper" and remove powdery deposits. Apply one coat of wood primer to the back of external fascia boards, timber door and window frames, tops and bottoms of external doors, associated trims and glazing beads before fixing in position.

Moisture content of substrate : To AS 2311 Clause 3.2.5, and JIS, JASS and TCVN at time of priming. Test the substrate with a moisture meter if required.

1.6.5 PAINT SYSTEMS

1.6.5.1 Paint Systems Generally - Painting

The clauses specify the number and order of coats, and the paint type for each coat, for the respective substrates to which the system is applicable.

Paint types : To AS 2311, Table 4.1, and JIS, JASS and TCVN. The paint types are specified by the "paint reference number" of that table, and/or by the corresponding GPC specification numbers. GPC numbers are quoted in brackets.

1.6.6 PAINTING SCHEDULES

1.6.6.1 Protective Coatings Schedule- Painting

Location : Refer to Finishes Schedule

1.6.6.2 Exclusions Schedule - Painting

Exclude the following surfaces from paint and corrosion protection systems :

- Flexible duct connections, rubber hoses and mountings and other non metallic flexible fittings;
- Wire rope and machined surfaces
- Metals plated or specially finished for appearance, bronze, brass, copper and stainless steel (except as specified in "Pipe identification plumbing");
- Aluminium frames;
- Metal floor duct covers;
- Fair faced brickwork, stonework, artificial stone and exposed aggregates
- Sprayed vermiculite;
- Floors, paving, roads unless otherwise specified;
- Inside of service ducts, heat exchangers, pipes and valves;
- Self finished surface such as glass and plastic laminates.

1.7 PLASTERING

1.7.1 GENERAL

1.7.1.1 Scope - Plastering

The work in this Section comprises the supply and application of internal and external cement render, external hard set plaster, internal skim coat plastering, and supply and fixing of plasterboard linings to internal areas; all to walls and ceilings as shown on the Drawings, and on the Finishes Schedule.

1.7.1.2 Definitions - Plastering

The terms "plaster", "plastering" and the like shall include the terms "render", "rendering" and the like except where the context otherwise requires.

1.7.1.3 Sample Panels - Plastering

Prepare in agreed positions, sample panels of sufficient area (not less than 4 m²) of each of the plaster and render finishes specified in this Section, including examples of the specified junction details and trim. An approved panel, if suitably located, may be permitted to be incorporated into the Works. Otherwise remove all traces on completion.

1.7.1.4 Extent - Plastering

Return plastering into reveals, heads, sills, recesses, niches, and the like. Plaster faces, ends, and soffits of projections in the background, such as string courses, sills, pilasters, corbels and the like. Run throating on soffits of external projections. Trim around openings.

1.7.2 MATERIALS

1.7.2.1 Materials Generally - Plastering

Sand :	To AS CA27, and JIS, JASS and TCVN, graded to the appropriate table of the Appendix to that code
Cement :	To AS 1315, Type A, and JIS, JASS and TCVN - normal cement.
Lime :	To AS 1672, and JIS, JASS and TCVN
Lime putty :	Prepare to one of the two methods in AS CA27, and JIS, JASS and TCVN
Water :	TO AS CA27, and JIS, JASS and TCVN.
White cement :	To AS 1315, Type A and JIS, JASS and TCVN, but free from iron salts
Gypsum plaster :	To AS 2592. , and JIS, JASS and TCVN
Admixtures :	Obtain prior approval before using admixtures to retard or accelerate setting, improve workability, reduce water content, or improve waterproofing properties, or the like.
Metal lath :	Sheet steel expanded to a mesh by slitting and stretching, galvanised to AS 1397, and JIS, JASS and TCVN, coating class Z 200.
Self-furring type :	Metal lath with staggered indentations which hold the body of the sheet 10 mm clear of the background.

1.7.3 WORKMANSHIP

1.7.3.1 Workmanship Generally - Plastering

To AS CA27, and JIS, JASS and TCVN. Carry out plastering under conditions which will not adversely affect the finished work. Complete in sufficient time to enable subsequent finishes to be applied under proper conditions. Cut out any damaged or faulty work, and make good.

1.7.3.2 Proportioning and Mixing - Plastering

To AS CA27, Section 5, and JIS, JASS and TCVN.

Generally each successive coat shall not be stronger (richer in cement) than the background or undercoat to which it is applied. Do not use mixes after initial set has occurred. Do not retemper mixes.

Make a coarse mix of lime putty and sand 24 hours before use. Prevent from drying out. Mixes specified to contain cement and sand only may be gauged by the addition of lime up to 25% of the cement content (i.e. not as a substitute for the cement) if necessary to improve workability.

1.7.3.3 Application - Plastering

If unavoidable in a large area of work, make junctions so that they are invisible in the finished work. Press plaster through the apertures of metal lath, wings of casing beads, and the like.

1.7.3.4 Tolerances - Plastering

Make finished surfaces even, free from defects, and true to the required surface. Make vertical surfaces plumb and horizontal surfaces level. Finish plane surfaces within a tolerance of 7mm in 3m as determined by a 3 m straight edge placed anywhere in any direction. Finish corners, angles, edges, and curved surfaces within equivalent tolerances.

1.7.3.5 Surface Finishes - Plastering

Provide a smooth dense surface free from texture and free from shrinkage cracks. Finish with a steel float.

1.7.3.6 Protection and Curing - Plastering

Protect adjoining work from damage during plastering. Provide temporary covering if necessary. Remove mortar splashes as the work proceeds. Protect from sun, wind, frost, rain and hail, and from damage by building operations or other causes. Provide temporary coverings if necessary.

- Cement-Based Work : Cure by preventing rapid or uneven drying out.
- Gypsum-Based Work : Do not subject to persistent dampness after work has set.

1.7.4 BACKGROUND PREPARATION

1.7.4.1 Background Defects - Plastering

Before plastering is commenced, make good any defects in the background which may adversely affect the quality of plasterwork. Back off excessive projections. Fill voids, hollows and honeycombs with a mix not stronger than the background nor weaker than the first coat.

Where a one coat application is specified, but the background is not sufficiently true to comply with the thickness limits for one coat, or has excessively uneven section resulting from variations in the composition of the background materials, carry out the work in two coats without extra charge.

1.7.4.2 Preparing Backgrounds - Plastering

To AS CA27, Section 4 and JIS, JASS and TCVN. Suitably prepare the background to receive the plaster finish, including but not necessarily limited to the following:

- Cleaning : Remove oils, greases, retarders, loose material and the like and leave the surface dust free and clean.
- Embedded items : Ensure that water pipes are sheathed to permit thermal movement. Prime paint with zinc-rich metal primer or provide equivalent rust protection to ungalvanised steel items to be embedded in gypsum plaster.
- Chases : If chases or recesses are more than 50 mm wide, cover with expanded metal lath extending not less than 75 mm beyond each side of the recess.
- Suction : Control by dampening, if necessary. Avoid over-wetting.
- Dense concrete backgrounds : If not sufficiently rough to provide a mechanical key, roughen by scabbling or the like to remove 3 mm of the surface and expose the aggregate. Then dash coat.
- Brickwork backgrounds : If not rough-jointed, rake out joints 5 mm deep. If raking out is impracticable, cover with expanded metal lath.
- Concrete blockwork backgrounds : Dash coat.

1.7.5 JUNCTION DETAILS

1.7.5.1 Vee Joints - Plastering

Provide neat vee joints in plaster whenever it crosses junctions between different background materials (for example junctions between brick and concrete backgrounds), except where the junction is bridged as specified in "Metal lath bridging - Plastering". Rule the vee joint straight and true and cut it right through the plaster to the background exactly on the line of the junction.

1.7.5.2 Edge Terminations - Plastering

Unless otherwise shown or specified, terminate edges of plaster abutting other finishes by bevelling the plaster neatly to a vee joint.

1.7.6 TRIM

1.7.6.1 Corners and Angles - Plastering

Re-entrant corners : Finish square

Salient angles :

Reinforcement : Corner beads to all exposed edges as specified in "Edge trim-Plastering"

1.7.6.2 Edge Trim - Plastering

- Beads : Provide the necessary corner beads, casing beads, stop beads and the like, consisting of purpose-made sections of approved pattern.
- Material : Zinc-coated steel to AS 1397 - G300- Z200, and JIS, JASS and TCVN.
- Thickness : Coated thickness of proprietary PVC beads:
- Corner beads (wings) : 0.53 mm
- Casing beads : 0.63 mm
- Fixing : Nail to structure at 300 mm centres. Wire to metal lath.

1.7.6.3 Finish without Cornice - Plastering

Finish walls to ceilings without cornice by an appropriate method to AS 2186 Clause 1 or AS 25 91 Clause 5.7.1, and JIS, JASS and TCVN.

1.7.7 PLASTER AND RENDER FINISHES

1.7.7.1 Cement Render - Plastering

Proportions : 4:1:16 CEMENT :LIME :SAND
Application : Apply direct to background, 12 mm maximum thickness
Finish : Wood float

1.7.7.2 White Set Plaster - Plastering

Proportions : 3:1 hard finish gypsum plaster : lime putty
Application : Apply a skim coat direct to the background, 4 mm maximum thickness.
Finish : Steel trowel

1.7.8 PLASTERBOARD AND FIBROUS PLASTER LININGS

1.7.8.1 Sheet Linings - Plastering

Gypsum plasterboard : To AS 2588, and JIS, JASS and TCVN
Fire-resistant gypsum plasterboard : Gypsum plasterboard with a glass-fibre reinforced mineral core, formulated for additional resistance to fire exposure.

1.7.8.2 Installing Sheet Linings - Plastering

Gypsum plasterboard : (Including water-resistant, insulating, and fire-resistant types) : To AS 2589, and JIS, JASS and TCVN.

1.7.9 PLASTERING SCHEDULES

1.7.9.1 Render Finishes Schedule - Plastering

One coat render :

Location : Refer to Finishes Schedule
Proportions : 4:1:16 cement : lime : sand
Finish : Wood float

Set plaster skim coat :

Location : Refer to Finishes Schedule

1.7.9.2 Sheet Linings Schedule - Plastering

Plasterboard ceiling lining

Location	:	Refer to Finishes Schedule
Lining type	:	Gypsum plasterboard
Sheets	:	Thickness : 13 mm and 16 mm
		Edge type : Recessed edge
Joint Finish	:	Flush joint
Fixing Method	:	Adhesive fixing and screw fixing

Moulded Plaster Cornice

Location	:	Refer To Finishes Schedule
Cornice type	:	Refer File Detail
Fixing method	:	Adhesive Fixing

1.8 DOORS

1.8.1 GENERAL

1.8.1.1 Scope - Doors

The work contained in this Section includes the supply, delivery and installation of metal door frames, timber doors, fire door and frame assemblies and roller shutters.

1.8.1.2 Approved Sub-Contractors - Doors

Obtain proprietary door and frame items specified in this Section from approved suppliers.

1.8.1.3 Samples - Doors

Supply two samples of each of the following where applicable:

- (a) Sections proposed to be used for frames, louvres, slats and the like
- (b) Joints made by proposed techniques
- (c) Finishes to prepared surfaces
- (d) Hardware items

The approved hardware samples will be made available for incorporation into the Works in locations to be identified by the Superintendent.

1.8.1.4 Guarantees - Doors

The guarantor agrees to rectify without cost to the Principal, faulty materials and workmanship and the consequences thereof including weather penetration, physical deterioration etc. for a period of 2 years from practical completion.

1.8.2 TESTS

1.8.2.1 Testing - Doors

Timber Doors : Test as specified in TIMBER DOOR TESTING - DOORS

1.8.3 MATERIALS AND WORKMANSHIP

Protect surfaces during the work under the Contract as necessary to prevent damage or defacement.

1.8.4 DOORFRAMES

1.8.4.1 Steel Door Frames - Doors

Frames assembled from steel sections, including necessary accessories such as buffers, strike plates, spreaders, mortar guards, fixing ties or brackets- cavity flashing and the like, with suitable provision for fixing specified hardware; pre-finished with protective coatings, built in or fixed to prepared openings.

Form from 1.2 mm or 1.6 mm thick steel sheet for metal door frames or fire door frames respectively, incorporating rebates or double rebates where required for side hung doors. Site assembly from "knocked down" components by mechanical methods, e.g. slot and lug joints. Hot dip galvanised and shop primed for the system specified in PAINTING.

Provide the following as required by the installation :

- Strike plate : Stainless steel strike plate with mortar guard.
- Buffers : Two resilient buffers.
- Cavity flashing : For external frames in cavity masonry in external walls only.
- Hinges : Weld in place or prepare frames for screw fixings.

Installation :

- Building in to masonry: By means of galvanised wire ties attached to stiles at 400 mm maximum centres. Build in and grout up solid as specified in BUILDING-IN BRICKWORK.
- Building in to concrete : Power tool fixing at sills building in with standard wire ties and solidly grouting up frames.

1.8.5 DOORS

1.8.5.1 Timber Doors - Doors

To AS 2688. Prime timber doors as specified in "Priming dressed timber - Painting" on all surfaces, including top and bottom edges, before hanging.

1.8.5.2 Timber Door Testing - Doors

Provide satisfactory evidence in the form of a report from an independent testing authority, that doors of each AS 2688 ,and TCVN, JIS, JASS standard , type specified have passed the tests applicable to the door type specified in Appendices A, B, C and D of AS 2688, ,and TCVN, JIS, JASS standard.

1.8.5.3 Flush Doors - Doors

To the appropriate Section of AS 2688 ,and TCVN, JIS, JASS standard. Increase the width of stiles and rails above the standard as necessary for sliding door grooves, door closers, and the like. Provide additional frame members where necessary to take fastenings of hardware such as push and kick plates, or to frame openings for panels. Form rebates if required on edges of doors in solid matching edge strips.

Edge Strips	:	To As 2688 ,and TCVN, JIS, JASS standard, thickness 12 mm.
Door Thickness	:	35 mm generally, 40 mm for external doors and where door width exceeds 900 mm.
Solid Core	:	Blockboard core to AS 2688 Section 5, and TCVN, JIS, JASS standard, or Particleboard core to AS2688 Section 6 ,and TCVN, JIS, JASS standard.
Face Veneers	:	As specified in "Door type schedules":
Intermediate rail core :		To AS 2688 Section 4 ,and TCVN, JIS, JASS standard, with facings of hardboard, particleboard, melamine or plywood with face veneers as specified in "Veneers-woodwork".

1.8.5.4 Roller Shutters - Doors

Refer to the "Door Schedule" but generally comprising a flexible curtain sliding between vertical guides, raised or lowered by rolling or unrolling around a horizontal drum (barrel) mounted above the opening, inclusive of the necessary operating gear, hardware, and accessories, installed to the manufacturer's recommendations.

The curtain in its closed position shall be capable of withstanding a positive or negative pressure on the surface of not less than 600 Pa without impairment of its ability to function under ambient temperature.

Unless otherwise specified provide standard hardware and accessories purpose-made by the shutter manufacturer for the shutter system, including handles, shoot bolts, locks, limit stops, buffers, and the like.

1.8.6 DOOR SCHEDULES

1.8.6.1 Door Type Schedule - Doors

The Tenderer/Builder is referred to the "DOOR SCHEDULE" for particulars of door types and door locations.

1.9 HARDWARE

1.9.1 GENERAL

1.9.1.1 Scope - Hardware

The work contained in this section includes the supply, delivery and fixing of all door hardware as listed in the Schedules.

1.9.1.2 Definitions - Hardware

Direction of closing and faces of door : To AS 1909 Figs. 1 and 2, and JIS, JASS and TCVN.

Hinge side : The side from which the knuckles of butt hinges are visible when the door is closed.

Closing side : The side closing against the stop bead or rebate.

Outside of a room door including a stairwell door: The corridor or hall side.

Outside of a single communicating door between two rooms (When neither room is a corridor, communication passage or hall): The side from which the knuckles of butt hinges are invisible when the door is closed.

“Right hand” : When the closing edge of the door is to the right when viewed from the outside: Vice Versa for “left hand”.

1.9.2 MATERIALS AND WORKMANSHIP

1.9.2.1 Installation - Hardware

All hardware components and fixings to be of non-ferrous materials. Install hardware to manufacturer's recommendations. On completion leave hardware clean, undamaged, in working order, and lubricated where appropriate with the correct lubrication. Install hardware with fixings appropriate to the item and of adequate gauge and length to provide firm fixing. Match exposed fixings to the material fixed.

During the work under the Contract protect hardware as necessary to prevent damage including staining, corrosion, scratching or other defacement. Obtain and furnish to the Principal the Manufacturers' printed recommendations for the maintenance of the hardware items installed.

1.9.3 LOCKS, LATCHES

1.9.3.1 Locks Generally - Hardware

Fabricate locks and latches from non-ferrous materials, free from flaws and defects, with parts firmly joined, and working parts accurately fitted to smooth close bearings, free from rattle or excessive play, appropriately lubricated. If mortise locks or latches are specified to rebated doors, provide purpose-made rebated pattern items. Locks specified for sliding doors shall have a suitable bolt action of the expanding type in which a pair of claws automatically extend vertically into the staple; or approved equivalent. Provide special heavy pattern non-ferrous springs in locks or latches which are specified to be fitted with non-spring-loaded lever handles.

1.9.3.2 Locks : Definitions - Hardware

For the purpose of this specification, the following definitions shall apply :

- Latch : An appliance for fastening a door, gate or the like, which catches automatically when the door closes, and is released by a hand operator (knob, lever handle, turn-button or the like item of fitted door furniture). Hand operation may be restricted for particular purposes (see combination lock, privacy latch, night-latch, vestibule lock).

- Lock : An appliance for fastening a door, gate or the like, which required a key to open
- Combination lock: Combines the functions of lock and latch. The hand operation of the latch may be prevented or released by key or snib. Prevention requiring key to release converts the latch into a lock.
- Deadlock: A lock or latch in which the bolt can not be retracted by end pressure, or by the operation of knobs or the like fitted furniture, unless released by key or snib.

Functional Types :

- Passage latch : Plain latch. Hand operators (knobs or levers) free at all times.
- Privacy latch : Hand operation prevented or released by inside snib. May include external emergency release slot for screwdriver or coin ("Bathroom latch").
- Exit latch : Internal hand operator always free. External hand operator prevented or releases by inside snib.
- Night latch nob : Can be opened from outside by key only. Opening from inside by knob or snib turn button ("Night latch"), or no means of opening from inside ("lock up shop nightlatch").

1.9.4 KEYING

1.9.4.1 Keys - Hardware

Supply keys to all locks. Arrange for the manufacturer or supplier to deliver Grandmaster and master key direct to the Principal. Deliver all other keys to the Principal upon Practical Completion.

Code stamp keys. Code stamp lock cylinders in an approved location. Supply each key with a purpose-made plastic key label legibly marked to identify the key, attached to the key by a metal ring.

All cylinder or pin-tumbler locks shall be nickel alloy, not brass and capable of being master keyed and grandmaster keyed as specified, and of future extensions if required. Key cylinder or pin tumbler locks to the groups scheduled in the "Door schedule".

Obtain from the lock manufacturer or supplier, and furnish to the Principal, a record of the master keyed and grandmaster keyed as specified, and of future extensions if required.

A "project" or "construction" key may used only if approved, and if used shall be rendered inoperative upon Practical Completion. Otherwise any cylinders installed during construction shall be replaced immediately before Practical Completion.

Unless otherwise specified, supply keys in the following quantities :

- Grandmaster keys : 1 keys.
- Master keys : 2 keys.
- Locks keyed to differ : 2 keys per lock.
- Locks keyed alike : 2 keys per lock.

1.9.5 DOOR FURNITURE

1.9.5.1 Door Furniture Sets - Hardware

If an item of door furniture is referenced elsewhere (for example in the Door schedule) in the plural (e.g. “knobs”), provide the item as a paired set, one to each side of the door. If referenced in the singular, provide a half set. Provide matching blank plates opposite half sets where appropriate.

1.9.5.2 Lock and Latch Furniture - Hardware

Lock and latch furniture shall be suitable for use with the lock or latch to which it is installed. Mount knobs and lever handles on roses or plates of matching material and finish. Lever handles shall have integral springs to counter-act sag.

Provide keyways, snib turnbuttons, cut-outs for lock cylinders, and the like, as required by the lock type. Provide separate matching keyhole plates, escutcheons for cylinder locks, snib turnbuttons, and the like, as required by the lock type.

Provide concealed fixing to exterior plates and roses, by means of metal thread screws passing through the door from inside into tapped blind holes in the plate, or by an equivalent method.

1.9.5.3 Door Stops - Hardware

Provide door stops where doors open to contact surfaces at 90°. Fix the door stop on the floor or as directed to prevent the door furniture striking the wall or other surfaces.

1.9.6 HARDWARE SCHEDULES

The Tenderer/Builder is referred to the “DOOR SCHEDULE” for particulars and position of hardware sets.

1.10 WINDOW

1.10.1 GENERAL

1.10.1.1 Scope - Window

Natural anodized aluminium windows and doors, sky lights, portico roof glazing, frameless glass walling.

1.10.1.2 Approved Sub-Contractors - Windows

Obtain the items specified in this Section from approved suppliers.

1.10.1.3 Shop Drawings - Windows

Supply two copies of shop drawings showing the following information where applicable to the window installation :

- (a) Layout (sectional plan and elevation) of the window assembly.
- (b) Full size sections of members.
- (c) Methods of assembly.
- (d) Methods of installation, including fixings, caulking, flashing.
- (e) Provision for vertical and horizontal expansion.
- (f) Junctions and trim to adjoining surfaces.
- (g) Glazing details including method, tolerances, rebate depths, edge restraint.

1.10.1.4 Samples - Windows

Requirement : Supply two samples of each of the following where applicable to the window installation :

- (a) Sections proposed to be used for frames, sashes, louvres, slats and the like.
- (b) Joints made by proposed techniques.
- (c) Finishes to prepared surfaces.
- (d) Colour range samples from pre-finished production material (e.g. anodized or organic coated extrusions and sheet). When the colour selection has been made, supply five sets of samples showing the approved colour range.
- (e) Hardware items : Standard hardware plus security locks, security locks, stainless steel hinges to glazed doors and patio sliding door locks to balcony and terrace sliding doors.

1.10.1.5 Prototypes - Windows

Install a prototype of the window system, fully glazed, finished as specified, and incorporating at least one example of each component in the system, including operating hardware, locks, keys, flashing, caulking, sealing and the like. Approved prototypes in appropriate locations may form part of the completed installation; otherwise remove all traces upon completion of the Works.

1.10.1.6 Guarantees - Windows

5 years from practical completion against faulty materials and workmanship and the consequences thereof including weather penetration, air infiltration, physical deterioration, etc.

1.10.2 TESTS

1.10.2.1 Testing - Windows

Provide satisfactory evidence in the form of a report from an independent testing authority that windows of each type specified:

Have passed the tests applicable to that type specified in AS 2047 Section 5 or AS 2146 Section 3, and JIS, JASS and TCVN.

Comply with the requirements of the specified window rating.

Are finished with specified coatings of not less than the specified thickness.

1.10.3 MATERIALS AND WORKMANSHIP

1.10.3.1 Fabrication - Windows

Make junctions so that no fixings, such as pins, screws, pressure indentations, and the like, shall be visible on exposed faces. Moving parts shall operate freely and smoothly without binding or sticking, at correct tensions or operating forces. Protect surfaces during the work under the contract as necessary to prevent damage or defacement. Provide a temporary coating to finished metal or plastic surfaces, and remove all traces on completion of the Works.

1.10.3.2 Installation - Windows

Install the windows by methods which ensure that neither the window frame nor the fixings will carry building loads, including loads resulting from short or long term deflection of slabs or beams.

Metal windows built in to masonry by means of anchor brackets and attachments to AS 2047 Rule 2.3 and AS 2048 Rule 8, 9, 10 and 11, and JIS, JASS and TCVN.

1.10.3.3 Glazing - Windows

Supply the window installations pre-glazed unless otherwise specified. Glass types and thicknesses shall comply with the relevant standards and safety codes for the required locations and pane sizes. Glass generally to be Terrain Category 2.

1.10.3.4 Finishes - Windows

50 microns thick heavy powder coat to selected colour to all metalwork in this trade.

1.10.4 HARDWARE

1.10.4.1 Hardware Generally - Windows

To AS 2047 Rule 2.5 and 3.6, and JIS, JASS and TCVN.

Unless otherwise specified, provide the windows with standard hardware purpose-made by the window manufacturer for the window system, or recommended by the window manufacturer for the purpose. All hardware to be non-ferrous. Where window hardware included key-operated locks, supply keys master-keyed for each residential unit.

1.10.5 WINDOW ASSEMBLIES

1.10.5.1 Openings - Windows

The following terms are used to refer to window opening types (sash, louvres) :

Double hung (vertical slide).

Horizontal-slide (including sliding glazed aluminium framed doors)

Projecting :

(a) Casement (side hung by hinge or stay)

(b) Awning (top hung by hinge or stay)

(c) Hopper (bottom hung)

Locate opening sash and fixed panels in windows as shown on the Drawings.

1.10.5.2 Aluminium Assemblies - Windows

To AS 2047 and AS 2048, and JIS, JASS and TCVN.

1.10.6 JUNCTIONS

1.10.6.1 Junctions with Building - Windows

Install flashings, drips, storm moulds, caulking, pointing or the like so that water is prevented from penetrating the building between the window frame and the building structure under the prevailing service conditions, including normal structural movement of the building.

1.10.6.2 Flashings and Weatherings- Windows

Flashings and weather bars shall be compatible with the other materials in the installation, and coated with a non-staining compound where necessary. Include the non-staining property in any guarantee required of the assembly.

1.10.6.3 Jointing Materials - Windows

If the window frames are to be caulked or pointed to the building structure, use jointing and pointing materials, including sealants, mastics, primers, gaskets, compressible fillers and the like, of the types shown on the Drawings, as recommended by the material manufacturers for the location and function, compatible when used together, and non-staining to finished surfaces. Do not use bituminous materials on absorbent surfaces.

1.10.6.4 Weather Seals- Windows

Polypropylene pile bonded into polypropylene backing, low friction silicone treated and ultraviolet stabilised. A pile weather seal with a central polypropylene fin bonded into the centre of the backing and raised above the level of the pile.

1.10.7 WINDOW SCHEDULES

1.10.7.1 Generally - Windows

The Tenderer/Builder is referred to the "Window Schedule" on Architectural Drawing for type, size and locations of windows.

1.11 GLAZING WORK

1.11.1 GENERAL

1.11.1.1 Scope - Glazing

This section covers glass and glazing to aluminium windows, frameless glazed walls and mirrors to bathroom. The tenderer should note that all glazing to be Terrain Category 2.

1.11.1.2 Guarantees - Glazing

Provide a five year written guarantee covering faulty materials and/or workmanship and the consequences thereof, including leaks, surface deterioration caused by weathering, breakage, etc.

1.11.2 DESIGN

1.11.2.1 Glass Thickness Design - Glazing

Determine the glass thickness as in accordance with AS 1288 ,and TCVN, JIS, JASS standard and the design wind pressure. Terrain Category 2.

1.11.3 MATERIALS

1.11.3.1 Glass - Glazing

To BS 952, Part 1, ,and TCVN, JIS, JASS standard of approved manufacture, and of kinds and grades specified or show on the drawings. Free from defects which detract from appearance or interfere with performance under normal conditions of use.

All glazing shall be of a type and thickness suitable for the work, best quality and shall be the kinds suitable for the purpose and grades specified or shown on the Drawings, and shall be free from cracks, scratches, bubbles, blisters, distortion and other defects which will interfere with the appearance or service, and shall be as follows:

- Clear glass, 6mm thick : for use in all windows and all general glazing screen with all framing in or supporting by 600mm footing wall.
- Laminated glass, 6mm thick : for use in doors with frames as specified in the Drawings.

1.11.3.2 Mirrors - Glazing

Glass of silvering quality backed with a reflective surface layer and protective coatings.

- Glass type : Clear float of silvering quality.
- Glass Thickness : 6 mm
- Edge finish : Rounded and polished.

1.11.3.3 Glazing Materials - Glazing

To AS 1288, Part 2, ,and TCVN, JIS, JASS standard (including putty, glazing compounds, sealants, gaskets, glazing tapes, spacers, setting blocks, compression wedges, and the like), appropriate for the conditions of application and the required performance, and complying with the recommendations of the manufacturer of the glass or glazing system, and as necessary to complete the installation.

All glass shall be set on neoprene packers fully bedded and sealed into all aluminium extrusions with silicone.

1.11.4 WORKMANSHIP

1.11.4.1 Workmanship - Glazing

To AS 1288, Part 2 ,and TCVN, JIS, JASS standard, the completed installation shall be left completely waterproof and weatherproof. Use methods such that building movements resulting from wind and thermal effects are not transferred to the glass.

1.11.4.2 Marking - Glazing

Use a soluble marking compound, and remove all traces on completion. Do not use lime or advertising stickers.

Permanent marking of safety glasses: To AS 2208 ,and TCVN, JIS, JASS standard.

Toughened safety glass: Do not cut, work or permanently mark after manufacture.

1.11.4.3 Safety Marking of Glass - Glazing

Permanently mark transparent glass in doors, side panels, and elsewhere where it might be mistaken for a doorway or the unimpeded path of travel, in the positions shown on the Drawings and by an approved methods.

The glazed wall to the main entrance shall have, on both sides of bottom fixed panels including doors, safety markings comprising 30 mm diameter polished stainless steel safety dots spaced at maximum 150 mm centres adhesive fixed in corresponding parts, perfectly straight and level with an adhesive recommended by the glass suppliers. Dots shall be fixed at heights as directed by the Architect.

1.11.4.4 Cleaning and Replacement - Glazing

On completion replace damaged glass. Clean and hand polish all metalwork and glass, remove all handling and installation marks, remove all protective coatings, and hand over in perfect condition.

1.11.4.5 Glass Installation Methods - Glazing

Standard : To AS 1288, Part 2 ,and TCVN, JIS, JASS standard.

Special Glasses : Including double glazed units, coloured and heat-absorbing glass such as body-tinted and surface modified glass, ceramic enamel glass, toughened glass, laminated glass, and the like. Follow the recommendations of the manufacturers of these glasses in the addition to requirements of AS 1288 ,and TCVN, JIS, JASS standard.

Laminated Glass : Use glazing materials which do not cause deterioration or discolouration of the interlayer.

1.11.4.6 Fixing Mirrors - Glazing

Fix by chrome domed headed screws drilled and plugged to brickwork. All joints between bench tops and mirrored panels sealed with clear structural grade silicone sealant.

1.12 SUSPENDED CEILING

1.12.1 GENERAL

1.12.1.1 Scope - Suspended Ceilings

This Section includes all materials and work required to install proprietary ceiling suspension systems and applied linings comprising sheet plasterboard, and fire resistant plasterboard all as shown on the drawings.

1.12.1.2 Definitions - Suspended Ceiling

- Ceiling : The material forming the main body of the soffit of a ceiling, consisting of sheets, strips, panels or tiles, together with any other material which may be applied.
- Concealed System : Suspended ceiling system on the soffit of which the supporting system is not exposed to view.
- Corridor Supporting System : Suspended ceiling system in which primary support members occur only at walls. The ceiling, or ceiling plus secondary members, spans between the primary support members.
- Supporting System : The tension members (hangers) and the framework of primary or secondary support members that carry the ceiling.
- Suspended Ceiling System : A ceiling and its supporting system, suspended from a supporting structure.

1.12.1.3 Maintenance Manual - Suspended Ceiling

On completion, furnish two copiers of a manual, suitably bound, of recommendations for the care and maintenance of the ceiling, and operating instructions for demounting where applicable.

1.12.2 PERFORMANCE

1.12.2.1 Dimensional Tolerances - Suspended Ceilings under Dead Load

To AS 2785, and JIS, JASS and TCVN

1.12.2.2 Strength - Suspended Ceilings

Ceiling System Generally : To AS 2785, and JIS, JASS and TCVN

1.12.2.3 Fire Resistance - Suspended Ceilings

For each fire resistant property or rating specified, furnish a test report to AS 1530, and JIS, JASS and TCVN from an independent testing authority showing that the ceiling system or material, as applicable, has attained the specified property or rating. The ceiling system shall not contain substances which when subject to fire conditions will emit excessive smoke or dangerous fumes.

If the specified fire resistance rating is a requirement of the building regulatory authority, satisfactory evidence of that authority's acceptance of the suspended ceiling system may be submitted as alternative proof of the attainment of the specified rating. Modify the installation without extra charge if necessary to satisfy the regulatory authority that the system complies with the specified rating.

1.12.3 PANELS, TILES, SHEETS AND STRIPS

1.12.3.1 Sheet Plasterboard - Suspended Ceilings

Material	:	To AS 2588, and JIS, JASS and TCVN
Edge type	:	Recessed edge
Thickness	:	13 mm
Application	:	To AS 2589, and JIS, JASS and TCVN

1.12.3.2 Fire Resistant Plasterboard - Suspended Ceilings

Material : To AS 2588, and JIS, JASS and TCVN
Thickness : 16 mm (two layers - overall 32 mm thick)
Fire Resistance Rating (Hours) : 1 hour

1.12.4 WORKMANSHIP

1.12.4.1 Installation - Suspended Ceilings

To AS 2785 Section 4, and JIS, JASS and TCVN.

Protect existing work from damage during the installation, and make good any such damage. Erect the ceilings level, on their correct alignments, and firmly fix so that under normal conditions there is no looseness or rattling of ceiling components. Avoid the faults described in Appendix B of AS 2785, and JIS, JASS and TCVN, by providing the relevant features there recommended. Fastenings shall not be visible in the finished ceiling.

1.12.5 STRUCTURE

1.12.5.1 Materials - Suspended Ceiling

To AS 2785 Section 2, and JIS, JASS and TCVN.

1.12.5.2 Support - Suspended Ceiling

Space support members as required by the loads on the system and the type of ceiling, and allow for the installation of service and accessories shown on the Drawings, including ductwork, light fittings, diffusers and the like. Do not suspend from services (e.g. ductwork) unless the service has been designed to accept the ceiling load.

Incorporate in the suspension system suitable and approved means of supporting bulkheads and similar non-horizontal surfaces and the adjacent ceiling.

1.12.5.3 Access Panels - Suspended Ceilings

Provide access panels in non-demountable ceilings at the rate of one per 10 m² of ceiling unless otherwise specified or shown on the Drawings. Each access panel shall match the ceiling panel in appearance and performance. Reinforce the back of the access panel by an approved means to prevent warping and facilitate handling. Provide each access panel with an approved identification mark.

1.12.6 TRIM

1.12.6.1 Trim Generally - Suspended Ceilings

Provide trim at junctions with other building elements and surfaces, e.g. walls, beams, penetrations, and the like, consistent with the style, materials and finishes of the ceiling system generally unless otherwise specified.

1.12.6.2 Trim to Plasterboard - Suspended Ceilings

Provide corner beads, casing beads, stop beads and the like, consisting of purpose-made sections of approved material and pattern.

1.12.6.3 Service Penetrations - Suspended Ceilings

Provide openings for, and fit the ceiling system up to, services elements, e.g. light fittings, ventilation outlets, detectors, sprinklers, and the like. Trim as specified in "Trim generally".

SECTION 2. ELECTRICAL WORKS

TABLE OF CONTENTS

	Page
2.1 INTRODUCTION.....	2-1
2.2 SCOPE OF WORK.....	2-1
2.3 STANDARDS.....	2-1
2.4 AUTHORITIES' REQUIREMENTS.....	2-2
2.5 INSPECTION AND TESTING.....	2-2
2.6 TENDER DRAWINGS.....	2-2
2.7 SHOP DRAWINGS.....	2-2
2.8 AS-BUILT DRAWINGS.....	2-2
2.9 MAINTENANCE MANUAL.....	2-2
2.10 BRAND NAMES.....	2-3
2.11 EQUIPMENT AND MATERIAL.....	2-3
2.12 SAMPLES.....	2-3
2.13 COMMISSIONING.....	2-3
2.14 SERVICE AND INSTALLATION SITE CONDITIONS.....	2-4
2.15 VOLTAGE DROP.....	2-4
2.16 RATING AND PERFORMANCE OF EQUIPMENT.....	2-4
2.17 EARTHING SYSTEM.....	2-4
2.18 DISTRIBUTION BOARDS (DBs) AND PANEL SWITCHES (PSs).....	2-5
2.19 MAINS AND SUB-MAINS.....	2-6
2.20 FINAL SUB-CIRCUITS.....	2-6
2.21 CABLE IDENTIFICATION.....	2-7
2.22 CONDUITS.....	2-7
2.23 CABLE LADDER.....	2-9
2.24 CABLE TRAY, TRUNKINGS.....	2-9
2.25 PVC INSULATED CABLES.....	2-9
2.26 CABLE TERMINATIONS.....	2-10
2.27 PHASE SEQUENCE.....	2-10
2.28 ACCESSORIES.....	2-10
2.29 LIGHT FITTINGS.....	2-11
2.30 CORROSION PROTECTION.....	2-12
2.31 FIXINGS.....	2-12
2.32 WALL PENETRATIONS.....	2-13
2.33 SPARES.....	2-13
2.34 CIRCUIT SCHEDULES.....	2-13
2.35 LABELLING.....	2-13
2.36 LIGHTNING PROTECTION SYSTEM.....	2-13
2.37 LIGHTNING COLUMNS.....	2-14
2.38 FIRE DETECTION AND ALARM SYSTEM.....	2-14

SECTION 2. ELECTRICAL WORKS

2.1 INTRODUCTION

This specification describes the technical requirements for the electrical installation for Building Works for Package B.

Although each and every item may not be specifically mentioned in this specification, the electrical installation shall be completed in every essential detail. Any of the works which would reasonably, and obviously be inferred as necessary for the complete, safe and satisfactory operation of the installation as whole, whether or nor expressly described or specified, shall be provided and such work executed as part of the contract.

It is intended that equipment purchased be designed and manufactured overseas to a standard which has been proven in service and to be capable of reliable operation. Equipment that is still undergoing development is not acceptable. The component parts of the installation shall be standard products where possible so that prompt and continuous service and delivery of spare parts may be assured.

2.2 SCOPE OF WORK

The work to be carried out is the detailed design, manufacture, supply, delivery, installation, testing, commissioning and warranty of the electrical installation for the Building Works for the Operations/Maintenance (O/M) Office at Thanh Da and the O/M Office and Guard House at Ben Me Coc This work shall include:

- (1) The distribution boards(lighting and power) , panel switchboards (PSs).
- (2) The power and lighting cables from the distributions boards to the Luminaries, socket outlets, fans, air-conditioners.
- (3) The drilling and tapping of the gland plates for the cable glands.
- (4) The lighting final sub-circuits from the switchboards, including switches and switch wires, light fittings, emergency lights, exits signs.
- (5) The power final sub-circuits from the switchboards, including power outlets and permanent connections to fixed appliances.
- (6) The earthing and lightning system.
- (7) The cable ladders, cables trays, conduits, flexible conduits, pipe ducts and trenches to support and protect all cabling.
- (8) The Fire Alarm System.
- (9) The “As-built Drawings and Maintenance Manuals”.
- (10) Assistance as required for the other trades.

2.3 STANDARDS

The electrical installation shall comply with the latest editions, at the time of tendering, of the IEC-364, Electrical Installation Guide and the appropriate edition of the CP Code:1995 or [equivalent standard approved by the Engineer](#).

2.4 AUTHORITIES' REQUIREMENTS

The electrical fire alarm installation shall comply with the requirements of the Local Authorities.

The Contractor shall assist the Engineer with relevant Authorities' approvals as required.

2.5 INSPECTION AND TESTING

The Contractor shall submit a schedule for testing for the Engineer's approval.

(Refer to Clause "Commissioning", herein)

2.6 TENDER DRAWINGS

The tender drawings are attached in drawing schedule and form part of this specification: The architectural, structural and mechanical services drawings that may have been included with the tender drawings are for reference purposes. These drawings are subject to change.

The drawings show the position and layouts throughout the site. These are to be considered as diagrammatic only. Unless specifically dimensioned relative to other building elements, the exact location shall be ascertained from the Engineer prior to installation.

2.7 SHOP DRAWINGS

Shop drawings including plant and Equipment assembly, schematic wiring diagrams and layout arrangements shall be provided by the Contractor and approved prior to construction. The shop drawings for the cable trays, cables ladders, panels, lighting fixture system, lightning shall include full details including cable sizes, levels, exact routes, wall penetrations, sections showing cable sizes and configuration on trays ladders, ducts trenches and spare space.

Procedures for drawings shall be in accordance with the requirements of clause 1.3.5 in of the General Specification.

2.8 AS-BUILT DRAWINGS

Refer to Section 1: General Specification

2.9 MAINTENANCE MANUAL

The Contractor shall supply three (3) copies of instruction books describing the electrical installation in detail and including all wiring diagrams, full catalogue data including installation instruction, assembly instructions, detailed circuit diagrams, descriptions of the operation and maintenance. The contractor shall also supply, either incorporated in the instruction books, or as a separate item, three (3) copies of the spares manual, comprehensive lists of the components used, including commercial type numbers and the type numbers of commercially available equivalent components.

Preliminary documentation shall be delivered no later than one (1) month prior to Practical Completion. All deficiencies in the documentation identified by the Engineer shall be promptly rectified by the Contractor.

The maintenance manual shall include the following:

- Full technical data and installation instructions on all equipment
- Maintenance instructions
- Operation instructions
- Test procedures
- As-constructed drawings
- All test results
- Final load schedule.

The manuals shall be A4 size. The binding shall be strong with a durable vinyl cover, clearly labelled on the front and spine. Two ring binders are not acceptable.

All information shall be the manufacture's original printed data sheets.

2.10 BRAND NAMES

Where brand names or manufactures names are used in this Specification they are to be used with the intent of specifying quality, appearance and standard of finish.

Alternatives may be offered provided that where equipment offered is of other manufacture than that indicated in this specification then such alternatives shall be noted on the tender submission.

Under no circumstances will alternative manufactured items be considered unless they are noted at the time of tender.

2.11 EQUIPMENT AND MATERIAL

Equipment and materials used in the execution of this work shall be new and supplied in accordance with the requirements of the Specification.

All equipment shall be rated to operate with supply voltage limits (220/380v).

2.12 SAMPLES

The Contractor shall submit samples of all materials requested by the Engineer.

2.13 COMMISSIONING

Commissioning testing in the presence of the Engineer shall be carried out after the equipment has been installed and tested by the Contractor.

The commissioning tests carried out by the Contractor in the presence of the Engineer shall be consist of :

- (1) Tests that are necessary to ensure that the equipment complies with the requirements of the Specification.
- (2) Tests designed to demonstrate the reliability of the equipment.
- (3) Earthing system and resistance to earth.
- (4) Megger testing of all sub-main cables
- (5) Phase rotation tests of the complete installation.
- (6) Full tests of all emergency lighting.
- (7) Illumination (Lux) levels produced by the lighting.
- (8) Any other tests deemed necessary by the Engineer.

All commissioning tests shall be completed prior to Practical Completion.

All documentation, in clause ' Maintenance Manual ', shall be delivered prior to the commissioning test.

2.14 SERVICE AND INSTALLATION SITE CONDITIONS

The equipment shall be site rated suitable for operation in ambient conditions as follows:

Maximum temperature: 45°C

Minimum temperature: 5°C

Elevation : less than 1000m

Maximum relative humidity : 95%

2.15 VOLTAGE DROP

The voltage drop throughout the installation shall be less than 5% from the transformer to the light fitting, outlets and equipment.

2.16 RATING AND PERFORMANCE OF EQUIPMENT

All equipment which is to be supplied by the Contractor and details of such equipment which have not been covered by any specific rating or performance requirements in this Specification shall be an approved construction and suitable for the duty they are to perform.

For any type of equipment and accessory, the same manufacturer and range shall be used throughout the installation to maintain standardization, unless otherwise specified or approved.

2.17 EARTHING SYSTEM

The earthing system shall be provided by the contractor as detailed on the drawings.

Locations of underground services shall be confirmed before driving in the earth electrodes. Any damage to existing underground service shall be repaired as directed by the Engineer at the Electrical Installation Contractor's expense.

All copper components shall be high conductivity electrolytic copper. The minimum single conductor size shall be cable 16mm² PVC.

All stainless steel components shall be suitable for direct burial in the ground. The minimum conductor size shall be 25mm by 3mm stainless steel strap.

Jointing of earthing system shall be made using the " CADWELD " process utilizing the correct moulds to suit the joint, unless otherwise specified.

All fixings, bolts nuts, washers spring washers shall be stainless steel or equally corrosion resistant material.

The installation shall be earthed as required by IEC-364 (TN-C/ TN-S) and the local Supply Authority.

The building earthing system shall include the following:

- (1) 5.25.8.1 Copper Plated earth electrodes, mechanically driven into the ground nominally 300mm below finished ground level.

- (2) An external earth network comprising bare copper cables interconnecting the earth electrodes. The cables shall be Cadwelded to the earth electrodes. The cables shall be direct buried 600mm (min) below finished ground level. Provide a durable orange PVC guard regularly marked 'ELECTRIC CABLE' at 300mm below ground level other the earth cable.
- (3) Stainless steel straps from the structural steel shall be Cadwelded to the external earth network. Earth stainless steel strap shall be screw fixed to the structural steel through holes drilled in the centre of the strap if above ground level. Preferably, the straps shall be welded to the reinforcing steel.
- (4) The building earthing system shall be bonded to the Main Earth Bar in the L.V. Switch room with a minimum of two (2) green, yellow PVC Insulated conductors.

The main earth mat shall include the following:

- (1) A minimum of 4 earth electrodes spaced at 6 meter, nominally 100mm level. The top of the electrode connection shall be accessible through a suitable earth pit cover. The electrodes shall be interconnected with bare copper conductors.
- (2) Green/ yellow PVC insulated copper conductors shall be used between the final electrodes and the main earth bar in the L.V. Switch room, as shown on the drawing.
- (3) The connections to the earth bars at the main switch room shall be made by inserting cables into lugs, soldering the lug to the cables and bolt fixing the lug to the earth bar so that the two earths remain electrically continuous.
- (4) The testing of earth resistance of the earthing systems with a DC and 50Hz injected signal. The test results shall be included in the manuals. The tests shall be carried out after a two week no rain period.

Sub-circuit earthing shall include:

- (1) An earth conductor shall be run to all light fittings, even when they are of completely non-metallic construction, so that the metallic light fitting may be substituted in the future.
- (2) Earth final sub-circuit shall be provided with its own earth conductor originating from the same distribution board as that which feeds the sub-circuit.

2.18 DISTRIBUTION BOARDS (DBs) AND PANEL SWITCHES (PSs)

The contractor shall supply and install all the distribution boards including the L.V. distribution board(the indoor distribution boards & the outdoor distribution boards), and panel switches as designated the drawings.

The indoor DBs shall be 3mm aluminium construction, manufactured by a recognized manufacturer . They shall be supported from the floor.

The outdoor DBs shall be 3mm aluminium construction, manufactured by a recognized manufacturer. They shall be free standing on concrete plinths provided by the contractor. The paintwork shall be U.V. resistant polyester power, oven baked and suitable for withstanding climatic conditions.

Circuit Breakers, contactors, fuses and other components shall be manufactured by internationally recognized manufacturers such as Mitsubishi, Hager, Square D or similar.

All busbars shall be tinned copper.

All switchboards shall be front access.

Install all the switchboards in position.

The process services switchboards and control panels shall be fixed to the floor at the bottom and the wall at the top with chemical setting metal threaded fixings.

All switchboards shall be mounted level. Provided steel packers as required to level the boards. Panels shall be checked to ensure that all doors and catches operate correctly, and that modules rack freely into position.

Where floors have been finished before mounting the switchboards the Contractors shall level the boards as above and the seal, in an approved manner, the space between the switchboards and the floor.

Terminate all cables, providing cable glands and lugs.

The Contractor shall arrange for the cleaning out of the switchboards interior and associated equipment prior to commissioning. All openings shall be sealed to prevent access to vermin.

The Contractor shall clean polish the exterior of the switchboards and associated equipment just prior to Practical Completion.

The Electrical installation Contractor shall install the pit covers for the pits in the main switchboard room, where applicable.

2.19 MAINS AND SUB-MAINS

- (1) The Contractor shall provide the mains and sub-mains cables as detailed on the drawings.
- (2) The cable from the diesel generator set shall run on the overhead / cable ladder to high level cable entry the main switchboard.
The cables to the generator set shall be fitted with a vibration isolation loop with cleats to support the cable.
- (3) The cabling to the outdoor distribution switchboards shall be buried underground, imbedded in clean washed sand, and spaced so as not to reduce the current rating.
- (4) The cables within the building shall be supported on the cable tray or ladder throughout their entire length.
- (5) Through joints in mains and sub-mains will not be permitted.
- (6) All sub-mains shall be neatly run and grouped without any crossovers.
All cables shall be straight and parallel to trench or cable ladder sides.

2.20 FINAL SUB-CIRCUITS

The final sub-circuits shall be run on cable trays, trunkings or in conduit within the buildings, concealed wherever possible.

Switches grouped together to control lights connected to the sub-circuits shall be mounted under a common flush plate.

The circuiting of outlets is outlined on the drawings and the Contractor is to prepare detailed shop drawings.

The entire installation shall be balanced across the three phases, to the satisfaction of the Engineer, to evenly load the diesel generator.

The final connection to fans, air-conditioners to vibration or movement for maintenance shall be made with a short length of flexible conduit.

Cables shall not be buried direct in render or run in the cavity of cavity walls, without mechanical protection.

All cabling shall be installed so that it is accessible in the future.

Final sub-circuits shall be PVC.

2.21 CABLE IDENTIFICATION

All cables shall be clearly numbered with cable sheath identified and each conductor shall be individually identified with a push-on type cable number or colour sleeve.

All cable identification and conductor numbers be unique throughout installation.

The numbering to be used shall be advised during the contract period. For tendering purpose the Tenderer shall allow all numbers to be four digits.

2.22 CONDUITS

Conduits indoor shall be PVC to IEC standard (BS6099 is reference) complete with purpose made fixtures and fittings.

Conduits outdoor or exposed to direct sunlight or surface mounted in machine rooms and work areas shall be H.D.G. Steel Class 4 to IEC standard (BS4568 is reference).

All conduits shall be erected before any cabling is drawn into the conduits.

Flexible conduits, conduits shall be PVC type, minimum size 20mm diameter and shall be terminated using a positive grip type termination.

Draw-in boxes shall be included in long runs of conduit such that draw-in points are not more than 20m apart.

All conduits shall be fixed in position with a spacer saddle securely fixed to the mounting surface in an approved manner. The spacer saddle shall support the conduit approximately 3 mm off the wall. Saddles shall be provided at 1m intervals.

The Contractor shall be responsible for determining routes and sizes of conduits unless these are already specified and for providing all necessary accessories even though such may or may not be indicated on drawings.

Maximum number of conductors in conduits

CONDUCTOR CROSS-SECTION (mm ²)	MAXIMUM NUMBER OF CONDUCTORS IN THE CONDUITS (mm)								
	20	25	32	38	50	63	75	90	100
1	10	18	31	45	-	-	-	-	-
1.5	10	14	25	35	-	-	-	-	-
2.5	5	9	16	22	38	-	-	-	-
4	5	7	13	18	30	47	-	-	-
6	4	5	10	14	23	36	48	-	-
10	3	4	6	9	15	22	32	44	50
16	2	3	4	5	9	14	21	28	37
25	-	-	3	4	7	11	16	22	28
35	-	-	2	3	5	8	13	18	23
50	-	-	1	2	4	6	9	13	16
70	-	-	1	1	3	5	8	10	13
95	-	-	1	1	2	3	6	8	10
120	-	-	1	1	1	3	6	8	10
150	-	-	1	1	1	3	5	7	9
185	-	-	1	1	1	2	4	5	7
240	-	-	1	1	1	1	3	6	6
300	-	-	-	1	1	1	3	4	5
400	-	-	-	-	1	1	1	3	4
500	-	-	-	-	1	1	1	2	3

Conduits shall generally be run vertically down from the cable tray above to the accessories.

Conduits shall be fixed to the building and structural steel works and shall not cross air space unless approved by the Engineer.

Different supply voltages shall be not be installed in the same duct or conduit.

All PVC conduits shall be cemented together with clear solvent in accordance with the manufacturer's recommendations.

Conduits shall change direction using manufactured bends and elbows. Heat setting of conduit is not permitted and any conduits heat set will be rejected and shall be replaced at the Contractor's expense.

An appropriate approved conduit coupling arrangement shall be provided and suitably fixed to conduits crossing structural expansion joints.

Conduits shall be so arranged that water is not ducted through them into the building.

Single lengths of conduit shall be used where the conduit run is shorter than 3m.

2.23 CABLE LADDER

Cable ladder inside the building shall be HDG Steel or aluminium cable ladder.

Only purpose-made bends, tees, rises, etc, shall be used. Site manufactured fittings will be rejected.

The cable ladder shall be supported to prevent sag or deformation when fully loaded with the maximum capacity of cables.

The cable ladder shall be supported on Unistrut channel and threaded rods provided by the Electrical Contractor. The rod shall be supported from a Unistrut beam clamps at ceiling level. Under no circumstances shall ladder supports be welded to the building structure.

All cables shall be securely fixed to ladder at intervals not exceeding 600mm. PVC cables shall be fixed using PCV cable ties.

Cable ladders shall be sized to provide adequate spacing of the cables so as to not effect the current rating and to provide space for the cable bending radii as recommended by the cable manufacturers.

The sharp edges of cable ladders shall be protected in an approved manner to prevent damage to the cable sheathing where the cable leaves the cable ladders. Generally cables shall sweet up and turn over the side of the cable ladder.

2.24 CABLE TRAY, TRUNKINGS

Cable tray, trunking shall be HDG Sheet steel, 16 gauge return edge type.

Bends, tees, rises, etc, shall be made using the specially manufactured components.

The cable tray, trunking shall be supported on Unistrut channel and threaded rods provided by the Electrical Contractor. The rod shall be supported on from a Unistrut beam clamps at ceiling level. Under no circumstances shall ladder supports be welded to the building structure.

The cable tray, trunking shall be supported to prevent sag or deformation when fully loaded with the maximum capacity of cables.

All cables shall be securely fixed to the tray at intervals not exceeding 600mm.

The sharp edges of the cable tray, trunking shall be protected in an approved manner to prevent damage to the cable sheathing where the cables leaves the cable trays . Generally cables shall sweep up the turn over the side of the cable trays.

2.25 PVC INSULATED CABLES

All cables shall be multi-stranded copper conducted V75 PVC 0.6/1KV insulate, minimum size 2.5sqmm(socket outlet), 1.5sqmm(lighting) unless otherwise specified.

The minimum conductor size given above should not be constructed to mean the minimum acceptable. Because of voltage drop limitations, the actual cable for some circuits may be required to be larger.

Cable insulation colours shall be as follows:

Single phase active	:	red (lighting)
		Yellow (socket outlet)
		Blue (power)
3 phase active	:	red, white and blue or red, yellow and blue
Neutral	:	black
Earth	:	green /yellow

Cables shall be run without joints from the circuit protection device to the points of use. Final sub-circuit cables , unless specified otherwise, shall be employed on the loop-in principle to all points and switches.

Cables shall be protected from direct sunlight and any other harmful substances.

2.26 CABLE TERMINATIONS

All cable terminations shall be carried out in an approved manner.

Cable conductors shall be cleaned prior to making termination.

Crimp type cable lugs shall be crimped using the lug manufacturers recommended crimping tools only.

After completion of laying of cables and making of all required joints and terminations, the cables shall be capable of satisfactorily with standing insulation resistance tests in accordance with the Standards for the type and size of cable.

If any of installations, either cable or joints box or boxes, breaks down under any such test, or otherwise fails to withstand the test voltage for the prescribed time, the installation will be deemed to be unsatisfactory by the Engineer and the faulty joint or joints are to be remade and /or the faulty section of cable replace with new cable or repaired. After such remaking of joints and / or replacing or repairing of cable, the installation shall be retested.

2.27 PHASE SEQUENCE

The phase sequence for the complete installation shall remain constant throughout and shall be demonstrated to the Engineer prior to Practical Completion.

The Contractor shall energize each phase individually from the temporary supply and the correct sequence shall be followed through to each of the distribution boards, multi-phase outlets, multi-phase connections and services switchboard and control panels.

2.28 ACCESSORIES

Flush polycarbonate accessories mounted on matching mounting block shall be used in all areas except external to the building. The accessories shall be standard electric white.

Surface mounted weatherproof accessories shall be used external to the building.

General purpose power outlets (GPO) shall be duplex, single phase universal style, three square pin, 15 ampere outlet and switch combination. Special purpose outlets shall be rated as shown on the drawings and shall be labelled to denote the function. All outlets shall be nominally 30mm above finished floor level (excepted emergency light, exhaust fan)

Light switches shall be rate at 20amperees, and shall be mounted 1200mm above finished floor level.

The three phase outlets shall be 5 round pin outlet and switch combination unit, rates at 32 amperes and shall be supplied with a matching plug. The three phase outlets shall be indicated by investor.

All accessories shall be labelled to denote the distribution board and the final sub-circuit breaker supplying the accessories. The labels shall be machine engraved traffolyte fixed with approved adhesive in a position to be approved by the Engineer.

The Contractor shall confirm the location of all accessories relative to door swings, sinks etc, on site prior to commencing installation.

2.29 LIGHT FITTINGS

- (1) All fittings shall comply with B.S. 4533 or equivalent approved by the Engineer and be marked accordingly as detailed in the specification.
- (2) All light fittings shall be of the brand and type specified in the drawings .Alternatives may be proposed at the time of tender, however they must be equivalent or better quality than the fittings specified.
- (3) All light fittings shall be adequately ventilated or otherwise designed to ensure that the internal temperature does not exceed the maximum temperature rating of the auxiliaries and to ensure that the surface temperature does not exceed 60°C.
- (4) Fluorescent lamps shall be mounted on a minimum of 70mm centres. There shall be a minimum of two (2) fixings for each fitting.
- (5) Power factor correction capacitors of suitable size to correct the power factor to not less than 0.85 lagging shall be fitted into each fitting and connected in shunt across the AC supply. Such capacitors shall be specifically designed and constructed for the purpose.
- (6) Ballast shall be low loss constant wattage type and conform with IEE . Tests and approved. Specifications in all respects. Where a single ballast is used to operate two discharge lamps it shall be purposely made for that application. Under no circumstances shall a ballast for operating a single lamp be used for operating two lamps of combined rating equal to that of the single lamp.
- (7) Switch start fluorescent fittings shall utilise an Osram starter or equivalent approved by the Engineer.
- (8) Internal wiring shall have a temperature rating of not less than 105°C. Wiring shall be run in a neat and orderly manner, without stress, securely fixed and so placed that contact with ballast units is avoided.
- (9) The terminal connector block, with each terminal of adequate size to accommodate a minimum of 3 x 7.85 conductors in each terminal, shall be fixed adjacent to the cable entry hole for the connection and looping of fixed wiring. An insulating barrier of synthetic resin bonded paper or equal approved shall be inserted between the terminal block and any metal part of the fitting on which the block is mounted. This barrier shall extend beyond the block by at least 50mm in all directions.

- (10) An earth terminal with anti-spread facilities shall be provided adjacent to the connector block and shall be in effective electrical contact with the metallic body of the fitting and auxiliaries and any other exposed metal.
- (11) Where diffusers are required the diffuser panel shall be removable in a convenient manner without the use of tools unless otherwise specified. Diffusers shall be of the pattern specified and shall be a minimum thickness of 3 mm.
- (12) Fluorescent lamps shall be high efficiency 25mm diameter with a through life output of no less than 300 lumens per 36 watts, and manufactured by an internationally recognized manufacturer.
The colour temperature of the lamp shall be as selected by the Engineer.
- (13) Fittings for external use shall be of the totally enclosed weatherproof type, either having a galvanized finish or be of non-ferrous construction. Supporting brackets shall be hot dip galvanized or non-ferrous construction
- (14) The light fittings shall be erected in straight lines, parallel and square.
- (15) Prior to Practical Completion, all light fittings shall be thoroughly cleaned of all dust and debris so that they are handed over in a thoroughly clean state.
- (16) Emergency lights and exit signs shall contain an integral battery, charger and inverter and shall be provided with an unswitched active. Some emergency lights fittings and all exits signs shall not be switched but serve as security lighting when all the other lights have been switched off.
Self contained, wall mounted, 2x20W tungsten halogen circular spot lamp emergency lighting luminaries of 3 hour duration as Thorn Industrial twin spot.
Self contained single side exit sign with 8 W fluorescent lamp for maintained emergency lighting for 3 hour duration .Steel construction as Thorn EFX3
- (17) Metal Halide :
High bay industrial discharge luminaries with vertical lamp, prismatic glass/parabolic vented aluminium reflector. IP 54 body as Thorn Hipak2
Hang 1m under structure beam

2.30 CORROSION PROTECTION

All equipment provided shall be corrosion resistant

The bonding of dissimilar metals needs to be verified for galvanic corrosion prior to installation.

2.31 FIXINGS

All external fixing components shall be stainless steel.

All fixings shall be retained secure by a lock nut, two full nuts, star washer or spring washer, unless otherwise specified.

All equipment shall be securely mounted in a manner approved by the Engineer.

Explosive type fixings are not to be used.

Generally, chemical setting metal threaded type fixings shall be used where equipment is fixed to masonry or concrete.

2.32 WALL PENETRATIONS

- (1) The Builder will provide the holes in the walls and floor slabs as require, providing shop drawings are prepared in advance of the building works.
- (2) The Contractor shall make any additional wall penetrations required, and "make good" upon completion.
- (3) Holes through masonry walls shall generally be made by removal of compete blocks or bricks. Where more than one block or brick is removed a suitably sized hot dip galvanized arch bar shall be fitted.
- (4) All penetrations shall be sealed after the installation of the electrical services.

Details of the materials to be used and the method of sealing shall be submitted to the Engineer for approval.

2.33 SPARES

Provide 10% or a carton, whichever is the lesser quantity, of fuses and lamps, including pilot lamps, of each type and size used on the project. The spares shall be handed to the Engineer at Practical Completion in their clearly labelled cartons.

2.34 CIRCUIT SCHEDULES

The Contractor shall provided schedule holders adjacent to each distribution board. The holders shall be complete with a circuit schedule that shall be easily removable.

The Contractor shall be type the circuit details on each of the circuit schedule that shall be easily removable.

A glass framed single line schematic drawing, A2 size shall be provide at the Main Switch room.

2.35 LABELLING

All labelling shall be machine engraved traffolyte using a stencil guide.

The labelling shall be sized in according with the order of importance of the item being labelled.

Dymo tape, making pen, painted or similar type labelling is not acceptable.

2.36 LIGHTNING PROTECTION SYSTEM

The Contractor shall provide and install a lightning protection system, conventional type, as indicated in the drawings and in accordance with IEC standard (Singapore Standard CP33 is reference).

All components shall be purpose made by a reputable manufacturer such as W.I.Furse & Co Ltd, or equivalent.

Connections between lighting conductors shall be made with approved, bolted termination units where ever the joint is accessible. Non-accessible connections shall be made with exothermic welding methods.

2.37 LIGHTNING COLUMNS

Columns shall be of welded steel construction and tapered along their length.

The columns shall be of circular (rolled) or octagonal (folded) cross sectional shape.

Where sections must be joined to form longer lengths these are to be sleeved, bolted flanges are not acceptable in the mid-sections of the pole.

Columns shall be hot dip galvanize.

Foundation designs are to be provided by contractor and based on the soil conditions on site. There shall be submitted for approval.

Light fittings are to be of the type as nominated on the drawings. Each light fitting is to be provided with an individual fuse or circuit breaker at the base of the column.

A securable cover is to be provided for access to the base of the column.

Cabling is to be routed through the foundation in PVC conduit and into the cavity of the column base.

2.38 FIRE DETECTION AND ALARM SYSTEM

- (1) The Contractor shall supply and install fire detection and alarm system in accordance with IEC standard , (BS5839 is reference).
IEC standard (or BS5839) specifies locations and the arrangement of detectors, alarm and manual call stations within the buildings.
- (2) The Contractor shall also supply and install a Main Fire Alarm panel (MFAP) the Guardhouse. The MFAP shall comply with the requirements of IEC standard (Singapore Standard CP10 is reference).
- (3) Provide a framed location diagram to represent the building and the zones within the building.
- (4) Provide smoke detectors to the areas as shown on the drawings.
- (5) Provide thermal detection to the areas as shown on the drawings.
- (6) Provide manual call points in the locations shown on the drawings.
- (7) Fire system cabling shall be run separately form other services.
- (8) The cabling for detector circuits shall be not less than 1.5sqmm multi-stranded copper conductor PVC insulated cable run in PVC conduits.
- (9) The cabling for the audible alarms (bells) shall be fire rated cable not less than 2.5sqmm multi-stranded copper conductor with a fire rate method of support.
- (10) Provide an external fire alarm bell outside the front entrance to the guardhouse and wire to the fire indicator panel.
- (11) Show the exact location of the end of line resistors on the as-constructed drawings.
- (12) Provide one (1) spare thermal fire alarm detector of each type used
Provide one (1) spare smoke detector of each type used.
Provide six (6) indicator lamps and fuses of each size used.
- (13) The Contractor shall provided the completed Certificate of installation and Commissioning of a fire Alarm System .
- (14) The Contractor shall test the completed installation and provide the Certificate
- (15) The Contractor shall test the completed installation and provide the completed Commissioning Test Report .

SECTION 3. PLUMBING AND DRAINAGE

TABLE OF CONTENTS

	Page
3.1 GENERAL REQUIREMENTS.....	3-1
3.2 PIPEWORK MATERIALS, VALVES AND ACCESSORIES.....	3-1
3.2.1 Water Supply Systems	3-1
3.2.2 Soil/Waste Water System	3-1
3.2.3 Unions, Joints Flanges and Fittings	3-2
3.2.3.1 General.....	3-2
3.2.3.2 Ductile Iron Pipes	3-2
3.2.3.3 uPVC pipes	3-2
3.2.3.4 Galvanized Steel Pipes	3-2
3.2.3.5 Cast Iron Spigot and Socket Pipes	3-3
3.2.4 Isolating Valves and Cocks.....	3-3
3.2.4.1 General.....	3-3
3.2.4.2 Isolating Valves.....	3-4
3.2.4.3 Stop Cocks/Valves.....	3-4
3.2.4.4 Regulating Valves	3-4
3.2.4.5 Bib Taps for Cleansing Purpose.....	3-5
3.2.5 Tank Fitting and Covers.....	3-5
3.2.6 Floor Drains.....	3-5
3.2.7 Termination of Soil/Waste Vents	3-5
3.2.8 Clean Outs	3-5
3.3 PIPEWORK INSTALLATION	3-5
3.3.1 General	3-5
3.3.2 Pipe Supports.....	3-6
3.3.3 Pipe Sleeves	3-8
3.3.4 Pipe Movement and Expansion Joints	3-8
3.3.5 Pipe Anchors	3-9
3.3.6 Pipes Through Roofs	3-9
3.3.7 Welding	3-9
3.4 TESTING AND COMMISSIONING OF THE INSTALLATION.....	3-11
3.4.1 General.....	3-11
3.4.2 Preliminary commissioning checks.....	3-11
3.4.3 Commissioning	3-12
3.4.4 Hydraulic Testing of Pipework	3-12
3.4.5 Operation Tests.....	3-13
3.4.6 Electrical Tests	3-14
3.4.7 Supply of Testing Equipment.....	3-14

SECTION 3. PLUMBING AND DRAINAGE

3.1 GENERAL REQUIREMENTS

- (1) All pipework and fittings shall be selected by the Contractor strictly in accordance with this specification.
- (2) Pipework, fittings, valves etc. shall refer to British Standards or equivalent standard approved by the Engineer .
- (3) The Contractor shall supply all isolating valves and control valves as indicated on the drawings and as required for the proper and efficient operation and maintenance of the entire systems.
- (4) All valves supplied shall be suitable for the working pressure and test pressure of the system as specified elsewhere in this Specification.
- (5) All valves shall be packed with an approved packing which will be replaceable under pressure. Threads shall be coated with oil and graphite. Packing should be replaced when found deteriorated on site.
- (6) The Contractor shall be responsible for the coordination and location of all piping and equipment with other Contractors before installation.
- (7) The Contractor shall be responsible before commencing work for checking all levels and gradients shown on the drawings and for relating them to site conditions to ascertain that conditions on site permit execution of work as shown on the drawings.

3.2 PIPEWORK MATERIALS, VALVES AND ACCESSORIES

3.2.1 Water Supply Systems

- | | |
|---|---|
| (a) Cold water pipe | Galvanised steel pipe |
| (b) Irrigation water supply pipe at aboveground | Galvanized steel, medium grade with screwed joints and fittings |
| (c) Irrigation water supply pipe at underground | Galvanized steel, heavy grade with screwed joints & fittings |

3.2.2 Soil/Waste Water System

- | | |
|---|-------------------------------------|
| (a) Above ground soil, waste, vertical stacks and horizontal branch pipes, whether or not inside pipe ducts, 80mm diameter to 150mm diameter. | Socket and spigot Cast Iron pipes |
| (b) Same as above but 225mm diameter and above | Socket and spigot Cast Iron pipes . |
| (c) Soil pipe for urinal concealed in wall and pipe duct | uPVC pipes and |
| (d) Same as above but 80mm diameter and above. | uPVC pipes and |
| (e) Waste pipes up to 50mm diameter | UPVC Pipe |
| (f) Vent stacks larger than 50mm diameter. | UPVC Pipe |
| (g) Vent and anti-syphonage pipes up to 50 mm diameter. | uPVC Pipe |
| (h) Below ground soil pipes between Inspection Chambers | uPVC pipe |

3.2.3 Unions, Joints Flanges and Fittings

3.2.3.1 General

- (a) In all pipe systems, long radius bends and pitcher tees shall be used wherever possible. All fittings shall be suitable for a working and test pressure not lower than the specified for the pipework system concerned elsewhere in this Specification.
- (b) Reduction in bore of pipe shall be generally made eccentric for horizontal pipes (to prevent air locking) and concentric taper fittings shall be fitted for vertical pipes unless specifically required to achieve the required space and invert levels.

3.2.3.2 Ductile Iron Pipes

- (a) The joints shall be of screw on ductile iron flanges for pipes and cast on flanges for fittings. Jointing gaskets shall be of proper full faced coated by approved jointing compound on both faces.
- (b) All socket and spigot ductile iron pipes and fittings of tyton joint. Jointing method shall be in accordance with the manufacturer's recommendation.
- (c) All ductile iron pipes and fitting shall be metallic zinc coated externally specification and final bitumen material coated. Flanged pipes and fitting shall be cement lined internally while socket and spigot pipes and fitting shall be bitumen material coated.

3.2.3.3 uPVC pipes

- (a) All uPVC pipes shall be jointed with sockets and fittings and as recommended by the PVC manufacturer or as a minimum standard solvent welded .
- (b) Solvent welding shall be used for all pipework, particular attention must be paid to preparation. Abrasive paper and spirit cleaner must be used. When applying solvent, heat shall be avoided as the cement may dry before chemical bonding between the two surfaces is completed. Mating surfaces shall be turned for even spread of the solvent. Excessive cement shall be wiped off quickly.
- (c) Flanged joints shall be used where solvent welding is not practicable and for the connection of valves and at locations to facilitate dismantling. Factory cut neoprene ring gaskets with approved jointing paste shall be used between flanges. The jointing medium must be in accordance with manufacturers recommendation.

3.2.3.4 Galvanized Steel Pipes .

- (a) Screw joints shall be used except for connection to cast iron pipes where joints shall be made by molten lead joints. All fittings shall be beaded.
- (b) No welded joint shall be allowed
- (c) Union Joints shall be used for joints subject to disconnection for future maintenance at a maximum distance of 6m and at connection to equipment.

3.2.3.5 Cast Iron Spigot and Socket Pipes

- (a) All joints to be lead caulked in accordance with this specification.
- (b) Except for mechanical joints, joints for cast drainage pipework generally shall be made using molten lead and the minimum depth & weight of lead per joint for the various sizes of pipes shall be as follows:

<u>Internal Dia of Pipe (mm)</u>	<u>Dept of Gaskin in Joint (mm)</u>	<u>Weight of Lead per Joint (mm)</u>
50	32	1.00
75	32	1.50
100	32	2.00
150	38	2.00
225	38	2.50
300	38	4.25
375	38	4.50

The spigot shall be centered in the adjoining socket by tightly caulking in sufficient turns of gaskin to achieve required depth given above. Molten pig lead shall then be poured in to fill remainder of the socket. The lead should be solidly caulked, with suitable tools to make up for the shrinkage of the molten lead on cooling.

- (c) Cold caulking compound may be used in individual cases for jointing cast iron spigot and socket pipes together which shall be at the discretion of the Engineer. Depths of gaskin shall be the same as that indicated for run lead joints.
- (d) Accesses/ Cleaning eyes shall be provided at the base of all stacks, opposite joints, on bends and elsewhere required whether shown on the Drawings or not and in such a position that they can be conveniently inspected and cleaned at all times.
- (e) Cleaning eyes and access covers shall be fitted with neoprene gasket and brass bolts.
- (f) Cast iron lead caulked caps should be allowed for future drain pipe connections wherever indicated on the drawings.

3.2.4 Isolating Valves and Cocks

3.2.4.1 General

The Contractor shall supply and install all isolating valves and control valves as indicated on the drawings and as required for the proper and efficient operation and maintenance of the entire systems.

All valves supplied shall be suitable for the working pressure and test pressure of the system as specified elsewhere in this Specification.

All valves other than automatic control valves shall be full line size.

Each valve shall have a purpose made reference number plate or label engraved or stamped indicating the manufacturer's catalogue number, pressure and temperature ratings. Valves shall be arranged so that clockwise rotation of the spindle will close the valve. Plastic Dymo labels are not acceptable.

All valves and accessory material necessary in the piping shall be furnished, whether or not shown on drawings as follows.

All valves shall be packed with an approved packing and threads shall be coated with oil and graphite. Packing should be replaced when found deteriorated on site.

Where possible all valves shall be located at convenient positions or operation from the floor with valve stems upright.

Valves that are flanged shall have flanges to the Table specified for the pipework.

The standard of valves and cocks shall comply with the current local water supply company and the following requirements.

Stainless steel 316 positioner shall be provided to indicate the open/close status of catch valve on the incoming mains to water tanks. Isolating valves shall be provided to isolate the incoming mains, water tank outlets, pumps, main distribution pipes.

3.2.4.2 Isolating Valves

All isolating valves shall be suitable for the pressure ratings specified elsewhere in the Specification.

(a) Cold Water Systems

(i) Up to and Including 50 mm Bore :

Full way gate valve of bronze body construction, wedge and valve seat shall be in bronze, non-rising spindle and screw collar in high tensile bronze. Valves shall have screwed female ends for taper treads.

Above 50 mm Bore :

Full way gate valve of bronze body construction, bolted bonnet, wedge and valve seat in bronze, non-rising spindle and screw collar in high tensile bronze.

(ii) Thermostatic mixer with chromium plated finish provide water controlled temperature 30°C - 50°C with a locked control for ablutionary purposes as indicated on the drawings. Mixers are virtually instantaneous shut-off in event of cold water failure.

Standard connections are hot water entry on the left, cold right, bottom outlet, when facing the mixer (All inlet and outlet sizes shall refer to the drawings indicated).

3.2.4.3 Stop Cocks/Valves

Stop valves/cocks shall be installed as shown on the drawings to isolate single fittings or groups of fittings. The stop cocks in the fresh water system shall be loose jumper type. Stop cock in the flush water system shall be in PVC and suitable for use with sea water. Samples shall be submitted for approval before ordering.

3.2.4.4 Regulating Valves

Regulating valves shall be installed as shown on the drawings. Regulating valves in cold and hot water systems shall have gunmetal body with screwed female connections for sizes up to 50 mm bore and flanged connections for valves above this size.

3.2.4.5 Bib Taps for Cleansing Purpose

Bib taps shall be provided for cleaning purpose. The bib taps shall comprise a vacuum breaker and suitable for use with rubber hoses with female threaded connection and stainless steel lockable box. The taps shall be chrome plated brass. Pad lock with two sets of key shall be provided.

3.2.5 Tank Fitting and Covers

- (1) Cast iron puddle flanged tank connectors with cement line shall be provided for water tanks for connection of inlets, outlets, drains, overflow and vents. Flanges of all fittings shall be drilled and shall be set into position by the Contractor prior to concreting.
- (2) Gunmetal puddle flanged tank connectors shall be provided for non-potable and potable water tanks.
- (3) Double sealed cast iron covers with lockable facility, lock and keys shall be provided for all water tanks.

3.2.6 Floor Drains

- (1) Floor drains shall be provided as shown on the Drawings.
- (2) All drains with 80mm water seal shall be provided.
- (3) All floor drains inside kitchens, bathrooms, toilets and public areas shall have chromium plated brass gratings to match the floor finishes. Fixing screws shall be of stainless steel or chromium plated brass flat head counter-sunk type.
- (4) Floor drains inside plant rooms shall have cast iron grating fitted with stainless steel flat head counter-sunk screw.

3.2.7 Termination of Soil/Waste Vents

All soil/waste vent pipes shall be terminated above roof level as shown on the Drawings. A copper wire vent balloon shall be securely fixed to the open ends of all vent pipes. An approved lead weathering "slate/apron" shall be fitted with minimum upstand of 150 mm.

3.2.8 Clean Outs

- (1) The Contractor shall provide where shown and as required, types and sizes as scheduled, floor and wall clean outs with cover plates in finished areas.
- (2) All clean outs shall be easily accessible and shall be leak-proof.

3.3 PIPEWORK INSTALLATION

3.3.1 General

- (1) Before commencing work, all levels and gradients of connecting pipeworks shall be checked to ascertain that conditions on site permit execution of work.
- (2) The Contractor shall note the restricted space available in certain service ducts and the absolute necessity to ensure that all pipework is installed in the correct sequence, manner and position to ensure that operation of all valves and maintenance is possible.

- (3) All reductions in pipe sizes shall be made using approved standard reducing fittings. Reducing bushes shall not be used without approval. Connections between lengths of pipes shall be made using standard fittings.
- (4) All copper and galvanized steel pipes and fittings where buried in walls or slabs, or installed in direct contact with concrete, the pipework shall be bitumen- coated and wrapped with Denso tape or other suitable materials before installation.
- (5) All pipework in the pump room, plant rooms, and on roof level shall be installed with flanges or unions at intervals not exceeding 6m for ease of dismantling.
- (6) Changes in direction of pipes shall be made with long radius bends, or elbow. Under no circumstances, the pipes shall be bent without the use of fittings.
- (7) All pipe runs when not installed underground or in ducts shall be concealed as far as possible by careful positioning or shall be chased into walls, laid in screed etc, or as directed by the Engineer .
- (8) All pipes passing through wall tiling and exposed to sight shall be provided with chromium plated wall flanges plugged and screwed to the wall.
- (9) Before concreting, the underground pipes and the floor shall be wetted down. Concrete shall be placed evenly on the entire width of the bedding and to within 25mm of the bottom of the pipe then without stopping, it shall be placed gently on one side of the pipe only and carefully worked under the pipe, ensuring that there is no void left below the pipe. It shall then be brought up equally on each side of the pipe to the required finished height, care must be taken not to force the pipes off their supports. The concrete and pipes shall then be damp until backfilling.

3.3.2 Pipe Supports

- (1) All pipework fittings, valves, connections, etc. shall be efficiently supported and bracketed. All pipework shall be supported at intervals not greater than the following on straight runs; and additional supports shall be provided at bends, valves, etc..

Galvanized Steel, Ductile Iron and Copper Nominal Bore of Pipe in (mm)	Intervals in Meters	
	Vertical Pipes	Horizontal Pipes
15	1.5	0.9
20	1.5	0.9
25	1.8	1.2
32	1.8	1.2
40	2.1	1.5
50	2.1	1.5
65	2.4	1.8
80	2.4	1.8
100	2.4	1.8
125	3.0	1.8
150	3.0	2.4
200	3.0	2.4
225	3.0	2.4
300	3.0	2.4
375	3.0	2.4

uPVC Pipes

Nominal Bore of pipe in (mm)	Intervals in Meters	
	Vertical Pipes	Horizontal Pipes
15	0.8	0.6
20	0.8	0.6
25	1.2	0.6
32	1.2	0.6
40	1.2	0.6
50	1.8	0.6
65	1.8	0.9
80	1.8	0.9
100	1.8	0.9
150	1.8	0.9

- (2) All supports for ductile iron, cast iron, galvanized steel and PVC pipe shall be ferrous. Supports for copper pipes shall be split type brass pipe rings (Details shall be submitted with the tender). Support pipes above ground with brackets, etc. cast in concrete piers at each joint and intervals as specified. For pipes run below ground, piers shall be formed of 1:3:6 concrete, minimum area 150mm x 300mm and depth 450mm min below ground. Pier width shall generally be 150mm wider than the total width of pipes supported on top of it.
- (3) All pipes supports shall be of such design and type to allow for the removal of any pipe section without the necessity of disconnecting other adjacent pipes.
- (4) Where Pipes Rings are used, they shall be split pattern with top and bottom bolts, and with the top ears carried clear of the insulation. For horizontal pipes, the ring boss, where rocking movement of the pipe ring is expected, shall have spherical seating washers.
- (5) In all plant and pump rooms discharge pipework from pumps, and all pipework where vibration could be transmitted to the building structure, shall be supported with brackets having a tough rubber lining in contact between the bracket and the pipe or shall have specially designed anti-vibration hangers/supports.
- (6) The Contractor shall be responsible for building-in of all supports, etc., required for the work. The Contractor shall allow for using "HILTI Redhead Bolt Fixings" or approved equivalent for cutting away and building in of brackets in brickwork, etc., as required. The Contractor shall particularly note that it may not be possible to fix the bolts directly above pipes and cantilever or sling type supports shall be used where required.
- (7) PVC. pipework shall be adequately supported such that no deflection of pipe occurs and supports shall be provided at all joints.
- (8) The Contractor shall provide adequate pipe anchors in order at the ends or turning points of PVC. pipes in order to prevent fracture of the pipe resulting from water hammer. Anchor points shall be fixed in a manner that the inertia from the flow will be directly transmitted onto the anchors thus releasing the PVC. pipes from being under stress.

3.3.3 Pipe Sleeves

- (1) Where pipes pass through walls, floors, etc., the Contractor shall provide pipe sleeves. Sleeves for ductile iron, cast iron and galvanized steel and copper pipes shall be steel. For plastic pipes the sleeves shall be plastic. Where sleeves are fitted through floors, they shall extend to at least 20 mm clear above the level of the finished floor.
- (2) The space between pipe sleeves and the pipe or insulation shall be completely backfilled with materials having the same fire resistant rating as the walls and floors.
- (3) Sleeves shall be of sufficient size to allow free movement of pipes and furthermore where pipes are insulated the sleeves shall be oversized to allow the insulation to be carried through the sleeves. The Contractor's attention is drawn to the vertical pipe ducts at all floor levels. Where pipes pass through floors, sleeves shall be provided.
- (4) Details of pipes through walls and floors shall be approved by the Engineer before installation.
- (5) The Contractor shall set sleeves in walls, floors, etc., and in the shuttering before concrete is poured.

3.3.4 Pipe Movement and Expansion Joints

- (1) Wherever possible, advantage shall be taken of changes in direction of pipes to take up expansion and contraction due to temperature changes of the pipe contents.
- (2) Expansion joints and movement joints shall be provided in pipes which cross the building expansion joints shall also be provided elsewhere to absorb the effect of expansion on pipes whether shown on the Drawings or not. Special attention shall be paid to the provision of expansion joints in hot water pipework.
- (3) Where expansion joints are required, they shall be Bellows type. Bellows shall be stainless steel with stainless steel inner and outer telescopic sleeves. The joints shall be suitable for a test pressure as specified for the pipes. Each joint shall be suitable for a transverse movement of not less than 25 mm and if necessary a joint of larger diameter than the pipe shall be installed with reducing fittings to obtain the allowable required pipe movement.
- (4) Where movement points occur, couplings shall be used so that building movement does not cause fracture or stress in the pipework.
- (5) Upon sizing and fixing expansion joints on pipes crossing the building expansion joints, the Contractor shall take into account, in addition to the expansion/ contraction of pipes due to temperature changes, the effect of relative horizontal movement between the two parts of the building structure. Pipe guides shall be fitted on each side of each joint to keep the joint and pipe in true alignment according to manufacturer's instruction.
- (6) Generally expansion bellows shall be installed mid way on each water riser. Details and location of expansion joints shall be submitted to the Engineer for approval.

3.3.5 Pipe Anchors

- (1) All pipes shall be anchored as required to control the movement of pipes due to thermal changes. Generally anchors shall also be fitted at the lower end of vertical pipes. Details of all anchor points shall be submitted to the Engineer for approval.
- (2) The anchors shall securely hold the pipe in a rigid position to resist the attempted movement due to expansion and the weight of pipe and contents.
- (3) The Contractor shall submit full details to the Engineer of all expansion and anchor joints proposed for use throughout the Building prior to installation.

3.3.6 Pipes Through Roofs

Where pipes pass through concrete roofs, 450mm x 450mm x 1.8 kg lead slates and collars for the pipes shall be provided, the slates being sand whacked between the layers of the asphalt or membrane roofing and collars bound to the pipes with galvanised screw dips, and sealed with approved mastic sealant.

3.3.7 Welding

- (1) Where steel pipework is required to be welded, it shall be carried out generally by the electrical arc process. Where steel pipework of 50mm dia. and below is to be welded, gas welding by the oxy-acetylene process may be used. Gas welding on pipework 65mm and above will not be permitted unless prior permission from the Engineer is obtained.
- (2) Where brazing or bronze welding is undertaken, such welding shall be carried out in accordance with and satisfy the testing procedures described in BS 1723 and BS 1724. In all other respects, particulars relating to the welding of steel pipework shall apply equally to copper.
- (3) The Contractor shall employ on the Contract only properly qualified and certificated welders of not less than 6 months experience, and any shop welded fabrications shall be welded by equally qualified welders.
- (4) The Contractor shall employ adequate number of competent welding supervisors to ensure that workmanship complies with the requirements of this Specification.
- (5) All personnel engaged on welding operations must possess a certificate of competence issued by an approved authority. These certificates must be produced for inspection by the Engineer before any welding is undertaken.

The Contractor will be required to produce evidence that each welder employed on the Contract is qualified in this manner and shall provide the Supervising Officer with the name of the welder, a copy of the welder's qualification certificates and identification mark and six months regularly employed certificate for the required class of work. The Contractor shall present successive six-monthly regularly employed certificates for each man.

- (6) The Engineer shall be notified of any change in welding personnel on the Contract and will required examinations of the work of any new welder or additional welder employed.
- (7) Test welds on both steel and copper by each welder employer on the site shall be carried out in the presence of the Engineer prior to the operator undertaking any work on the Contract. All such test welds must be made in position as directed by the Architect and shall be subjected to visual examination and bend. Each weld shall be given a suitable mark enabling the operator to be identified.
- (8) The quality of welding in steel or copper shall be subjected to careful inspection and testing by the Architect and where so deemed necessary may be subjected to non-destructive and/or destructive tests under the supervision of the Engineer.
- (9) Non-destructive testing shall consist of either radio-graphic. The Contractor shall allow for 2% of all welds for testing by this method. This testing shall be carried out only by approved specialists.
- (10) The Contractor shall undertake destructive test which will entail cutting out from the completed installation at any time, up to 1% of welded joint for both steel and copper, at the entire discretion of the Engineer and in positions as directed by him. Should any specimen welds so examined be designated un satisfactory, the Contractor shall remove such further work as instructed. all such work shall be replaced and made good at the expense of the Contractor, to a standard acceptable to the Engineer. Where tests welds are removed from a pipeline, it shall be made good by welding in a length of similar bore and class of pipe not less than 300mm long.
- (11) Manufactured weld fittings shall be used wherever practicable and the Engineer permission must be obtained where it is intended to fabricate in lieu of using manufactured weld fittings.
- (12) Welded branch joints are to be made with manufactured branch fittings accurately profiled to fit the main, the opening of the main being correctly shaped to coincide with the branch, both pieces having bevelled edges. All burrs, etc. are to be removed before welding is commenced and the operator must ensure that the branch piece does not project into the bore of the main but sits closely onto the bevelled surfaces.
- (13) Where flanges are welded to steel pipework, the joints shall be hammer tested. Any imperfect welds shall be made good at the Contractor's expense.
- (14) Where flanges and weld fittings are used on copper pipework the technique of brazing or bronze welding shall be used, employing the best quality welding rods and flux. The welding rods are to be of a type not subject to dezincification, i.e. "Siltroalloy" or equal.
- (15) Brazing and bronze welding is not to be employed for fabricating branch tees.

3.4 TESTING AND COMMISSIONING OF THE INSTALLATION

3.4.1 General

- (1) The Contractor shall carry out all necessary testing and commissioning procedures comprising tests at maker's works, site tests during construction, commissioning, and acceptance tests all as specified below.
- (2) Tests shall be carried out in accordance with the appropriate CIBSE commissioning code.
- (3) The Contractor shall include in this Tender all costs associated with the testing and commissioning procedures including materials, labour, instruments and the provision of all necessary test points. Such costs shall also include the cost of making good any defects arising out of such tests at maker's works, such costs shall also include the provision of fuel and all other incidental costs.
- (4) All tests shall be carried out to the satisfaction of the Engineer and shall also be witnessed by the Engineer. In the case of pressure tests at maker's works the tests shall be witnessed by an approved independent Insurance Company. The Contractor shall give not less than ten days written notice to the Engineer.
- (5) The Engineer shall be entitled at all reasonable times during manufacture to inspect, examine, and test on the Contractor's premises the materials and workmanship of all plant to be supplied under the Contract, and if part of the said plant is being manufactured on other premises, to equally examine and test as if the said plant were being manufactured on the Contractor's premises. Such inspection examination, or testing, if made, shall not release the Contractors from any obligation under the Contract. All costs shall be borne by the Contractor.

3.4.2 Preliminary commissioning checks

- (1) The Contractor shall ensure that all equipment included under this Contract is thoroughly cleaned, lubricated and checked for serviceability immediately before setting to work. Particular attention is drawn to the removal of building debris from motors and pipework.
- (2) All pipework shall be thoroughly flushed and chemically cleaned to ensure that all foreign matter is removed and internal surfaces are degreased. During all preliminary flushing, plant shall be isolated by means of bypasses to avoid dead legs, and the systems shall be completely isolated from any existing systems to ensure contamination cannot occur.
- (3) Further flushing and chemical treatment shall be carried out on isolated systems by connection of temporary diesel driven pumps to circulate water and dosing chemical. The Contractor shall allow for cross-connection of flow and return pipework at the extremities of risers and interface points with existing installations or other contracts.
- (4) All automatic controls and safety devices shall be inspected and checked for serviceability before the working fluid or electricity is applied to the system.

3.4.3 Commissioning

- (1) When the preliminary commissioning checks have been carried out, the Contractor shall set to work, regulate and calibrate the installations in accordance with a programme to be agreed with the Engineer.
- (2) All valves, switches, controls, etc. shall be regulated and capable of proper operation and in the case of valves shall be capable of tight shut off.
- (3) All apparatus shall be silent and vibration free in accordance with the requirements of this Specification.
- (4) All instruments shall be correctly calibrated and shall read accurately.
- (5) Each water system shall be set in operation with the water volumes to each unit measured, regulated and the plant set for the correct duty.
- (6) The Contractor shall operate pumps to ensure that all control systems are functioning correctly and are properly sequenced and interlocked.
- (7) All instruments shall have been recalibrated within six months of the start of commissioning or testing.
- (8) Calibration of all instruments shall be certified by the instrument manufacturer or an approved calibration agency.

3.4.4 Hydraulic Testing of Pipework

- (1) The Contractor shall carry out hydraulic test on the complete plumbing systems and the drainage system to show that it is functioning satisfactorily within the requirements of this Specification.
- (2) The contractor shall provide suitable test pumps and arrange for a supply of water required in connection with testing of pipework. The test pump shall be fitted with pressure gauges which shall be of suitable range for the pressure being applied.
- (3) Hydraulic tests shall be carried out as the pipework is installed and shall be completed before chases in walls and ducts are closed. Also tests shall be carried out prior to false ceilings and other finishes are installed.
- (4) All water services pipework, except incoming cold water supply to the water tanks shall be hydraulically tested for a period of not less than 6 hours to a pressure of not less than one and a half times the working pressure. Without leakage or loss of pressure. The maximum working pressure for water systems shall be deemed to be static head plus the total pump head. Minimum testing pressure shall be 7 bars. The contractor must record all test figures together with schedules of pipe lengths and should note that testing shall be witnessed by the Engineer.
- (5) With respect to incoming water supply the test Clause shall be charged with water and all air liberated. The pipework shall be allowed to stand for three days before final testing. Test pressure shall be raised slowly to the maximum value. The permissible pressure drop 0.15 kg/sq. c.m. after six hours shall not be exceeded.
- (6) Testing apparatus shall be provided by the Contractor.

- (7) The Contractor must carry out any additional tests required by the local water supply company.
- (8) Remove the blank cap from one of the drain plugs (at the top of the stack if possible) and connect the tube from a manometer gauge to it or by passing the tube through one of the trap seals.
- (9) Blow air through the tube and reconnect to the manometer gauge to obtain a reading of 1-1/2"w.g/ the level should remain for a period of not less than three minutes without falling and without further air being added.
- (10) If the test is found unsatisfactory, then smoke may be used to help find any leaks with the aid of a smoke pump, whereby a visual and smell check can be made on the stack and with the aid of a jar of soapy water by painting the joints leaks can be detected and rectified.
When this has been completed, the test should be repeated until found satisfactory.
- (11) When applying the smoke test to a uPVC stack on no account should be the smoke rocket be in direct contact with this materials as serious damage could occur.

3.4.5 Operation Tests

- (1) The Contractor shall ensure to the satisfaction of the Engineer that the installation or portion thereof has been set to work and complies with all requirements including the following :
 - (i) That the plant and apparatus is of robust construction and of capacity for the duty specified.
 - (ii) That all valves, switches, controls, etc. are properly regulated and capable of proper operation.
 - (iii) That all apparatus is silent.
 - (iv) That all instruments are correctly calibrated and read accurately.
 - (v) That all services are tested in accordance with the details of the relevant clauses of this Specification.
- (2) Should the results of these tests show that the pumps or any other items of equipment fail to perform to the efficiencies or other performance figures as given in this Specification, and as accepted in the contractor's tender, then the Contractor shall adjust, modify and if necessary replace the equipment without additional cost to the Contract in order that the required performance is obtained. Should it be necessary for the contractor to attend to items of plant as described he will be responsible for cost for any damage or deterioration to the building or any other services consequent on such attendance.
- (3) The Contractor shall perform all tests and demonstrations as called for by the Government (all departments).
- (4) Testing procedures shall be submitted two months after the approval of major equipment to the Engineer for approval.

3.4.6 Electrical Tests

- (1) In addition to any electrical tests listed elsewhere in this Specification, the following tests for electrical systems shall be carried out.
- (2) The precise method of carrying out all tests shall first be agreed with the Engineer.
- (3) The Contractor shall verify polarity of the circuits to ensure that all fuses and single-pole control devices are connected in the "live" conductor only, and that wiring has been correctly connected to the socket-out terminals.
- (4) The Contractor shall measure the earth continuity conductor with alternating current in accordance with Item 1a Appendix 6 of I.E.E. Regulations, 16th Edition.
- (5) Tests of effectiveness of earthing shall be made with loop-impedance test in accordance with Item 2 of Appendix 6 of I.E.E. Regulations, 16th Edition.
- (6) A 1000V "Megger" tester shall be applied for the measurement of insulation resistance of all L.V. equipment. Measured value shall be recorded as per Regulation E7, E8 and E9 of I.E.E. Regulations, 16th Edition. Motors shall be tested at the works, and tested for insulation resistance on site.
- (7) H.V. cables shall be tested to B.S. 148.
- (8) Motor control centres shall be tested at the Works and all details of tests shall be certified and submitted for record. On site testing shall include (but need not be limited to) the following :
 - Mechanical tests including checking of all mechanical and electrical connections, interlocks, etc.
 - high voltage injection and insulation tests;
 - testing of overcurrent, and earth fault protection by primary injection, and all other protection devices;
 - functional checks of all control and starter circuits;
 - calibration of metering instrument, C.T. etc; and
 - any other tests as recommended by manufacturers.

3.4.7 Supply of Testing Equipment

- (1) The Contractor shall provide all tools, pressure pumps, instruments and recorders required to carry out the tests given in this Clause.
All water and electricity required for testing purpose shall be supplied by the Contractor.

SECTION 4. MECHANICAL VENTILATION AND AIR-CONDITIONING

TABLE OF CONTENTS

	Page
4.1 DESIGN CRITERIA AND SCOPE.....	4-1
4.1.1 Air Conditioning and Mechanical Ventilation.....	4-1
4.1.1.1 Extent of Air conditioning and Mechanical Ventilation Installation.....	4-1
4.1.1.2 Design Criteria.....	4-1
4.1.1.3 Codes and Regulations.....	4-1
4.2 PIPEWORK	4-2
4.2.1 Materials	4-2
4.2.2 PIPE CONNECTION	4-2
4.2.3 PIPE SUPPORTS.....	4-2
4.2.4 PIPEWORK INSULATION.....	4-3
4.3 DUCTWORK AND FITTINGS	4-3
4.3.1 Materials	4-3
4.3.2 Duct Thickness	4-3
4.3.2.1 Rectangular duct.	4-3
4.3.2.2 Round duct.	4-4
4.3.3 Duct Hangers and Supports	4-4
4.3.3.1 Rectangular duct:	4-4
4.3.3.2 Round duct :	4-4
4.3.4 Volume Control Damper.....	4-5
4.3.5 Access Panel	4-5
4.3.6 Thermal Insulation	4-5
4.3.7 Flexible Duct	4-5
4.3.8 Diffusers/Grilles	4-5
4.3.9 Air Louvre	4-6
4.4 AXIAL FAN AND WALL MOUNTED FAN.....	4-6
4.4.1 Axial Fan:	4-6
4.4.1.1 Impellers.....	4-6
4.4.1.2 Casing.....	4-6
4.4.2 Wall mounted Fan:.....	4-7
4.5 AIR COOLED SPLIT UNIT	4-7
4.5.1 General :	4-7

4.5.2 Condensing Units :	4-7
4.5.3 Fan coil Units :	4-7
4.6 ELECTRICAL	4-8
4.6.1 General	4-8
4.6.2 Raceway and Fitting	4-8
4.6.3 Wire and Cable	4-9
4.6.3.1 General	4-9
4.6.3.2 Wire	4-9
4.6.3.3 Labelling	4-9
4.7 PAINTING, LABELLING AND FINISHING	4-9
4.7.1 Equipment	4-9
4.7.2 Exposed Metalwork	4-9
4.7.3 Pipework Identification	4-10
4.8 REGULATION OF QUALITY ASSURANCE	4-10
4.8.1 Conditions of Materials	4-10
4.8.2 Operating Manuals	4-10
4.8.3 Completion	4-10
4.8.4 Testing and commissioning	4-11
4.8.4.1 Procedure – General	4-11
4.8.4.2 Procedure – Equipment, systems, controls and safety devices	4-11
4.8.4.3 Off-Site tests	4-11
4.8.4.4 Procedure - Fans	4-11
4.8.4.5 Procedure – Outlets airflows	4-12
4.8.4.6 Procedure – Refrigerant Piping Guide Lines	4-12
4.8.4.7 Procedure – Refrigerant piping procedure (outdoor units)	4-12
4.8.4.8 Procedure – Refrigerant piping procedure (indoor units)	4-12
4.8.4.9 Procedure – Insulating and Isolating Refrigerant Lines	4-14
4.8.4.10 Procedure – Gaseous charging	4-14

SECTION 4. MECHANICAL VENTILATION AND AIR-CONDITIONING

4.1 DESIGN CRITERIA AND SCOPE

4.1.1 Air Conditioning and Mechanical Ventilation

4.1.1.1 Extent of Air conditioning and Mechanical Ventilation Installation.

Air conditioning shall be design for all of the rooms and spaces as indicated on the drawings which shall include, but not be limited to the Operations/Maintenance Office and Guard House at Ben Me Coc (1) and the Operations/Maintenance Office at Thanh Da. The system shall be air cooled spit units with the indoor units of wall mounted or ceiling suspended.

Ventilation is not applicable to this package.

4.1.1.2 Design Criteria

- Outdoor Conditions

Meteorological data of Ho Chi Minh City:

Summer Dry-bulb	: 33.9°C.
Coincident Wet-bulb	: 29.4°C.
Winter Dry-bulb	: 18.3°C.

- Indoor Conditions

- Air Conditioning

Office	Temperature (°C) DB	Relation Humidity % RH
1. Offices	24 ± 1°C	65 ± 5

- Mechanical Ventilation

Space	Total air supply Air Change per hour	Min. Fresh air for Air Conditioning Spaces (l/s/m ²)
Not applicable		

4.1.1.3 Codes and Regulations

The air conditioning and ventilation system shall be design in accordance with :

- American Society of Heating, Ventilating and Air Conditioning Engineers (ASHRAE)
- Sheet Metal & Air conditioning National Association (SMACNA).

4.2 PIPEWORK

4.2.1 Materials

- (a) Condensate drain pipe: uPVC pipe.
- Resistance in internal pressure : 42 kgf/cm².
 - Longitudinal reversion : ≤ 5.

<i>Nominal size</i> (mm)	<i>Outside Diameter</i> (mm)	<i>Wall thickness</i> (mm)
φ25	33.3 ± 0.1	2.1 ± 0.2
φ32	42.3 ± 0.1	2.1 ± 0.2
φ40	48.5 ± 0.1	2.5 ± 0.2

- (b) Refrigerant pipework :

Requirements for this section shall be applied to refrigerant piping connected to the outdoor/indoor units of an air-conditioning machine of a separate type. Installation shall be so made that the refrigerant and lubrication oil circulation does not interfere with normal operation.

The material for refrigerant pipework shall be of Light gauge copper tube with the specification as follows :

- Tensile Strength : 21 kgf/mm².
- Elongation : 40 % Min.
- Hardness Value : 60 Max.

<u><i>Nominal size</i></u> (inch)	<u><i>Wall thickness</i></u> (mm)
3/8	0.64
1/2	0.71
3/4	0.81
1	0.89
1-1/4	1.07
1-1/2	1.24
2	1.47

4.2.2 PIPE CONNECTION

- (1) Refrigerant pipework : Solder-connected
- (2) uPVC pipework : uPVC .

4.2.3 PIPE SUPPORTS

Refrigerant pipe shall be run in trunking c/w cover as in drawing.
Centre of supports shall be of 2m.

4.2.4 PIPEWORK INSULATION

All Refrigerant pipe and condensate drain pipe shall be insulated with Closed cell insulation tube, which shall have physical properties as follows :

<u>Average Physical Properties</u>	<u>Rating</u>
Density	0.08 –0.12 g/cm ³ .
Thermal Conductivity at 20°C	0.0374 W/mK.
Temperature Limits °C	-40°C to +105°C
Water Absorption (% by weight)	3
Water Vapour Permeability	0.033
Ozone Resistance	Excellent
Thermal Stability (% shrinkage)	
7 days (200°F)	4.5
7 days (220°F)	5.5
Average time of burning	Less than 5 seconds
Average extend of burning	15mm
Flexible	Excellent
Weather and Ultraviolet Rays Resistance	Good
(1) Refrigerant pipe :	Closed cell insulation tube 13mm THK
(2) Condensate drain:	Closed cell insulation tube 9mm THK

4.3 DUCTWORK AND FITTINGS

4.3.1 Materials

All ductwork shall be of galvanized steel sheet.

4.3.2 Duct Thickness

4.3.2.1 Rectangular duct.

- (1) Seams for long ducts shall be button punch snaps not more than 2250 mm in length. Ducts in excess of that length and ducts with complex bends shall have *Pittsburg* seams.
- (2) Seams in air flow direction shall have internal grooved seams when use of standard sheeting is not possible.
- (3) Sheet thickness of duct shall be as listed in following Table, with deformed ducts being the largest dimension.

<i>Greatest duct dimension (mm)</i>	<i>Thickness(mm)</i>
Not more than 300	0.5
301 to 450	0.6
451 to 750	0.7
751 to 1500	0.8

4.3.2.2 Round duct.

Round ducts shall be spiral ducts, galvanised steel sheet shall be spiralled with over-lapped machine seams and nominal sized shall indicate the interior diameters. Sheet thickness and seam pitch shall be as listed in following Table and seam folds shall have minimum width of 5mm.

<i>Diameter (mm)</i>	<i>Thickness(mm)</i>
Not more than 450	0.5
451 to 750	0.6
751 to 1000	0.8
Greater than 1000	1.0

<i>Diameter (mm)</i>	<i>Seam pitch(mm)</i>
Not more than 100	Not more than 100
101 to 1000	Not more than 150

4.3.3 Duct Hangers and Supports

4.3.3.1 Rectangular duct:

Rectangular ducts shall be supported as shown in figure below and support shall be shaped steel having dimensions as follows :

<i>Longer side of duct (mm)</i>	<i>Hanger for lateral run</i>	<i>Supports for pipe risers</i>
	<i>Shape steel & steel rod (mm)</i> <i>Maximum interval (m)</i>	<i>Shape steel & steel rod (mm)</i> <i>Maximum interval (m)</i>
750 or less	25x25x3 Diameter 9 3.0	25x25x3 3.6
751 to 1500	30x30x3 Diameter 9 3.0	30x30x3 3.6
1501 to 2250	40x40x3 Diameter 9 3.0	40x40x3 3.6
Over 2250	40x40x3 Diameter 9 3.0	40x40x3 3.6

4.3.3.2 Round duct :

Round duct shall be supported as shown in figure below and supports shall be as listed in following Table :

<i>Duct Dia. (mm)</i>	<i>Steel flat (mm)</i>	<i>Steel rods (m)</i>	<i>Maximum interval (m)</i>
1500 or less	25 x 3	Dia. 0.9	3.0
Over 1500	30 x 3	Dia. 0.9	3.0

4.3.4 Volume Control Damper

Volume control dampers shall be provided for the proper regulation of the air conditioning and mechanical ventilating system. In general, dampers shall be provided as follows :

- (a) In all main supply and exhaust air ducts, branches, supply air connection to the indoor packaged units.
- (b) Behind all supply and exhaust air diffusers / grilles.

Structure and Finish

- Casing and blades in galvanized steel sheet 0.8mm to 1.5mm thickness.
- Shaft is made of steel with the bronze bushings.
- Antirust under coated. Finished in black or custom picked colours .

4.3.5 Access Panel

Access panel shall be provided at every point in ductwork system where access for checking, servicing and cleaning of equipment is required including fire dampers, volume control dampers etc. The minimum size shall be 450mm x 450mm or 50mm narrower than the duct whichever is smaller.

4.3.6 Thermal Insulation

- (1) Fibreglass of 32 kg/m³ with thermal conductivity of not greater than 0.05 W/mK at 20°C mean temperature.
Max. service Temperature : 300°C.
- (2) All ductwork shall be external insulation of 25mm fibreglass thickness, including aluminium sheet 0.5mm. Insulation shall be continuous.

4.3.7 Flexible Duct

- Description : High quality insulated aluminium foil flexible air duct using aluminium foil inner core. Thick blanket of fibre glass insulation for energy efficiency. Tough reinforced outer jacket for resistance to tear and puncture.
- Construction : Outer vapour barrier is constructed from 2 layers of tough polyester and one outer layer of foil laminated with fire retardant adhesive with spiral fibreglass strand reinforcement.
- Working pressure :
 - φ 100 - φ 250 : 1.5 kPa (pos.), 0.19 kPa (neg.)
 - φ 300 - φ 500 : 1.0 kPa (pos.), 0.19 kPa (neg.)
- Air velocity : Max. 25 m/s .
- Thermal Value (R) : 0.74 (m² – C/W) at 24°C mean temperature.

4.3.8 Diffusers/Grilles

- Diffusers to be used in factory will be of wall type with horizontal and vertical blades.

- Diffusers/grilles shall have face sections consisting of a peripheral border, individually adjustable horizontal aerofoil blades or shall have face sections consisting of a peripheral border, individually adjustable horizontal and vertical aerofoil blades. Front border 30mm wide with visible screw fixing. Available on request with spring clip fixing or concealed fixing and sub frame.
- Blades and frames are made of extruded aluminium 1.2 to 1.5mm thickness or Black steel sheet 0.8mm thickness.
- Power-coated on requirement of Architect.

In addition, square diffusers or wall type with horizontal and vertical blades will be used. In general, proposal from the Interior Designer will be considered.

4.3.9 Air Louvre

- Air louvre shall have face sections consisting of a peripheral, core made up with fixed air control blades. Front border 30mm wide with visible screw fixing. Available on request with spring clip fixing or concealed fixing and sub frame.
- Blades and frames are made of extruded aluminium 1.5 to 2.0mm thickness or Black steel sheet 1.2mm thickness.
- Power-coated on requirement of Architect.

4.4 AXIAL FAN AND WALL MOUNTED FAN

4.4.1 Axial Fan:

4.4.1.1 Impellers

- Blades :
The blades have been designed with a special aerofoil section to give excellent performance and low noise characteristics. The materials used can be injection-moulded, chemically-coupled, glass-reinforced polypropylene.
- Hubs :
The bush ensures ease of fitting and removal of the impeller from the motor shaft should adjustment of the pitch angle, cleaning or repair of the impeller prove necessary.
- Fixings :
All impellers are assembled using high-tensile, zinc-plated set screws and self-locking nuts.
- Material :
Polypropylene blades will be supplied for this fan.

4.4.1.2 Casing

Casing is rolled and flanged from heavy-gauge mild steel. The casing enclose the impeller and motor completely and weatherproof external terminal box is standard.

4.4.2 Wall mounted Fan:

Impeller & Casing : Plastic.

4.5 AIR COOLED SPLIT UNIT

4.5.1 General :

- The split air conditioning Units shall consist be of an external, exposed condensers and exposed fan coil units.
- The units shall be rated at the performance given in drawings. The units shall be rated in accordance with the relevant JIS standard.

4.5.2 Condensing Units :

- Condensing Units shall be assembled on heavy gauge steel frames. Units shall include a compressor, split fin condensing coil, fan and motors, controls and holding charge of refrigerant (R22). Operating range shall be between 50 deg C and 10 deg C.
- The unit casing shall be constructed of galvanized heavy gauge steel. Units shall have removable panels which allow access to all major components and controls.
- Compressors may be reciprocating or scroll type. Temperature and current overload protection shall be provided. Compressor shall be mounted on spring or rubber isolators, and sound mufflers as necessary to minimise vibrations transmission and noise.
- The condenser coil shall be internal finned or smooth bore copper tubes, mechanically boned to aluminium plate fin. Coils shall be factory pressure and leak tested to 2500 kPa. Coils shall be delivered with suitable protection from damage as would normally be expected during installation. This could be using rigid, corrugated plastic board.
- The condenser fan shall be a direct drive, statically and dynamically balanced propeller fans with aluminium blades and corrosion protected steel hubs. Condenser fan motors shall be of the totally enclosed type, with permanently lubricated ball bearings, and shall have build in thermal and current overload protection.

4.5.3 Fan coil Units :

- (1) Fan coil units shall be completely factory assembled including evaporator coil, condensate drain pan, fan motors, filters and casing.
- (2) The unit casing shall be constructed of moulded plastic. Units shall have removable panels which allow access to all major components and controls. Knockouts shall be provided for electrical and refrigeration connections.
- (3) The evaporator coil shall be internally finned or smooth bore copper tubes, mechanically boned to aluminium plate fin. Coils shall be factory pressure and leak tested to 2500 kPa.
- (4) The supply air fan shall be a forward curved, centrifugal type fan with direct drive. Three speed motors required.
- (5) All necessary controls shall be factory installed and hardwired.
- (6) The fan coil unit temperature controller shall be of the remote hardwired type allowing it to be fixed in position. As a minimum the controller shall include temperature adjustment, and an on/of switch.

4.6 ELECTRICAL

4.6.1 General

(1) Codes

Electrical materials, methods of construction and work quality must equal or exceed the requirements of this specification and the minimum requirements within the following :

All Municipal Codes enforced by the city or country where the equipment is to be installed.

All State Codes enforced by the state inspection department in the state where the equipment is to be installed.

Latest Edition of National Electric Code.

(2) Test and Inspections

All materials and workmanship is subject to inspection by an authorised representative of the purchaser's Engineering Division, Power and Control group, during and after fabrication.

The vendor shall notify the purchaser at least 2 weeks in advance of the date the equipment is ready for shipment.

4.6.2 Raceway and Fitting

(1) Rigid Conduit

Rigid steel conduit shall be standard weight, mild rigid steel, hot deep galvanised. Couplings, elbows and bends shall meet these same requirements. The minimum trade size shall be $\frac{3}{4}$ inch.

All conduit fittings and boxes shall be of the threaded hub with watertight gaskets. Conduit bodies shall be solid gaskets types with covers.

Conduit shall be cut smoothly and supported firmly. All sharp edges, burrs, rough surfaces, or threads which may come in contact with wire insulation shall be remove.

(2) Liquid-tight flexible Conduit

Liquid-tight flexible metal conduit shall be constructed of single strip, flexible, continuous, interlocked, and double wrapped steel, galvanised inside and outside and with liquid-tight jacket of flexible polyvinyl chloride (PVC). All liquid tight flexible metal conduit shall be coloured grey and be a minimum trade size of $\frac{1}{4}$ inch.

Liquid tight flexible conduit shall be used for the final connection to isolate equipment vibration or to connect to movable components. Maximum length of a flexible connection shall be limited to 36 inches, the minimum length shall be 18 inches and should be considered the standard required length if flexible conduit is required.

The minimum size of the underground conduit shall be 25mm diameter.

4.6.3 Wire and Cable

4.6.3.1 General

Wires shall run continuously from one piece of apparatus to another with no slices in conduits or conducts.

Inside the control panel enclosure the vendor shall route the above three wiring groups away from each other and in separate group wireways.

Cable shall be handle with care.

Cable runs shall present a neat and tidy appearance.

The vendor shall provide all wiring between electrical components on packaged equipment.

4.6.3.2 Wire

All conductors shall be stranded copper with 600 volt minimum insulation rating.

Power cables shall be sized to meet the load and regulatory requirements along with the following considerations.

- Motor supply cables shall produce a maximum voltage drop of 20% on starting, at the motor terminals
- Feeder cable shall give a maximum voltage drop of 5% at the buss bar when the largest load is started with all other loads running.
- Steady state voltage drop shall not exceed 5% under any circumstances.

4.6.3.3 Labelling

Cables and all the cores of all control/data/signal/communication cables shall be numbered, on both ends, using approved type numbers to correspond to the relevant diagrams and equipment drawings.

Numbers shall read way from left to right or up to down.

Numbers shall be arranged so that they can be easily read without the need for twisting or moving of wires.

4.7 PAINTING, LABELLING AND FINISHING

4.7.1 Equipment

All items of equipment shall be given one finishing coat of full gloss enamel, except where the manufacturer's standard finish is approved.

4.7.2 Exposed Metalwork

All exposed metalwork shall be painted with one priming coat, one undercoat and one finishing coat of full gloss enamel.

The primer coat for exposed galvanised iron shall be an approved galvanised iron primer.

4.7.3 Pipework Identification

Circumferential bands of standard ground colours shall be not less than 100mm wide on pipes up to 50mm nominal diameter, and not less than 150mm wide on pipes greater than 50mm nominal diameter.

Supplementary colours shall be displayed as bands not less than 25mm wide in the centre of the ground colour bands.

Where lettering is required it shall be painted in contrasting colour in accordance with the standard, in block letters not less than 15mm high for pipes up to 50mm nominal diameter, and in block letter not less than 40mm high for larger pipes.

Identification bands shall be located where they are clearly visible in each room or compartment through which the pipe runs, and shall be placed at centres not exceeding 6m.

Direction of flow shall be indicated by an arrow painted on the pipe adjacent to each colour band. Arrows shall be 75mm long on pipes up to 50mm nominal diameter, and 150mm long on large pipes.

4.8 REGULATION OF QUALITY ASSURANCE

4.8.1 Conditions of Materials

All materials shall have to assure the following conditions :

- 100% brand-new.
- Technical data are correct and sufficient as stated in specification.
- All materials shall be approved by Owner.

4.8.2 Operating Manuals

The contractor shall prepare four (4) copies of an operating manual, therefore employer and one for Engineer describing the operation and maintenance of the whole system and including:

- (1) Equipment and system description
- (2) Operating Instruction for all equipment
- (3) Manufacturer's pamphlets and catalogues for all equipment
- (4) Schedule of recommended maintenance by contractor for each system and equipment item.
- (5) Schedule of equipment including labelled valves if possible, indicating the design and commissioned duty points.
- (6) Completed check list (commissioning and testing item)
- (7) Completed testing and commissioning results
- (8) As-built drawings

4.8.3 Completion

After all, the systems have been successfully tested and the As-built drawings and operating manuals submitted, the contractor shall request the Owner (or representative) in writing to request the issue of the certificate of completion. The maintenance period begins from the date that the Owner (or Representative) is certified as having reached completion.

4.8.4 Testing and commissioning

Before any of the systems in the contract are put into service, we shall be subjected to a commissioning and testing procedure

4.8.4.1 Procedure – General

Testing and commissioning procedures shall be so arranged to verify that the equipment on systems as installed fully comply with the specification and documents and result. In a permanent record of the test carried out. They include the followings:

- (a) Visual check of all work for completion and against diagrams of all wiring.
 - (b) Check that all work complies with latest regulations, specifications, and performance criteria.
 - (c) Check that all equipment is safe to operate, and that overloads, safety devices and interlocks are all in working order.
 - (d) Check operating frequently, function of all devices and rotation of motors.
 - (e) Verification of performance under site conditions, under load and simulated "WORST CASE" condition.
 - (f) Insulation tests shall be made with 500V" Megaohmmeter". No cable will be accepted with an insulation resistance, including termination, of less than 50 Megaohmmeter.
 - (g) Testing continuity and unique identification of all conductors in all cables.
 - (h) Measure resistance of main earth and test all earth continuity connections
 - (i) Check polarity and phase rotation of supply and at all outlets.
- All tests shall be conducted in accordance with commissioning guides or handbooks

4.8.4.2 Procedure –Equipment, systems, controls and safety devices

- (a) Check of all work for completeness and proper working order
- (b) Test run all equipment for at least 24 hours
- (c) Check calibration and operation of each device

4.8.4.3 Off-Site tests

The following items shall be tested at the manufacturer's factory and then retested on site as necessary to verify the performance – where necessary detailed calculation will be carried out and submitted for review based on shop drawings and actual equipment to be used to verify fan, control panels, switchboards, variable volume boxes, fan coil units (indoor).

4.8.4.4 Procedure - Fans

- (a) Check bearings for overheating
- (b) Measure flow, pressure, current and power factor and adjust unit to reach design conditions. For supply fans, the design air flow are with air filters in a dirty condition with a maximum pressure drop of 125 Pa to simulate pressure rise due to dirty filters

4.8.4.5 Procedure – Outlets airflows

Measure airflow at each outlet and adjust to within 10% of design airflow as stated on the drawings.

Adjust outlet flow directions (using black painted sheet metal blanks for diffusers) to ensure that velocities at occupant level do not exceed 1m/s when achieving the correct air throw.

4.8.4.6 Procedure – Refrigerant Piping Guide Lines

All units are prepared at the factory. To ensure satisfactory operation and performance, the following points should be noted:

- (a) Adhere to recommended piping sizes and lengths
- (b) Liquid loops or oil traps must be provided according to standard piping guidelines.

Notes:

- Insulate all refrigerant suction piping and connections. Secure all piping to prevent vibration
- Do not connect a multi- circuit outdoor unit to a single circuit evaporating unit (Blower)

4.8.4.7 Procedure – Refrigerant piping procedure (outdoor units)

- (1) Puncture seal caps to remove N2 and reduce pressure
- (2) Heat and remove the seal caps
- (3) Cut, fit and braze tubing, starting at the outdoor unit and work toward the indoor unit. All brazing should be done using a 14 to 55 kPa dry Nitrogen purge flowing through the pipe being brazed
- (4) Shut off Nitrogen supply
- (5) Shut off the manifold valve for the line that is connected to the suction line gauge port. Disconnect the line from the gauge port.

4.8.4.8 Procedure – Refrigerant piping procedure (indoor units)

One liquid and suction lines are complete on the indoor unit, puncture the seal caps on the indoor unit connection stubs.

- (1) Remove both seal caps from the indoor unit connection stubs
- (2) Turn nitrogen supply on, Nitrogen enters through the liquid line gas port
- (3) Braze the liquid line connections
- (4) Open the Schrader valve on the suction line and the braze suction line to the connection stub- Nitrogen will bleed out the open gauge port on the suction line.
- (5) Shut off nitrogen supply and disconnect from the gauge manifold
- (6) Connect an R 22 drum to the gauge manifold and purge nitrogen from the circuit with 83 to 104 kPa R 22 - place a leak detector at the open suction gauge port. When R 22 begins flowing from the gauge port, replace the gauge port cap.
- (7) Allow system refrigerant pressure to build up to about 276 kPa

- **Leaking testing:**
Leak test the entire system – using proper procedures and caution, repair any leaks found and repeat the leak test.
- **Evacuation procedure:**
 1. Connect vacuum pump to both the liquid and suction line Schrader valves.
 2. Evacuate the circuit to hold a 350 micron vacuum
- **Refrigerant charging procedure:**
Recommended refrigerant charges are given in table No.2, calculate any required additional refrigerant using table 3, and charge by weight through the gauge port on the liquid line. Once the charge enters. The system, disconnect the charging line.

Table 2. Refrigerant charge (R-22)

<u>Model Number</u>	<u>Nominal Refrigerant charge</u>
75	6.4 kg
100	8.6kg
150	6.4kg ea. ckt
200	8.6kg ea. ckt

Sufficient operating charge for outdoor unit and 7.6m of nominally sized refrigerant piping.

Table 3 Additional Required Refrigerant

<u>Tubing size</u>	<u>Additional</u>	<u>Additional</u>	<u>See</u>
<i>Suction liquid</i>	<i>Tubing length</i>	<i>Refrigerant</i>	<i>Note</i>
28.6 mm	2.6mm	4.6 m	0.320 kg (1)
28.6 mm	2.6mm	7.6 m	0.085 kg (1)
28.6 mm	2.6mm	9.7 m	0.682 kg (1)
28.6 mm	2.6mm	12.2 m	0.852 kg (1)
34.9 mm	12.7mm	4.6 m	0.568 kg (2)
34.9 mm	12.7mm	7.6 m	0.938 kg (2)
34.9 mm	12.7mm	9.7 m	1.222 kg (2)
34.9 mm	12.7mm	12.2 m	1.506 kg (2)
41.3 mm	15.8mm	4.6 m	0.881 kg (3)
41.3 mm	15.8mm	7.6 m	1.491 kg (3)
41.3 mm	15.8mm	9.7 m	1.909 kg (3)
41.3 mm	15.8mm	12.2 m	2.386 kg (3)

- (1) Amounts shown are based on 21 gram of refrigerant per foot of 28.6 mm and 2.6 mm lines
 - (2) Amounts shown are based on 38 gram of refrigerant per foot of 34.9 mm and 12.7 mm lines
 - (3) Amounts shown are based on 60 gram of refrigerant per foot of 41.3 mm and 15.9 mm lines
- For tubing over 12.2 m calculate the additional refrigerant needed, based on notes above.

4.8.4.9 Procedure – Insulating and Isolating Refrigerant Lines

Insulate the entire suction line with refrigerant piping insulation. Also insulate any portion of the liquid line exposed to temperature extremes. Insulate and Isolate liquid and suction lines from each other – Isolate refrigerant lines from the structure and any ductwork.

To prevent possible noise or vibration problems be certain to Isolate Refrigerant lines from the building.

4.8.4.10 Procedure – Gaseous charging

This Procedure is accomplished with the unit operating. Electrical connections must be complete do not proceed until the system is ready to operate.

- (1) Connect R 22 with gauge manifold to the Schrader valves (Pressure taps) on the compressor discharge and suction lines.
- (2) Turn on power to the unit. Allow the system to run for five to ten minutes to stabilize operating conditions.
- (3) Measure airflow across the Indoor coil-compare the measurements with the fan performance Data in Data / Submittal or facts – once proper airflow is established, observe the suction and head pressure gauges on the gauge manifold.

Pressure reading should fall approximately at the points shown by the pressure airs in service facts. Add or remove refrigerant (gas only) as required to obtain correct head and suction pressures – check suction line superheat and condenser sub-cooling to ensure the unit is operating properly.

- (4) Disconnect all power to the unit
- (5) Remove the charging system from the unit and close the opening in the bottom of the control box, with the pivotal cover before attempting to replace access panel.
- (6) Replace all panels

- **Electrical wiring:**

The wiring consists of providing power supply to the unit, installing the system indoor thermostat and providing low voltage system interconnecting Wiring – Access to Electrical connection locations is shown in the dimensional drawings.

- **Unit Power Supply:**

The installer must provide line Voltage Circuit(s) to the unit main power terminal as shown by the unit wiring diagrams in service facts or field wiring.

Power supply must agree with electrical data specified on the unit nameplate. Power supply must include a disconnect switch in a location convenient to the unit. Ground the unit according to local codes and provide flexible conduit if codes require and/or if vibration transmission may cause noise problems.

Determine proper wire sizes and unit protective fusing requirements by referring to the unit nameplate and/or the unit service facts. Filed wiring diagrams for accessories are shipped with the accessory.

- **Low voltage Wiring:**

Mount the indoor thermostat in accordance with the thermostat installation instructions

- **Sequence of operation:**

Generally, Operation of the system cooling cycles is controlled by the position of the system switch on the room thermostat – once system switch is placed in either the cool position, unit operation is automatic. The optional automatically cool with sufficient room temperature change.

- **Evaporator Fan (Indoor Supply Air)**

The evaporator fan is controlled by an ON/AUTO switch on the room thermostat – with the switch position at Auto and the system operating in the cooling mode, fan operation coincides with the cooling ON, fan operation is continuous.

- **Cooling Mode:**

With the disconnect switch in the “ON” position, current is supplied to the compressor crank case heater(s) and control transformer. The crank case heater(s) supplies heat to the compressor(s) during the “OFF” cycle. With the room thermostat system switch position at cool and the fan switch at AUTO, the compressor contactor energized on a call for cooling. When the contracts of the compressor contactor close, operation of the compressor and condenser fan begins. The evaporator fan contactor also energizes on a call for cooling and initiates evaporator fan operation.

Safety control: All of these controls may not be installed on your unit, check electrical schematic